

产品规格书

PRODUCT SPECIFICATION

Customer: 深圳市占美高科有限公司

Customer's part number:

Product description: 27 cm Terminal Antenna

Uni Link's part number: MS-2400JT-0

Issue Date: 2022-5-30

Note: 2400-2500MHz, RA SMA male

Application and Features

Applications :

- 1: 2.4G WIFI
- 2: Public wireless hot spot
- 3: Wireless video system

Features :

- 1: Weight is light
- 2: Installed for vertical or horizontal polarization
- 3: RoHS compliant

INDEX

- 1、 PRODUCT TECHNICAL SPECIFICATION
- 2、 PRODUCT PICTURE
- 3、 PRODUCT SPECIFICATION CHART
- 4、 MECHANICAL CHARACTERISTICS
- 5、 DURABILITY
- 6、 VSWR
- 7、 RADIATION PATTERN


1、PRODUCT TECHNICAL SPECIFICATION

Electrical Specifications	
Frequency Range (MHz)	2400-2500
Bandwidth (MHz)	100
Horizontal Beamwidth-°	360
Vertical Beamwidth-°	30
Input Impedance (Ω)	50
V.S.W.R	≤ 1.5
Gain (dBi)	2
Max Input Power (w)	2
Mechanical Specifications	
Antenna Dimension-mm (mm)	27 +/- 1
Connect Type	RA SMA Plug
Rated Wind Velocity	
Work Temperature °C	-40- +80
Pole Diameter-mm	$\Phi 40-50$
Cable length-mm	
Weight (g)	4.5

2、PRODUCT PICTURE



3、PRODUCT SPECIFICATION CHART.

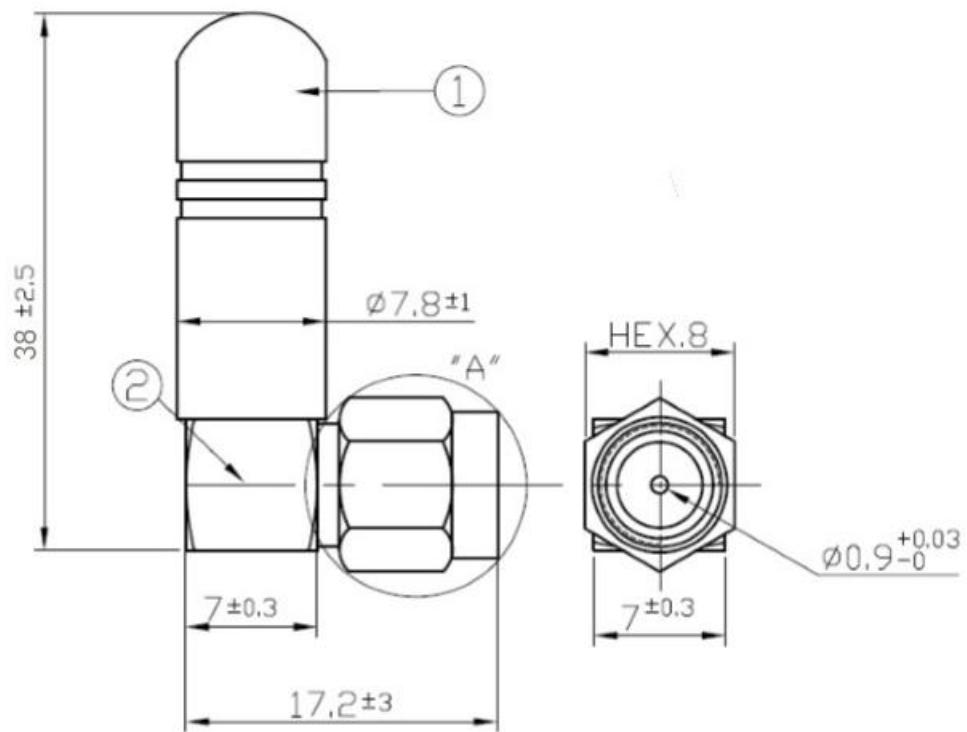



4、MECHANICAL CHARACTERISTICS)

1	BENDING TEST	Put load 120g to 30cm cable from the end of the connector, fixed joints, swaying test at an angle of 60 degrees , test features after 1000 times	after 1000 times test no visible damage
2	STRENG TEST	Put 15pounds static load to the end of the cable continue 1 minute	After test no visible damage
3	VIBRATION TEST	the X-axis direction for 120 minutes, and the Y-axis direction 120 minutes, the Z-axis direction 240 minutes as vibration testing of 1.1mm amplitude and 33.30Hz/sec of frequency	After test no visible damage


5、DURABILITY

1	HEAT TEST	85+2 °C for 24 hours, after keep in normal condition for 30min the to test.	All characteristic range is 30% of the initial value
2	HUMIDITY TEST	40+2 °C 90-95%RH for 24 hours, after keep in normal condition for 30min the to test.	
3	COLD TEST	-40+2 °C for 24 hours, after keep in normal condition for 30min the to test.	

6、VSWR

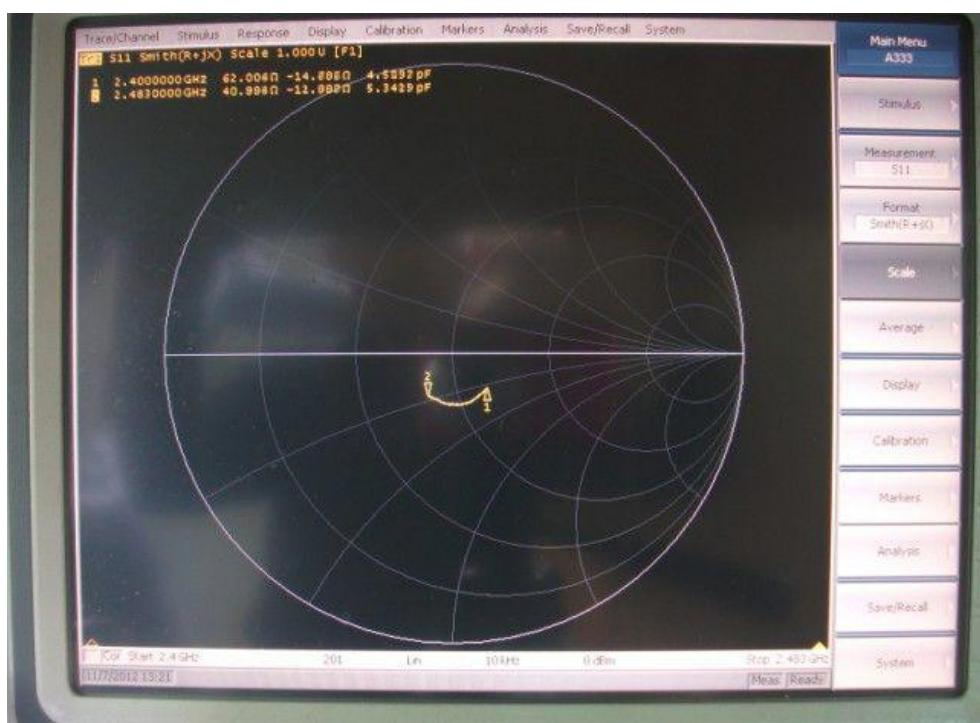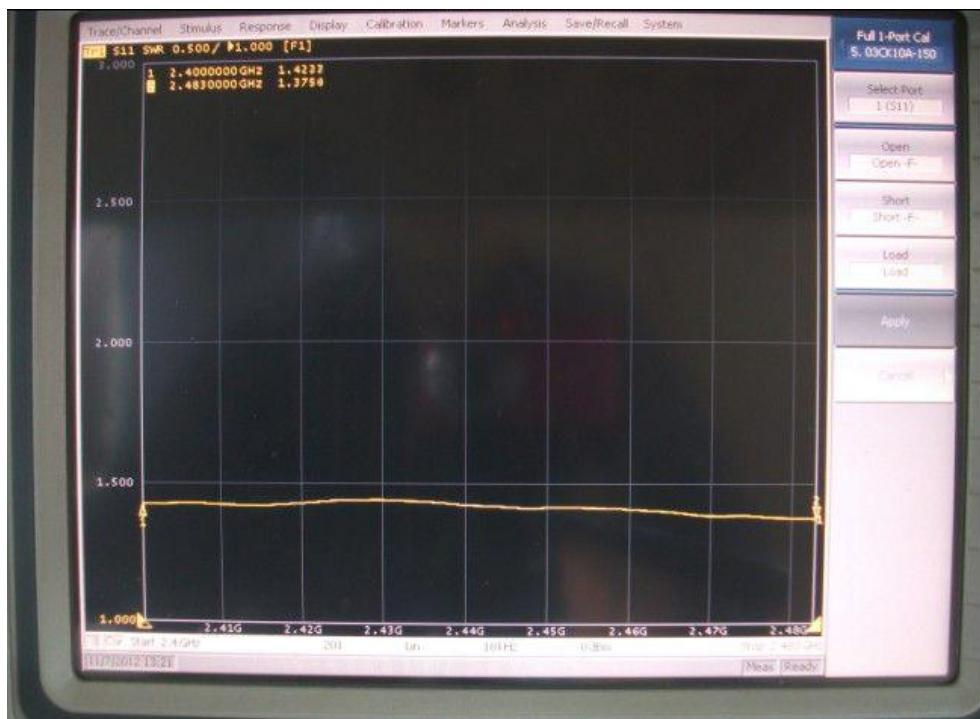

7、RADIATION PATTERN

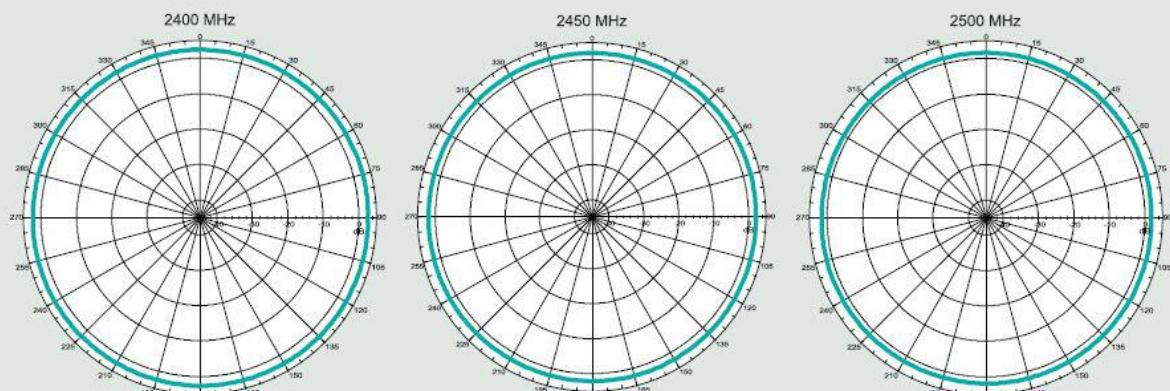Horizontal Position**Vertical Position**