



Test report

Number **T251-0283/23**

Project file: C20211657

Date: 2023-05-11

Pages: 10

Product: **Automatic watch winder**

Type reference: **TM001**

Ratings: 5 – 12 Vdc (Supplied over USB-C)
Protection class: III

Trademark: **TIME MACHINE**

Applicant: **Berišaj d.o.o.**
Vilharjeva ulica 44, SI-1000 Ljubljana

Manufacturer: Twenty Five Seven, prodaja in storitve, d.o.o.
Vilharjeva ulica 44, SI-1000 Ljubljana

Place of manufacture: Twenty Five Seven, prodaja in storitve, d.o.o.
Vilharjeva ulica 44, SI-1000 Ljubljana

Summary of testing

Testing method: Antenna pattern measurements

Testing location: SIQ Ljubljana
Mašera-Spasičeva ulica 10, SI-1000 Ljubljana, Slovenia

Remarks: Date of receipt of test items: 2021-08-05
Number of items tested: 1
Date of performance of tests: 2023-02-13
The test results presented in this report relate only to the items tested.
The test items were tested in the condition as received.
The product complies with the requirements of the testing methods.

Tested by: Luka Cvajnar

Approved by: Marjan Mak

The report shall not be reproduced except in full.

SIQ Ljubljana, Mašera-Spasičeva ulica 10, SI-1000 Ljubljana, Slovenia
T +386 1 4778 100, F +386 1 4778 444, info@siq.si, www.siq.si

CONTENTS	page
<u>1 GENERAL</u>	<u>3</u>
1.1 EQUIPMENT UNDER TEST	3
1.2 ANTENNA PATTERN MEASUREMENT	5
1.3 TEST RESULTS BLE ANTENNA	6
1.4 MAXIMUM BLE ANTENNA GAIN	9
<u>2 USED TEST EQUIPMENT</u>	<u>10</u>

1 GENERAL

History sheet			
Date	Report No.	Change	Revision
2023-05-11	T251-0283/23	Initial Test Report issued.	--

Environmental conditions:

Ambient temperature: 15 °C to 35 °C

Relative humidity: 30 % to 60 %

Atmospheric pressure: 860 mbar to 1060 mbar

1.1 Equipment under test

Automatic watch winder

Type: **TM001**


Tested was antenna pattern of the sample below.



Picture of test sample – BLE Antenna

Copy of marking plate

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

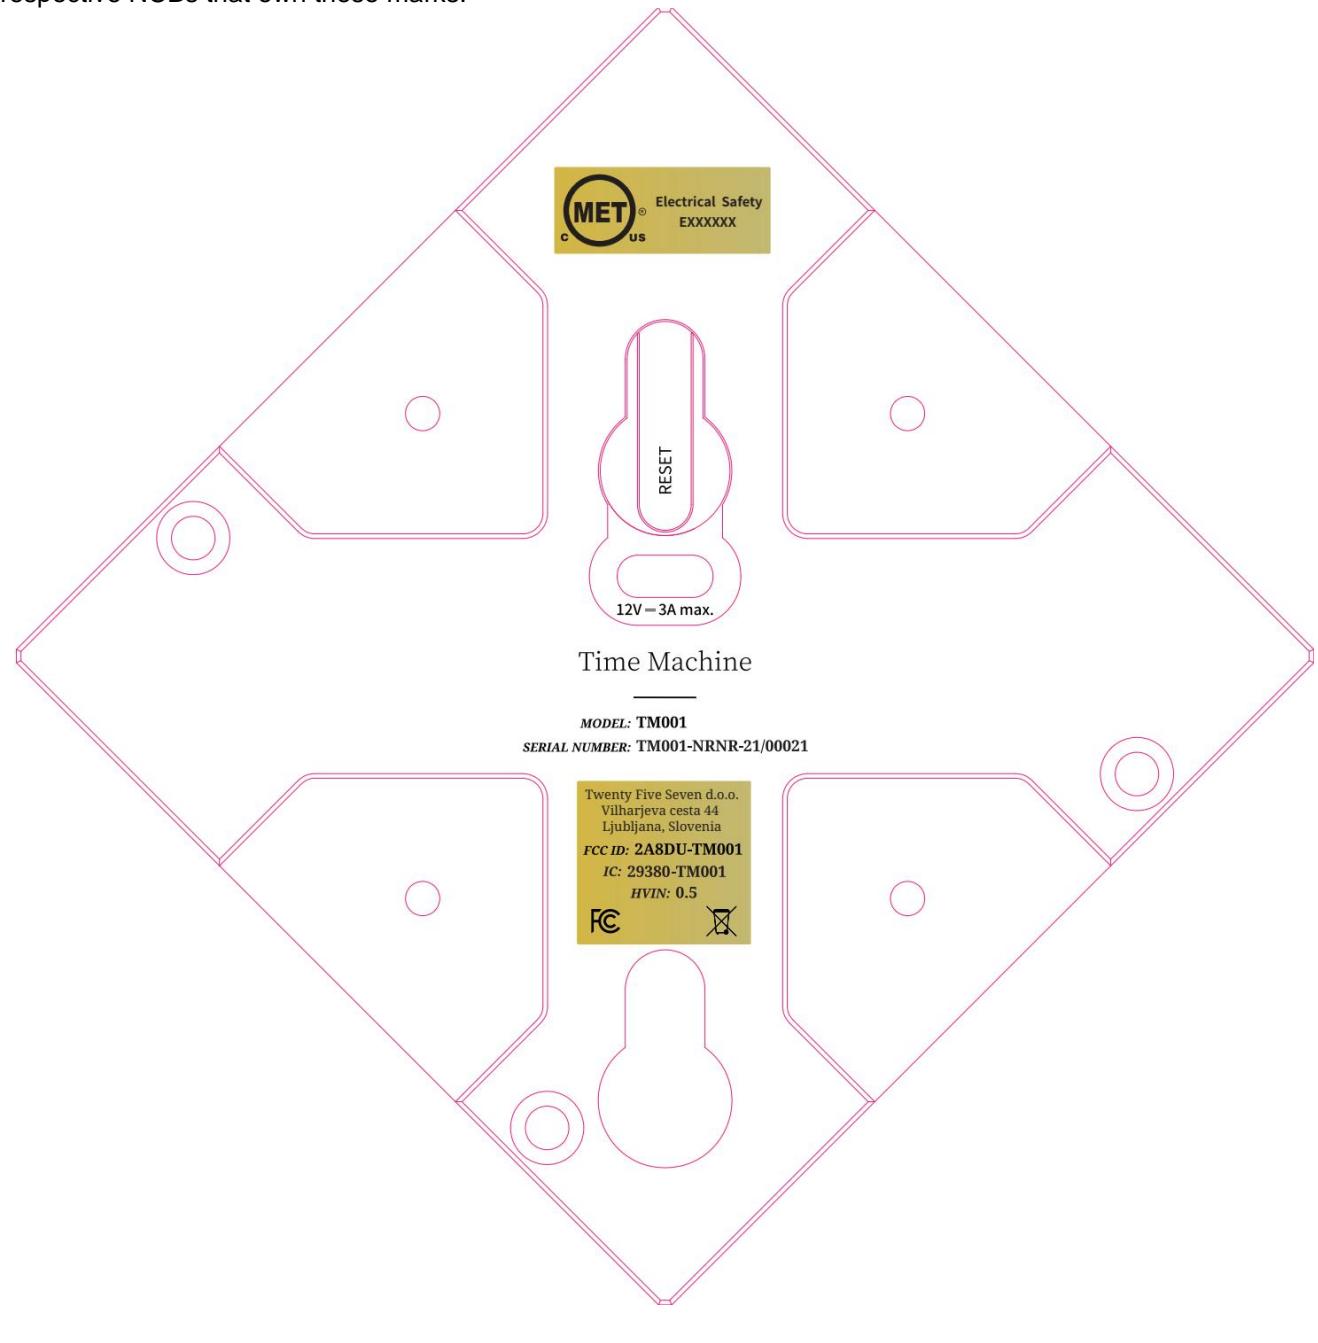

1.2 Antenna pattern measurement

1.2.1 Test procedure

The radiation pattern for BLE antenna implemented to PCB reference design has been measured in an anechoic chamber with 3 meters test distance. Test results show radiation patterns for two planes, measured with vertical and horizontal polarization of measuring antenna. All measurements were performed at 2402, 2440 and 2480 MHz frequency.

1.3 Test results BLE Antenna

EUT Information


EUT:
Operating mode

TimeMachine
TX 2402 MHz


AziChart MinMax Eval

Frequency (MHz)	Max. Value (dBm)	Azimuth max. (deg)	Pol max.	Min. Value (dBm)	Azimuth min. (deg)	Pol min.
2402.000000	-4.74	353	H	-31.37	281	V

Azimuth Chart: Horizontal

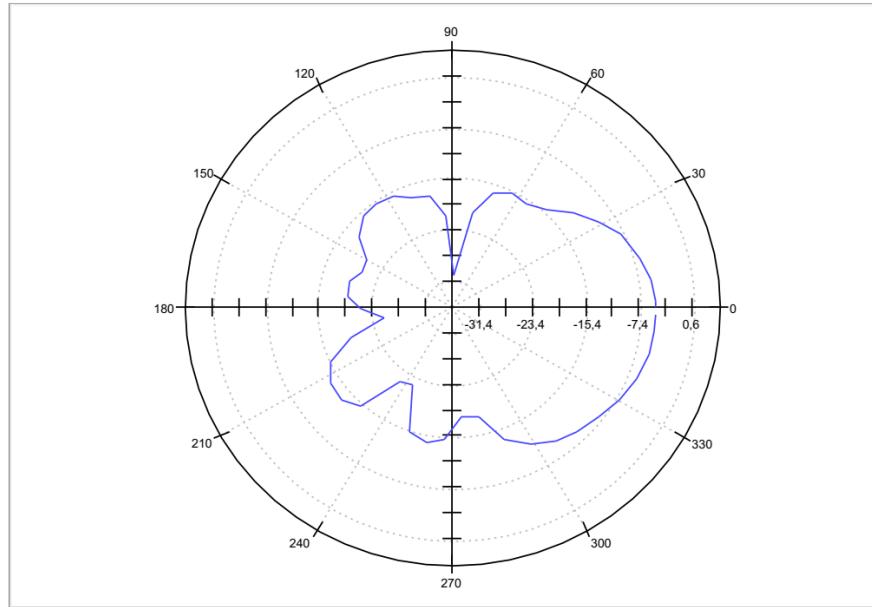


Azimuth Chart: Vertical

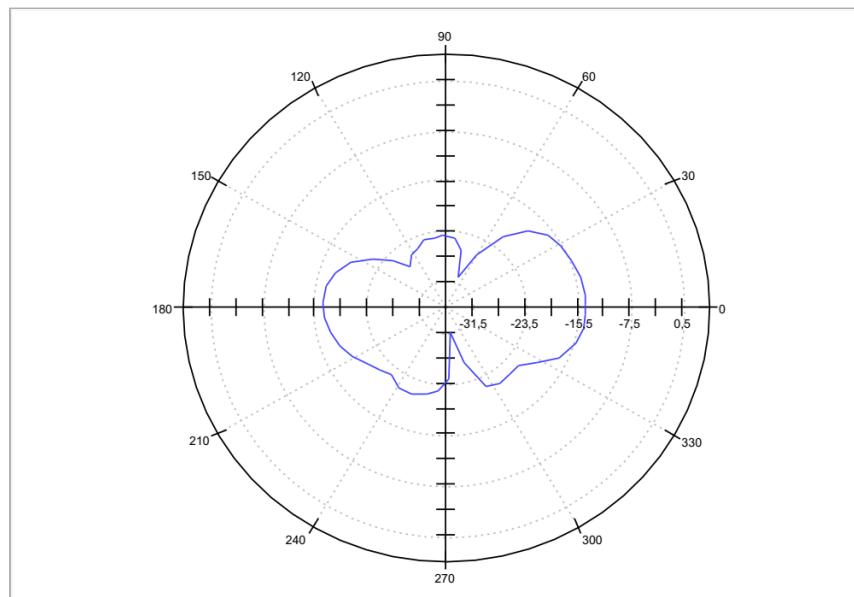


EUT InformationEUT:
Operating modeTimeMachine
TX 2440 MHz**AziChart MinMax Eval**

Frequency (MHz)	Max. Value (dBm)	Azimuth max. (deg)	Pol max.	Min. Value (dBm)	Azimuth min. (deg)	Pol min.
2440.000000	-3.87	347	H	-33.82	91	V

Azimuth Chart: Horizontal

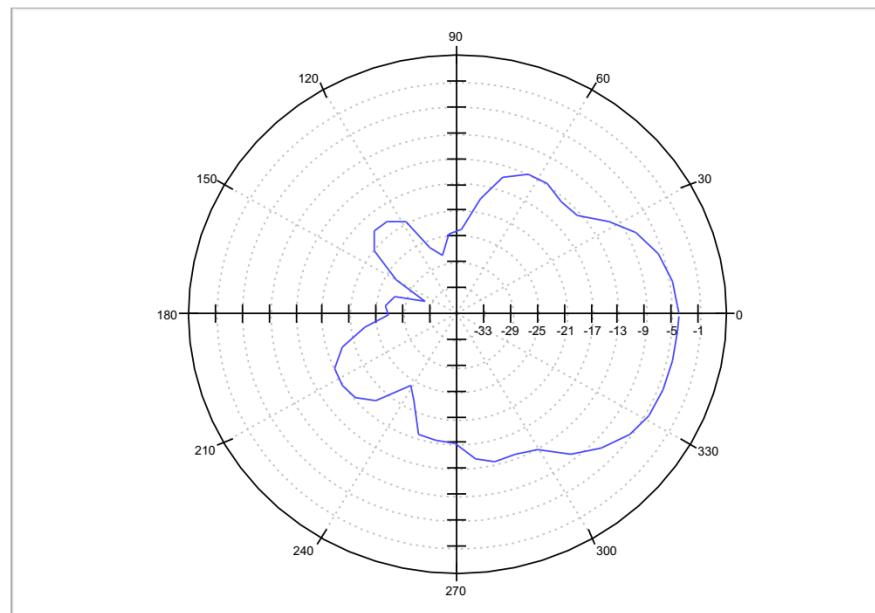


Azimuth Chart: Vertical

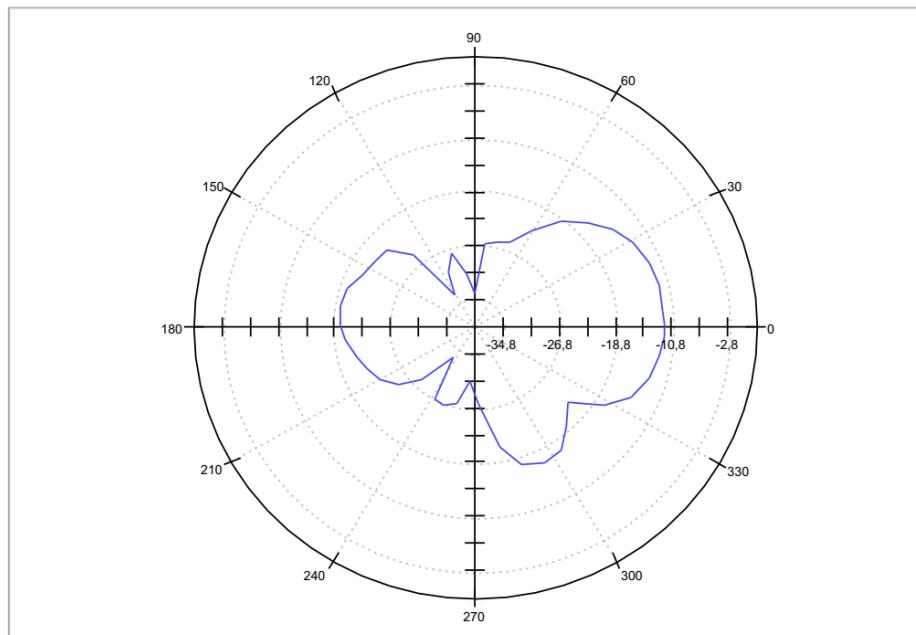


EUT InformationEUT:
Operating modeTimeMachine
TX 2480 MHz**AziChart MinMax Eval**

Frequency (MHz)	Max. Value (dBm)	Azimuth max. (deg)	Pol max.	Min. Value (dBm)	Azimuth min. (deg)	Pol min.
2480.000000	-3.76	355	H	-36.21	131	V

Azimuth Chart: Horizontal

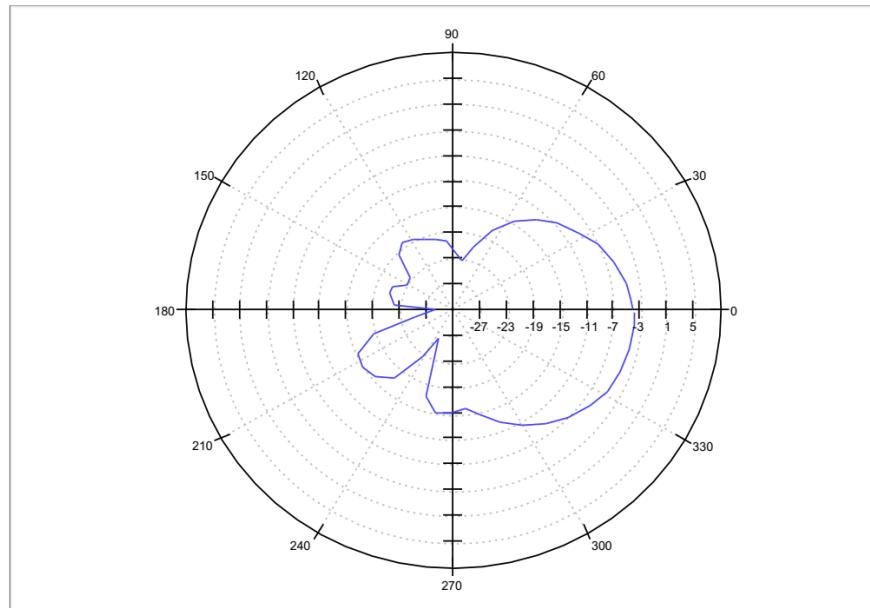

Azimuth Chart: Vertical

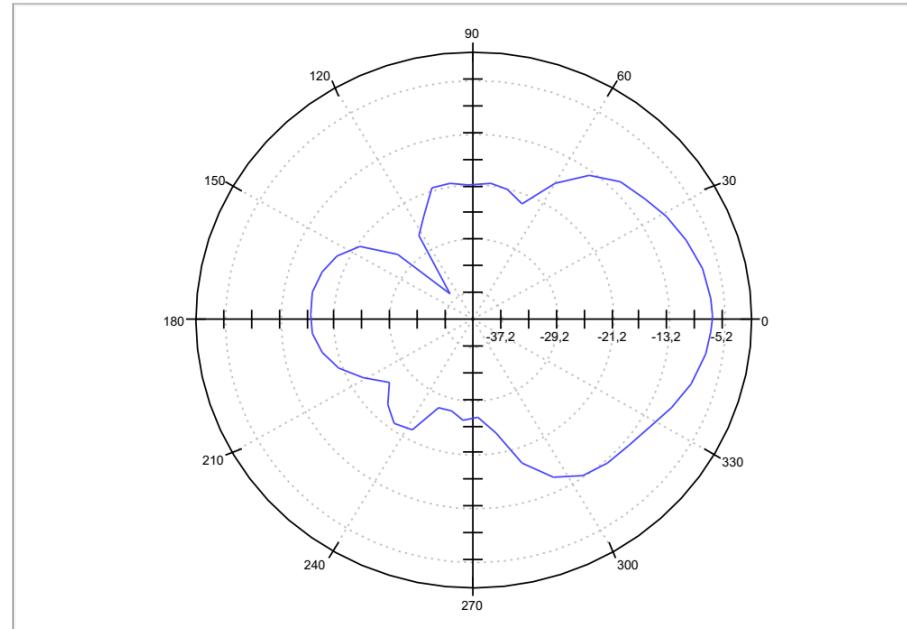

1.4 Maximum BLE antenna gain

DUT Frequency (MHz)	Maximum antenna gain (dBi)
2402.000000	-4.74
2440.000000	-3.87
2480.000000	-3.76

2 USED TEST EQUIPMENT

Antenna pattern measurement

Manufacturer	Model No.	Used	Calibrated	Calibrated until
Comtest engineering, SAC2 (together with controlling equipment)	SAC 3m	X	2022-04-14	2025-04-14
Maturo, Turn table (2 m diameter)	TT 2.0 SI	X	/	/
Maturo, Bore-sight antenna mast	BAM-4.0-P	X	/	/
Maturo, positioning equipment	NCD	X	/	/
Rohde & Schwarz, RFI receiver	ESU 26	X	2022-01-04	2023-07-04
R&S, Ultra Broadband Antenna	HL562E		2020-09-30	2023-09-30
R&S, Horn Antenna	HF907	X	2020-08-21	2023-08-21