


DIGITAL MICROSCOPE

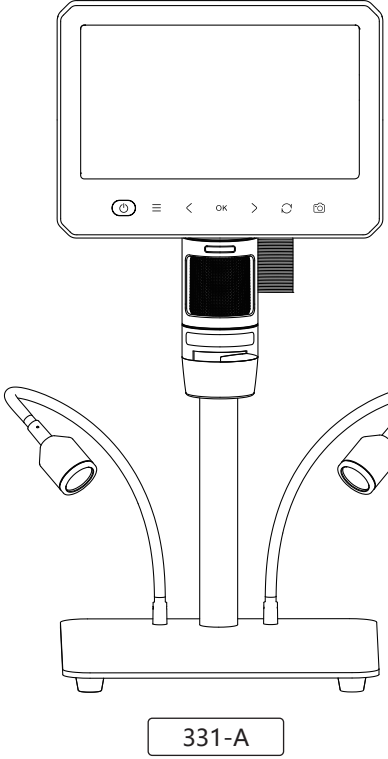

尺寸: 140*105MM
装订本, 正反面印刷

PRODUCT DESCRIPTION

Thank you for purchasing this equipment. It is complex to use, so please read this manual in detail to understand how to operate the microscope before using it.


IMPORTANT NOTES

- Please fully charge the product before first use. Please do not charge directly through the PC, but choose a 5V-2A adapter.
- In PC mode, this device only supports USB3.0 or above interface, not USB2.0 interface.
- This product is not a biological microscope and is not suitable for cell biology research.
- The optimal focal distance of the microscope is 2-60mm. You need to adjust the focus by adjusting the focus drum to achieve the clearest state.
- This device cannot be accurately read microscope magnification. It is a combination of digital and optical magnification microscope. The specific magnification effect is subject to the actual picture taken.
- When the battery is low, both the storage mode and PC camera mode cannot be used normally. This is not a product failure.
- Do not touch the lens or other optical parts with your hands, otherwise it will cause image blur and affect imaging quality.
- Do not disassemble the product or component structure by yourself to avoid abnormal equipment use.

BATTERY INSTRUCTIONS

- Please use a safe and compliant 5V/2A home charger to charge this device.
- This device supports charging while in use.
- If the device is left unused for a long period of time, please ensure that it is charged at least once every 3 months to prevent irreparable damage caused by over-discharging the battery.

FUNCTION INTRODUCTION

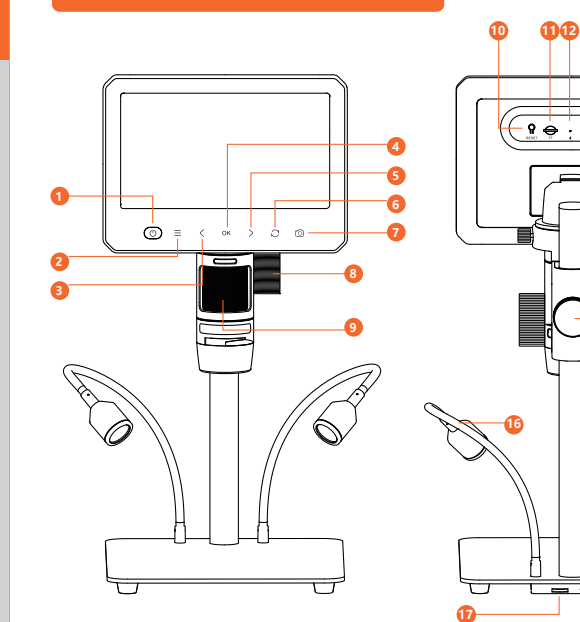

Power button

Press and hold for 3 seconds to switch on/off the device

Menu key

Set the relevant parameters

Left selection key

Scroll up / Dim lens light

Right selection key

Scroll down / Enhanced Lens Lighting

Mode switch key

Short press to switch photo, video, file browsing mode / long press to switch different color display modes

Bracket adjustment knob

Can adjust the lens height up and down

Reset button

When the product crashes, press to force shutdown

Charging indicator

When charging the red light is on, when it's done the green light is on

Light power supply port

Output 5V=1A

External light source

Two 3W high-brightness LED lights

Light source charging port

Input 5V/1A

Lock screw

Can fix the lens height

External light adjustment knob

The size of the external light can be adjusted

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A

TF card slot

Support expansion 0-64G TF card

Charging interface

Input 5V = 2A