

FCC RADIO TEST REPORT

FCC ID: 2A8EM-HIBREAKPRO

Product: Smartphone

Trade Mark: Bigme

Model No.: HiBreak pro

Family Model: HiBreak pro plus, HiBreak pro se, HiBreak pro color, HiBreak pro color plus, HiBreak pro color se, B651, B651 Lite, B651 Pro, B651 Plus, B651C, B651C Lite, B651C Pro, B651C+, B651 Color, B651 Color Lite, B651 Color Pro, B651 Color Plus

Report No.: S25021100607004

Issue Date: Apr. 07, 2025

Prepared for

Bigme Cloud Literacy Technology Co., Ltd.
01 18F, COFCO Property Tower, Baomin No.1Rd, Bao an 3rd District,
Shenzhen, China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
No. 24 Xinfa East Road, Xiangshan Community, Xinqiao Street,
Baoan District, Shenzhen, Guangdong, People's Republic of China
Tel. 0755-23200050 Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name : Bigme Cloud Literacy Technology Co., Ltd.
Address : 01 18F, COFCO Property Tower, Baomin No.1Rd, Bao an 3rd District, Shenzhen, China

Manufacturer's Name : Bigme Cloud Literacy Technology Co., Ltd.
Address : 01 18F, COFCO Property Tower, Baomin No.1Rd, Bao an 3rd District, Shenzhen, China

Product description

Product name : Smartphone
Trade Mark : Bigme
Model and/or type reference : HiBreak pro
Family Model : HiBreak pro plus, HiBreak pro se, HiBreak pro color, HiBreak pro color plus, HiBreak pro color se, B651, B651 Lite, B651 Pro, B651 Plus, B651C, B651C Lite, B651C Pro, B651C+, B651 Color, B651 Color Lite, B651 Color Pro, B651 Color Plus

Test Sample Number..... : S250211006008
Date (s) of performance of tests .: Feb. 12, 2025 ~ Apr. 07, 2025
Standards : FCC Part15.407
Test procedure..... : ANSI C63.10-2013
KDB 789033 D02 General UNII Test Procedures New Rules v02r01
KDB 905462 D03 Client Without DFS New Rules v01r02
KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.

Prepared By : Allen Liu
Allen Liu
(Project Engineer)

Reviewed By : Aaron Cheng
Aaron Cheng
(Supervisor)

Approved By : Alex Li
Alex Li
(Manager)

Table of Contents

	Page
1. SUMMARY OF TEST RESULTS	7
1.1 FACILITIES AND ACCREDITATIONS	8
1.2 MEASUREMENT UNCERTAINTY	8
1 . GENERAL INFORMATION	9
1.1 GENERAL DESCRIPTION OF EUT	9
1.2 DESCRIPTION OF TEST MODES	12
1.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	13
1.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	14
1.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	15
2 . EMC EMISSION TEST	17
2.1 CONDUCTED EMISSION MEASUREMENT	17
2.1.1 APPLICABLE STANDARD	17
2.1.2 CONFORMANCE LIMIT	17
2.1.3 TEST CONFIGURATION	17
2.1.4 TEST PROCEDURE	17
2.2 RADIATED EMISSION MEASUREMENT	26
2.2.1 APPLICABLE STANDARD	26
2.2.2 CONFORMANCE LIMIT	26
2.2.3 MEASURING INSTRUMENTS	26
2.2.4 TEST CONFIGURATION	27
2.2.5 TEST PROCEDURE	28
2.2.6 TEST RESULTS (9KHZ – 30 MHZ)	29
2.2.7 TEST RESULTS (30MHZ – 1GHZ)	30
2.2.8 TEST RESULTS (1GHZ-18GHZ)	38
2.2.10 TEST RESULTS (18GHZ-40GHZ)	42
3 . POWER SPECTRAL DENSITY TEST	61
3.1 APPLIED PROCEDURES / LIMIT	61
3.2 TEST PROCEDURE	62
3.3 DEVIATION FROM STANDARD	62
3.4 TEST SETUP	62
3.5 EUT OPERATION CONDITIONS	62
3.6 TEST RESULTS	63
4 . 26DB & 99% EMISSION BANDWIDTH	64
4.1 APPLIED PROCEDURES / LIMIT	64
4.2 TEST PROCEDURE	64
4.3 EUT OPERATION CONDITIONS	65
4.4 TEST RESULTS	65

Table of Contents

	Page
5 . MINIMUM 6 DB BANDWIDTH	66
5.1 APPLIED PROCEDURES / LIMIT	66
5.2 TEST PROCEDURE	66
5.3 DEVIATION FROM STANDARD	66
5.4 TEST SETUP	66
5.5 EUT OPERATION CONDITIONS	66
5.6 TEST RESULTS	67
6 . MAXIMUM CONDUCTED OUTPUT POWER	68
6.1 PPLIED PROCEDURES / LIMIT	68
6.2 TEST RESULTS	70
7 . OUT OF BAND EMISSIONS	71
7.1 APPLICABLE STANDARD	71
7.2 TEST PROCEDURE	71
7.3 DEVIATION FROM STANDARD	72
7.4 TEST SETUP	72
7.5 EUT OPERATION CONDITIONS	72
7.6 TEST RESULTS	73
8. FREQUENCY STABILITY MEASUREMENT	74
8.1 LIMIT	74
8.2 TEST PROCEDURES	74
8.3 TEST SETUP LAYOUT	74
8.4 EUT OPERATION DURING TEST	74
8.5 TEST RESULTS	75
9. DYNAMIC FREQUENCY SELECTION(DFS)	87
9.1 APPLICABILITY OF DFS REQUIREMENTS	87
9.2 INTERFERENCE THRESHOLD VALUES, MASTER OR CLIENT INCORPORATING IN-SERVICE MONITORING	87
9.3 DFS RESPONSE REQUIREMENT VALUES	88
9.4 SHORT PULSE RADAR TEST WAVEFORMS	88
9.5 CALIBRATION SETUP AND DFS TEST RESULTS	89
9.6 CONDUCTED CALIBRATION SETUP	89
9.7 RADAR WAVEFORM CALIBRATION RESULT	89
9.8 IN-SERVICE MONITORING: CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON-OCCUPANCY PERIOD	90
9.9 RESULT OF CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME	

Table of Contents

	Page
AND NON-OCCUPANCY PERIOD FOR CLIENT BEACON TEST	91
10. ANTENNA REQUIREMENT	92
10.1 STANDARD REQUIREMENT	92
10.2 EUT ANTENNA	92
11. TEST RESULTS	92

Revision History

Report No.	Version	Description	Issued Date
S25021100607004	Rev.01	Initial issue of report	Apr. 07, 2025

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
15.207	AC Power Line Conducted Emissions	PASS	
15.209(a), 15.407 (b)(1) 15.407 (b)(2) 15.407 (b)(3) 15.407 (b)(4) 15.407(b)(8)(9)	Spurious Radiated Emissions	PASS	
15.407 (a)	26 dB and 99% Emission Bandwidth	PASS	
15.407(e)	Minimum 6 dB bandwidth	PASS	
15.407 (a)	Maximum Conducted Output Power	PASS	
15.407 (b)(1) 15.407 (b)(2) 15.407 (b)(3) 15.407 (b)(4)	Band Edge	PASS	
15.407 (a)	Power Spectral Density	PASS	
15.407(b)	Spurious Emissions at Antenna Terminals	PASS	
15.407(g)	Frequency Stability Measurement	PASS	
15.407(h)	Dynamic Frequency Selection(DFS)	PASS	
15.203	Antenna Requirement	PASS	
15.407(c)	Automatically discontinue transmission	PASS	(Note 3)

NOTE:

- (1)" N/A" denotes test is not applicable in this Test Report
- (2) This device operates with a duty cycle greater than 99%
- (3) The product is a client device, and the data transmission is limited by the AP.
When the information to be sent is missing or the operation fails,
the device will automatically stop sending and directly connect to the AP correctly again.

1.1 FACILITIES AND ACCREDITATIONS

FACILITIES

All measurement facilities used to collect the measurement data are located at

No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, People's Republic of China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

CNAS-Lab. : The Certificate Registration Number is L5516.

IC-Registration : The Certificate Registration Number is 9270A.
CAB identifier:CN0074

FCC- Accredited : Test Firm Registration Number: 463705.
Designation Number: CN1184

A2LA-Lab. : The Certificate Registration Number is 4298.01

Name of Firm : Shenzhen NTEK Testing Technology Co., Ltd.

Site Location : No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, People's Republic of China

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.80\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(9KHz~30MHz)	$\pm 6\text{dB}$
5	All emissions, radiated(30MHz~1GHz)	$\pm 2.64\text{dB}$
6	All emissions, radiated(1GHz~6GHz)	$\pm 2.40\text{dB}$
7	All emissions, radiated(> 6GHz)	$\pm 2.52\text{dB}$
8	Temperature	$\pm 0.5^{\circ}\text{C}$
9	Humidity	$\pm 2\%$
10	Radio Frequency	$\pm 0.2\text{ppm}$
11	POWER SPECTRAL DENSITY	$\pm 1.21\text{dB}$

1. GENERAL INFORMATION

1.1 GENERAL DESCRIPTION OF EUT

Equipment	Smartphone		
Trade Mark	Bigme		
Model Name	HiBreak pro		
Family Model	HiBreak pro plus, HiBreak pro se, HiBreak pro color, HiBreak pro color plus, HiBreak pro color se, B651, B651 Lite, B651 Pro, B651 Plus, B651C, B651C Lite, B651C Pro, B651C+, B651 Color, B651 Color Lite, B651 Color Pro, B651 Color Plus		
Model Difference	All models are the same circuit and RF module, except for model names.		
FCC ID	2A8EM-HIBREAKPRO		
Product Description	Mode Supported	☒ 802.11a/n/ac/ax (20MHz channel bandwidth) ☒ 802.11n/ac/ax (40MHz channel bandwidth) ☒ 802.11ac/ax (80MHz channel bandwidth)	
	Data Rate	802.11a: 6/9/12/18/24/36/48/54Mbps; 802.11n (20MHz): MCS0-15, up to 144Mbps 802.11n (40MHz): MCS0-15, up to 300Mbps 802.11ac (20MHz): MCS0-8, up to 173.4Mbps 802.11ac (40MHz): MCS0-9, up to 400Mbps 802.11ac (80MHz): MCS0-9, up to 866.6Mbps 802.11ax (20MHz): MCS0-11, up to 286.8Mbps 802.11ax (40MHz): MCS0-11, up to 573.5Mbps 802.11ax (80MHz): MCS0-11, up to 1201Mbps	
	Modulation	802.11a:OFDM (BPSK / QPSK / 16QAM/64QAM) 802.11n:OFDM (QPSK/BPSK/16QAM/64QAM) 802.11ac:OFDM (QPSK/BPSK/16QAM/64QAM/ 256QAM) 802.11ax: OFDMA (QPSK/BPSK/16QAM/64QAM/ 256QAM/1024QAM)	
	Operating Frequency Range	☒ U-NII-1: 5150 MHz ~5250MHz ☒ U-NII-2A: 5250MHz~5350MHz ☒ U-NII-2C: 5470MHz~5725MHz ☒ U-NII-3: 5725 MHz ~5850 MHz	
	Function:	☐ Outdoor AP ☐ Indoor AP ☐ Fixed P2P ☒ Client	
	DFS type:	☐ master devices ☐ Slave devices with radar detection ☒ Slave devices without radar detection	
	Support TPC	☐ YES ☒ NO	
	Antenna Type	Antenna 1: FPC Antenna Antenna 2: FPC Antenna	
	Antenna Gain	5.2G Antenna 1: 0.96 dBi; Antenna 2: 0.96 dBi 5.3G Antenna 1: 0.96 dBi; Antenna 2: 0.96 dBi 5.6G Antenna 1: 0.96 dBi; Antenna 2: 0.96 dBi 5.8G Antenna 1: 0.96 dBi; Antenna 2: 0.96dBi	
	Smart system	☒ SISO for 802.11a/n/ac/ax ☒ MIMO for 802.11n/ac/ax	
	Based on the application, features, or specification exhibited in User's Manual, More details of EUT technical specification, please refer to the User's Manual.		

Adapter	N/A
Battery	DC 3.85V, 4500mAh, 17.325Wh
Rating(s)	DC 3.85V from battery or DC 5V from adapter
Connecting I/O Port(s)	Please refer to the User's Manual
HW Version	V1
SW Version	N/A

for 5G WIFI has two antennas, and different modes support different transmit mode what describe as Following form:

Mode	Tx/Rx
802.11a/n/ac/ax	1TX, 1RX
802.11n/ac/ax	1TX/2TX, 1RX/2RX

For 5GHz mode, Antenna 1,2 are transmitting, each with the same directional gain.

For MIMO mode, Directional gain= $G_{ANT} + 10 \log(N_{ANT})$ dBi =3.97dBi in 5GHz

the 802.11n(20/40) ac/ax(20/40/80) 5GHz has MIMO mode.

Note: G1 means antenna gain for ANT 1 in dBi.

G2 means antenna gain for ANT 2 in dBi.

N_{ANT} means the number of Antennas.

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. Frequency and Channel list:

Band	20MHz		40MHz		80MHz	
	Channel	Frequency	Channel	Frequency	Channel	Frequency
U-NII-1	36	5180 MHz	38	5190 MHz	42	5210 MHz
	40	5200 MHz	46	5230 MHz	-	-
	44	5220 MHz				
	48	5240 MHz				
U-NII-2A	52	5260 MHz	54	5270 MHz	58	5290 MHz
	56	5280 MHz	62	5310 MHz		
	60	5300 MHz				
	64	5320 MHz				
U-NII-2C	100	5500 MHz	102	5510 MHz	106	5530 MHz
	104	5520 MHz	110	5550 MHz	122	5610 MHz
	108	5540 MHz	118	5590 MHz		
	112	5560 MHz	126	5630 MHz		
	116	5580 MHz	134	5670 MHz		
	120	5600 MHz				
	124	5620 MHz				
	128	5640 MHz				
	132	5660 MHz				
	136	5680 MHz				
	140	5700 MHz				
U-NII-3	149	5745 MHz	151	5755 MHz	155	5775 MHz
	153	5765 MHz	159	5795 MHz		
	157	5785 MHz				
	161	5805 MHz				
	165	5825 MHz				

1.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

For Radiated Emission	
Final Test Mode	Description
Mode 1	Normal Link Mode
Mode 2	802.11a/n/ac/ax 20 CH36/ CH40/CH48/CH52/CH56/CH64/CH100/CH120 /CH140/CH149/CH157/CH165
Mode 3	802.11n40/ac/ ax40 CH38/CH46/CH54/CH62/CH102/CH118/CH134 /CH151/CH159
Mode 4	802.11ac/ax80 CH42/CH58/CH106/CH122/CH155


For Conducted Emission	
Final Test Mode	Description
Mode 1	Normal Link Mode
Mode 2	802.11a/n/ac/ax 20 CH36/ CH40/CH48/CH52/CH56/CH64/CH100/CH120 /CH140/CH149/CH157/CH165
Mode 3	802.11n40/ac/ ax40 CH38/CH46/CH54/CH62/CH102/CH118/CH134 /CH151/CH159
Mode 4	802.11ac/ax80 CH42/CH58/CH106/CH122/CH155

Note:


- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

1.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


For AC Conducted Emission Mode

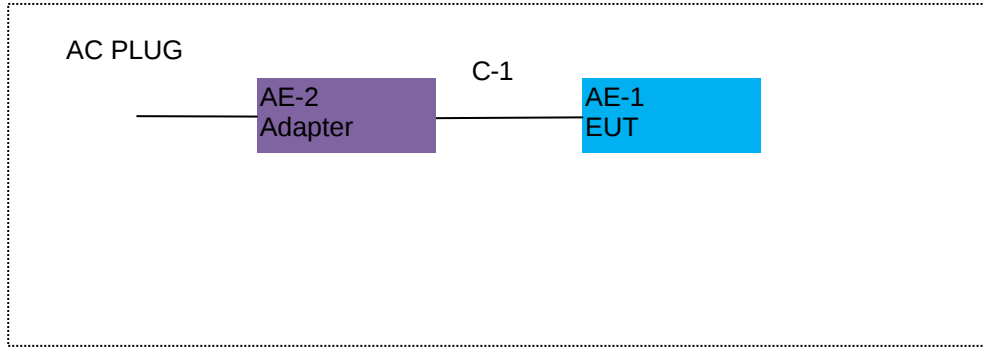

For Radiated Test Cases

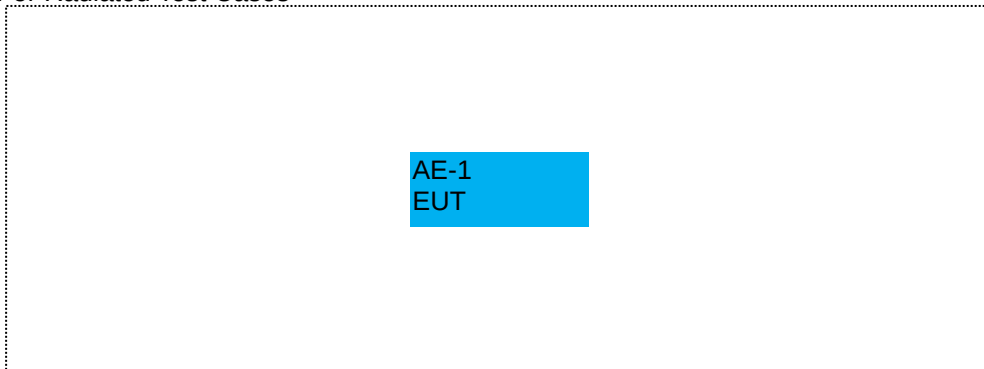

For Conducted Test Cases

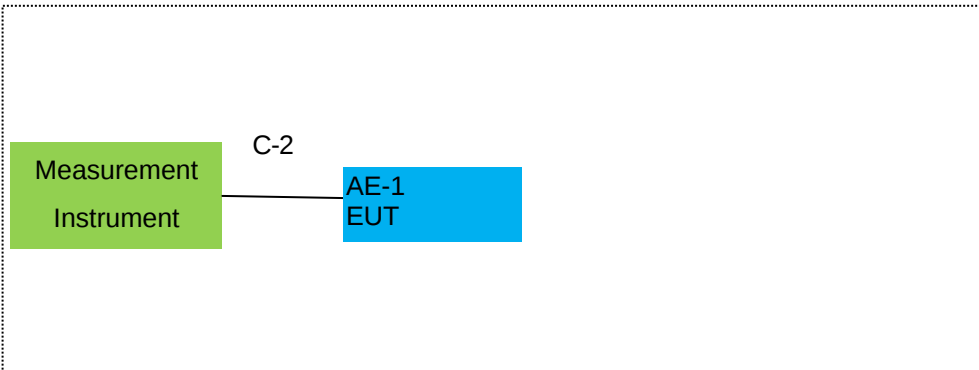

Note: 1. The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

1.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
AE-1	Smartphone	HiBreak pro	N/A	EUT
AE-2	Adapter	N/A	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length
C-1	USB Cable	YES	NO	1.0m
C-2	RF Cable	YES	NO	0.1m

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) During the battery power test, the battery is fully charged.

1.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation& Conducted Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4440A	MY41000130	2024.04.26	2025.04.25	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2024.04.25	2025.04.24	1 year
3	Spectrum Analyzer	R&S	FSV40	101417	2024.04.25	2025.04.24	1 year
4	Test Receiver	R&S	ESPI7	101318	2024.04.26	2025.04.25	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	2024.05.12	2025.05.11	1 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2024.04.26	2027.04.25	3 year
7	Horn Antenna	EM	EM-AH-10180	2011071402	2024.05.12	2027.05.11	3 year
8	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	803	2024.05.12	2027.05.11	3 year
9	Amplifier	EMC	EMC051835SE	980246	2024.04.25	2025.04.24	1 year
10	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	055	2024.05.17	2027.05.16	3 year
11	Power Meter	DARE	RPR3006W	15100041SN084	2024.04.25	2025.04.24	1 year
12	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2023.05.06	2026.05.05	3 year
13	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2023.05.06	2026.05.05	3 year
14	High Test Cable(1G-40G Hz)	N/A	R-03	N/A	2022.06.17	2025.06.16	3 year
15	Filter	TRILTHIC	2400MHz	29	2024.04.26	2027.04.25	3 year
16	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A
17	MXG Vector Signal Generator	Agilent	N5182A	MY47070317	2024.04.25	2025.04.24	1 year

Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test
And this temporary antenna connector is listed within the instrument list

AC Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2024.04.26	2025.04.25	1 year
2	LISN	R&S	ENV216	101313	2024.04.25	2025.04.24	1 year
3	LISN	SCHWARZBECK	NNLK 8129	8129245	2024.04.25	2025.04.24	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2024.04.26	2027.04.25	3 year
5	Test Cable (9KHz-30MHz)	N/A	C01	N/A	2023.05.06	2026.05.05	3 year
6	Test Cable (9KHz-30MHz)	N/A	C02	N/A	2023.05.06	2026.05.05	3 year
7	Test Cable (9KHz-30MHz)	N/A	C03	N/A	2023.05.06	2026.05.05	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable& Aux Equipment which is scheduled for calibration every 3 years.

Measurement Software

Item	Manufacturer	Software Name	Software Version	Description
1	MWRTest	MTS 8310 2.4GHz/5GHz	2.0	RF Conducted Test
2	Farad	EZ-EMC_RE	AIT-03A	RadiatedTest
3	Farad	EZ-EMC_CE	AIT-03A	AC Conducted Test

2. EMC EMISSION TEST

2.1 CONDUCTED EMISSION MEASUREMENT

2.1.1 APPLICABLE STANDARD


According to FCC Part 15.207(a)

2.1.2 CONFORMANCE LIMIT

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56*	56-46*
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. *Decreases with the logarithm of the frequency
2. The lower limit shall apply at the transition frequencies
3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

2.1.3 TEST CONFIGURATION

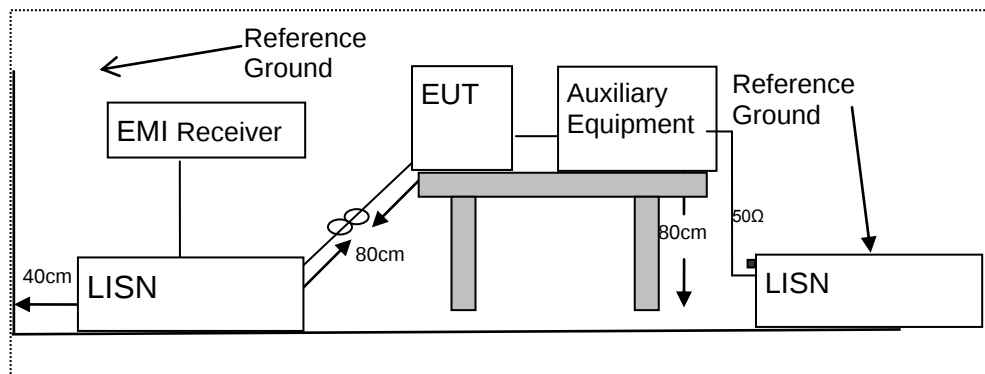

2.1.4 TEST PROCEDURE

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
2. The EUT was placed on a table which is 0.8m above ground plane.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. The frequency range from 150KHz to 30MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.

EUT :	Smartphone	Model Name. :	HiBreak pro
Temperature :	25 °C	Relative Humidity :	53%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(WIFI 5.2G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1500	51.38	10.00	61.38	66.00	-4.62	QP
0.1500	31.75	10.00	41.75	56.00	-14.25	AVG
0.2140	43.49	10.12	53.61	63.05	-9.44	QP
0.2140	23.07	10.12	33.19	53.05	-19.86	AVG
0.2508	38.12	10.19	48.31	61.73	-13.42	QP
0.2508	21.61	10.19	31.80	51.73	-19.93	AVG
0.5780	23.02	10.85	33.87	56.00	-22.13	QP
0.5780	13.26	10.85	24.11	46.00	-21.89	AVG
4.5860	32.01	10.05	42.06	56.00	-13.94	QP
4.5860	19.29	10.05	29.34	46.00	-16.66	AVG
20.4500	34.38	12.82	47.20	60.00	-12.80	QP
20.4500	21.26	12.82	34.08	50.00	-15.92	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

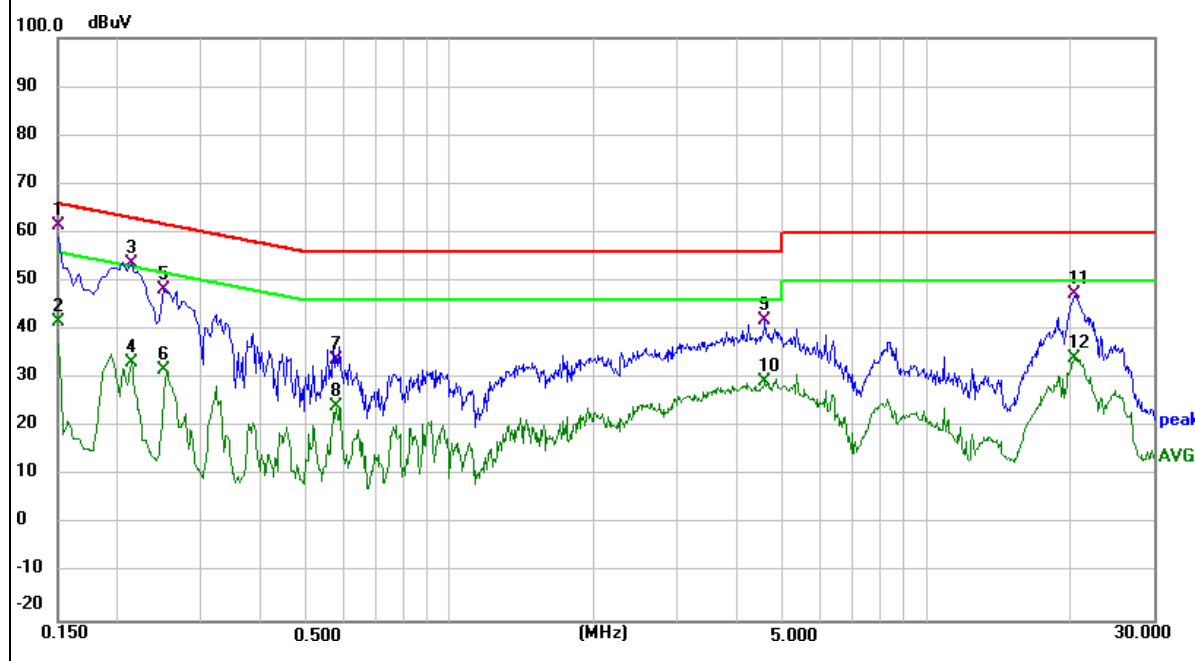


EUT :	Smartphone	Model Name. :	HiBreak pro
Temperature :	25 °C	Relative Humidity :	53%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(WIFI 5.2G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1900	44.89	9.50	54.39	64.04	-9.65	QP
0.1900	29.69	9.50	39.19	54.04	-14.85	AVG
0.2540	39.55	9.61	49.16	61.63	-12.47	QP
0.2540	23.81	9.61	33.42	51.63	-18.21	AVG
0.3220	32.58	9.73	42.31	59.66	-17.35	QP
0.3220	17.54	9.73	27.27	49.66	-22.39	AVG
0.5780	25.10	10.13	35.23	56.00	-20.77	QP
0.5780	13.33	10.13	23.46	46.00	-22.54	AVG
5.0300	30.10	9.33	39.43	60.00	-20.57	QP
5.0300	19.12	9.33	28.45	50.00	-21.55	AVG
20.7500	31.59	12.04	43.63	60.00	-16.37	QP
20.7500	14.88	12.04	26.92	50.00	-23.08	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

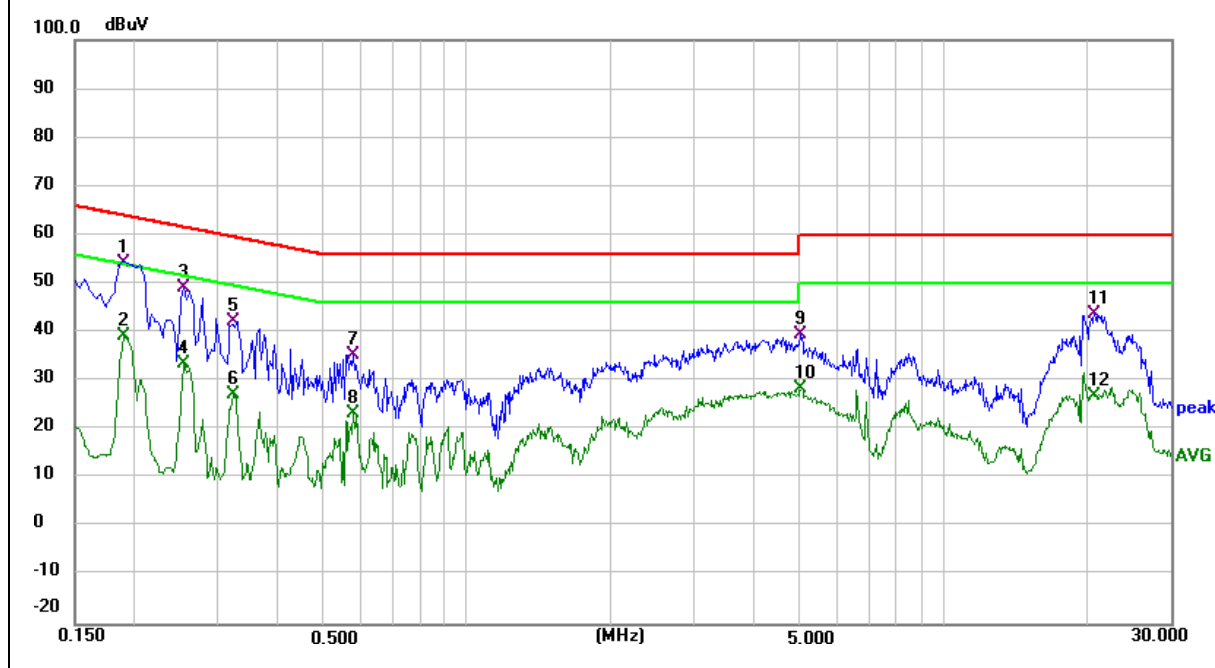


EUT :	Smartphone	Model Name. :	HiBreak pro
Temperature :	25 °C	Relative Humidity :	53%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(WIFI 5.3G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1819	45.43	10.05	55.48	64.40	-8.92	QP
0.1819	21.76	10.05	31.81	54.40	-22.59	AVG
0.2900	38.85	10.27	49.12	60.52	-11.40	QP
0.2900	21.58	10.27	31.85	50.52	-18.67	AVG
0.5060	36.61	10.70	47.31	56.00	-8.69	QP
0.5060	24.45	10.70	35.15	46.00	-10.85	AVG
0.7620	34.46	11.24	45.70	56.00	-10.30	QP
0.7620	21.12	11.24	32.36	46.00	-13.64	AVG
2.1020	31.67	9.82	41.49	56.00	-14.51	QP
2.1020	17.35	9.82	27.17	46.00	-18.83	AVG
12.7299	39.01	-1.33	37.68	60.00	-22.32	QP
12.7299	26.74	-1.33	25.41	50.00	-24.59	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

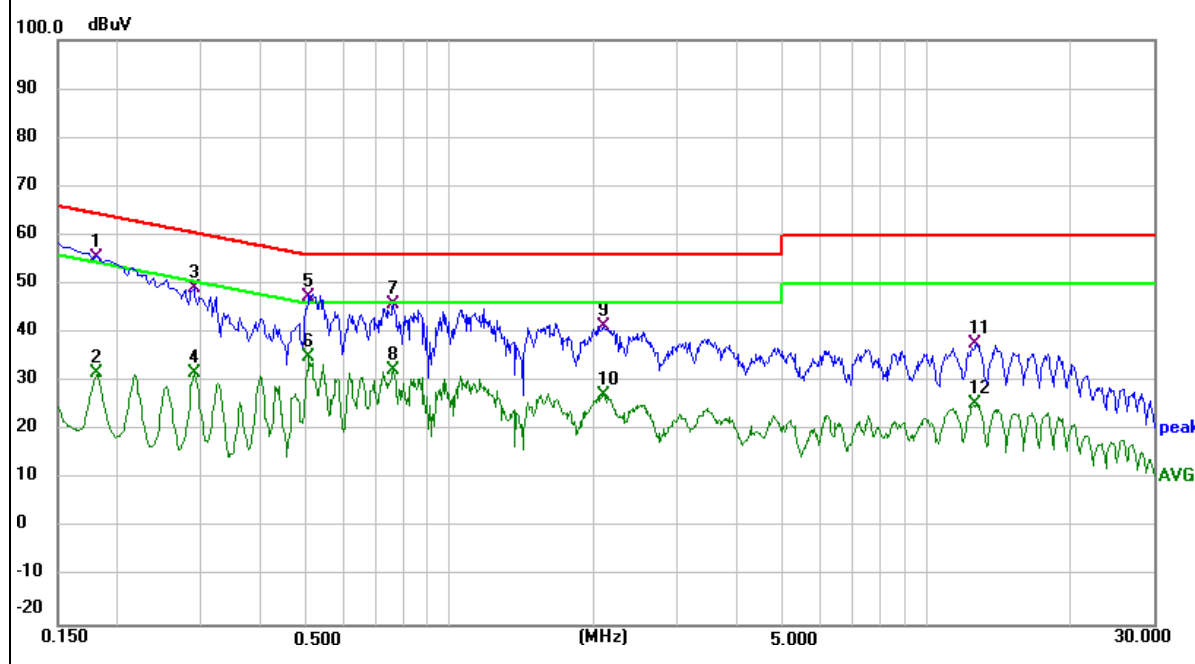


EUT :	Smartphone	Model Name. :	HiBreak pro
Temperature :	25 °C	Relative Humidity :	53%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(WIFI 5.3G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1796	45.66	9.48	55.14	64.50	-9.36	QP
0.1796	24.16	9.48	33.64	54.50	-20.86	AVG
0.2900	34.37	9.68	44.05	60.52	-16.47	QP
0.2900	23.23	9.68	32.91	50.52	-17.61	AVG
0.5020	32.47	9.97	42.44	56.00	-13.56	QP
0.5020	27.20	9.97	37.17	46.00	-8.83	AVG
0.8340	28.12	10.66	38.78	56.00	-17.22	QP
0.8340	18.29	10.66	28.95	46.00	-17.05	AVG
2.0780	28.88	9.07	37.95	56.00	-18.05	QP
2.0780	18.36	9.07	27.43	46.00	-18.57	AVG
12.0540	35.36	-1.57	33.79	60.00	-26.21	QP
12.0540	26.26	-1.57	24.69	50.00	-25.31	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

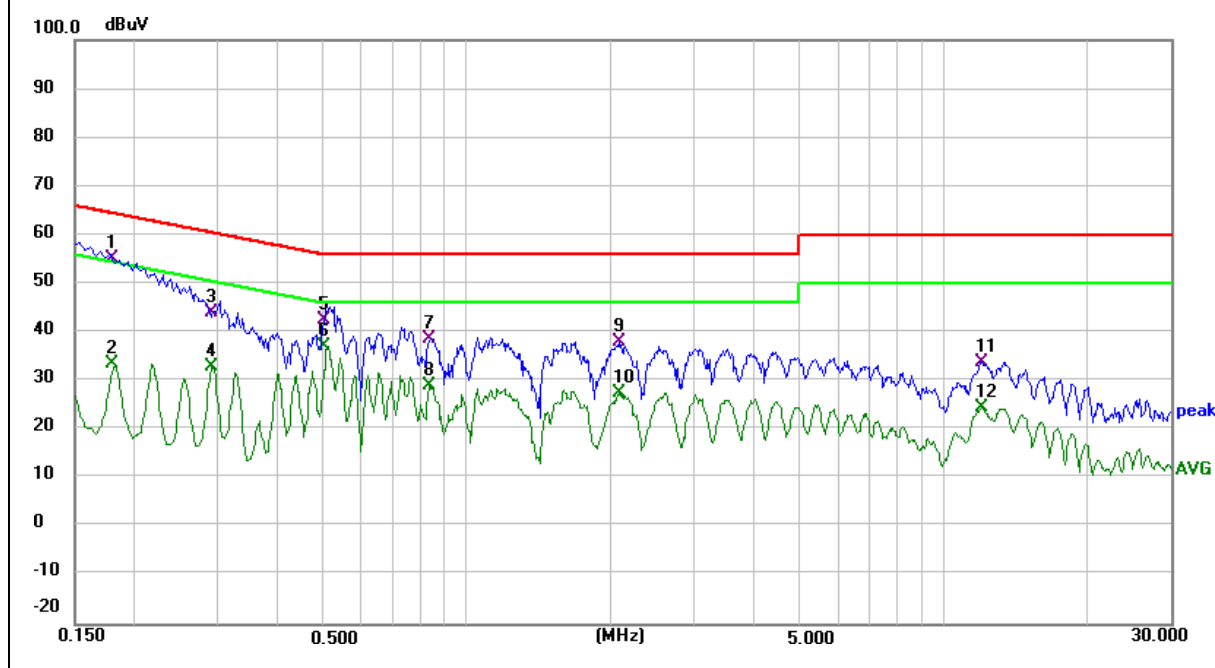


EUT :	Smartphone	Model Name. :	HiBreak pro
Temperature :	25 °C	Relative Humidity :	53%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(WIFI 5.6G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1819	45.68	10.05	55.73	64.40	-8.67	QP
0.1819	20.95	10.05	31.00	54.40	-23.40	AVG
0.5140	38.97	10.70	49.67	56.00	-6.33	QP
0.5140	27.14	10.70	37.84	46.00	-8.16	AVG
0.7300	35.80	11.17	46.97	56.00	-9.03	QP
0.7300	22.35	11.17	33.52	46.00	-12.48	AVG
2.0700	32.70	9.81	42.51	56.00	-13.49	QP
2.0700	18.05	9.81	27.86	46.00	-18.14	AVG
7.2380	26.57	10.43	37.00	60.00	-23.00	QP
7.2380	13.05	10.43	23.48	50.00	-26.52	AVG
13.5700	39.93	-2.00	37.93	60.00	-22.07	QP
13.5700	25.94	-2.00	23.94	50.00	-26.06	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

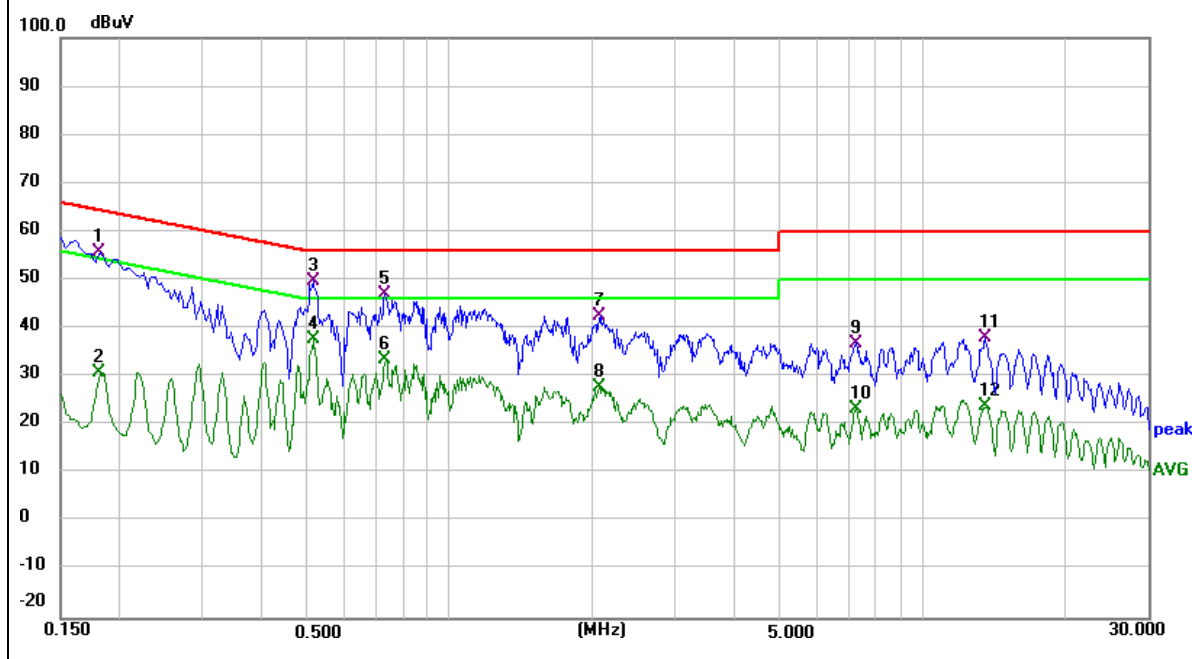


EUT :	Smartphone	Model Name. :	HiBreak pro
Temperature :	25 °C	Relative Humidity :	53%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(WIFI 5.6G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1819	44.00	9.48	53.48	64.40	-10.92	QP
0.1819	24.31	9.48	33.79	54.40	-20.61	AVG
0.5140	35.72	9.99	45.71	56.00	-10.29	QP
0.5140	26.97	9.99	36.96	46.00	-9.04	AVG
0.8380	28.54	10.68	39.22	56.00	-16.78	QP
0.8380	18.81	10.68	29.49	46.00	-16.51	AVG
1.5900	26.26	12.22	38.48	56.00	-17.52	QP
1.5900	16.10	12.22	28.32	46.00	-17.68	AVG
4.4380	26.45	9.28	35.73	56.00	-20.27	QP
4.4380	16.76	9.28	26.04	46.00	-19.96	AVG
12.0659	35.75	-1.59	34.16	60.00	-25.84	QP
12.0659	24.74	-1.59	23.15	50.00	-26.85	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

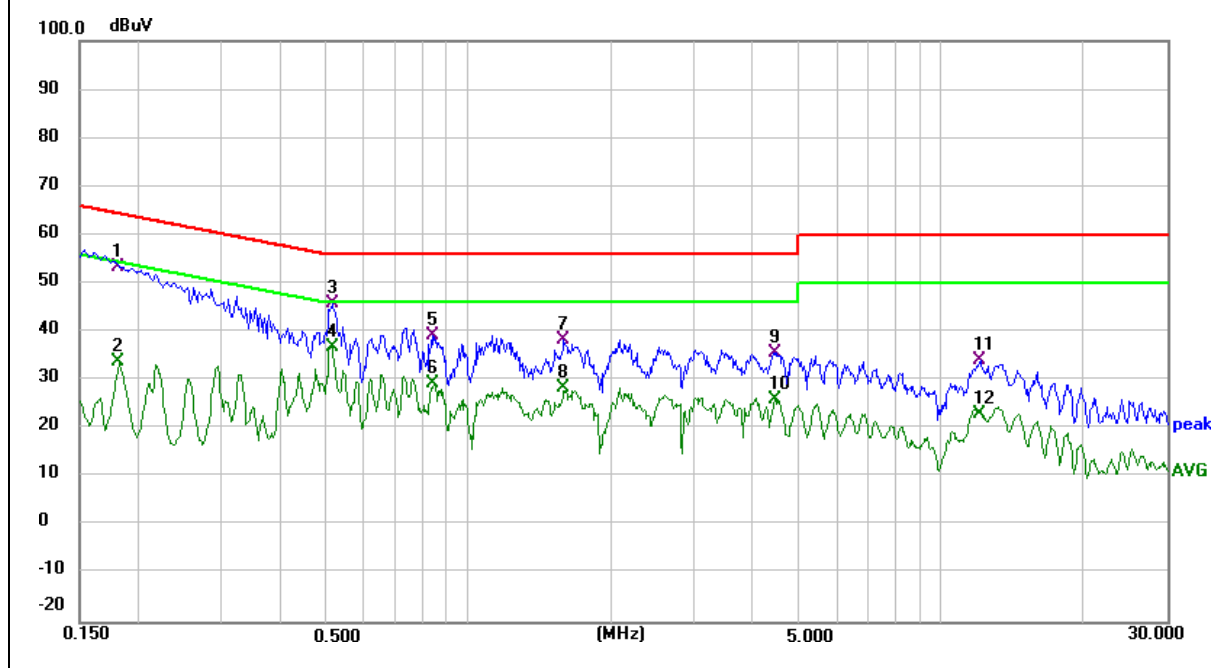


EUT :	Smartphone	Model Name. :	HiBreak pro
Temperature :	25 °C	Relative Humidity :	53%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(WIFI 5.8G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1740	31.15	10.04	41.19	64.77	-23.58	QP
0.1740	20.98	10.04	31.02	54.77	-23.75	AVG
0.4860	34.98	10.66	45.64	56.24	-10.60	QP
0.4860	24.70	10.66	35.36	46.24	-10.88	AVG
0.9500	30.90	11.63	42.53	56.00	-13.47	QP
0.9500	20.73	11.63	32.36	46.00	-13.64	AVG
1.2380	27.85	12.23	40.08	56.00	-15.92	QP
1.2380	17.89	12.23	30.12	46.00	-15.88	AVG
2.2460	28.73	9.82	38.55	56.00	-17.45	QP
2.2460	18.63	9.82	28.45	46.00	-17.55	AVG
13.9500	27.15	11.64	38.79	60.00	-21.21	QP
13.9500	17.05	11.64	28.69	50.00	-21.31	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

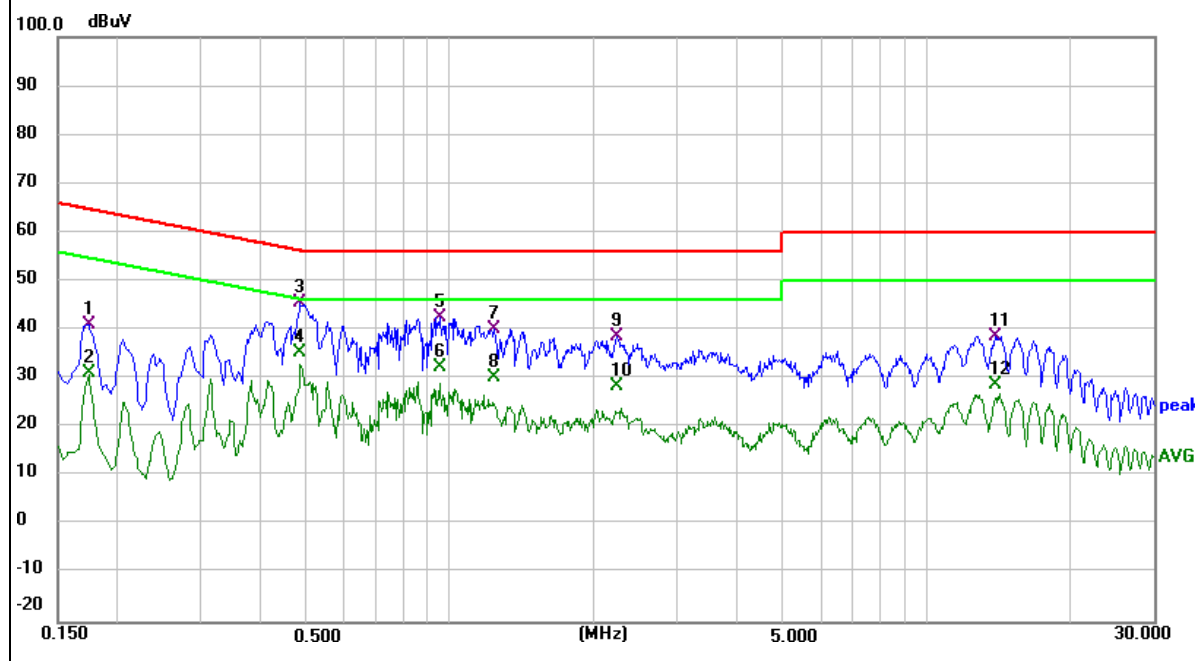


EUT :	Smartphone	Model Name. :	HiBreak pro
Temperature :	25 °C	Relative Humidity :	53%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(WIFI 5.8G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1740	28.26	9.47	37.73	64.77	-27.04	QP
0.1740	18.18	9.47	27.65	54.77	-27.12	AVG
0.4180	29.69	9.90	39.59	57.49	-17.90	QP
0.4180	19.46	9.90	29.36	47.49	-18.13	AVG
0.5020	36.10	9.97	46.07	56.00	-9.93	QP
0.5020	26.39	9.97	36.36	46.00	-9.64	AVG
0.9300	26.89	10.86	37.75	56.00	-18.25	QP
0.9300	16.39	10.86	27.25	46.00	-18.75	AVG
1.4140	24.32	11.85	36.17	56.00	-19.83	QP
1.4140	14.73	11.85	26.58	46.00	-19.42	AVG
12.1700	36.91	-1.67	35.24	60.00	-24.76	QP
12.1700	27.36	-1.67	25.69	50.00	-24.31	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

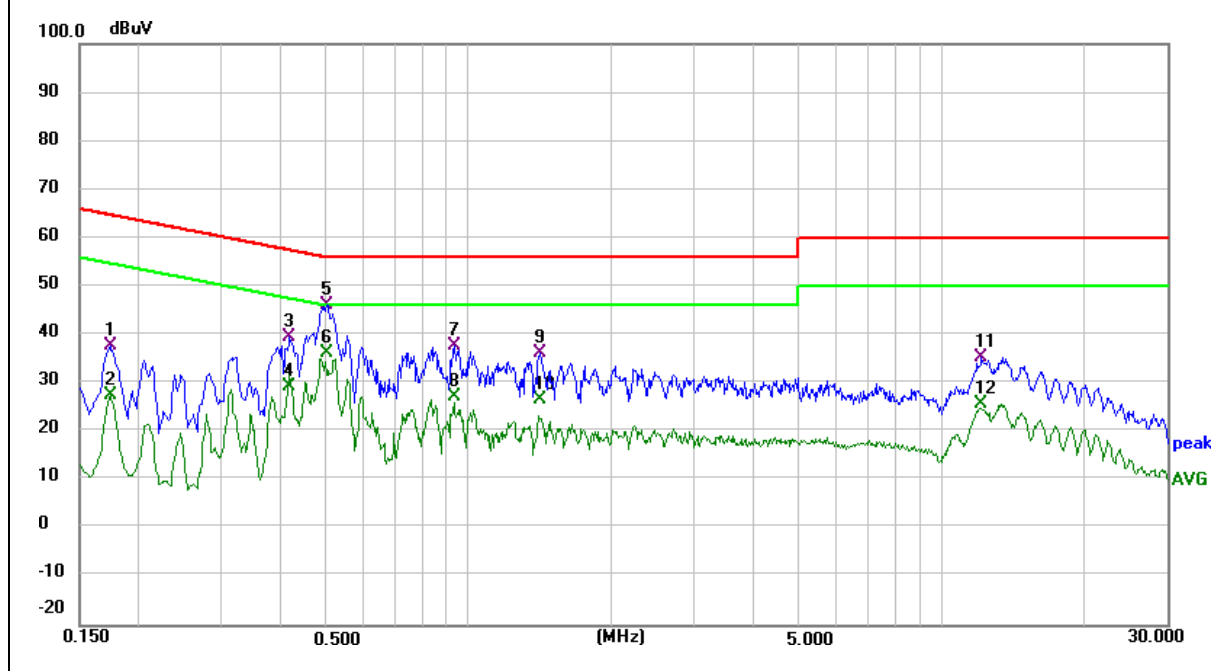

2.2 RADIATED EMISSION MEASUREMENT

2.2.1 APPLICABLE STANDARD

According to FCC Part 15.407(d) and 15.209

2.2.2 CONFORMANCE LIMIT

According to FCC Part 15.407(b)(7): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300
0.490~1.705	24000/F(KHz)	20 log (uV/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Remark :1. Emission level in dBuV/m=20 log (uV/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. For Frequency 9kHz~30MHz:

Distance extrapolation factor =40log(Specific distance/ test distance)(dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor.

For Frequency above 30MHz:

Distance extrapolation factor =20log(Specific distance/ test distance)(dB);


Limit line=Specific limits(dBuV) + distance extrapolation factor.

2.2.3 MEASURING INSTRUMENTS


The Measuring equipment is listed in the section 6.3 of this test report.

2.2.4 TEST CONFIGURATION


(a) For radiated emissions below 30MHz

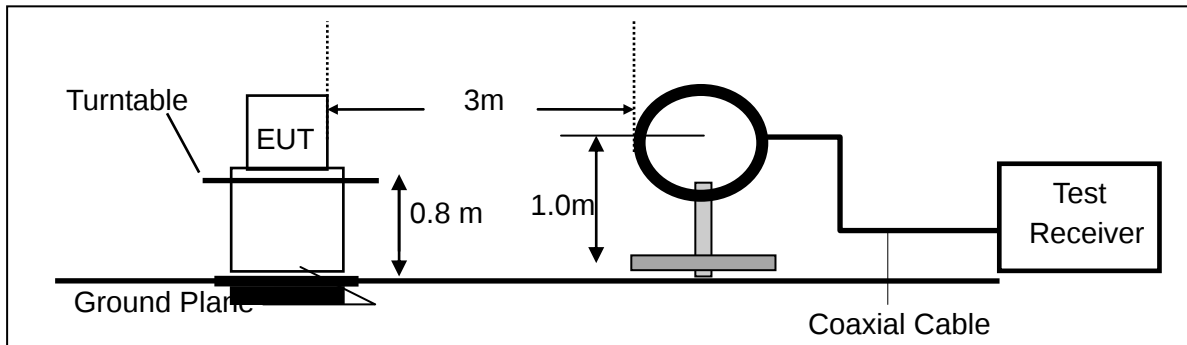

(b) For radiated emissions from 30MHz to 1000MHz

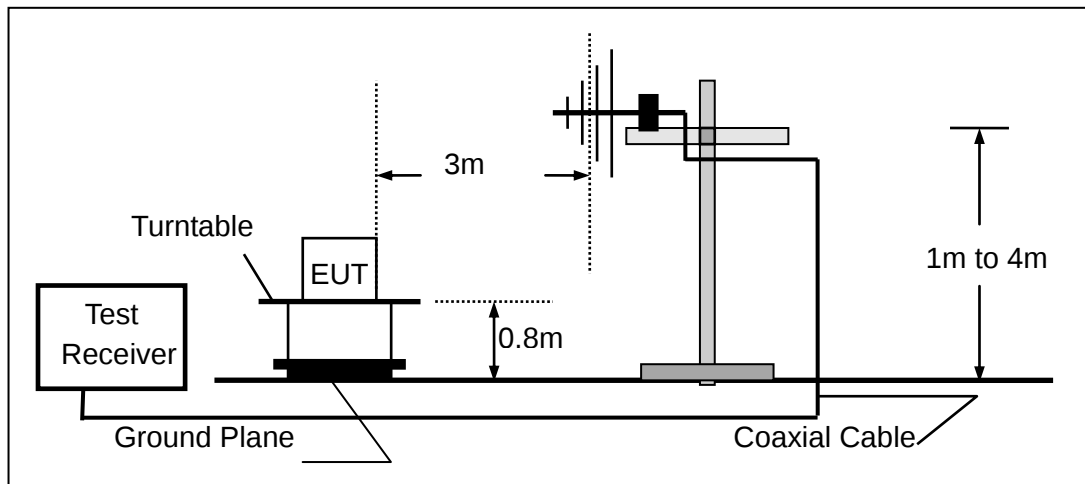

(c) For radiated emissions above 1000MHz

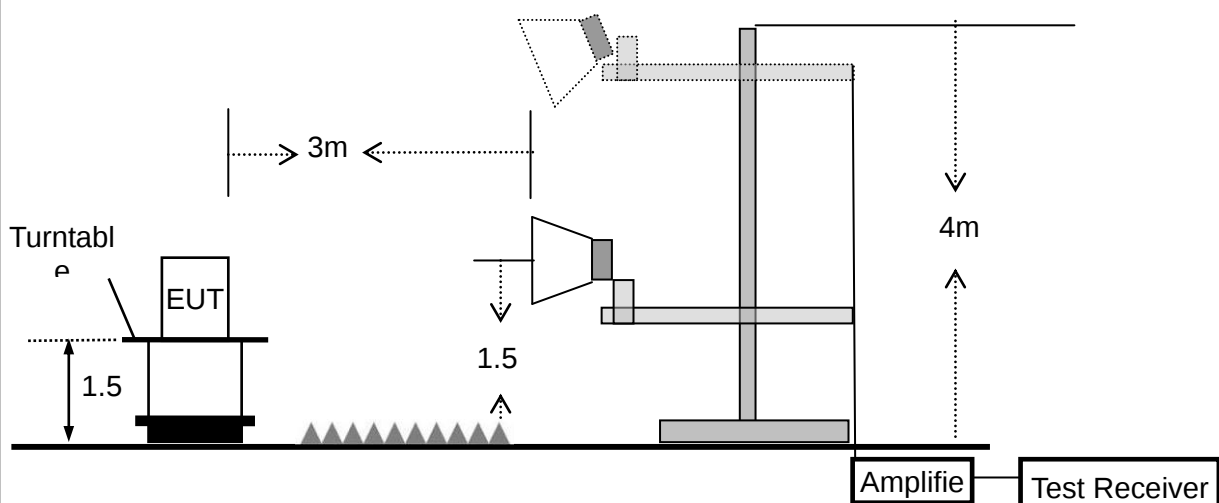

2.2.5 TEST PROCEDURE

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW} [kHz])$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

2.2.6 TEST RESULTS (9KHZ – 30 MHZ)

EUT :	Smartphone	Model Name :	HiBreak pro
Temperature :	26 °C	Relative Humidity :	54%
Pressure:	1010 hPa	Test Voltage :	DC 3.85V
Test Mode :	TX	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	N/A
--	--	--	--	N/A

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


2.2.7 TEST RESULTS (30MHZ – 1GHZ)

EUT :	Smartphone	Model Name :	HiBreak pro
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 3.85V
Test Mode :	TX(WIFI 5.2G-ax20 MIMO) (Low CH)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	49.1865	-0.30	19.62	19.32	40.00	-20.68	QP
V	74.1350	2.88	15.55	18.43	40.00	-21.57	QP
V	140.8350	6.76	14.16	20.92	43.50	-22.58	QP
V	193.7726	4.42	16.98	21.40	43.50	-22.10	QP
V	332.5187	6.06	20.64	26.70	46.00	-19.30	QP
V	570.6100	3.39	26.72	30.11	46.00	-15.89	QP

Remark:


Emission Level= ReadingLevel+ Factor, Margin= Emission Level - Limit

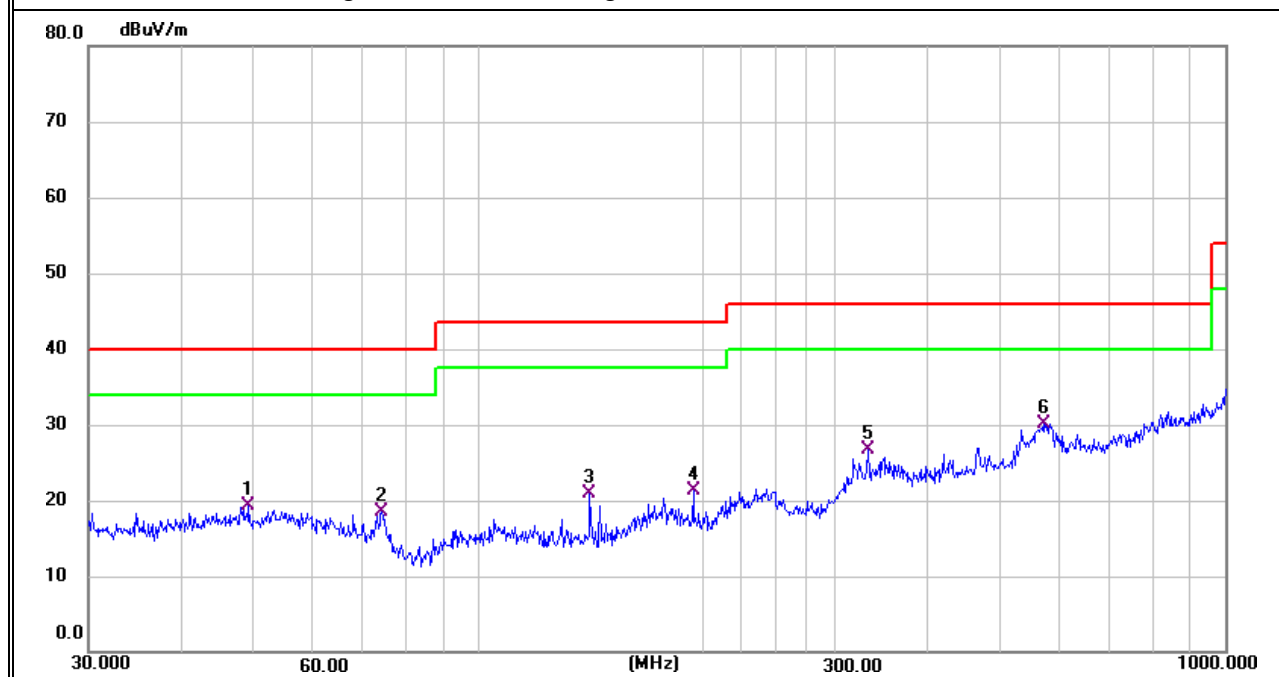

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBUV)	(dB)	(dBUV/m)	(dBUV/m)	(dB)	
H	53.5052	0.85	19.52	20.37	40.00	-19.63	QP
H	76.2442	13.10	15.01	28.11	40.00	-11.89	QP
H	191.0738	9.92	16.39	26.31	43.50	-17.19	QP
H	344.3854	8.49	21.31	29.80	46.00	-16.20	QP
H	497.6764	6.43	24.51	30.94	46.00	-15.06	QP
H	572.6144	8.63	26.64	35.27	46.00	-10.73	QP

Remark:

Emission Level= ReadingLevel+ Factor, Margin= Emission Level - Limit

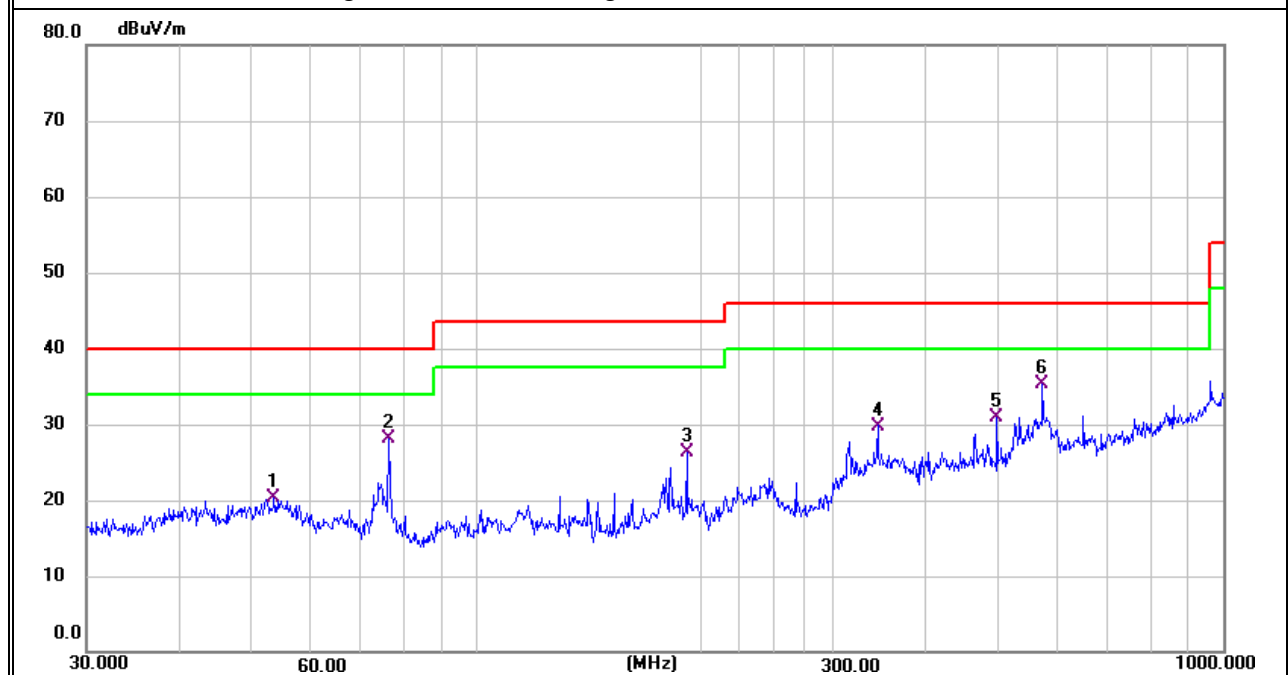


Note: All modes have been tested, just the worst mode has been recorded in the report.

EUT :	Smartphone	Model Name :	HiBreak pro
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 3.85V
Test Mode :	TX(WIFI 5.3G-ax20 MIMO) (Low CH)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	41.7129	15.55	18.91	34.46	40.00	-5.54	QP
V	123.2654	7.95	15.96	23.91	43.50	-19.59	QP
V	191.0738	8.36	16.39	24.75	43.50	-18.75	QP
V	344.3855	5.55	21.31	26.86	46.00	-19.14	QP
V	572.6144	5.93	26.64	32.57	46.00	-13.43	QP
V	649.6596	6.54	26.43	32.97	46.00	-13.03	QP

Remark:


Emission Level= ReadingLevel+ Factor, Margin= Emission Level - Limit

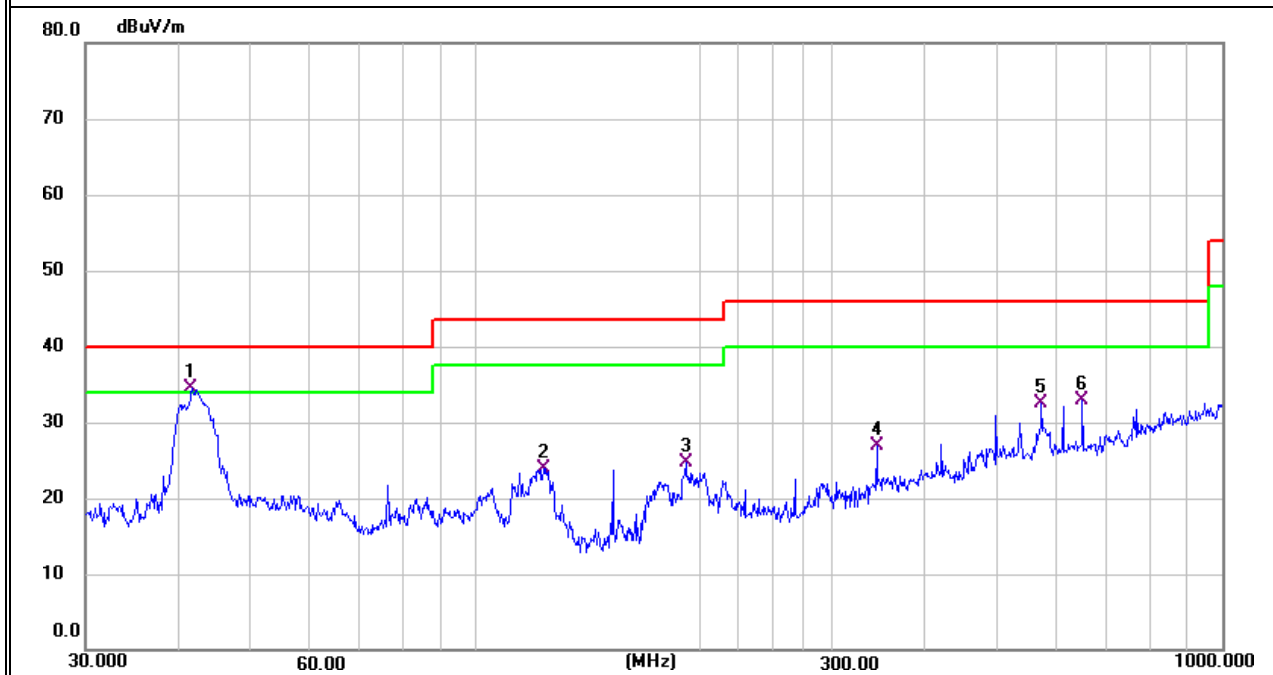

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	42.3022	3.90	19.14	23.04	40.00	-16.96	QP
H	107.1337	0.60	17.78	18.38	43.50	-25.12	QP
H	214.5142	2.21	18.60	20.81	43.50	-22.69	QP
H	299.3158	4.59	20.09	24.68	46.00	-21.32	QP
H	420.5803	4.20	22.53	26.73	46.00	-19.27	QP
H	572.6144	6.41	26.64	33.05	46.00	-12.95	QP

Remark:

Emission Level= ReadingLevel+ Factor, Margin= Emission Level - Limit

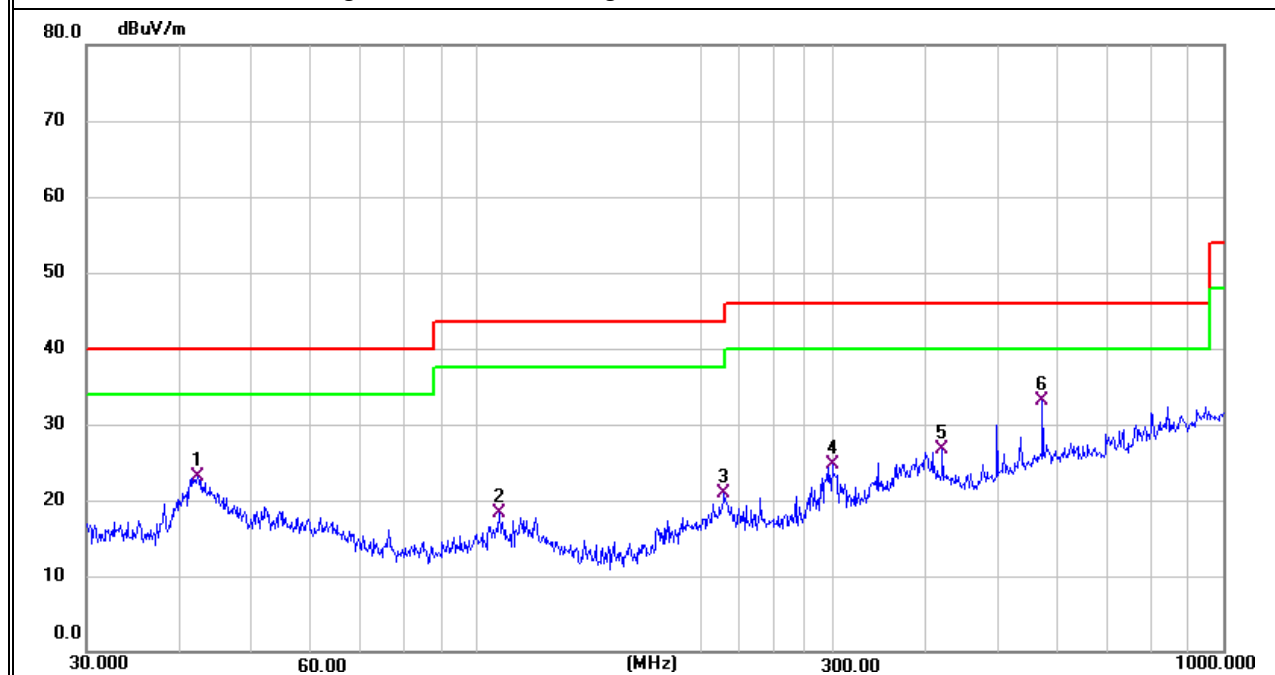


Note: All modes have been tested, just the worst mode has been recorded in the report.

EUT :	Smartphone	Model Name :	HiBreak pro
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 3.85V
Test Mode :	TX(WIFI 5.6G-ax20 MIMO) (Low CH)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	41.5670	14.83	18.83	33.66	40.00	-6.34	QP
V	119.0180	7.22	17.05	24.27	43.50	-19.23	QP
V	191.0738	7.74	16.39	24.13	43.50	-19.37	QP
V	420.5803	6.13	22.53	28.66	46.00	-17.34	QP
V	497.6764	6.37	24.51	30.88	46.00	-15.12	QP
V	612.0641	6.52	26.43	32.95	46.00	-13.05	QP

Remark:


Emission Level= ReadingLevel+ Factor, Margin= Emission Level - Limit

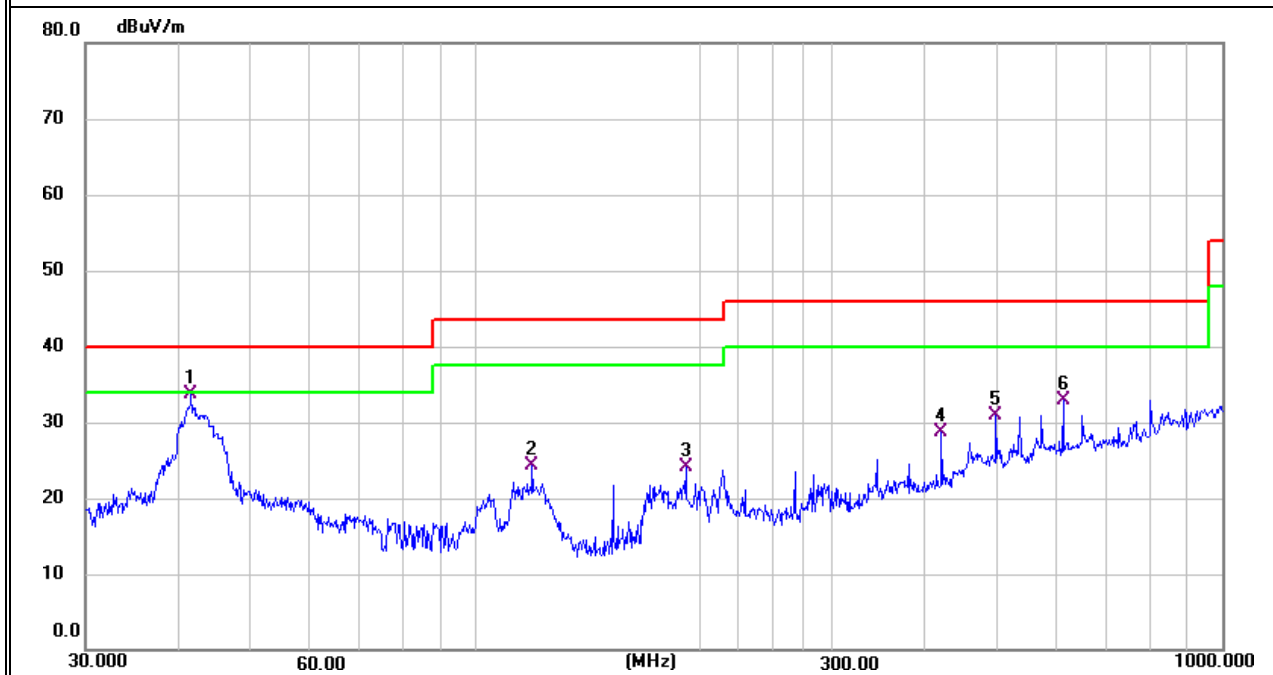

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	42.4508	2.66	19.19	21.85	40.00	-18.15	QP
H	122.8340	2.29	16.05	18.34	43.50	-25.16	QP
H	299.3158	6.82	20.09	26.91	46.00	-19.09	QP
H	497.6764	7.13	24.51	31.64	46.00	-14.36	QP
H	766.0571	7.47	28.16	35.63	46.00	-10.37	QP
H	890.7277	5.87	29.94	35.81	46.00	-10.19	QP

Remark:

Emission Level= ReadingLevel+ Factor, Margin= Emission Level - Limit

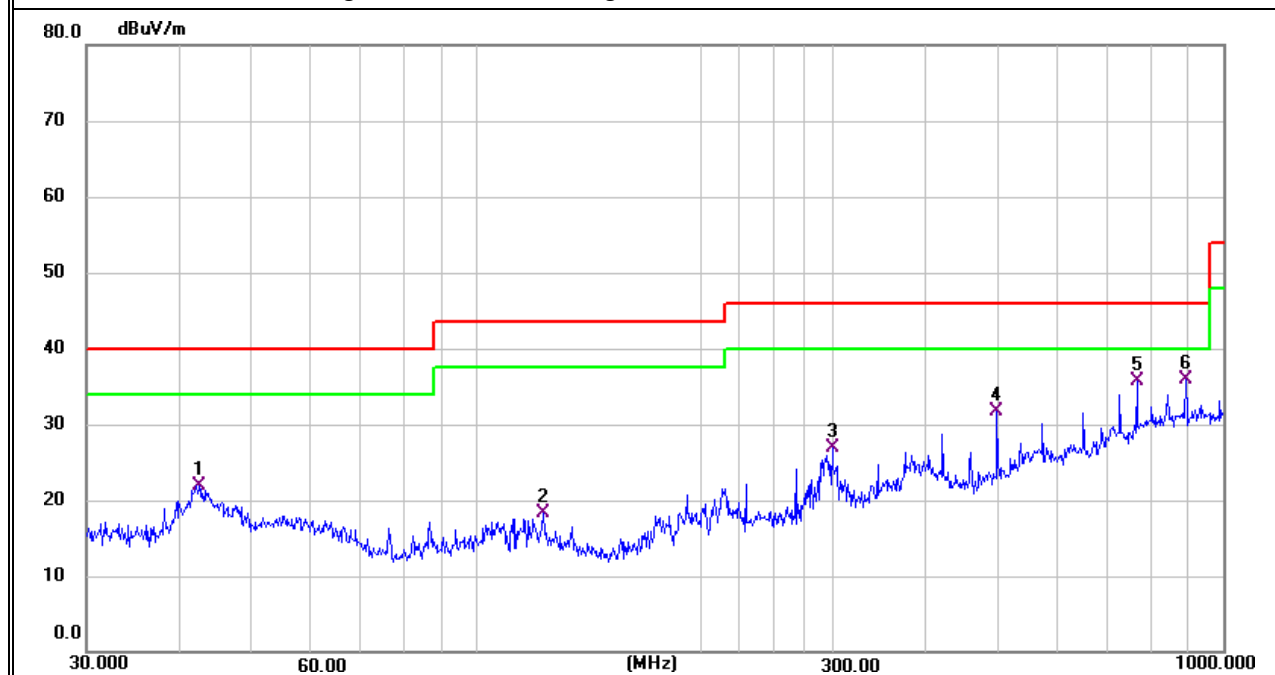


Note: All modes have been tested, just the worst mode has been recorded in the report.

EUT :	Smartphone	Model Name :	HiBreak pro
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 3.85V
Test Mode :	TX(WIFI 5.8G-n20 MIMO) (Low CH)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	44.9004	8.90	19.45	28.35	40.00	-11.65	QP
V	82.3588	13.56	13.96	27.52	40.00	-12.48	QP
V	206.3975	6.27	17.79	24.06	43.50	-19.44	QP
V	296.1836	8.68	20.02	28.70	46.00	-17.30	QP
V	649.6594	7.27	26.43	33.70	46.00	-12.30	QP
V	801.7862	5.61	28.99	34.60	46.00	-11.40	QP

Remark:


Emission Level= ReadingLevel+ Factor, Margin= Emission Level - Limit

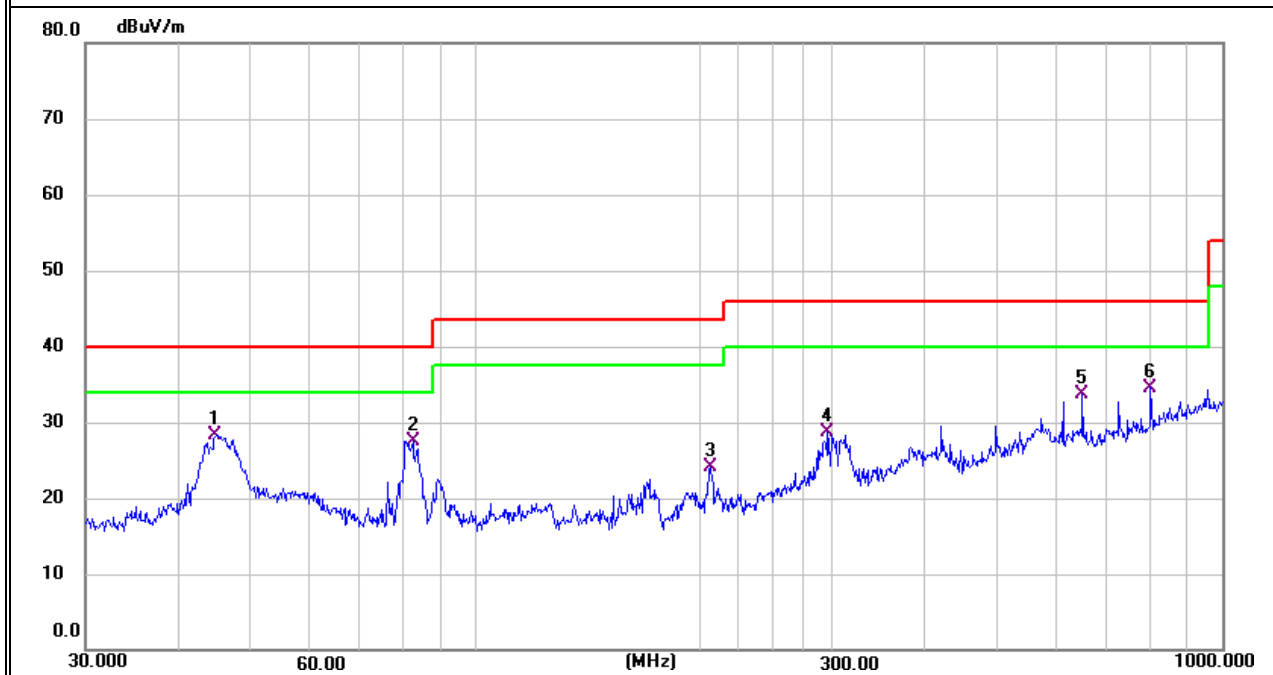

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	46.1779	12.70	19.38	32.08	40.00	-7.92	QP
H	80.0805	8.56	14.35	22.91	40.00	-17.09	QP
H	173.8135	11.35	15.69	27.04	43.50	-16.46	QP
H	211.5261	3.90	18.12	22.02	43.50	-21.48	QP
H	497.6764	6.69	24.51	31.20	46.00	-14.80	QP
H	649.6594	7.42	26.43	33.85	46.00	-12.15	QP

Remark:

Emission Level= ReadingLevel+ Factor, Margin= Emission Level - Limit

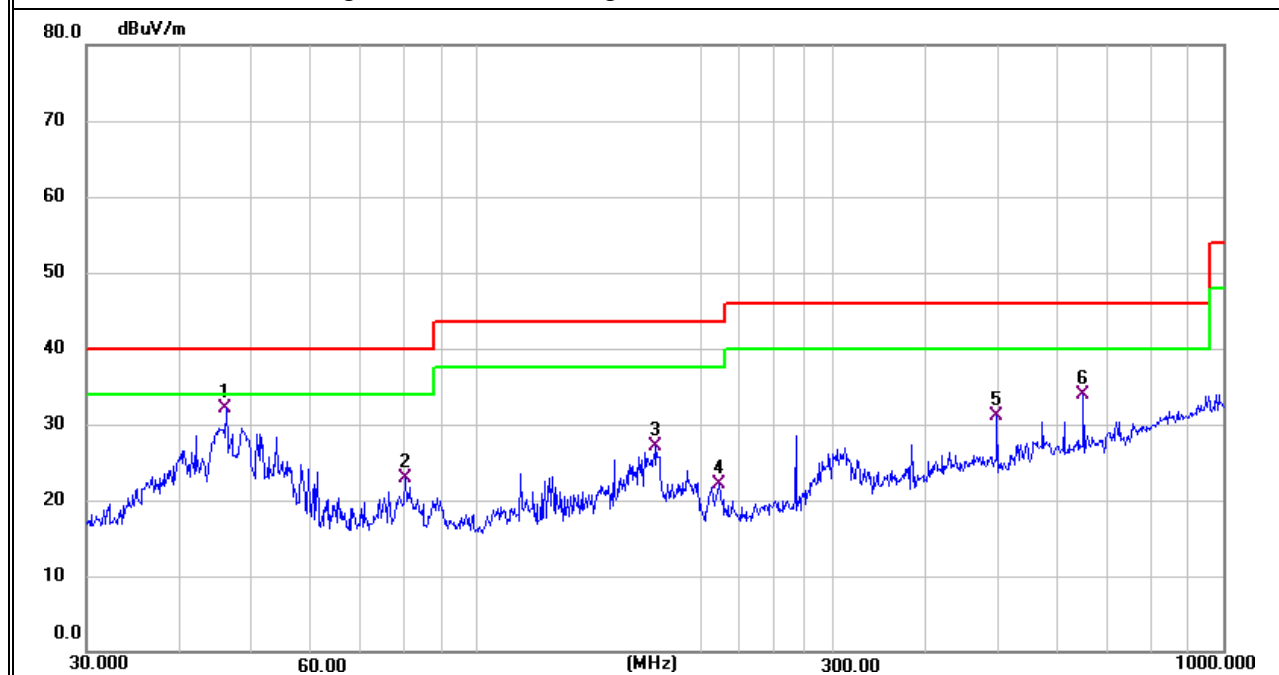

Note: All modes have been tested, just the worst mode has been recorded in the report.

2.2.8 TEST RESULTS (1GHz-18GHz)

EUT :	Smartphone	Model Name. :	HiBreak pro
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.85V
Test Mode :	TX(5.2G) - 802.11ax20 MIMO		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamplifier Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G									
Vertical	3694.10	59.64	5.94	35.40	44.00	56.98	74.00	-17.02	Pk
Vertical	3694.10	39.31	5.94	35.40	44.00	36.65	54.00	-17.35	AV
Vertical	10360.15	59.56	8.46	39.75	44.50	63.27	68.20	-4.93	Pk
Vertical	15540.22	60.27	10.12	38.80	44.10	65.09	74.00	-8.91	Pk
Vertical	15540.22	40.55	10.12	38.80	42.70	46.77	54.00	-7.23	AV
Horizontal	3713.00	59.38	5.94	35.18	44.00	56.50	74.00	-17.50	Pk
Horizontal	3713.00	40.15	5.94	35.18	44.00	37.27	54.00	-16.73	AV
Horizontal	10360.47	60.19	8.46	38.71	44.50	62.86	68.20	-5.34	Pk
Horizontal	15540.38	60.21	10.12	38.38	44.10	64.61	74.00	-9.39	Pk
Horizontal	15540.38	39.43	10.12	38.38	44.10	43.83	54.00	-10.17	AV
middle Channel (5200 MHz)-Above 1G									
Vertical	3624.13	59.74	6.48	36.35	44.05	58.52	74.00	-15.48	Pk
Vertical	3624.13	40.34	6.48	36.35	44.05	39.12	54.00	-14.88	AV
Vertical	10400.09	59.90	8.47	37.88	44.51	61.74	68.20	-6.46	Pk
Vertical	15600.15	60.28	10.12	38.80	44.10	65.10	74.00	-8.90	Pk
Vertical	15600.15	40.30	10.12	38.80	42.70	46.52	54.00	-7.48	AV
Horizontal	4202.14	59.72	6.48	36.37	44.05	58.52	74.00	-15.48	Pk
Horizontal	4202.14	39.27	6.48	36.37	44.05	38.07	54.00	-15.93	AV
Horizontal	10400.14	59.80	8.47	38.64	44.50	62.41	68.20	-5.79	Pk
Horizontal	15600.51	59.52	10.12	38.38	44.10	63.92	74.00	-10.08	Pk
Horizontal	15600.51	39.08	10.12	38.38	44.10	43.48	54.00	-10.52	AV
High Channel (5240 MHz)-Above 1G									
Vertical	4597.70	59.47	7.10	37.24	43.50	60.31	74.00	-13.69	Pk
Vertical	4597.70	40.08	7.10	37.24	43.50	40.92	54.00	-13.08	AV
Vertical	10480.23	60.31	8.46	37.68	44.50	61.95	68.20	-6.25	Pk
Vertical	15720.15	59.94	10.12	38.80	44.10	64.76	74.00	-9.24	Pk
Vertical	15720.15	40.65	10.12	38.80	42.70	46.87	54.00	-7.13	AV
Horizontal	4589.26	59.71	7.10	37.24	43.50	60.55	74.00	-13.45	Pk
Horizontal	4589.26	40.55	7.10	37.24	43.50	41.39	54.00	-12.61	AV
Horizontal	10480.59	60.85	8.46	38.57	44.50	63.38	68.20	-4.82	Pk
Horizontal	15720.18	59.72	10.12	38.38	44.10	64.12	74.00	-9.88	Pk
Horizontal	15720.18	39.16	10.12	38.38	44.10	43.56	54.00	-10.44	AV

Note: "802.11ax20 MIMO(5.2G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamplifier Factor = Level.

EUT :	Smartphone	Model Name. :	HiBreak pro
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.85V
Test Mode :	TX(5.3G) - 802.11ax20 MIMO		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamplifier Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5260 MHz)-Above 1G									
Vertical	4633.25	59.54	5.44	35.40	44.00	56.38	74.00	-17.62	Pk
Vertical	4633.25	39.93	5.74	35.40	44.00	37.07	54.00	-16.93	AV
Vertical	10520.12	60.53	8.26	39.75	44.50	64.04	68.20	-4.16	Pk
Vertical	15780.34	59.23	10.12	38.80	44.10	64.05	74.00	-9.95	Pk
Vertical	15780.34	39.91	9.62	38.80	42.70	45.64	54.00	-8.36	AV
Horizontal	4366.15	59.92	5.57	35.18	44.00	56.67	74.00	-17.33	Pk
Horizontal	4366.15	40.35	5.74	35.18	44.00	37.27	54.00	-16.73	AV
Horizontal	10520.26	59.61	8.38	38.71	44.50	62.20	68.20	-6.00	Pk
Horizontal	15780.34	59.89	9.88	38.38	44.10	64.05	74.00	-9.95	Pk
Horizontal	15780.34	39.85	9.94	38.38	44.10	44.07	54.00	-9.93	AV
middle Channel (5280 MHz)-Above 1G									
Vertical	4122.34	60.30	6.08	36.35	44.05	58.68	74.00	-15.32	Pk
Vertical	4122.34	40.14	6.39	36.35	44.05	38.83	54.00	-15.17	AV
Vertical	10560.19	59.84	8.28	37.88	44.51	61.49	68.20	-6.71	Pk
Vertical	15840.36	60.57	9.79	38.8	44.10	65.05	74.00	-8.95	Pk
Vertical	15840.36	40.36	9.70	38.8	42.70	46.16	54.00	-7.84	AV
Horizontal	3869.48	59.41	6.11	36.37	44.05	57.84	74.00	-16.16	Pk
Horizontal	3869.48	40.61	6.27	36.37	44.05	39.20	54.00	-14.80	AV
Horizontal	10560.74	59.56	8.33	38.64	44.50	62.03	68.20	-6.17	Pk
Horizontal	15840.37	60.11	9.99	38.38	44.10	64.38	74.00	-9.62	Pk
Horizontal	15840.37	39.74	9.81	38.38	44.10	43.83	54.00	-10.17	AV
High Channel (5320 MHz)-Above 1G									
Vertical	5366.52	60.23	6.96	37.24	43.50	60.93	74.00	-13.07	Pk
Vertical	5366.52	40.88	7.07	37.24	43.50	41.69	54.00	-12.31	AV
Vertical	10640.58	59.76	8.14	37.68	44.50	61.08	74.00	-12.92	Pk
Vertical	10640.58	40.39	8.35	37.68	44.50	41.92	54.00	-12.08	AV
Vertical	15960.41	39.56	10.11	38.8	44.10	44.37	74.00	-29.63	Pk
Vertical	15960.41	40.72	9.64	38.8	42.70	46.46	54.00	-7.54	AV
Horizontal	5436.59	60.16	7.05	37.24	43.50	60.95	74.00	-13.05	Pk
Horizontal	5436.59	39.38	7.05	37.24	43.50	40.17	54.00	-13.83	AV
Horizontal	10640.24	60.33	8.20	38.57	44.50	62.60	74.00	-11.40	Pk
Horizontal	10640.24	39.51	8.03	38.57	44.50	41.61	54.00	-12.39	AV

Note: ANT 1 802.11ax20 MIMO(5.3G) mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamplifier Factor = Level.

EUT :	Smartphone	Model Name. :	HiBreak pro
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.85V
Test Mode :	TX(5.6G) - 802.11ax20 MIMO		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5500 MHz)-Above 1G									
Vertical	5433.02	60.76	5.61	35.40	44.00	57.77	74.00	-16.23	Pk
Vertical	5433.02	49.94	5.76	35.40	44.00	47.11	54.00	-6.89	AV
Vertical	11000.25	59.13	8.24	39.75	44.50	62.62	74.00	-11.38	Pk
Vertical	11000.25	40.25	8.35	39.75	44.50	43.85	54.00	-10.15	AV
Vertical	16500.41	60.83	10.05	38.80	44.10	65.58	68.20	-2.62	Pk
Horizontal	5126.47	59.66	5.78	35.18	44.00	56.62	74.00	-17.38	Pk
Horizontal	5126.47	49.10	5.66	35.18	44.00	45.95	54.00	-8.05	AV
Horizontal	11000.32	59.43	8.22	38.71	44.50	61.87	74.00	-12.13	Pk
Horizontal	11000.32	39.46	8.14	38.71	44.50	41.81	54.00	-12.19	AV
Horizontal	16500.47	57.53	10.04	38.38	44.10	61.84	68.20	-6.36	Pk
Middle Channel (5600 MHz)-Above 1G									
Vertical	4933.25	59.33	6.29	36.35	44.05	57.92	74.00	-16.08	Pk
Vertical	4933.25	50.51	6.24	36.35	44.05	49.05	54.00	-4.95	AV
Vertical	11200.58	60.96	8.24	37.88	44.51	62.58	74.00	-11.42	Pk
Vertical	11200.58	40.37	8.13	37.88	44.51	41.86	54.00	-12.14	AV
Vertical	16800.45	59.60	9.71	38.80	44.10	64.01	68.20	-4.19	Pk
Horizontal	4766.32	60.44	6.44	36.37	44.05	59.20	74.00	-14.80	Pk
Horizontal	4766.32	49.87	6.13	36.37	44.05	48.32	54.00	-5.68	AV
Horizontal	11200.45	60.96	8.31	38.64	44.50	63.40	74.00	-10.60	Pk
Horizontal	11200.45	40.26	8.04	38.64	44.50	42.44	54.00	-11.56	AV
Horizontal	16800.33	56.21	10.09	38.38	44.10	60.57	68.20	-7.63	Pk
High Channel (5700 MHz)-Above 1G									
Vertical	5647.33	60.81	6.79	37.24	43.50	61.34	68.20	-6.86	Pk
Vertical	11400.29	59.04	8.10	37.68	44.50	60.32	74.00	-13.68	Pk
Vertical	11400.29	40.87	8.23	37.68	44.50	42.28	54.00	-11.72	AV
Vertical	17100.54	49.12	9.70	38.80	44.10	53.52	68.20	-14.68	Pk
Horizontal	5433.26	59.11	6.74	37.24	43.50	59.59	74.00	-14.41	Pk
Horizontal	5433.26	40.76	6.74	37.24	43.50	41.24	54.00	-12.76	AV
Horizontal	11400.43	50.61	8.25	38.57	44.50	52.93	74.00	-21.07	Pk
Horizontal	11400.43	40.48	8.35	38.57	44.50	42.91	54.00	-11.09	AV
Horizontal	17100.58	40.62	9.70	38.38	44.10	44.59	68.20	-23.61	Pk

Note:"802.11ax20 MIMO(5.6G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

EUT :	Smartphone	Model Name. :	HiBreak pro
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.85V
Test Mode :	TX (5.8G) -- 802.11n20 MIMO		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamplifier Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G									
Vertical	5122.51	59.53	5.94	35.40	44.00	56.87	74.00	-17.13	Pk
Vertical	5122.51	39.55	5.94	35.40	44.00	36.89	54.00	-17.11	AV
Vertical	11490.60	59.77	8.46	39.75	44.50	63.48	74.00	-10.52	Pk
Vertical	11490.60	40.96	8.46	39.75	44.50	44.67	54.00	-9.33	AV
Vertical	17235.65	40.57	10.12	38.80	44.10	45.39	68.20	-22.81	Pk
Horizontal	5166.60	60.37	5.94	35.18	44.00	57.49	68.20	-10.71	Pk
Horizontal	11490.47	49.71	8.46	38.71	44.50	52.38	74.00	-21.62	Pk
Horizontal	11490.47	40.01	8.46	38.71	44.50	42.68	54.00	-11.32	AV
Horizontal	17235.47	56.68	10.12	38.38	44.10	61.08	68.20	-7.12	Pk
middle Channel (5785 MHz)-Above 1G									
Vertical	5433.40	60.81	6.48	36.35	44.05	59.59	74.00	-14.41	Pk
Vertical	5433.40	40.24	6.48	36.35	44.05	39.02	54.00	-14.98	AV
Vertical	11570.41	60.67	8.47	37.88	44.51	62.51	74.00	-11.49	Pk
Vertical	11570.41	39.87	8.47	37.88	44.51	41.71	54.00	-12.29	AV
Vertical	17355.84	39.06	10.12	38.80	44.10	43.88	68.20	-24.32	Pk
Horizontal	4866.60	60.40	6.48	36.37	44.05	59.20	74.00	-14.80	Pk
Horizontal	4866.60	40.16	6.48	36.37	44.05	38.96	54.00	-15.04	AV
Horizontal	11570.28	60.01	8.47	38.64	44.50	62.62	74.00	-11.38	Pk
Horizontal	11570.28	40.58	8.47	38.64	44.50	43.19	54.00	-10.81	AV
Horizontal	17355.49	50.91	10.12	38.38	44.10	55.31	68.20	-12.89	Pk
middle Channel (5825 MHz)-Above 1G									
Vertical	5244.48	60.93	7.10	37.24	43.50	61.77	68.20	-6.43	Pk
Vertical	11652.42	59.34	8.46	37.68	44.50	60.98	74.00	-13.02	Pk
Vertical	11652.42	39.84	8.46	37.68	44.50	41.48	54.00	-12.52	AV
Vertical	17473.74	50.75	10.12	38.80	44.10	55.57	68.20	-12.63	Pk
Horizontal	5285.29	59.43	7.10	37.24	43.50	60.27	68.20	-7.93	Pk
Horizontal	11652.67	59.11	8.46	38.57	44.50	61.64	74.00	-12.36	Pk
Horizontal	11652.67	40.53	8.46	38.57	44.50	43.06	54.00	-10.94	AV
Horizontal	17474.68	49.68	10.12	38.38	44.10	54.08	68.20	-14.12	Pk

Note: "802.11n20 MIMO(5.8G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamplifier Factor = Level.

2.2.10 TEST RESULTS (18GHz-40GHz)


EUT :	Smartphone	Model Name. :	HiBreak pro
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.85V
Test Mode :	TX (5.2G)-802.11ax20 MIMO ;TX (5.3G)-802.11ax20 MIMO TX (5.6G)-802.11ax20 MIMO;TX (5.8G)-802.11n20 MIMO		

All the modulation modes have been tested, and the worst result was report as below:

Low Channel (5180 MHz)-Above 1G

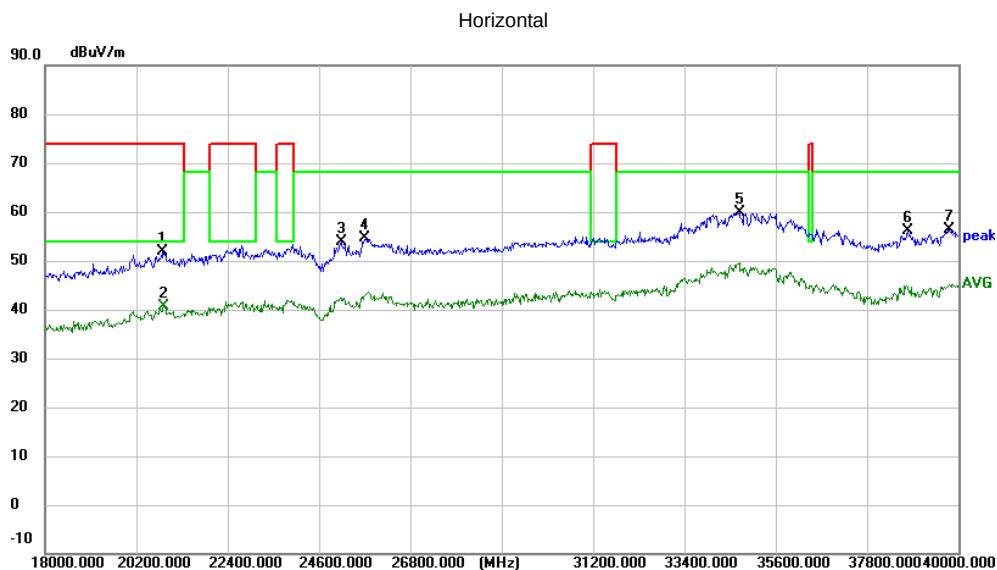


	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	20860.000	60.62	-8.71	51.91	74.00	-22.09	peak
2	20882.000	49.41	-8.72	40.69	54.00	-13.31	AVG
3	25147.800	57.98	-4.01	53.97	68.20	-14.23	peak
4	25753.533	60.24	-5.58	54.66	68.20	-13.54	peak
5 *	34731.000	56.83	3.01	59.84	68.20	-8.36	peak
6	38776.800	54.45	1.80	56.25	68.20	-11.95	peak
7	39813.000	53.27	3.14	56.41	68.20	-11.79	peak

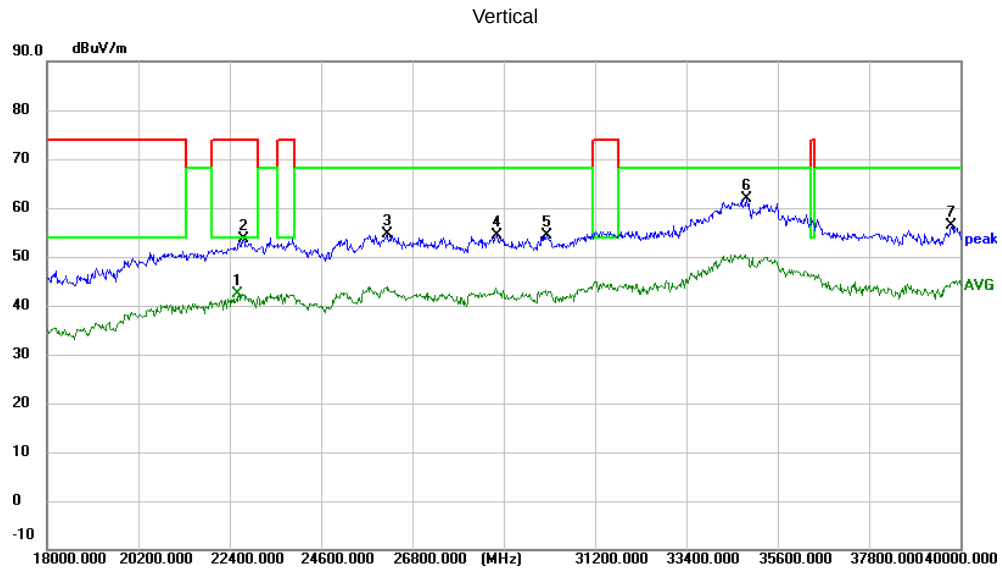


	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	22631.733	49.79	-7.40	42.39	54.00	-11.61	AVG
2	22745.400	61.07	-7.45	53.62	74.00	-20.38	peak
3	26199.400	61.12	-6.45	54.67	68.20	-13.53	peak
4	28859.200	63.29	-8.87	54.42	68.20	-13.78	peak
5	30051.600	61.75	-7.41	54.34	68.20	-13.86	peak
6 *	34869.600	58.40	3.40	61.80	68.20	-6.40	peak
7	39818.133	53.20	3.15	56.35	68.20	-11.85	peak

High Channel (5240 MHz)-Above 1G

Horizontal

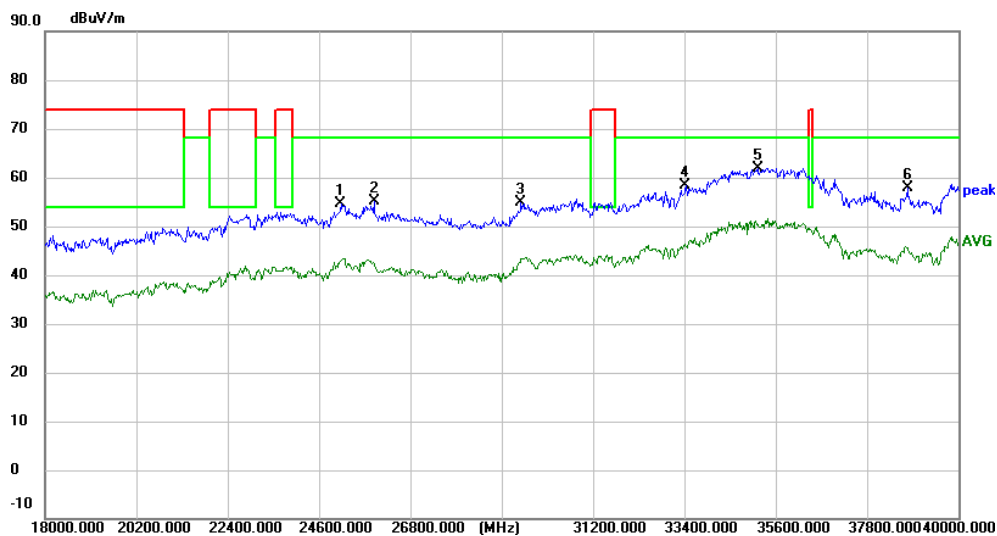

	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	25152.933	58.65	-4.02	54.63	68.20	-13.57	peak
2	25939.067	60.89	-5.80	55.09	68.20	-13.11	peak
3	29487.667	62.59	-7.82	54.77	68.20	-13.43	peak
4	33458.666	59.21	-0.86	58.35	68.20	-9.85	peak
5 *	35177.600	58.69	3.15	61.84	68.20	-6.36	peak
6	38803.200	56.10	1.84	57.94	68.20	-10.26	peak

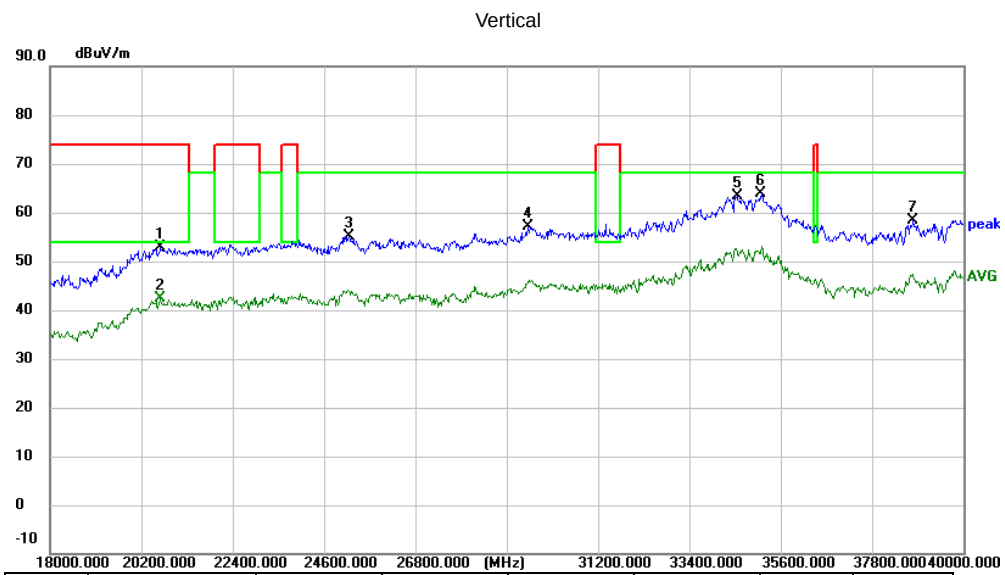


	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	20671.533	61.69	-8.69	53.00	74.00	-21.00	peak
2	20671.533	51.05	-8.69	42.36	54.00	-11.64	AVG
3	25220.400	59.30	-4.16	55.14	68.20	-13.06	peak
4	29527.267	64.89	-7.78	57.11	68.20	-11.09	peak
5	34568.200	60.78	2.65	63.43	68.20	-4.77	peak
6 *	35158.533	60.77	3.21	63.98	68.20	-4.22	peak
7	38810.533	56.49	1.86	58.35	68.20	-9.85	peak


Note:802.11ax20 MIMO mode is the worst mode.

Low Channel (5260 MHz)-Above 1G

Horizontal

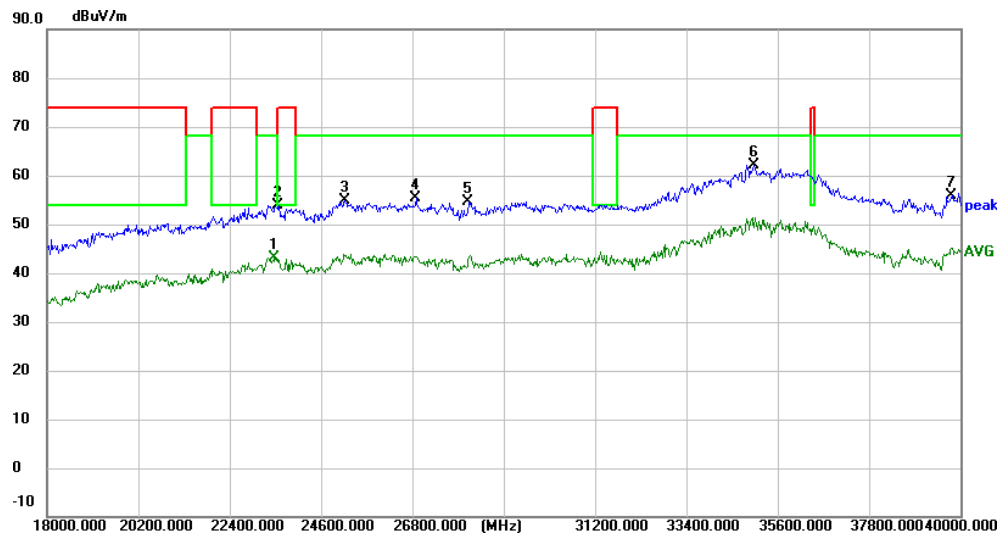


	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	23509.533	49.64	-6.54	43.10	68.20	-25.10	AVG
2	23604.133	60.38	-6.54	53.84	74.00	-20.16	peak
3	25191.067	58.87	-4.10	54.77	68.20	-13.43	peak
4	26897.533	63.39	-7.89	55.50	68.20	-12.70	peak
5	28186.733	63.35	-8.80	54.55	68.20	-13.65	peak
6 *	35036.800	58.44	3.66	62.10	68.20	-6.10	peak
7	39813.733	52.62	3.14	55.76	68.20	-12.44	peak

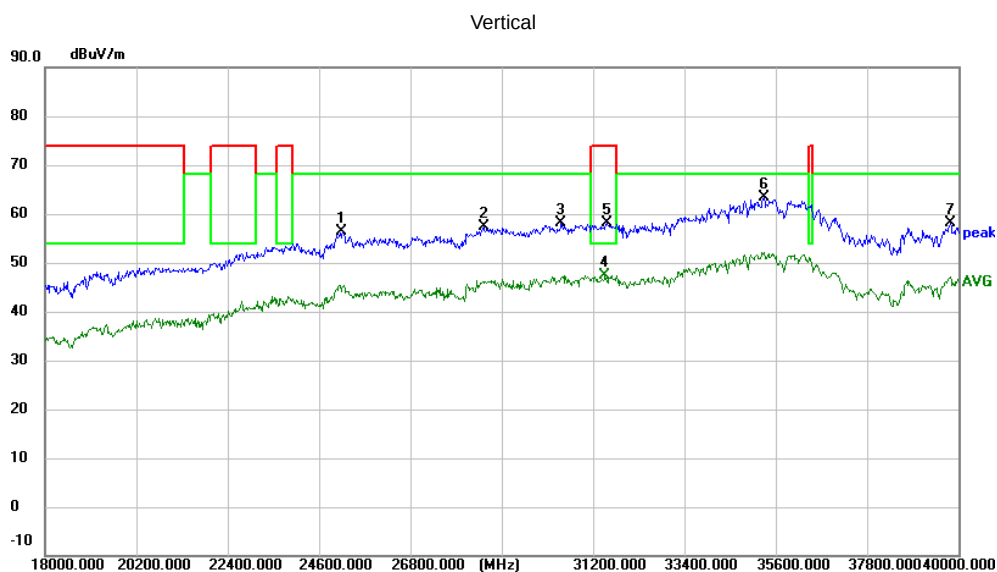


	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	25192.533	60.39	-4.10	56.29	68.20	-11.91	peak
2	28579.067	66.02	-8.74	57.28	68.20	-10.92	peak
3	30466.667	65.19	-7.15	58.04	68.20	-10.16	peak
4	31524.133	52.96	-5.67	47.29	54.00	-6.71	AVG
5	31541.000	63.74	-5.65	58.09	74.00	-15.91	peak
6 *	35322.800	60.59	2.82	63.41	68.20	-4.79	peak
7	39812.267	54.91	3.13	58.04	68.20	-10.16	peak

High Channel (5320 MHz)-Above 1G

Horizontal

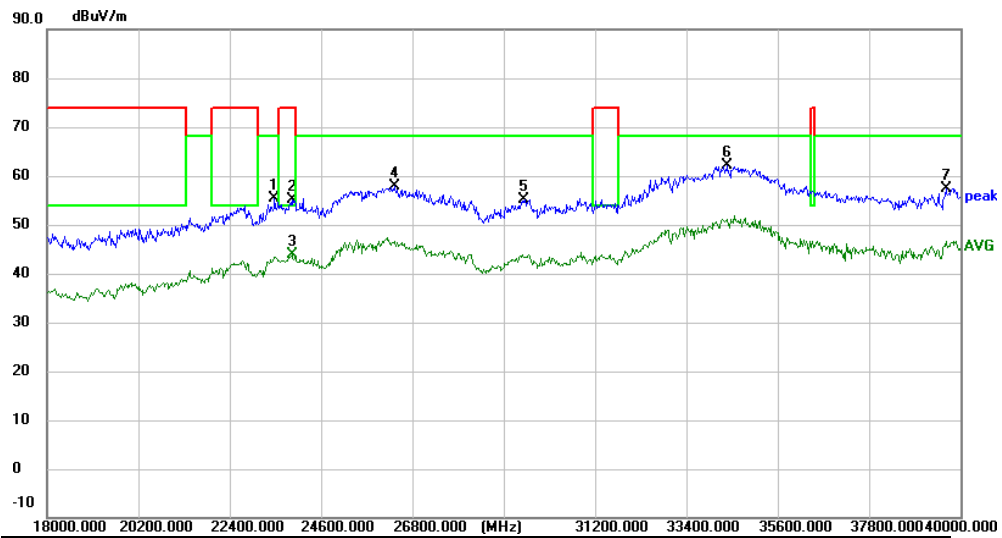

	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	23498.533	61.89	-6.55	55.34	68.20	-12.86	peak
2	23915.067	61.25	-6.06	55.19	74.00	-18.81	peak
3	23915.067	49.89	-6.06	43.83	54.00	-10.17	AVG
4	26384.200	64.71	-6.92	57.79	68.20	-10.41	peak
5	29528.733	62.99	-7.78	55.21	68.20	-12.99	peak
6 *	34414.933	59.90	2.14	62.04	68.20	-6.16	peak
7	39683.200	54.42	2.94	57.36	68.20	-10.84	peak

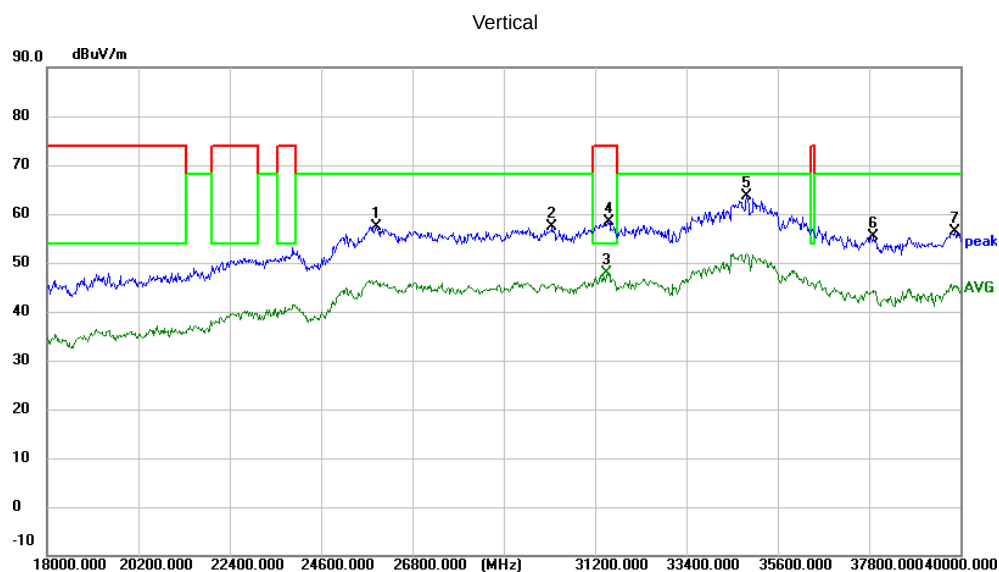


	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	25960.333	63.20	-5.83	57.37	68.20	-10.83	peak
2	30208.533	64.76	-7.41	57.35	68.20	-10.85	peak
3	31530.733	53.49	-5.67	47.82	54.00	-6.18	AVG
4	31561.533	63.93	-5.62	58.31	74.00	-15.69	peak
5 *	34873.267	60.18	3.41	63.59	68.20	-4.61	peak
6	37940.067	54.93	0.37	55.30	68.20	-12.90	peak
7	39903.200	53.08	3.26	56.34	68.20	-11.86	peak


Note: 802.11ax20 MIMO mode is the worst mode.

Low Channel (5500 MHz)-Above 1G

Horizontal

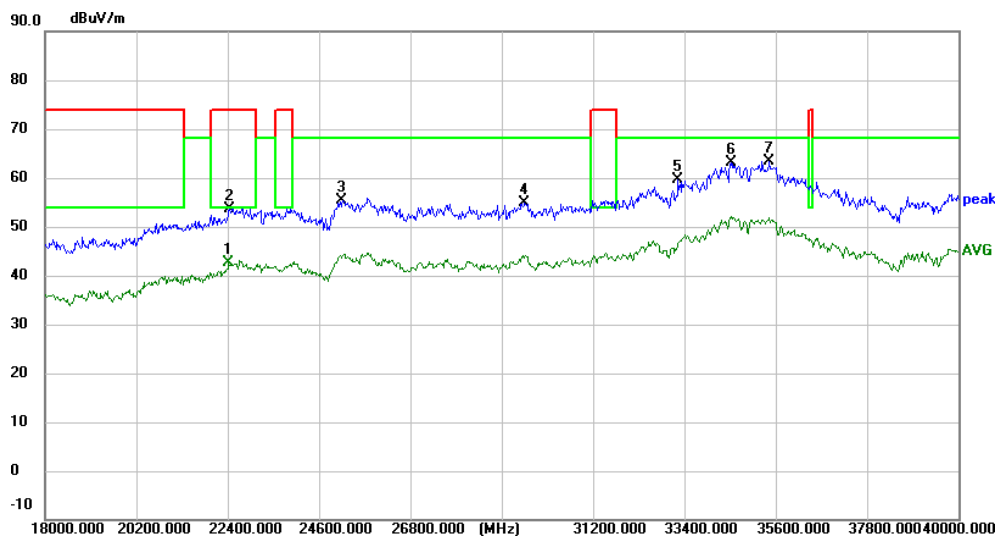


	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	22436.667	50.07	-7.47	42.60	54.00	-11.40	AVG
2	22466.000	61.00	-7.40	53.60	74.00	-20.40	peak
3	25190.333	59.56	-4.10	55.46	68.20	-12.74	peak
4	29562.466	62.50	-7.74	54.76	68.20	-13.44	peak
5	33272.400	60.95	-1.39	59.56	68.20	-8.64	peak
6	34552.067	60.43	2.61	63.04	68.20	-5.16	peak
7 *	35458.467	60.74	2.71	63.45	68.20	-4.75	peak

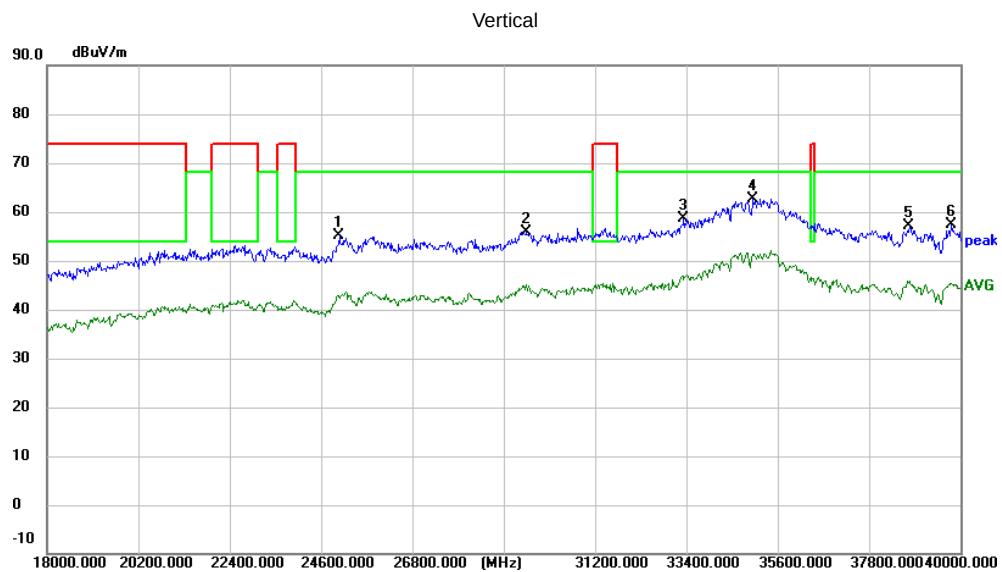


	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	25071.533	58.91	-3.86	55.05	68.20	-13.15	peak
2	29577.867	63.71	-7.73	55.98	68.20	-12.22	peak
3	33351.600	59.75	-1.17	58.58	68.20	-9.62	peak
4 *	35028.000	58.83	3.70	62.53	68.20	-5.67	peak
5	38782.666	55.24	1.82	57.06	68.20	-11.14	peak
6	39799.800	54.18	3.12	57.30	68.20	-10.90	peak

High Channel (5700 MHz)-Above 1G

Horizontal

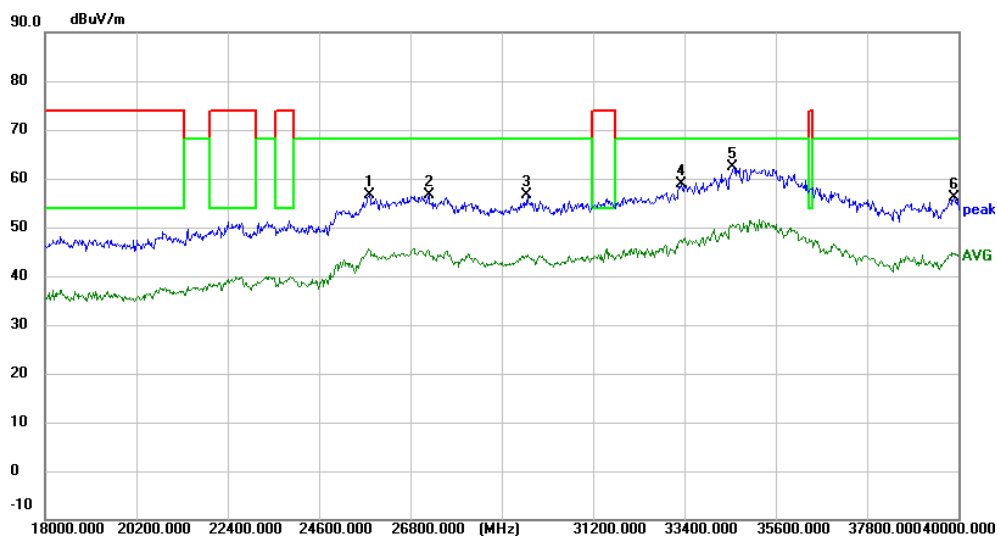

	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	25829.067	62.19	-5.67	56.52	68.20	-11.68	peak
2	27272.267	64.70	-8.18	56.52	68.20	-11.68	peak
3	29618.933	64.22	-7.70	56.52	68.20	-11.68	peak
4	33334.000	60.12	-1.22	58.90	68.20	-9.30	peak
5 *	34597.533	59.74	2.71	62.45	68.20	-5.75	peak
6	39907.600	52.99	3.26	56.25	68.20	-11.95	peak

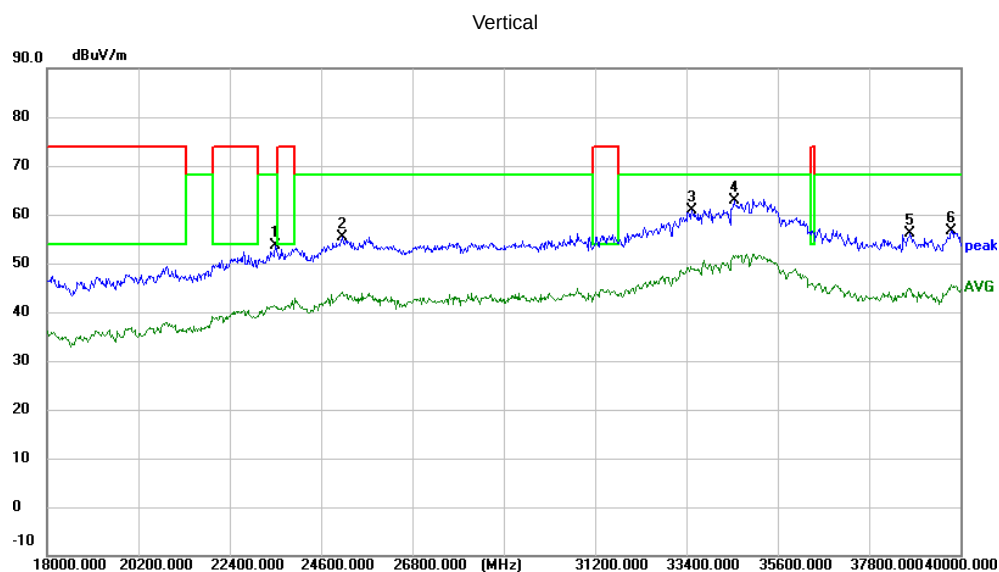


	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	23510.267	60.23	-6.54	53.69	68.20	-14.51	peak
2	25123.600	59.40	-3.96	55.44	68.20	-12.76	peak
3	33556.200	61.46	-0.58	60.88	68.20	-7.32	peak
4 *	34570.400	60.25	2.65	62.90	68.20	-5.30	peak
5	38806.133	54.25	1.84	56.09	68.20	-12.11	peak
6	39792.467	53.47	3.12	56.59	68.20	-11.61	peak


Note:802.11ax20 MIMO mode is the worst mode.

Low Channel (5745 MHz)-Above 1G

Horizontal

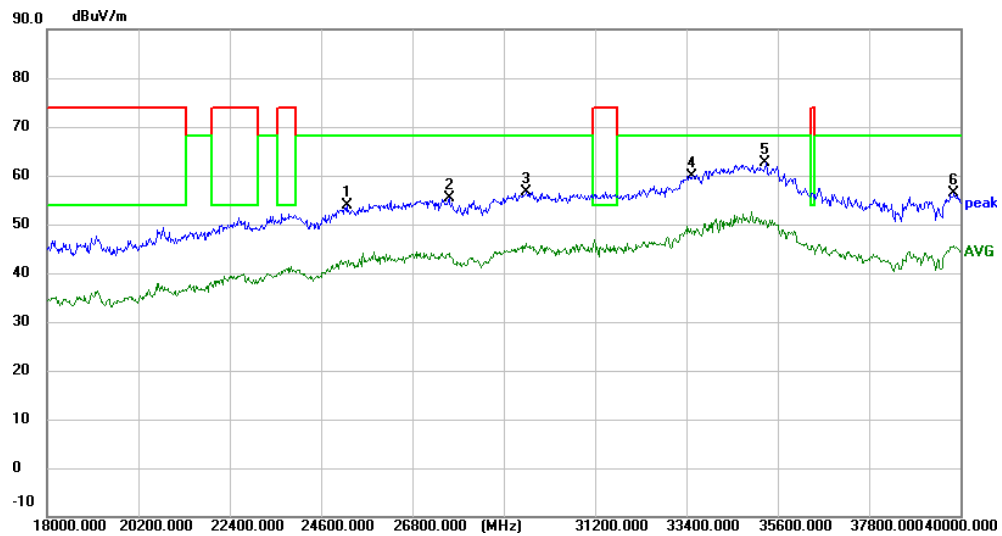


	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	25238.000	58.17	-4.19	53.98	68.20	-14.22	peak
2	27702.000	63.91	-8.48	55.43	68.20	-12.77	peak
3	29567.600	64.39	-7.73	56.66	68.20	-11.54	peak
4	33568.666	60.40	-0.54	59.86	68.20	-8.34	peak
5 *	35319.133	59.87	2.82	62.69	68.20	-5.51	peak
6	39868.000	53.09	3.22	56.31	68.20	-11.89	peak

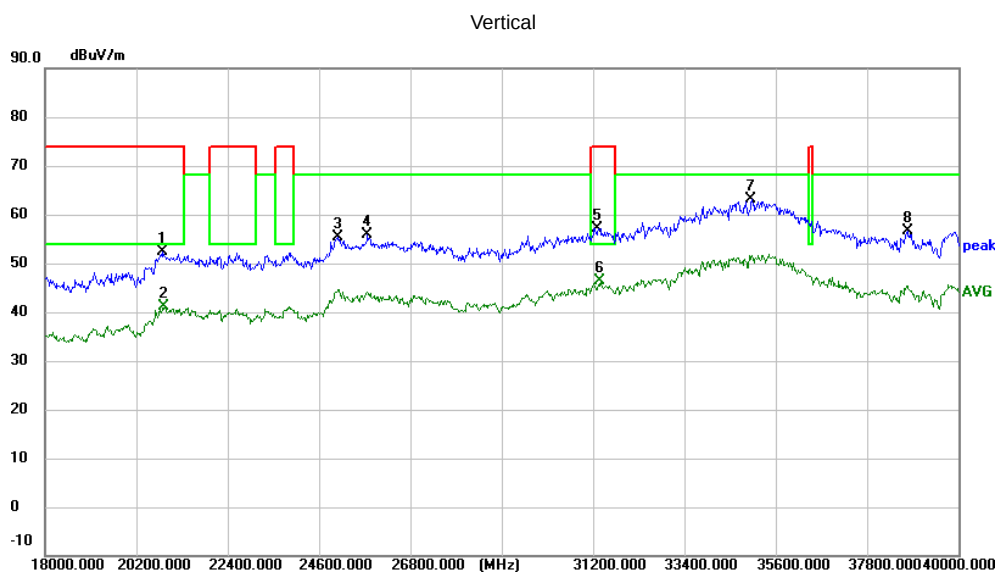


	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	20852.667	60.98	-8.71	52.27	74.00	-21.73	peak
2	20906.933	49.78	-8.73	41.05	54.00	-12.95	AVG
3	25081.067	59.18	-3.88	55.30	68.20	-12.90	peak
4	25790.200	61.45	-5.62	55.83	68.20	-12.37	peak
5	31366.466	62.93	-5.74	57.19	74.00	-16.81	peak
6	31400.933	52.12	-5.73	46.39	54.00	-7.61	AVG
7 *	35033.133	59.56	3.67	63.23	68.20	-4.97	peak
8	38779.000	54.77	1.80	56.57	68.20	-11.63	peak

High Channel (5825 MHz)-Above 1G

Horizontal

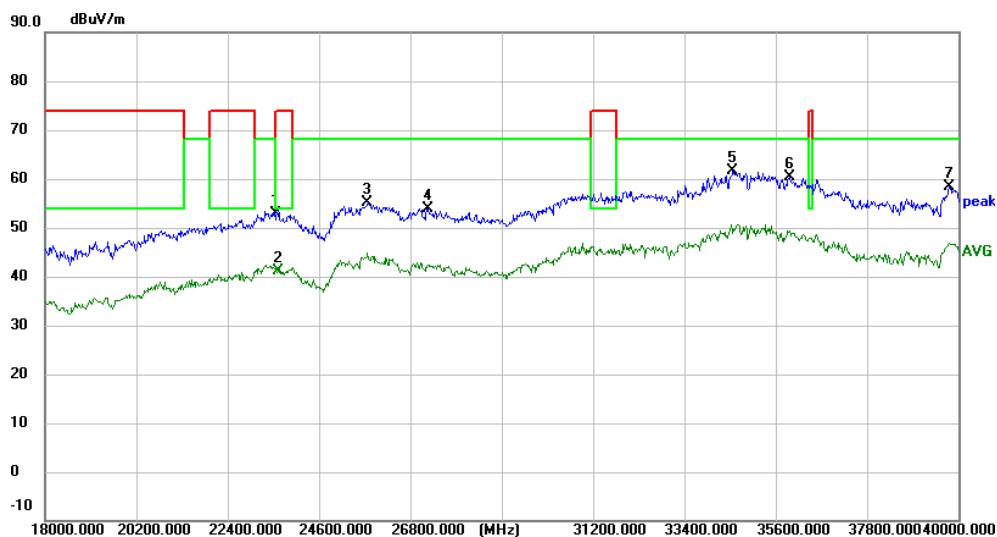

	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	23608.533	59.43	-6.53	52.90	74.00	-21.10	peak
2	23613.667	47.77	-6.54	41.23	54.00	-12.77	AVG
3	25812.933	60.73	-5.64	55.09	68.20	-13.11	peak
4	27234.867	62.15	-8.17	53.98	68.20	-14.22	peak
5 *	34596.800	58.98	2.71	61.69	68.20	-6.51	peak
6	35943.200	58.63	1.68	60.31	68.20	-7.89	peak
7	39813.000	55.15	3.14	58.29	68.20	-9.91	peak

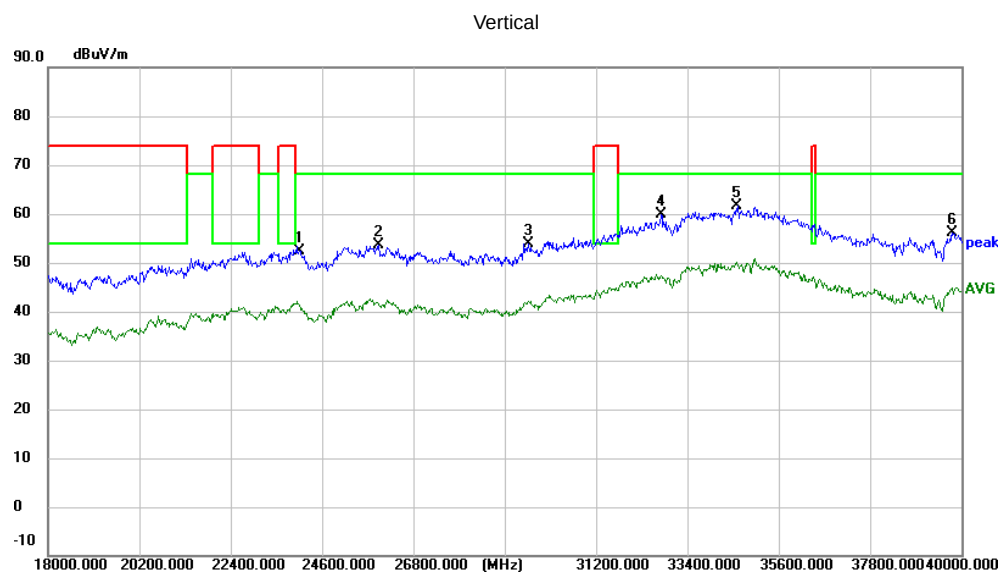

	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	24069.800	58.44	-5.96	52.48	68.20	-15.72	peak
2	25983.067	59.37	-5.86	53.51	68.20	-14.69	peak
3	29586.667	61.68	-7.73	53.95	68.20	-14.25	peak
4	32786.200	62.55	-2.73	59.82	68.20	-8.38	peak
5 *	34645.933	58.73	2.82	61.55	68.20	-6.65	peak
6	39790.267	52.89	3.12	56.01	68.20	-12.19	peak

Note: 802.11n20 MIMO mode is the worst mode.

2.2.10 Spurious Emission in Restricted Band 4.5GHz~5.150 GHz& 5.350GHz~5460GHz

EUT :	Smartphone	Model Name. :	HiBreak pro
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.85V
Test Mode :	TX (5.2G)-802.11ax20 MIMO		

All the modulation modes have been tested, The report just record the worst data mode.

Frequency	Meter Reading	Cable Loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
Low Channel (5180 MHz)									
4500	62.53	3.615	32.6	43.25	55.49	74	-18.51	Pk	Horizontal
4500	37.58	3.615	32.6	43.25	30.55	54	-23.45	AV	Horizontal
4500	63.56	3.615	32.6	43.25	56.53	74	-17.47	Pk	Vertical
4500	32.76	3.615	32.6	43.25	25.73	54	-28.27	AV	Vertical
5150	63.46	3.911	34.6	43.27	58.70	74	-15.30	Pk	Horizontal
5150	32.04	3.911	34.6	43.27	27.28	54	-26.72	AV	Horizontal
5150	63.30	3.911	34.6	43.27	58.54	74	-15.46	Pk	Vertical
5150	42.68	3.911	34.6	43.27	37.92	54	-16.08	AV	Vertical
High Channel (5240 MHz)									
5350	62.43	3.939	33.7	43.23	56.83	74	-17.17	Pk	Vertical
5350	34.08	3.939	33.7	43.23	28.49	54	-25.51	AV	Vertical
5350	62.71	3.939	33.7	43.23	57.12	74	-16.88	Pk	Horizontal
5350	37.47	3.939	33.7	43.23	31.88	54	-22.12	AV	Horizontal

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor

(2) "802.11ax20 MIMO " mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

EUT :	Smartphone	Model Name. :	HiBreak pro
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.85V
Test Mode :	TX (5.3G)-802.11ax20 MIMO		

All the modulation modes have been tested, The report just record the worst data mode.

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel (5320 MHz)-Above 1G									
Horizontal	5350	66.32	3.94	33.7	43.23	60.73	74	-13.27	Pk
Horizontal	5350	47.64	3.94	33.7	43.23	42.05	54	-11.95	AV
Vertical	5350	68.01	3.94	33.7	43.23	62.42	74	-11.58	Pk
Vertical	5350	43.16	3.94	33.7	43.23	37.57	54	-16.43	AV

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor

(2) "802.11ax20 MIMO " mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

EUT :	Smartphone	Model Name. :	HiBreak pro
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.85V
Test Mode :	TX (5.6G)-802.11ax20 MIMO		

All the modulation modes have been tested, The report just record the worst data mode.

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5500 MHz)-Above 1G									
Vertical	5460	66.91	3.95	34.56	43.21	62.21	74	-11.79	Pk
Vertical	5460	47.07	3.95	34.56	43.21	42.37	54	-11.63	AV
Horizontal	5460	67.24	3.95	34.56	43.21	62.54	74	-11.46	Pk
Horizontal	5460	43.01	3.95	34.56	43.21	38.31	54	-15.69	AV

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor

(2) "802.11ax20 MIMO " mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

3. POWER SPECTRAL DENSITY TEST

3.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(a)

For the band 5.15-5.25 GHz,

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

,

3.2 TEST PROCEDURE

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:


- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ KHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ KHz}$ is available on nearly all spectrum analyzers.

3.3 DEVIATION FROM STANDARD

No deviation.

3.4 TEST SETUP

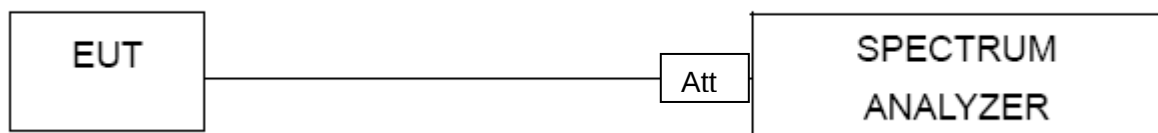

3.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

3.6 TEST RESULTS

EUT :	Smartphone	Model Name :	HiBreak pro
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1015 hPa	Test Voltage :	DC 3.85V
Test Mode :	TX Frequency Band 1 (5150-5250MHz), Band 2A (5250-5350MHz), Band 2C (5470-5725MHz), Band 3 (5745-5825MHz)		

Test data reference attachment.

Directional gain=3.97dBi < 6.0 dBi so power limit don't need to change.

4. 26DB & 99% EMISSION BANDWIDTH

4.1 APPLIED PROCEDURES / LIMIT


The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

4.2 TEST PROCEDURE

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

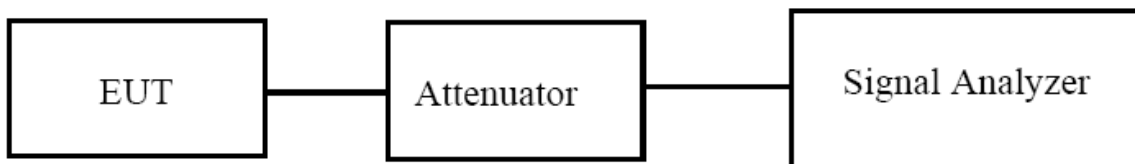

4.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.4 TEST RESULTS

EUT :	Smartphone	Model Name :	HiBreak pro
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 3.85V
Test Mode :	TX Frequency Band 1 (5150-5250MHz), Band 2A (5250-5350MHz), Band 2C(5470-5725MHz), Band 3(5725-5850MHz)		

Test data reference attachment.

5. MINIMUM 6 DB BANDWIDTH

5.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(e)

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

5.2 TEST PROCEDURE


Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP

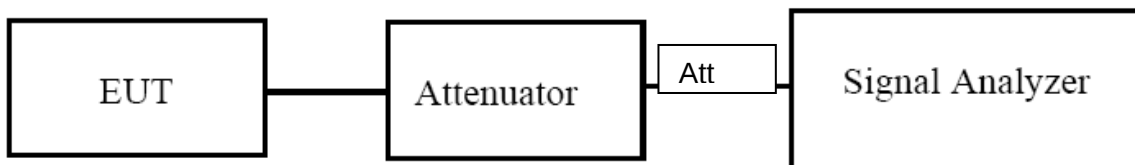

5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULTS

EUT :	Smartphone	Model Name :	HiBreak pro
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 3.85V
Test Mode :	TX (5G) Mode Frequency Band 3 (5725-5850MHz)		

Test data reference attachment.

6. MAXIMUM CONDUCTED OUTPUT POWER

6.1 PPLIED PROCEDURES / LIMIT

According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	250mW
5250~5350	250 mW or 11 dBm + 10 log B Note: The limit is the smaller of the two, "B" represents -26dB bandwidth.
5470~5725	250 mW or 11 dBm + 10 log B Note: The limit is the smaller of the two, "B" represents -26dB bandwidth.
5725~5850	1W


6.2 TEST PROCEDURE

- Method PM is Measurement using an RF average power meter. The procedure for this method is as follows:
 - a) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
 - 1) The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
 - 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
 - 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
 - b) If the transmitter does not transmit continuously, measure the duty cycle D of the transmitter output signal as described in 12.2.
 - c) Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
 - d) Adjust the measurement in dBm by adding $[10 \log (1 / D)]$, where D is the duty cycle {e.g., $[10 \log (1 / 0.25)]$, if the duty cycle is 25%}.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

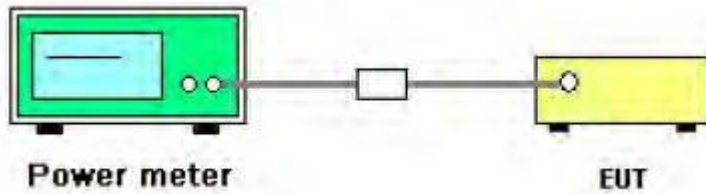

6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.2 TEST RESULTS

EUT :	Smartphone	Model Name :	HiBreak pro
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 3.85V
Test Mode :	TX (5G) Mode Frequency Band 1 (5150-5250MHz), Band 2A (5250-5350MHz) Band 2C, (5470-5725MHz), Band 3 (5725-5850MHz)		

Test data reference attachment.

Directional gain=3.97dBi < 6.0 dBi so power limit don't need to change.

7. OUT OF BAND EMISSIONS

7.1 APPLICABLE STANDARD

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
 - (ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

7.2 TEST PROCEDURE


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.

3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

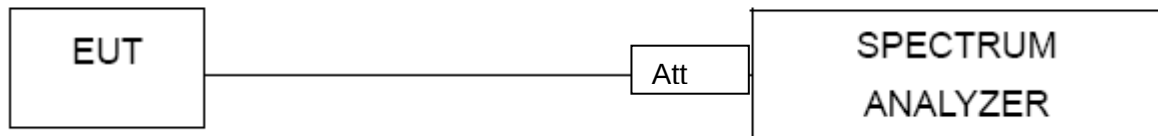

7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.6 TEST RESULTS

EUT :	Smartphone	Model Name :	HiBreak pro
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 3.85V

Test data reference attachment.

8. Frequency Stability Measurement


8.1 LIMIT

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

8.2 TEST PROCEDURES

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11 specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$.

8.3 TEST SETUP LAYOUT

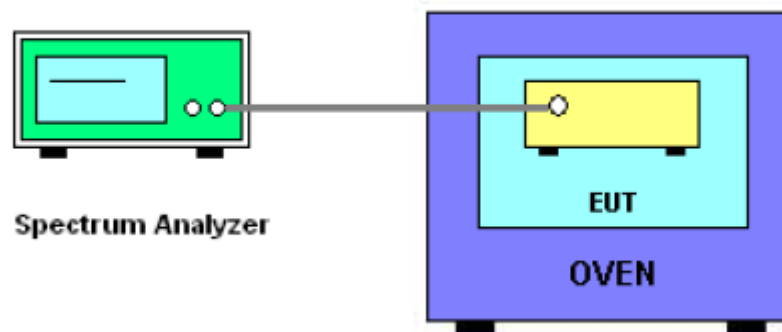

8.4 EUT OPERATION DURING TEST

1. The EUT was programmed to be in continuously un-modulation transmitting mode.
2. The module has two antennas, and the worst data is Antenna 1, only shown Antenna 1 date.

8.5 TEST RESULTS

EUT :	Smartphone	Model Name. :	HiBreak pro
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.85V
Test Mode :	TX Frequency Band I (5150-5250MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.85	5180.0052	5180	0.0052	1.0053
		V max (V)	4.43	5180.0028	5180	0.0028	0.5422
		V min (V)	3.27	5180.0061	5180	0.0061	1.1783
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.85	T (°C)	-20	5180.0057	5180	0.0057	1.0986
		T (°C)	-10	5180.0084	5180	0.0084	1.6148
		T (°C)	0	5180.0003	5180	0.0003	0.0667
		T (°C)	10	5180.0062	5180	0.0062	1.1924
		T (°C)	20	5180.0100	5180	0.0100	1.9287
		T (°C)	30	5180.0058	5180	0.0058	1.1187
		T (°C)	40	5180.0028	5180	0.0028	0.5383
		T (°C)	50	5180.0025	5180	0.0025	0.4823
		T (°C)	60	5180.0003	5180	0.0003	0.0656
		T (°C)	70	5180.0050	5180	0.0050	0.9565
Limits				Within 5150-5250MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.85	5200.0021	5200	0.0021	0.3947
		V max (V)	4.43	5200.0081	5200	0.0081	1.5505
		V min (V)	3.27	5200.0045	5200	0.0045	0.8721
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.85	T (°C)	-20	5200.0070	5200	0.0070	1.3515
		T (°C)	-10	5200.0038	5200	0.0038	0.7289
		T (°C)	0	5200.0061	5200	0.0061	1.1801
		T (°C)	10	5200.0079	5200	0.0079	1.5176
		T (°C)	20	5200.0031	5200	0.0031	0.5925
		T (°C)	30	5200.0089	5200	0.0089	1.7042
		T (°C)	40	5200.0022	5200	0.0022	0.4198
		T (°C)	50	5200.0026	5200	0.0026	0.5078
		T (°C)	60	5200.0078	5200	0.0078	1.4997
		T (°C)	70	5200.0067	5200	0.0067	1.2852
Limits				Within 5150-5250MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.85	5240.0066	5240	0.0066	1.2601
		V max (V)	4.43	5240.0075	5240	0.0075	1.4400
		V min (V)	3.27	5240.0081	5240	0.0081	1.5412
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.85	T (°C)	-20	5240.0048	5240	0.0048	0.9243
		T (°C)	-10	5240.0028	5240	0.0028	0.5425
		T (°C)	0	5240.0055	5240	0.0055	1.0511
		T (°C)	10	5240.0023	5240	0.0023	0.4439
		T (°C)	20	5240.0087	5240	0.0087	1.6525
		T (°C)	30	5240.0072	5240	0.0072	1.3708
		T (°C)	40	5240.0067	5240	0.0067	1.2850
		T (°C)	50	5240.0008	5240	0.0008	0.1486
		T (°C)	60	5240.0085	5240	0.0085	1.6179
		T (°C)	70	5240.0090	5240	0.0090	1.7123
Limits				Within 5150-5250MHz			
Result				Complies			

EUT :	Smartphone	Model Name. :	HiBreak pro
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.85V
Test Mode :	TX Frequency Band 2A (5250-5350MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5260MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.85	5260.0081	5260	0.00806	1.5324
		V max (V)	4.43	5260.0014	5260	0.00136	0.2591
		V min (V)	3.27	5260.0014	5260	0.00143	0.2723
Limits				Within 5250-5350MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5260MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.85	T (°C)	-20	5260.0084	5260	0.00843	1.6031
		T (°C)	-10	5260.0037	5260	0.00368	0.6989
		T (°C)	0	5260.0069	5260	0.00692	1.3149
		T (°C)	10	5260.0022	5260	0.00221	0.4194
		T (°C)	20	5260.0009	5260	0.00092	0.1756
		T (°C)	30	5260.0057	5260	0.00566	1.0752
		T (°C)	40	5260.0013	5260	0.00129	0.2446
		T (°C)	50	5260.0021	5260	0.00214	0.4077
		T (°C)	60	5260.0067	5260	0.00666	1.2669
		T (°C)	70	5260.0070	5260	0.00702	1.3351
Limits				Within 5250-5350MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5280MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.85	5280.0026	5280	0.00257	0.4861
		V max (V)	4.43	5280.0073	5280	0.00726	1.3745
		V min (V)	3.27	5280.0035	5280	0.00346	0.6562
Limits				Within 5250-5350MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5280MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.85	T (°C)	-20	5280.0050	5280	0.00501	0.9495
		T (°C)	-10	5280.0098	5280	0.00985	1.8647
		T (°C)	0	5280.0099	5280	0.00989	1.8732
		T (°C)	10	5280.0061	5280	0.00611	1.1574
		T (°C)	20	5280.0045	5280	0.00455	0.8611
		T (°C)	30	5280.0015	5280	0.00148	0.2811
		T (°C)	40	5280.0045	5280	0.00453	0.8579
		T (°C)	50	5280.0079	5280	0.00789	1.4949
		T (°C)	60	5280.0090	5280	0.00899	1.7029
		T (°C)	70	5280.0085	5280	0.00852	1.6127
Limits				Within 5250-5350MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5320MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.85	5320.0094	5320	0.00941	1.7696
		V max (V)	4.43	5320.0050	5320	0.00505	0.9490
		V min (V)	3.27	5320.0099	5320	0.00992	1.8640
Limits				Within 5250-5350MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5320MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.85	T (°C)	-20	5320.0042	5320	0.00419	0.7882
		T (°C)	-10	5320.0011	5320	0.00106	0.1997
		T (°C)	0	5320.0020	5320	0.00197	0.3698
		T (°C)	10	5320.0072	5320	0.00720	1.3536
		T (°C)	20	5320.0033	5320	0.00325	0.6110
		T (°C)	30	5320.0041	5320	0.00413	0.7764
		T (°C)	40	5320.0096	5320	0.00955	1.7954
		T (°C)	50	5320.0032	5320	0.00323	0.6074
		T (°C)	60	5320.0066	5320	0.00655	1.2321
		T (°C)	70	5320.0078	5320	0.00775	1.4571
Limits				Within 5250-5350MHz			
Result				Complies			

EUT :	Smartphone	Model Name. :	HiBreak pro
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.85V
Test Mode :	TX Frequency Band 2C (5470-5725MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5500MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.85	5500.0031	5500	0.00313	0.5691
		V max (V)	4.43	5500.0048	5500	0.00485	0.8817
		V min (V)	3.27	5500.0043	5500	0.00428	0.7779
Limits				Within 5470-5725MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5500MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.85	T (°C)	-20	5500.0074	5500	0.00743	1.3515
		T (°C)	-10	5500.0008	5500	0.00084	0.1525
		T (°C)	0	5500.0076	5500	0.00759	1.3800
		T (°C)	10	5500.0064	5500	0.00639	1.1624
		T (°C)	20	5500.0029	5500	0.00293	0.5331
		T (°C)	30	5500.0033	5500	0.00330	0.6003
		T (°C)	40	5500.0023	5500	0.00230	0.4187
		T (°C)	50	5500.0002	5500	0.00021	0.0373
		T (°C)	60	5500.0009	5500	0.00085	0.1545
		T (°C)	70	5500.0081	5500	0.00812	1.4756
Limits				Within 5470-5725MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5600MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.85	5600.0072	5600	0.00720	1.2855
		V max (V)	4.43	5600.0067	5600	0.00665	1.1881
		V min (V)	3.27	5600.0016	5600	0.00165	0.2942
Limits				Within 5470-5725MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5600MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.85	T (°C)	-20	5600.0079	5600	0.00787	1.4054
		T (°C)	-10	5600.0060	5600	0.00595	1.0628
		T (°C)	0	5600.0060	5600	0.00598	1.0680
		T (°C)	10	5600.0061	5600	0.00606	1.0828
		T (°C)	20	5600.0046	5600	0.00463	0.8264
		T (°C)	30	5600.0048	5600	0.00477	0.8517
		T (°C)	40	5600.0033	5600	0.00332	0.5934
		T (°C)	50	5600.0035	5600	0.00351	0.6267
		T (°C)	60	5600.0082	5600	0.00821	1.4662
		T (°C)	70	5600.0058	5600	0.00576	1.0282
Limits				Within 5470-5725MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5700MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.85	5700.0050	5700	0.00496	0.8710
		V max (V)	4.43	5700.0093	5700	0.00931	1.6338
		V min (V)	3.27	5700.0005	5700	0.00054	0.0954
Limits				Within 5470-5725MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5700MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.85	T (°C)	-20	5700.0038	5700	0.00376	0.6605
		T (°C)	-10	5700.0045	5700	0.00455	0.7982
		T (°C)	0	5700.0063	5700	0.00628	1.1010
		T (°C)	10	5700.0056	5700	0.00564	0.9888
		T (°C)	20	5700.0074	5700	0.00736	1.2915
		T (°C)	30	5700.0022	5700	0.00217	0.3802
		T (°C)	40	5700.0070	5700	0.00703	1.2334
		T (°C)	50	5700.0027	5700	0.00271	0.4750
		T (°C)	60	5700.0026	5700	0.00259	0.4541
		T (°C)	70	5700.0039	5700	0.00392	0.6872
Limits				Within 5470-5725MHz			
Result				Complies			

EUT :	Smartphone	Model Name. :	HiBreak pro
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.85V
Test Mode :	TX Frequency(5745-5850MHz)		

Voltage vs. Frequency Stability

Page 68: Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.85	5745.0079	5745	0.00790	1.3751
		V max (V)	4.43	5745.0047	5745	0.00466	0.8103
		V min (V)	3.27	5745.0030	5745	0.00305	0.5307
Limits				Within 5745-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.85	T (°C)	-20	5745.0095	5745	0.00949	1.6525
		T (°C)	-10	5745.0062	5745	0.00625	1.0872
		T (°C)	0	5745.0081	5745	0.00812	1.4141
		T (°C)	10	5745.0026	5745	0.00264	0.4603
		T (°C)	20	5745.0019	5745	0.00189	0.3295
		T (°C)	30	5745.0057	5745	0.00569	0.9902
		T (°C)	40	5745.0010	5745	0.00097	0.1686
		T (°C)	50	5745.0030	5745	0.00301	0.5238
		T (°C)	60	5745.0011	5745	0.00110	0.1919
		T (°C)	70	5745.0081	5745	0.00812	1.4125
Limits				Within 5745-5850MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.85	5785.0093	5785	0.00931	1.6092
		V max (V)	4.43	5785.0045	5785	0.00447	0.7719
		V min (V)	3.27	5785.0067	5785	0.00670	1.1589
Limits				Within 5745-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.85	T (°C)	-20	5785.0057	5785	0.00568	0.9815
		T (°C)	-10	5785.0049	5785	0.00487	0.8412
		T (°C)	0	5785.0008	5785	0.00082	0.1419
		T (°C)	10	5785.0034	5785	0.00342	0.5913
		T (°C)	20	5785.0087	5785	0.00867	1.4995
		T (°C)	30	5785.0041	5785	0.00415	0.7172
		T (°C)	40	5785.0059	5785	0.00591	1.0208
		T (°C)	50	5785.0053	5785	0.00527	0.9116
		T (°C)	60	5785.0052	5785	0.00524	0.9063
		T (°C)	70	5785.0064	5785	0.00635	1.0985
Limits				Within 5745-5850MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.85	5825.0067	5825	0.00671	1.1521
		V max (V)	4.43	5825.0035	5825	0.00353	0.6053
		V min (V)	3.27	5825.0053	5825	0.00528	0.9058
Limits				Within 5745-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.85	T (°C)	-20	5825.0075	5825	0.00751	1.2894
		T (°C)	-10	5825.0037	5825	0.00368	0.6323
		T (°C)	0	5825.0088	5825	0.00880	1.5106
		T (°C)	10	5825.0008	5825	0.00077	0.1330
		T (°C)	20	5825.0044	5825	0.00442	0.7593
		T (°C)	30	5825.0042	5825	0.00417	0.7166
		T (°C)	40	5825.0097	5825	0.00973	1.6705
		T (°C)	50	5825.0031	5825	0.00306	0.5252
		T (°C)	60	5825.0034	5825	0.00339	0.5818
		T (°C)	70	5825.0031	5825	0.00309	0.5305
Limits				Within 5745-5850MHz			
Result				Complies			

9. DYNAMIC FREQUENCY SELECTION(DFS)

9.1 APPLICABILITY OF DFS REQUIREMENTS

EUT is client and operates as client without radar detection function.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
DFS Detection Threshold	Yes	Not required	Yes
Channel Closing Transmission Time	Yes	Yes	Yes
Channel Move Time	Yes	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required	Yes
Client Beacon Test	N/A	Yes	Yes

Additional requirements for devices with multiple bandwidth modes	Operational Mode	
	Master or Client With Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required
Note Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.		

9.2 INTERFERENCE THRESHOLD VALUES, MASTER OR CLIENT INCORPORATING IN-SERVICE MONITORING

Maximum Transmit Power	Value (see notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note 3: EIRP is based on the highest antenna gain.	

9.3 DFS RESPONSE REQUIREMENT VALUES

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the 99% power bandwidth See Note 3.

Note 1: The instant that the Channel Move Time and the Channel Closing Transmission Time begins is as follows:

- For the Short pulse radar Test Signals this instant is the end of the Burst.
- For the Frequency Hopping radar Test Signal, this instant is the end of the last radar Burst generated.
- For the Long Pulse radar Test Signal this instant is the end of the 12 second period defining the radar transmission.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate Channel changes (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 is used and for each frequency step the minimum percentage of detection is 90%. Measurements are performed with no data traffic.

9.4 SHORT PULSE RADAR TEST WAVEFORMS

As the EUT is a Client Device with no Radar Detection, only one type radar pulse is required for the testing. Radar Pulse type 0 was used in the evaluation of the Client device for the purpose of measuring the Channel Move Time and the Channel Closing Transmission Time.

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Trials
0	1	1428	18	60%	30
1	1	Test A Test B	$\text{Roundup}\left(\frac{1}{360} \cdot \frac{19 \cdot 10^6}{\text{PRI}_{\text{max}}}\right)$	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a

Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A

A minimum of 30 unique waveforms are required for each of the short pulse radar types 2 through 4. For short pulse radar type 1, the same waveform is used a minimum of 30 times. If more than 30 waveforms are used for short pulse radar types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms.


If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B. The aggregate is the average of the percentage of successful detections of short pulse radar types 1-4.

9.5 CALIBRATION SETUP AND DFS TEST RESULTS

Radar Waveform Calibration Procedure

- 1) A 50 ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected to place of the master
- 2) The interference Radar Detection Threshold Level is $-62\text{dBm} - 2\text{dBi} + 1\text{dB} = -63\text{dBm}$ that had been taken into account the output power range and antenna gain.
- 3) The following equipment setup was used to calibrate the conducted radar waveform. A vector signal generator was utilized to establish the test signal level for radar type 0. During this process there were no transmissions by either the master or client device. The spectrum analyzer was switched to the zero spans (time domain) at the frequency of the radar waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3 MHz. The spectrum analyzer had offset -1.0dB to compensate RF cable loss 1.0dB.
- 4) The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was $-62\text{dBm} - 2\text{dBi} + 1\text{dB} = -63\text{dBm}$. Capture the spectrum analyzer plots on short pulse radar waveform.

9.6 CONDUCTED CALIBRATION SETUP

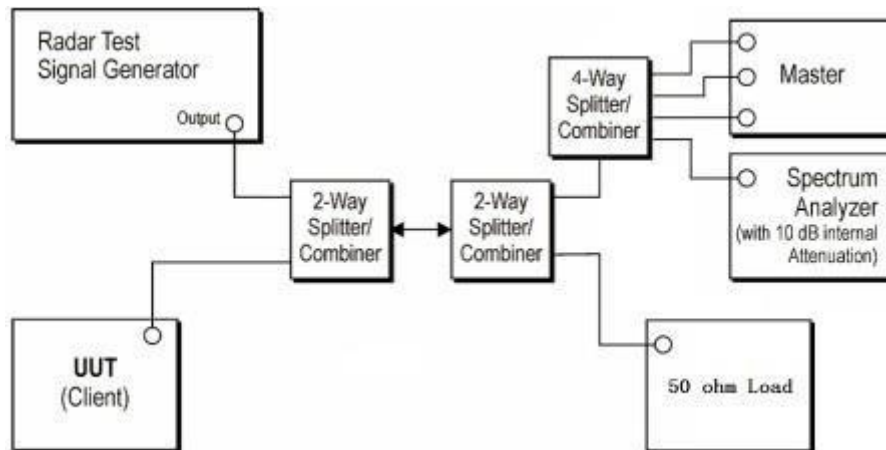

Wireless AP	Manufacturer	ASUSTek Computer Inc
	Model NO.	AX5400
	FCC ID	MSQ-RTAXJ300

Note:1. The Slave device associated with the EUT during these tests does not have radar detection capability.

2. WLAN traffic is generated by using the iperf software to send packets from the Master IP address to the Slave IP address.

3. The time required for the master and slave devices to fully start up is 120s.

4. EUT does not support TPC.


9.7 RADAR WAVEFORM CALIBRATION RESULT

Test data reference attachment.

9.8 IN-SERVICE MONITORING: CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON-OCCUPANCY PERIOD

TEST CONFIGURATION:

Setup for Client with injection at the Master

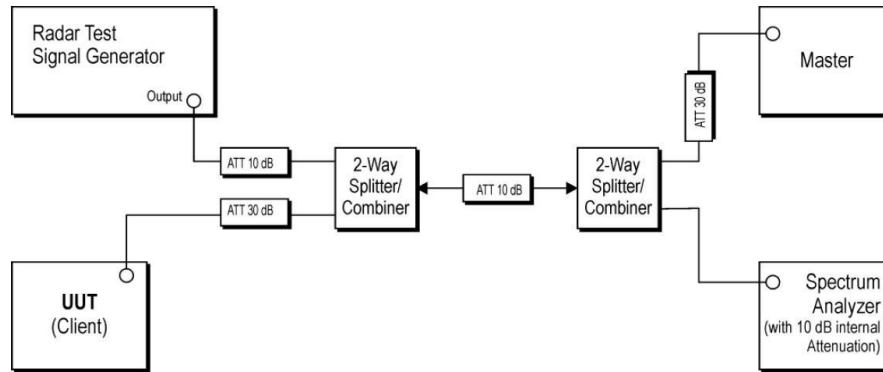

TEST PROCEDURE:

1. The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
2. The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device
3. A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
4. EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is Streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Smart PhoneClassic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
5. When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
6. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom In 600ms plot of the Short Pulse Radar Type
7. Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.3ms) = S (12000ms) / B (4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
8. Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

TEST MODE:

Mode	Frequency (MHz)
ac80	5290
ac80	5530
n40	5310
n40	5510
a	5320
a	5500

9.9 RESULT OF CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON-OCCUPANCY PERIOD FOR CLIENT BEACON TEST

Test data reference attachment.

10. ANTENNA REQUIREMENT

10.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

10.2 EUT ANTENNA

The EUT antenna is permanent attached FPC Antenna. It comply with the standard requirement.

11. TEST RESULTS

Refer to attachment

END OF REPORT