



Report of Measurements  
FCC Part 15, Subpart C, Section 15.247

On

2.4 GHz ZRadio System, Train to Wayside Communications  
On-Board Radio  
FCC ID: 2A8HRS25441-B57-A3

**Customer Name:** Siemens Mobility

**Customer P.O.:** 4510076816

**Date of Report:** February 28, 2023

**Test Report No:** R-3578P-6B, Rev. A

**Test Start Date:** August 2, 2022

**Test Finish Date:** February 27, 2023

Our letters, procedures and reports are for the exclusive use of the customer to whom they are addressed and their communication or the use of the name of Retlif Testing Laboratories must receive our prior written approval. Our letters, procedures and reports apply only to the sample tested and are not necessarily indicative of the qualities of apparently identical or similar products. The letters, procedures and reports and the name of Retlif Testing Laboratories or insignia are not to be used under any circumstances in advertising to the general public. This test report shall not be reproduced, except in full, without the written approval of Retlif Testing Laboratories.

**Certification and Signatures** We certify that this report is a true representation of the results obtained from the tests of the equipment stated. We further certify that the measurements shown in this report were made in accordance with the procedures indicated and vouch for the qualifications of all Retlif Testing Laboratories personnel taking them.

 Richard J. Reitz Director of Engineering iNARTE Electromagnetic Compatibility Engineer EMC-050739-E	 Scott Wentworth Branch Manager
--	---

**Non-Warranty Provision**

The testing services have been performed, findings obtained and reports prepared in accordance with generally accepted laboratory principles and practices. This warranty is in lieu of all others, either expressed or implied.

**Non-Endorsement**

This test report contains only findings and results arrived at after employing the specific test procedures and standards listed herein. It is not intended to constitute a recommendation, endorsement or certification of the product or material tested. This test report must not be used by the client to claim product endorsement by ANAB or any agency of the U.S. Government.



40 YEARS OF TESTING EXCELLENCE

Corporate Headquarters:  
795 Marconi Avenue  
Ronkonkoma, NY 11779 USA  
Tel: (631) 737-1500  
Fax: (631) 737-1497

101 New Boston Road  
Goffstown, NH 03045 USA  
Tel: (603) 497-4600  
Fax: (603) 497-5281

Washington Regulatory Compliance  
1600 North Oak Street, #1710  
Arlington, VA 22209 USA  
Tel: (703) 528-3895

## Table of Contents

List of Tables .....	2
Tests Performed .....	4
General Test Information .....	5
Requirements and Test Results.....	6
Requirement: 15.247(a)(2), Minimum 6 dB Bandwidth .....	6
Requirements and Test Results.....	10
Requirement: 15.247(b)(3), Maximum Peak Conducted Output Power .....	10
Requirements and Test Results.....	18
Requirement: 15.247(b)(4), Antenna Gain .....	18
Requirements and Test Results.....	19
Requirement: 15.247(d), Out of Band Emissions .....	19
Requirements and Test Results.....	29
Requirement: 15.247(e), Power Spectral Density .....	29
Requirements and Test Results.....	33
Requirement: 15.109(a) / 15.209(a), Radiated Emissions, General Requirements.....	33

## List of Tables

Table 1 - Radiated Emission Limits .....	33
--	----

## Technical Information

**Report Number:** R-3578P-6B, Rev. A

**Applicant:** Siemens Mobility, Inc.

**Address:** 162 East Bridge Street  
Suite 200  
Homestead, PA 15120

**FRN:** 0032806093

**Test Sample:** 2.4 GHz ZRadio System, Train to Wayside Comm

**Model Number:** S25441-B57-A3-1.B

**FCC ID:** 2A8HRS25441-B57-A3

**Frequency Range of Operation:** 2405 to 2480 MHz

**Power Output:** 7.96 mW

**Antenna Gain:** 8.5 dBi

**Equipment Class:** DTS – Digital Transmission System

**Equipment Use:** Mobile

**Power Requirements:** 24 Vdc Derived from Vehicle

**Transmission**

**Protocols/Modulation** IEEE 802.15.4

**Test Specifications:**

FCC Rules and Regulations Part 15, Subpart C, Section 15.247

**Test Procedures:**

ANSI C63.4: 2014

ANSI C63.10: 2013

**Test Facility:**

Retlif Testing Laboratories

3131 Detwiler Road

Harleysville, PA 19438

FCC Registered Designation Number: US2321

## Tests Performed

The test methods that were performed to demonstrate compliance with the FCC Rules are shown below:

FCC Part 15, Subpart C Rule Section	ANSI C63.10 Test Method	Test Result
1.1310 Radiofrequency Radiation Exposure Limits	N/A	Pass
15.247(a)(2), Minimum 6 dB Bandwidth	11.8 DTS Bandwidth	Pass
15.247(b)(3), Maximum Peak Conducted Output Power	11.9 Fundamental Emission Output Power	Pass
15.247(b)(4), Antenna Gain	N/A	Pass
15.247(d), Out of Band Emissions	11.11 Emissions in Non-Restricted Frequency Bands	Pass
15.209, Radiated Emissions Limits	11.12 Emissions in Restricted Frequency Bands – 11.12.1 Radiated Emissions Measurements	Pass
15.205, Restricted Bands of Operation	11.13 Band Edge Measurements	Pass
15.247(e), Power Spectral Density	11.10 Maximum Power Spectral Density	Pass



All test methods listed above are included in Retlif Testing Laboratories ANSI National Accreditation Board (ANAB), ISO/IEC 17025 Scope of Accreditation, Certificate Number: L2320.02.

## General Test Information

### **FCC Part 15.31:**

- Testing was performed using the procedures specified in ANSI C63.10-2013 in accordance with 15.31(a)(3).
- Testing was performed with the transmitter continuously transmitting at the selected frequency in accordance with 15.31(c).
- Field strength measurements were made on an Open Area Test Site in accordance with 15.31(d).
- Power output measurements were performed with the supply voltage varied between 85 and 115% of the nominal rated supply voltage in accordance with 15.31(e).
- Field strength measurements were made at the distance specified in the appropriate rule section, the test results were not extrapolated in accordance with 15.31(f).
- The Device under test was positioned and adjusted to maximize the level of emissions in accordance with 15.31(g).
- The test sample operates over a frequency range of 75 MHz (2405 to 2480 MHz). All testing outlined herein was performed with the device under test operating at 3 frequencies. One at the top, one near the middle and one at the bottom of the range of operation in accordance with 15.31(m).

### **FCC Part 15.33:**

- The radio frequency spectrum was investigated from 9 kHz to the 10th harmonic of the highest fundamental frequency as specified in 15.33(a)(1).

### **FCC Part 15.35:**

- On frequencies below or equal to 1000 MHz, measurements were made utilizing a CISPR quasi-peak detector and associated bandwidths.
- On frequencies above 1000 MHz, measurements were made utilizing an average detector and a minimum resolution bandwidth of 1 MHz


## Requirements and Test Results

### **Requirement: 15.247(a)(2), Minimum 6 dB Bandwidth**

Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 - 5850 MHz bands. The minimum 6 dB bandwidths shall be at least 500 kHz.

- **Results:**

The minimum 6 dB bandwidth measured complies with the requirement that the Bandwidth be no less than 500 kHz.

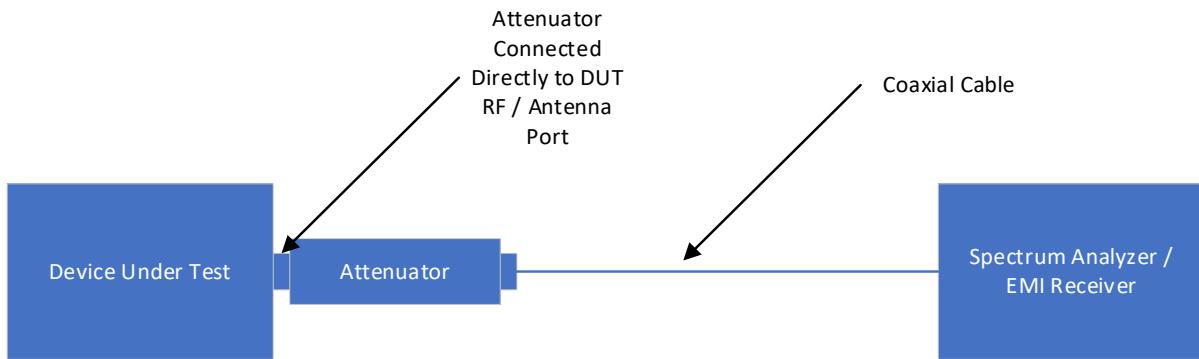

## Equipment List

EN	Manufacturer	Model No.	Description	Serial No.	Due Date
8496	NARDA MICROWAVE	768-10	ATTENUATOR, COAXIAL, DC – 11 GHz	04105	6/30/2023
8816	ROHDE & SCHWARZ	ESW26	RECEIVER, EMI, 1 Hz - 26 GHz	103087	8/31/2023
8817	MICRO-COAX	LU7-022-1000	CABLE, COAXIAL, DC - 18 GHz	060-2538360 00	11/30/2023

## Occupied Bandwidth

<b>Test Specification:</b>	FCC Part 15, Subpart C, 15.247(a)(2), Occupied Bandwidth
<b>Method:</b>	ANSI C63.10, Section 11.8.1, DTS Bandwidth, Option 1
<b>Job Number/Customer:</b>	R-3578P-6B/ Siemens Mobility
<b>Test Sample:</b>	2.4 GHz ZRadio System, Train to Wayside Communications
<b>Model Number:</b>	S25441-B57-A3-1.B; 8708660000 (P/S)
<b>Serial Number:</b>	6101142745-003; 7508000291 (P/S)
<b>Operating Mode:</b>	Transmitting at 2405 MHz
<b>Technician:</b>	M. Nowak
<b>Date(s):</b>	1/19/23
<b>Temperature:</b>	21.0 °C
<b>Relative Humidity:</b>	32.5 %
<b>Occupied Bandwidth:</b>	1.59 MHz



12:51:01 PM 01/19/2023


## Occupied Bandwidth

<b>Test Specification:</b>	FCC Part 15, Subpart C, 15.247(a)(2), Occupied Bandwidth
<b>Method:</b>	ANSI C63.10, Section 11.8.1, DTS Bandwidth, Option 1
<b>Job Number/Customer:</b>	R-3578P-6B/ Siemens Mobility
<b>Test Sample:</b>	2.4 GHz ZRadio System, Train to Wayside Communications
<b>Model Number:</b>	S25441-B57-A3-1.B; 8708660000 (P/S)
<b>Serial Number:</b>	6101142745-003; 7508000291 (P/S)
<b>Operating Mode:</b>	Transmitting at 2445 MHz
<b>Technician:</b>	M. Nowak
<b>Date(s):</b>	1/19/23
<b>Temperature:</b>	21.0 °C
<b>Relative Humidity:</b>	32.5 %
<b>Occupied Bandwidth:</b>	1.64 MHz



## Occupied Bandwidth

<b>Test Specification:</b>	FCC Part 15, Subpart C, 15.247(a)(2), Occupied Bandwidth
<b>Method:</b>	ANSI C63.10, Section 11.8.1, DTS Bandwidth, Option 1
<b>Job Number/Customer:</b>	R-3578P-6B/ Siemens Mobility
<b>Test Sample:</b>	2.4 GHz ZRadio System, Train to Wayside Communications
<b>Model Number:</b>	S25441-B57-A3-1.B; 8708660000 (P/S)
<b>Serial Number:</b>	6101142745-003; 7508000291 (P/S)
<b>Operating Mode:</b>	Transmitting at 2480 MHz
<b>Technician:</b>	M. Nowak
<b>Date(s):</b>	1/19/23
<b>Temperature:</b>	21.0 °C
<b>Relative Humidity:</b>	32.5 %
<b>Occupied Bandwidth:</b>	1.66 MHz

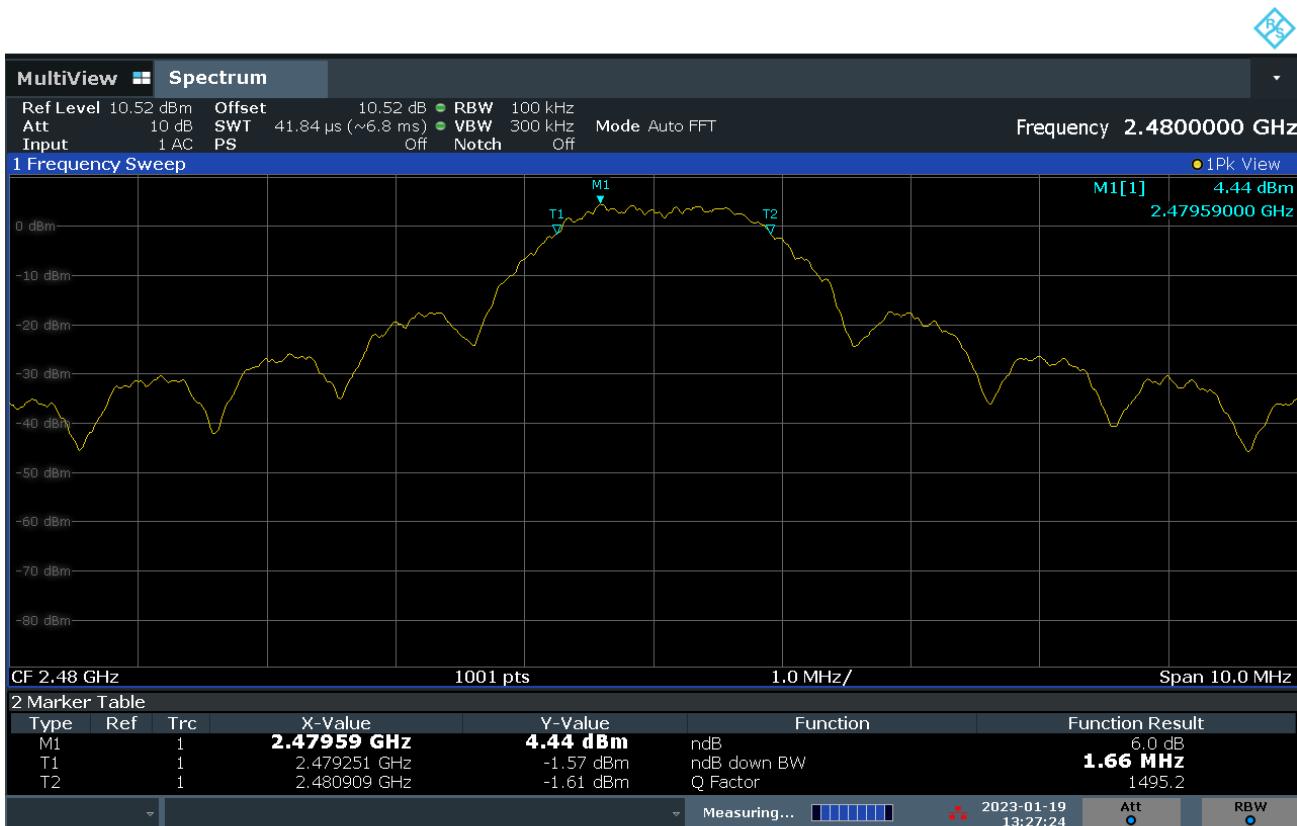

## Requirements and Test Results

### **Requirement: 15.247(b)(3), Maximum Peak Conducted Output Power**

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

For systems using digital modulation in the 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 - 5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antenna and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antenna and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

- **Results:**

The device operates in the 2400 to 2483.5 MHz band. The maximum peak output power was measured and was found to be 9.01 dBm (7.96 mWatts). The antenna used with the device has a directional gain of 8.5 dBi. This is 2.5 dBi above the maximum value specified in 15.247(b)(4). The output power limit is therefore reduced by 2.5 dBi. The device was found to comply with the reduced output power limit of 562.3 mW.

### Calculations:

$$P_{OUT} = P_{Limit} - (G_{Tx} - 6)$$

Where:

$P_{OUT}$  = Reduced Output Power Limit in dBm

$P_{Limit}$  = FCC Specified Power Output Limit = 30 dBm

$G_{Tx}$  = Maximum Directional Gain of the Antenna of the Device Under Test = 8.5 dBi


$$P_{OUT} = 30 \text{ dBm} - (8.5 \text{ dBi} - 6 \text{ dB})$$

$$P_{OUT} = 30 \text{ dBm} - 2.5 \text{ dB}$$

$$P_{OUT} = 27.5 \text{ dBm}$$

$$P_{Out \text{ mW}} = 10^{(P_{out}/10)}$$

$$P_{Out \text{ mW}} = 10^{(27.5/10)} = 10^{(2.75)} = 562.3 \text{ mW}$$

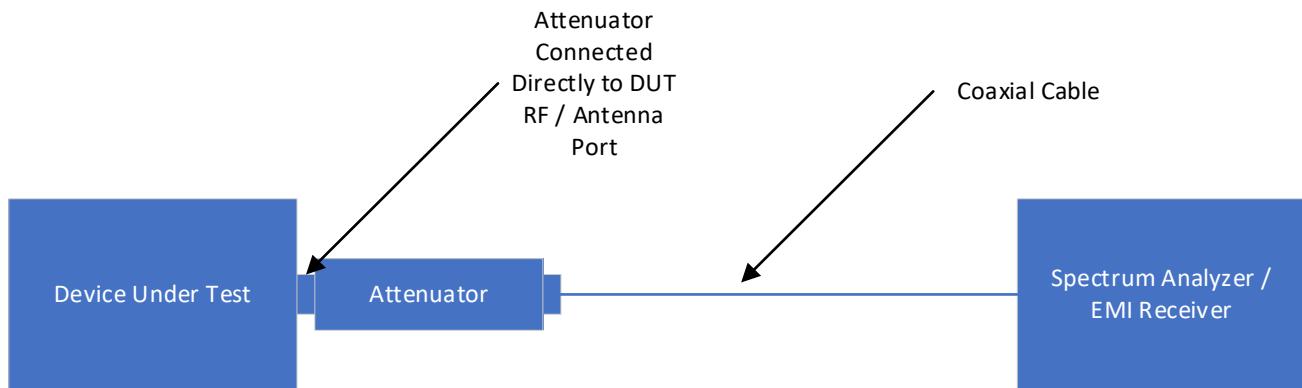


### Equipment List

EN	Manufacturer	Model No.	Description	Serial No.	Due Date
8496	NARDA MICROWAVE	768-10	ATTENUATOR, COAXIAL, DC – 11 GHz	04105	6/30/2023
8816	ROHDE & SCHWARZ	ESW26	RECEIVER, EMI, 1 Hz - 26 GHz	103087	8/31/2023
8817	MICRO-COAX	LU7-022-1000	CABLE, COAXIAL, DC - 18 GHz	060-2538360 00	11/30/2023

## POWER OUTPUT

<b>Test Specification:</b>	FCC Part 15, Subpart C, 15.247(b)(3), Power Output
<b>Method:</b>	ANSI C63.10, Section 11.9.1.1, Maximum Peak Conducted Output Power
<b>Job Number/Customer:</b>	R-3578P-6B/ Siemens Mobility
<b>Test Sample:</b>	2.4 GHz ZRadio System, Train to Wayside Communications
<b>Model Number:</b>	S25441-B57-A3-1.B; 8708660000 (P/S)
<b>Serial Number:</b>	6101142745-003; 7508000291 (P/S)
<b>Operating Mode:</b>	Transmitting at 2405 MHz
<b>Technician:</b>	M. Nowak
<b>Date(s):</b>	2/16/23
<b>Temperature:</b>	21.2 °C
<b>Relative Humidity:</b>	32.1 %
<b>Maximum Power Output:</b>	8.74 dBm

### 24 VDC Nominal Rated Supply Voltage

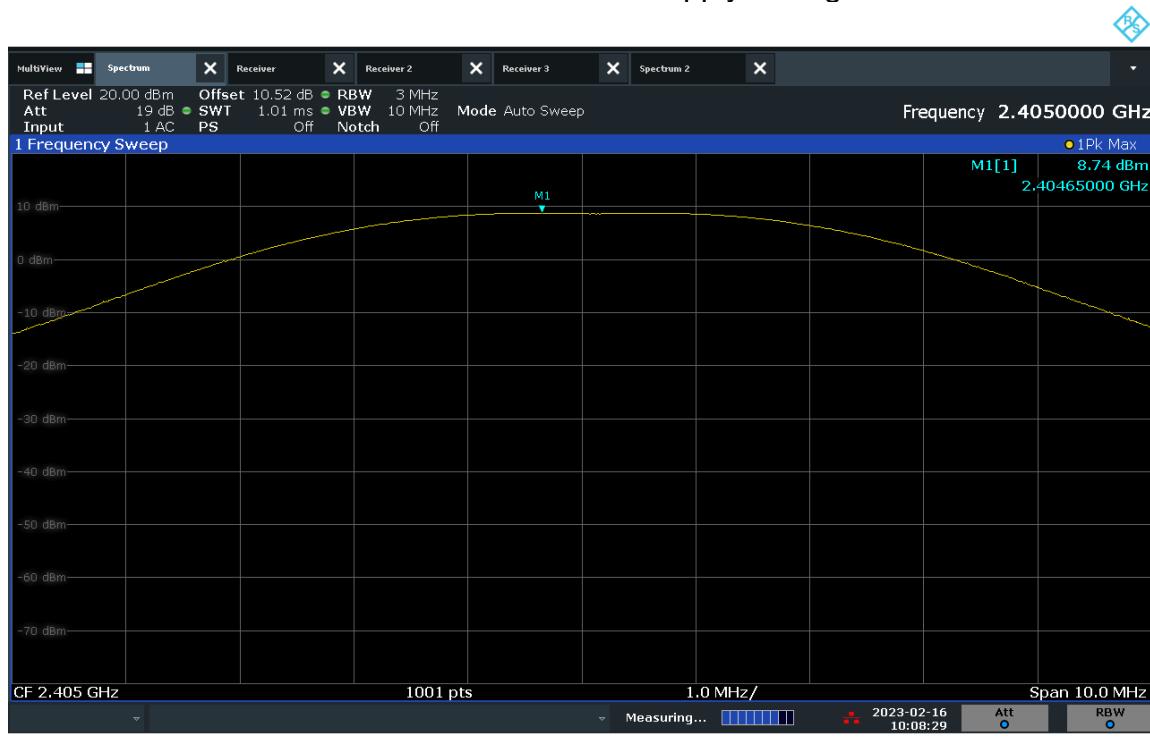

## 85% Nominal Rated Supply Voltage



10:40:41 AM 02/16/2023

## 115% Nominal Rated Supply Voltage



10:43:19 AM 02/16/2023


## POWER OUTPUT

<b>Test Specification:</b>	FCC Part 15, Subpart C, 15.247(b)(3), Power Output
<b>Method:</b>	ANSI C63.10, Section 11.9.1.1, Maximum Peak Conducted Output Power
<b>Job Number/Customer:</b>	R-3578P-6B/ Siemens Mobility
<b>Test Sample:</b>	2.4 GHz ZRadio System, Train to Wayside Communications
<b>Model Number:</b>	S25441-B57-A3-1.B; 8708660000 (P/S)
<b>Serial Number:</b>	6101142745-003; 7508000291 (P/S)
<b>Operating Mode:</b>	Transmitting at 2445 MHz
<b>Technician:</b>	M. Nowak
<b>Date(s):</b>	2/16/23
<b>Temperature:</b>	21.2 °C
<b>Relative Humidity:</b>	32.1 %
<b>Maximum Power Output:</b>	8.96 dBm


24 VDC Nominal Rated Supply Voltage



## 85% Nominal Rated Supply Voltage

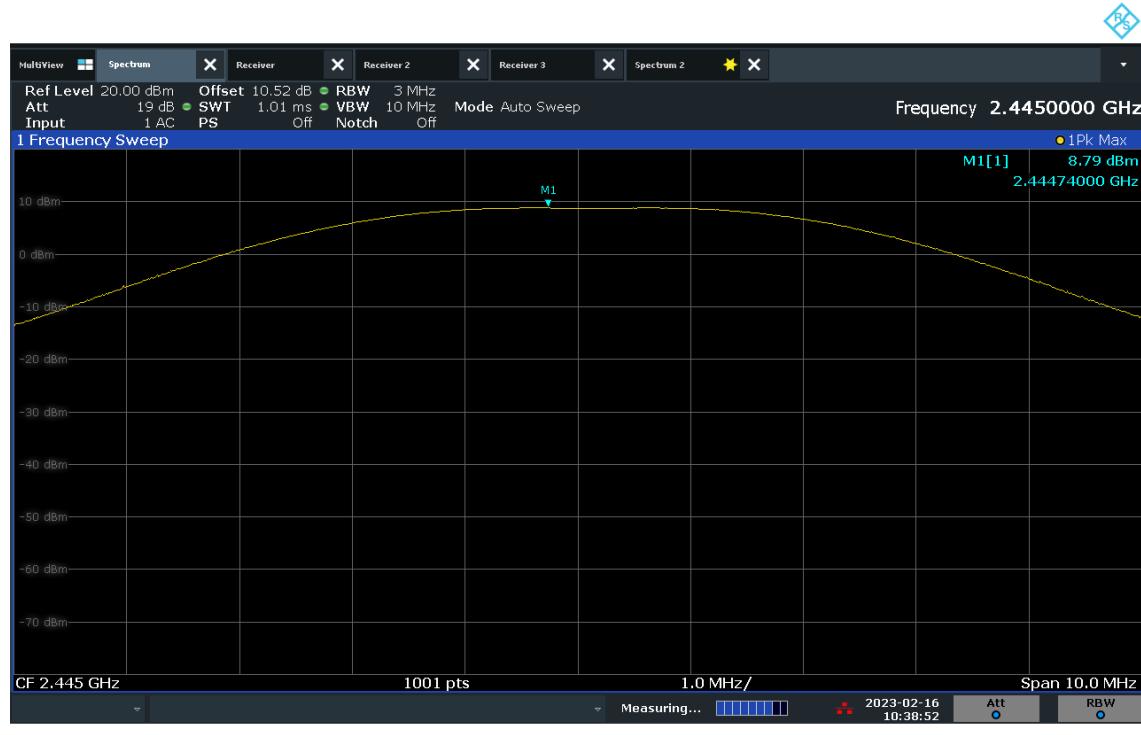

## 115% Nominal Rated Supply Voltage

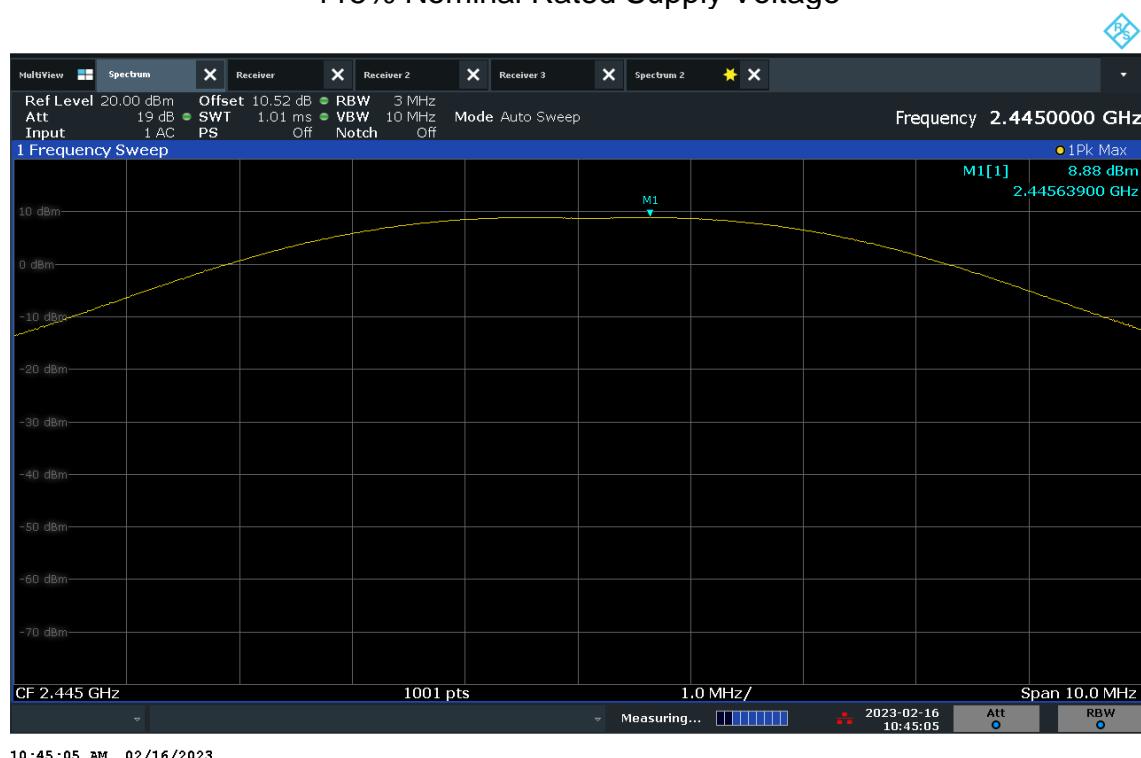


## POWER OUTPUT

<b>Test Specification:</b>	FCC Part 15, Subpart C, 15.247(b)(3), Power Output
<b>Method:</b>	ANSI C63.10, Section 11.9.1.1, Maximum Peak Conducted Output Power
<b>Job Number/Customer:</b>	R-3578P-6B/ Siemens Mobility
<b>Test Sample:</b>	2.4 GHz ZRadio System, Train to Wayside Communications
<b>Model Number:</b>	S25441-B57-A3-1.B; 8708660000 (P/S)
<b>Serial Number:</b>	6101142745-003; 7508000291 (P/S)
<b>Operating Mode:</b>	Transmitting at 2480 MHz
<b>Technician:</b>	M. Nowak
<b>Date(s):</b>	2/16/23
<b>Temperature:</b>	21.2 °C
<b>Relative Humidity:</b>	32.1 %
<b>Maximum Power Output:</b>	9.01 dBm


### 24 VDC Nominal Rated Supply Voltage



## 85% Nominal Rated Supply Voltage

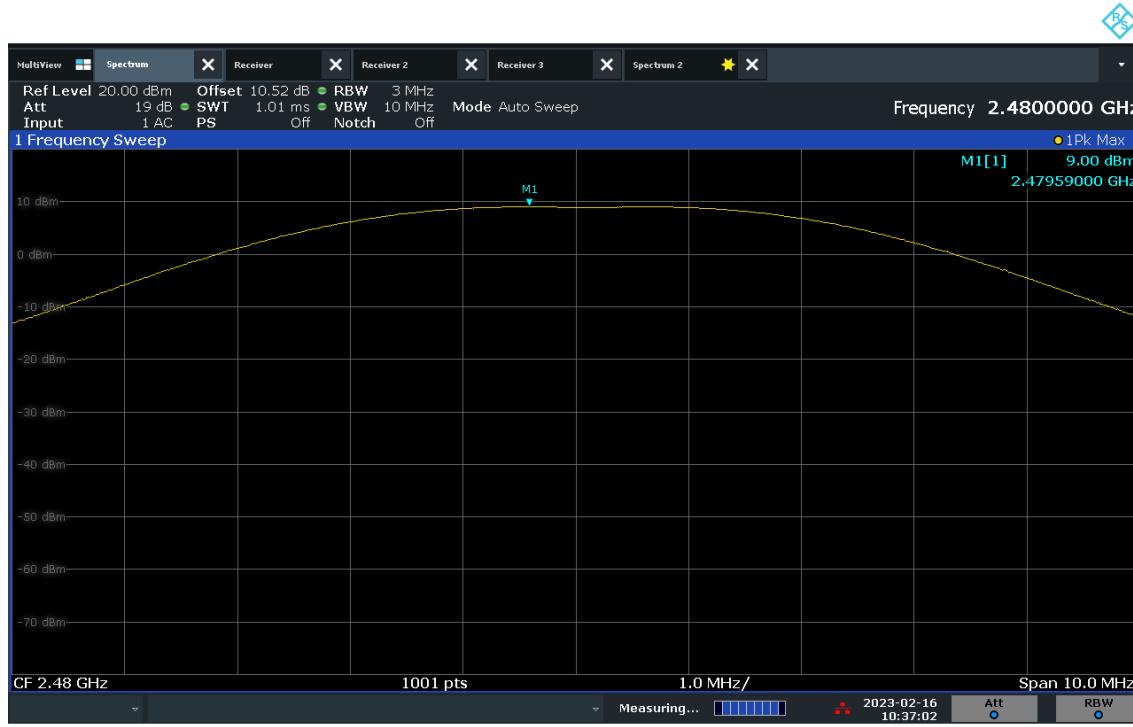

## 115% Nominal Rated Supply Voltage

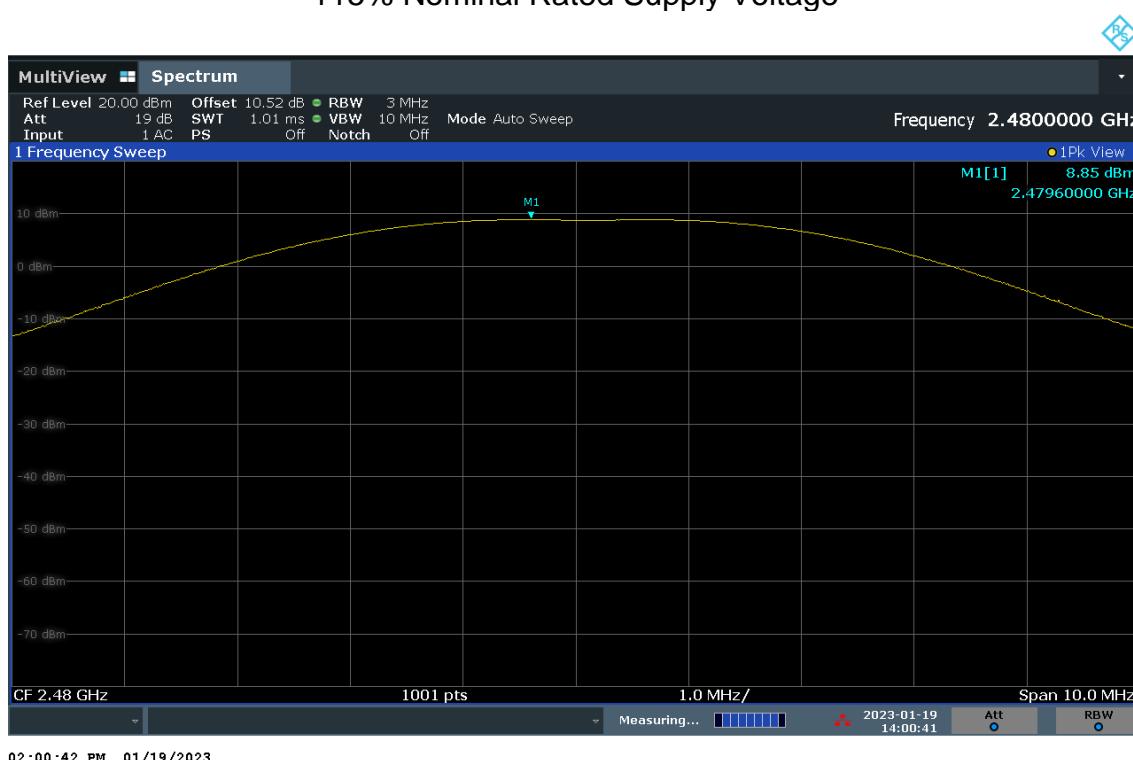

## Requirements and Test Results

### **Requirement: 15.247(b)(4), Antenna Gain**

The conducted output power limit specified is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

- **Results:**

The antenna utilized has a directional gain of 8.5 dBi. The power output limit has been reduced by 2.5 dB, the amount that the directional gain of the antenna exceeds 6 dBi.

## Requirements and Test Results


### Requirement: 15.247(d), Out of Band Emissions

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) must also comply with the radiated emissions limits specified in Section 15.209(a) (see Section 15.205(c)).

- Results:

In any 100 kHz bandwidth outside the frequency band in which the Spread spectrum intentional radiator was operating, the radio frequency power that was produced by the intentional radiator was at least 20 dB below that in the 100 kHz bandwidth within the band that contained the highest level of the desired power. All emissions, which fell within the restricted bands specified in 15.205(a), were measured and found to be in compliance with the limits specified in 15.209(a).

#### Out of Band Emissions - Conducted

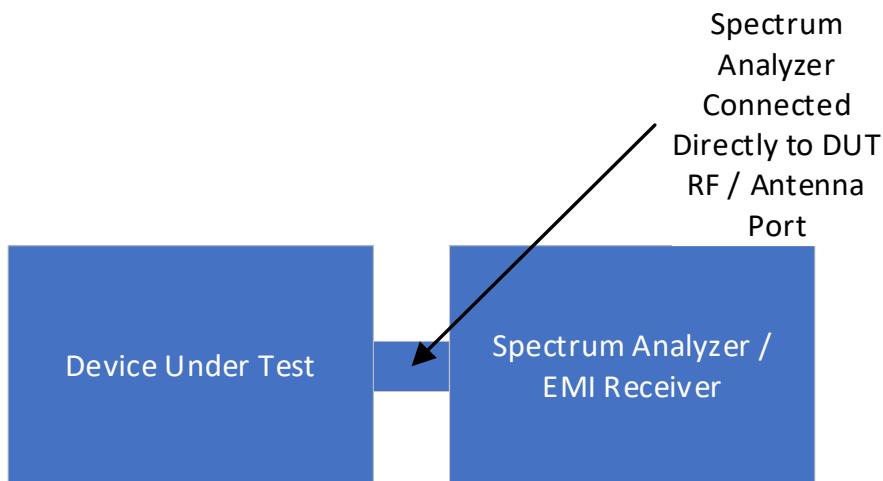


#### EQUIPMENT LIST

EN	Manufacturer	Model No.	Description	Serial No.	Due Date
713 8619	ROHDE & Schwarz OMEGA	ESIB26 OM-73	RECEIVER, EMI, 20 Hz - 26.5 GHz HYGROMETER, -20 to 70 deg. C, 0-99% RH	834000/008 051442102C	3/31/2023 4/30/2023


## OUT OF BAND EMISSIONS - CONDUCTED

<b>Test Specification:</b>	FCC Part 15, Subpart C, 15.247(d), Antenna Conducted Emissions
<b>Method:</b>	ANSI C63.10, Section 11.11, Antenna-port conducted emission measurements
<b>Job Number/Customer:</b>	R-3578P-6B/ Siemens Mobility
<b>Test Sample:</b>	2.4 GHz ZRadio System, Train to Wayside Communications
<b>Model Number:</b>	S25441-B57-A3-1.B; 8708660000 (P/S)
<b>Serial Number:</b>	6101142745-003; 7508000291 (P/S)
<b>Operating Mode:</b>	Transmitting at 2405 MHz
<b>Technician:</b>	M. Nowak
<b>Date(s):</b>	8/4/22
<b>Temperature:</b>	21.9 °C
<b>Relative Humidity:</b>	50.4%

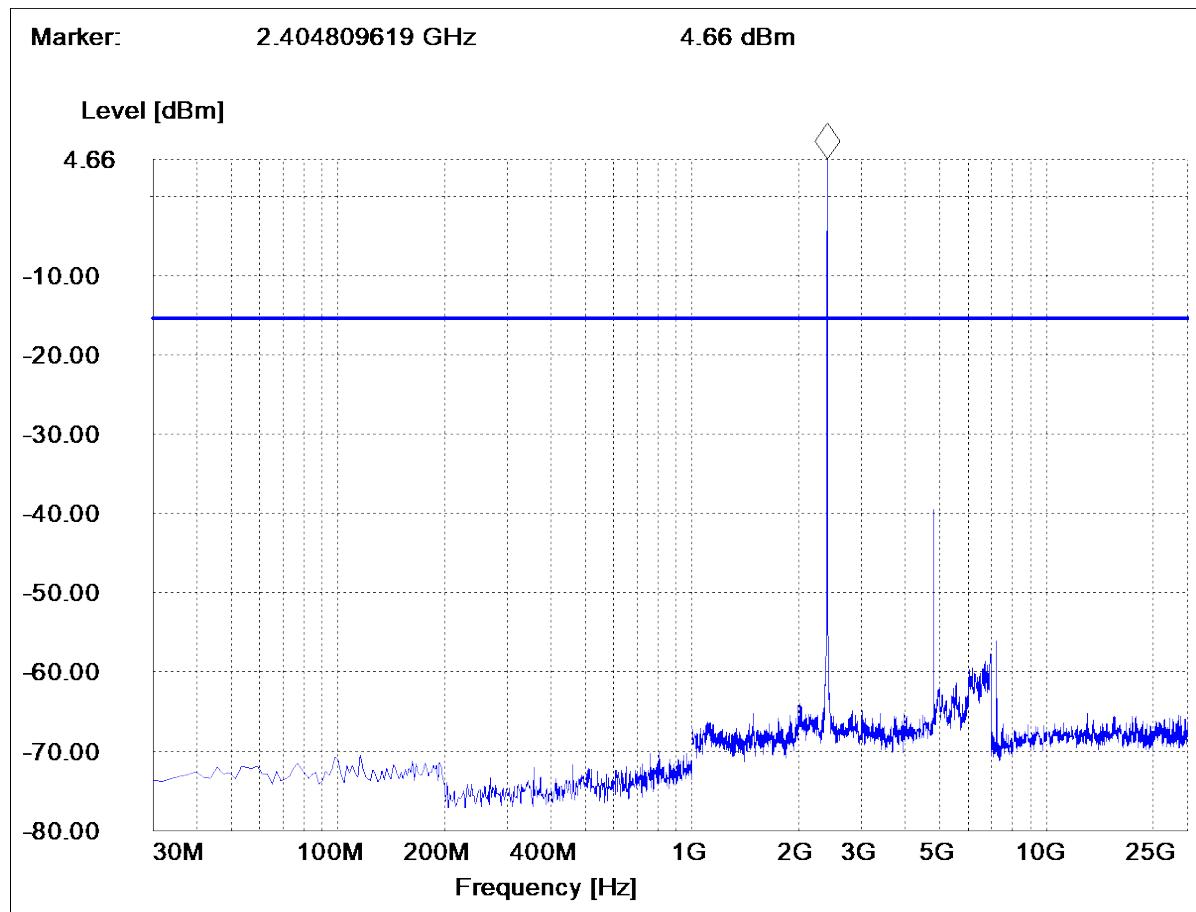


## OUT OF BAND EMISSIONS - CONDUCTED

<b>Test Specification:</b>	FCC Part 15, Subpart C, 15.247(d), Antenna Conducted Emissions
<b>Method:</b>	ANSI C63.10, Section 11.11, Antenna-port conducted emission measurements
<b>Job Number/Customer:</b>	R-3578P-6B/ Siemens Mobility
<b>Test Sample:</b>	2.4 GHz ZRadio System, Train to Wayside Communications
<b>Model Number:</b>	S25441-B57-A3-1.B; 8708660000 (P/S)
<b>Serial Number:</b>	6101142745-003; 7508000291 (P/S)
<b>Operating Mode:</b>	Transmitting at 2445 MHz
<b>Technician:</b>	M. Nowak
<b>Date(s):</b>	8/4/22
<b>Temperature:</b>	21.9 °C
<b>Relative Humidity:</b>	50.4%

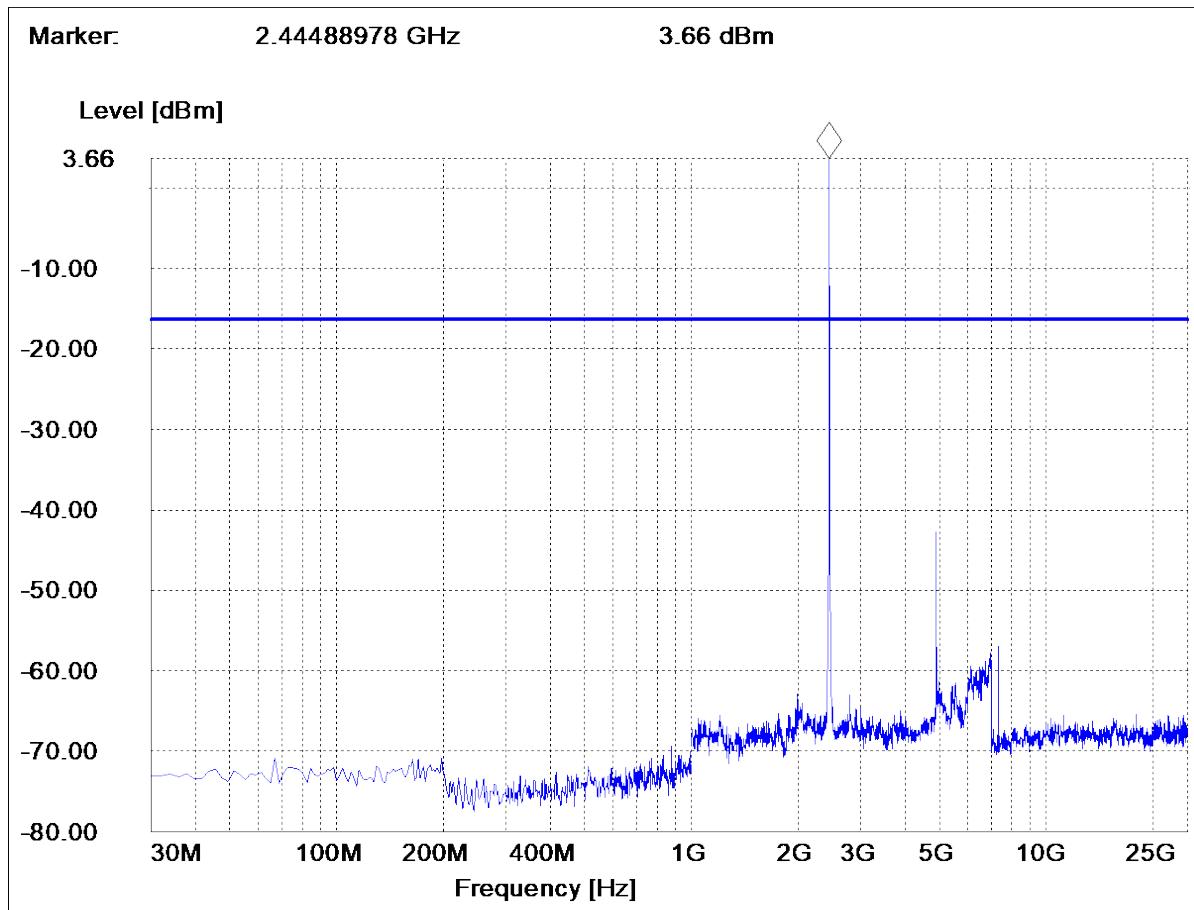


## OUT OF BAND EMISSIONS - CONDUCTED

<b>Test Specification:</b>	FCC Part 15, Subpart C, 15.247(d), Antenna Conducted Emissions
<b>Method:</b>	ANSI C63.10, Section 11.11, Antenna-port conducted emission measurements
<b>Job Number/Customer:</b>	R-3578P-6B/ Siemens Mobility
<b>Test Sample:</b>	2.4 GHz ZRadio System, Train to Wayside Communications
<b>Model Number:</b>	S25441-B57-A3-1.B; 8708660000 (P/S)
<b>Serial Number:</b>	6101142745-003; 7508000291 (P/S)
<b>Operating Mode:</b>	Transmitting at 2480 MHz
<b>Technician:</b>	M. Nowak
<b>Date(s):</b>	8/4/22
<b>Temperature:</b>	21.9 °C
<b>Relative Humidity:</b>	50.4%

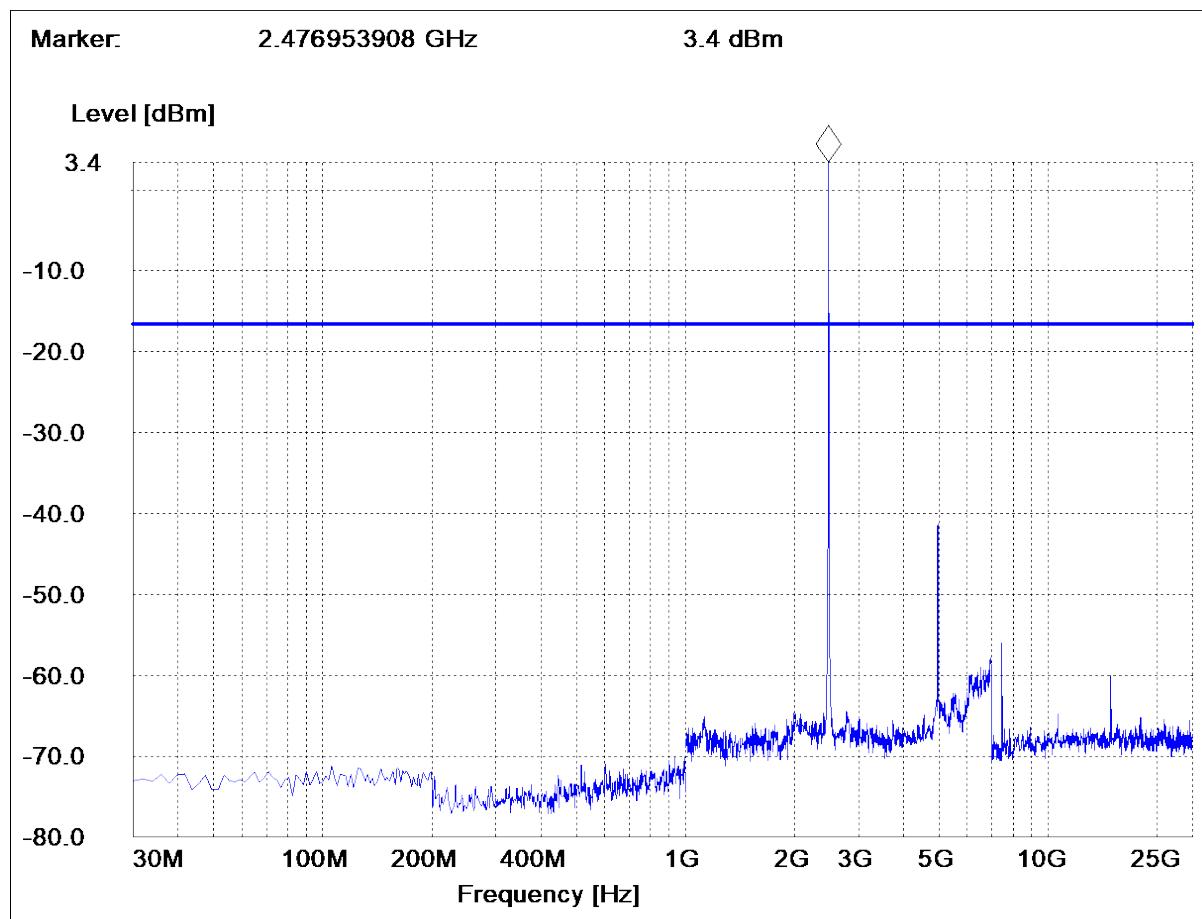

## Out of Band Emissions – Radiated Emissions Restricted Bands and Band Edge

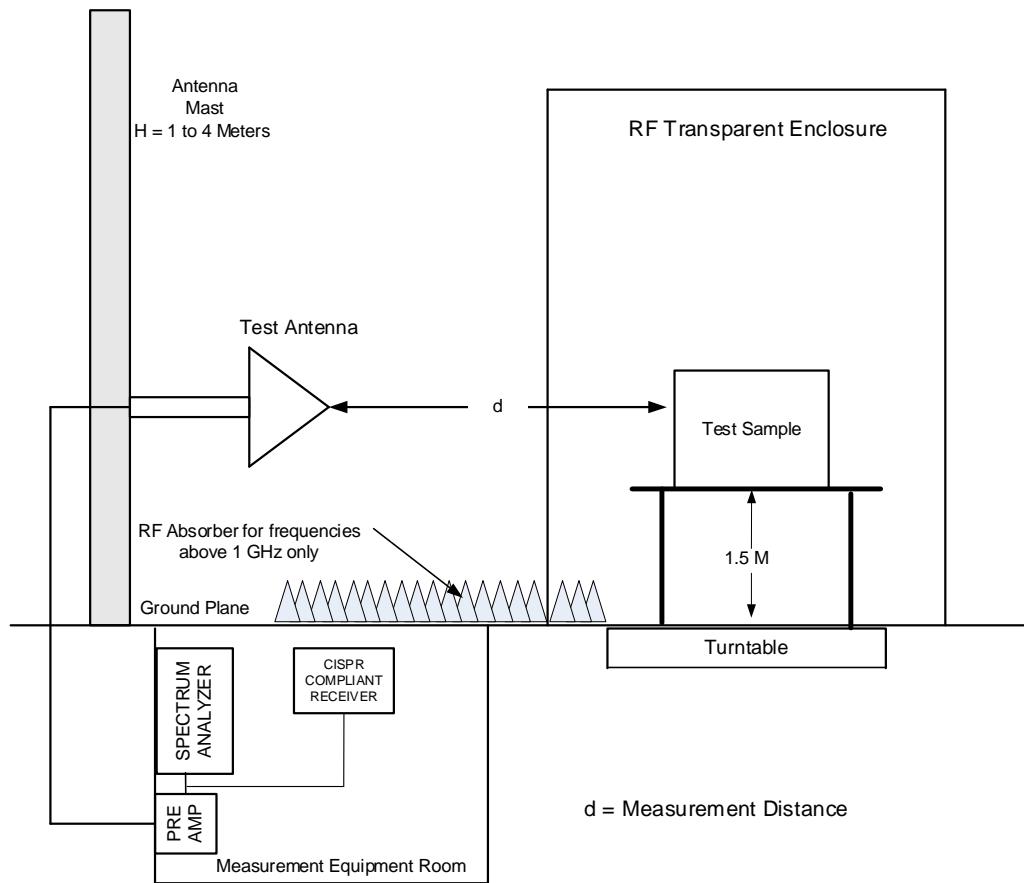

### EQUIPMENT LIST

EN	Manufacturer	Model No.	Description	Serial No.	Due Date
8018	ETS / EMCO	3115	ANTENNA, DOUBLE RIDGED GUIDE, 1 - 18 GHz	2023	12/31/2022
8300	RETLIF	RPA	OPEN AREA TEST SITE, ATTENUATION, 3/10 Meter OATS	N/A	5/31/2024
8317	AGILENT / HP	8449B	PRE-AMPLIFIER, 1 - 26.5 GHz, 30 dB	3008A02311	5/31/2023
8419A	MICRO-COAX	UFB311A-1-0480-50U50	CABLE, COAXIAL, 10 kHz - 18 GHz	231149-001	1/31/2023
8487A	MICRO-COAX	UFB311A-1-0480-50U50	CABLE, COAXIAL, 10 kHz - 18 GHz	231149-002	1/31/2023
8637	AGILENT/HP	8563E	ANALYZER, SPECTRUM, 30 Hz - 26.5 GHz	3246A00426	1/31/2023
8662	DIGI-SENSE	20250-30	HYGROMETER, 0 - 50 deg. c, 10 - 90 % RH	151210305	10/31/2022

## OUT OF BAND EMISSIONS – RADIATED – RESTRICTED BANDS

<b>Test Specification:</b>	FCC Part 15, Subpart C, 15.209, Radiated Spurious Emissions
<b>Method:</b>	ANSI C63.10, Section 11.12, Emissions in Restricted Frequency Bands, Radiated Emission Measurements
<b>Job Number/Customer:</b>	R-3578P-6B/ Siemens Mobility
<b>Test Sample:</b>	2.4 GHz ZRadio System, Train to Wayside Communications
<b>Model Number:</b>	S25441-B57-A3-1.B; 8708660000 (P/S)
<b>Serial Number:</b>	6101142745-003; 7508000291 (P/S)
<b>Operating Mode:</b>	Transmitting at 2405 MHz
<b>Technician:</b>	M. Nowak
<b>Date(s):</b>	8/5/22
<b>Temperature:</b>	21.9 °C
<b>Relative Humidity:</b>	50.4%

Notes: \*Noise floor measurement, minimum sensitivity of measurement system.

Frequency	Antenna Pol /Height	EUT Orientation	Meter Reading	Correction Factor	Corrected Reading	Converted Reading	Limit
GHz	(V/H) / (m)	Degrees	dBuV	dB	dBuV/m	uV/m	uV/m
1.00							500
*4.810	H / 1.50	180.0	17.1	1.3	18.4	8.32	
25.00							500

## OUT OF BAND EMISSIONS – RADIATED – RESTRICTED BANDS

<b>Test Specification:</b>	FCC Part 15, Subpart C, 15.209, Radiated Spurious Emissions
<b>Method:</b>	ANSI C63.10, Section 11.12, Emissions in Restricted Frequency Bands, Radiated Emission Measurements
<b>Job Number/Customer:</b>	R-3578P-6B/ Siemens Mobility
<b>Test Sample:</b>	2.4 GHz ZRadio System, Train to Wayside Communications
<b>Model Number:</b>	S25441-B57-A3-1.B; 8708660000 (P/S)
<b>Serial Number:</b>	6101142745-003; 7508000291 (P/S)
<b>Operating Mode:</b>	Transmitting at 2445 MHz
<b>Technician:</b>	M. Nowak
<b>Date(s):</b>	8/5/22
<b>Temperature:</b>	21.9 °C
<b>Relative Humidity:</b>	50.4%

Notes: \*Noise floor measurement, minimum sensitivity of measurement system.

Frequency	Antenna Pol /Height	EUT Orientation	Meter Reading	Correction Factor	Corrected Reading	Converted Reading	Limit
GHz	(V/H) / (m)	Degrees	dBuV	dB	dBuV/m	uV/m	uV/m
1.00							500
*4.890	H / 1.50	180.0	19.3	1.6	20.9	11.10	
*7.343	H / 1.50	180.0	16.1	4.8	20.9	11.10	
25.00							500

## OUT OF BAND EMISSIONS – RADIATED – RESTRICTED BANDS

<b>Test Specification:</b>	FCC Part 15, Subpart C, 15.209, Radiated Spurious Emissions
<b>Method:</b>	ANSI C63.10, Section 11.12, Emissions in Restricted Frequency Bands, Radiated Emission Measurements
<b>Job Number/Customer:</b>	R-3578P-6B/ Siemens Mobility
<b>Test Sample:</b>	2.4 GHz ZRadio System, Train to Wayside Communications
<b>Model Number:</b>	S25441-B57-A3-1.B; 8708660000 (P/S)
<b>Serial Number:</b>	6101142745-003; 7508000291 (P/S)
<b>Operating Mode:</b>	Transmitting at 2480 MHz
<b>Technician:</b>	M. Nowak
<b>Date(s):</b>	8/5/22
<b>Temperature:</b>	21.9 °C
<b>Relative Humidity:</b>	50.4%

Notes: \*Noise floor measurement, minimum sensitivity of measurement system.

Frequency	Antenna Pol /Height	EUT Orientation	Meter Reading	Correction Factor	Corrected Reading	Converted Reading	Limit
GHz	(V/H) / (m)	Degrees	dBuV	dB	dBuV/m	uV/m	uV/m
1.00							500
*4.962	H / 1.50	180.0	17.9	1.7	19.6	9.55	
*7.447	H / 1.50	180.0	16.7	5.0	21.7	12.17	
25.00							500

## OUT OF BAND EMISSIONS – RADIATED – BAND EDGE

<b>Test Specification:</b>	FCC Part 15, Subpart C, 15.209, Radiated Spurious Emissions
<b>Method:</b>	ANSI C63.4, Section 8, Radiated Emission Measurements
<b>Job Number/Customer:</b>	R-3578P-6B/ Siemens Mobility
<b>Test Sample:</b>	2.4 GHz ZRadio System, Train to Wayside Communications
<b>Model Number:</b>	S25441-B57-A3-1.B; 8708660000 (P/S)
<b>Serial Number:</b>	6101142745-003; 7508000291 (P/S)
<b>Operating Mode:</b>	Transmitting at 2405 MHz
<b>Technician:</b>	M. Nowak
<b>Date(s):</b>	8/12/22
<b>Temperature:</b>	21.9 °C
<b>Relative Humidity:</b>	50.4%

Notes: \*Noise floor measurement, minimum sensitivity of measurement system.

Frequency	Antenna Pol /Height	EUT Orientation	Meter Reading	Correction Factor	Corrected Reading	Converted Reading	Limit
GHz	(V/H) / (m)	Degrees	dBuV	dB	dBuV/m	uV/m	uV/m
1.00							500
*2.390	H / 1.50	180.0	42.5	-4.0	38.5	84.14	
25.00							500

## OUT OF BAND EMISSIONS – RADIATED – BAND EDGE

<b>Test Specification:</b>	FCC Part 15, Subpart C, 15.209, Radiated Spurious Emissions
<b>Method:</b>	ANSI C63.4, Section 8, Radiated Emission Measurements
<b>Job Number/Customer:</b>	R-3578P-6B/ Siemens Mobility
<b>Test Sample:</b>	2.4 GHz ZRadio System, Train to Wayside Communications
<b>Model Number:</b>	S25441-B57-A3-1.B; 8708660000 (P/S)
<b>Serial Number:</b>	6101142745-003; 7508000291 (P/S)
<b>Operating Mode:</b>	Transmitting at 2480 MHz
<b>Technician:</b>	M. Nowak
<b>Date(s):</b>	8/12/22
<b>Temperature:</b>	21.9 °C
<b>Relative Humidity:</b>	50.4%

Notes: \*Noise floor measurement, minimum sensitivity of measurement system.

Frequency	Antenna Pol /Height	EUT Orientation	Meter Reading	Correction Factor	Corrected Reading	Converted Reading	Limit
GHz	(V/H) / (m)	Degrees	dBuV	dB	dBuV/m	uV/m	uV/m
1.00							500
*2.4835	H / 1.50	180.0	47.4	-3.9	43.5	149.63	
25.00							500


## Requirements and Test Results

### **Requirement: 15.247(e), Power Spectral Density**

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power was used to determine the power spectral density.

- Results:**

The power spectral density conducted from the intentional radiator to the antenna was not greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density was determined in accordance with Section 15.247(b)(3), herein. The same method of determining the conducted output power was used to determine the power spectral density.

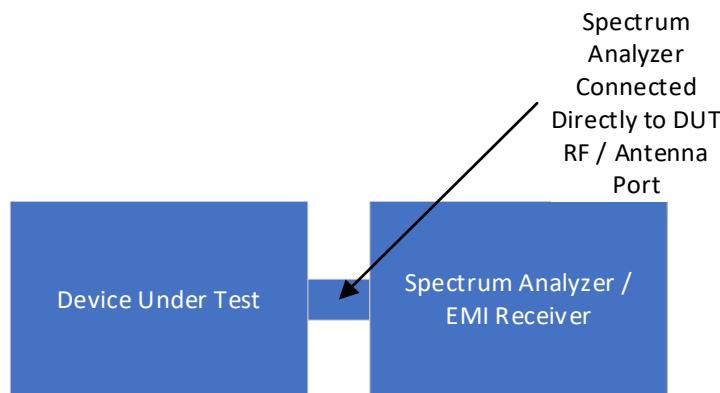


## EQUIPMENT LIST

EN	Manufacturer	Model No.	Description	Serial No.	Due Date
713	ROHDE & Schwarz	ESIB26	RECEIVER, EMI, 20 Hz - 26.5 GHz	834000/008	3/31/2023
8619	OMEGA	OM-73	HYGROMETER, -20 to 70 deg. C, 0-99% RH	051442102C	4/30/2023


## POWER SPECTRAL DENSITY

<b>Test Specification:</b>	FCC Part 15, Subpart C, 15.247(e), Power Spectral Density
<b>Method:</b>	ANSI C63.10, Section 11.10.2, Maximum power spectral density in the fundamental emission
<b>Job Number/Customer:</b>	R-3578P-6B/ Siemens Mobility
<b>Test Sample:</b>	2.4 GHz ZRadio System, Train to Wayside Communications
<b>Model Number:</b>	S25441-B57-A3-1.B; 8708660000 (P/S)
<b>Serial Number:</b>	6101142745-003; 7508000291 (P/S)
<b>Operating Mode:</b>	Transmitting at 2405 MHz
<b>Technician:</b>	M. Nowak
<b>Date(s):</b>	2/16/23
<b>Temperature:</b>	21.2 °C
<b>Relative Humidity:</b>	32.1 %
<b>Power Spectral Density:</b>	-6.37 dBm

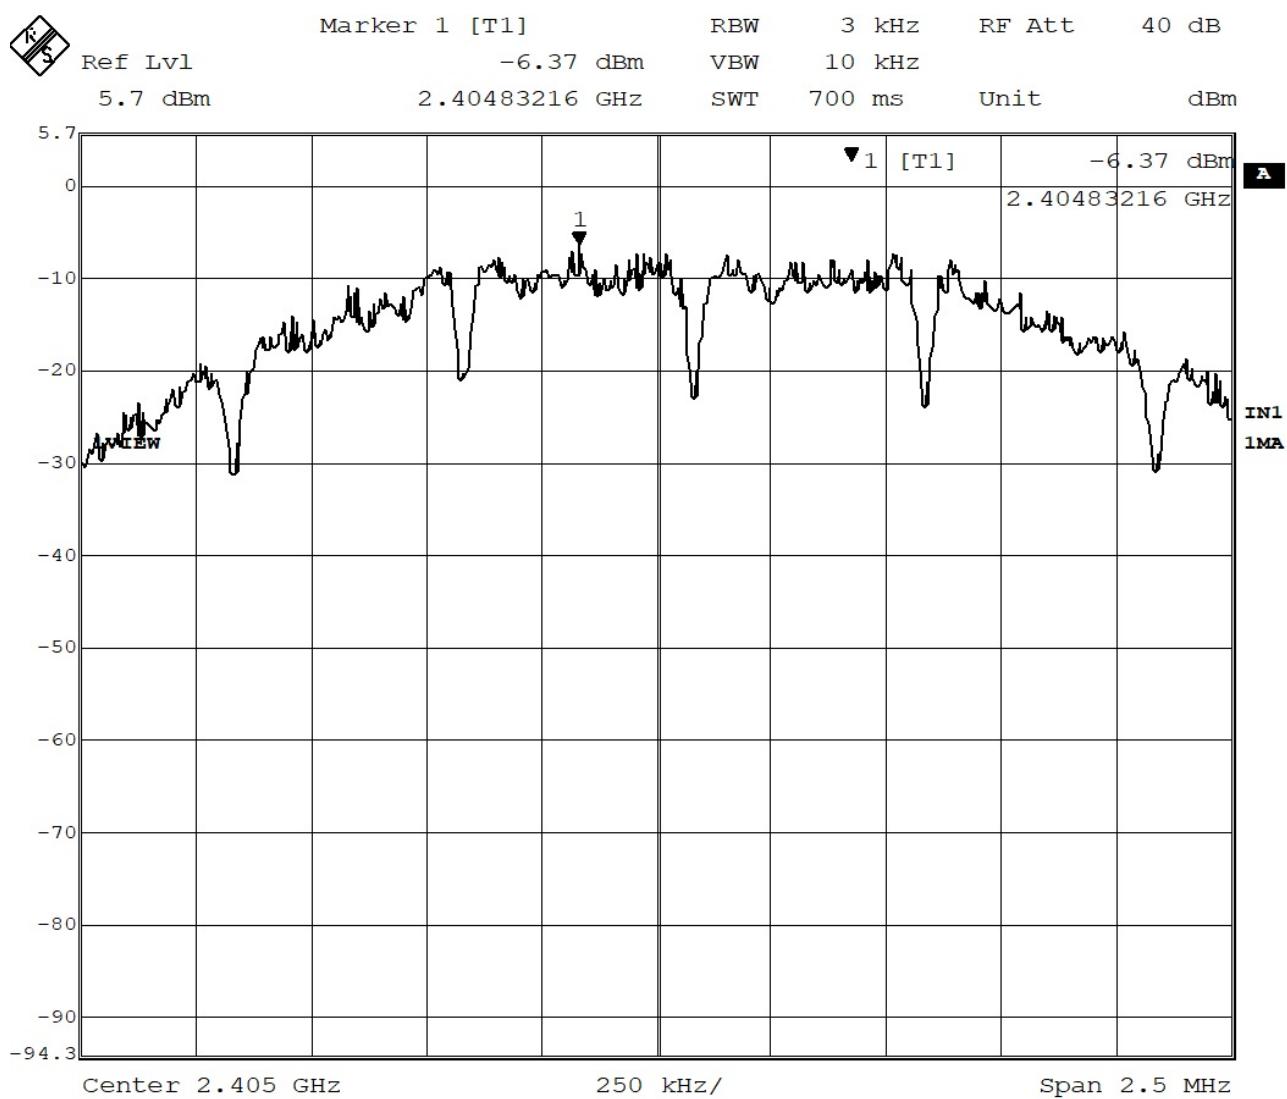


## POWER SPECTRAL DENSITY

<b>Test Specification:</b>	FCC Part 15, Subpart C, 15.247(e), Power Spectral Density
<b>Method:</b>	ANSI C63.10, Section 11.10.2, Maximum power spectral density in the fundamental emission
<b>Job Number/Customer:</b>	R-3578P-6B/ Siemens Mobility
<b>Test Sample:</b>	2.4 GHz ZRadio System, Train to Wayside Communications
<b>Model Number:</b>	S25441-B57-A3-1.B; 8708660000 (P/S)
<b>Serial Number:</b>	6101142745-003; 7508000291 (P/S)
<b>Operating Mode:</b>	Transmitting at 2445 MHz
<b>Technician:</b>	M. Nowak
<b>Date(s):</b>	2/16/23
<b>Temperature:</b>	21.2 °C
<b>Relative Humidity:</b>	32.1 %
<b>Power Spectral Density:</b>	-6.68 dBm

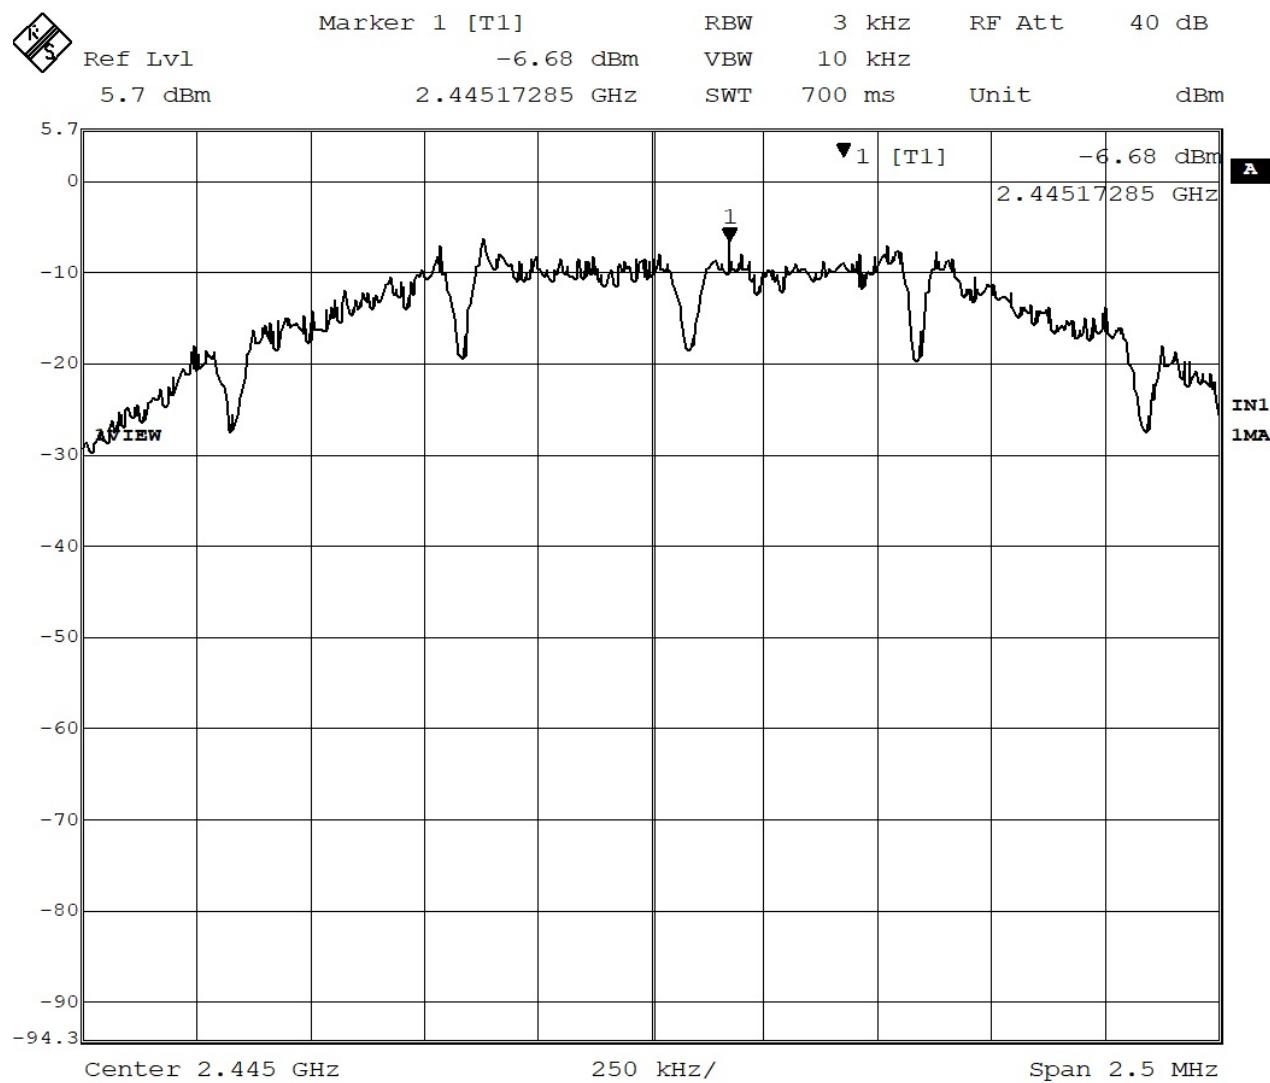

## POWER SPECTRAL DENSITY

<b>Test Specification:</b>	FCC Part 15, Subpart C, 15.247(e), Power Spectral Density
<b>Method:</b>	ANSI C63.10, Section 11.10.2, Maximum power spectral density in the fundamental emission
<b>Job Number/Customer:</b>	R-3578P-6B/ Siemens Mobility
<b>Test Sample:</b>	2.4 GHz ZRadio System, Train to Wayside Communications
<b>Model Number:</b>	S25441-B57-A3-1.B; 8708660000 (P/S)
<b>Serial Number:</b>	6101142745-003; 7508000291 (P/S)
<b>Operating Mode:</b>	Transmitting at 2480 MHz
<b>Technician:</b>	M. Nowak
<b>Date(s):</b>	2/16/23
<b>Temperature:</b>	21.2 °C
<b>Relative Humidity:</b>	32.1 %
<b>Power Spectral Density:</b>	-7.01 dBm

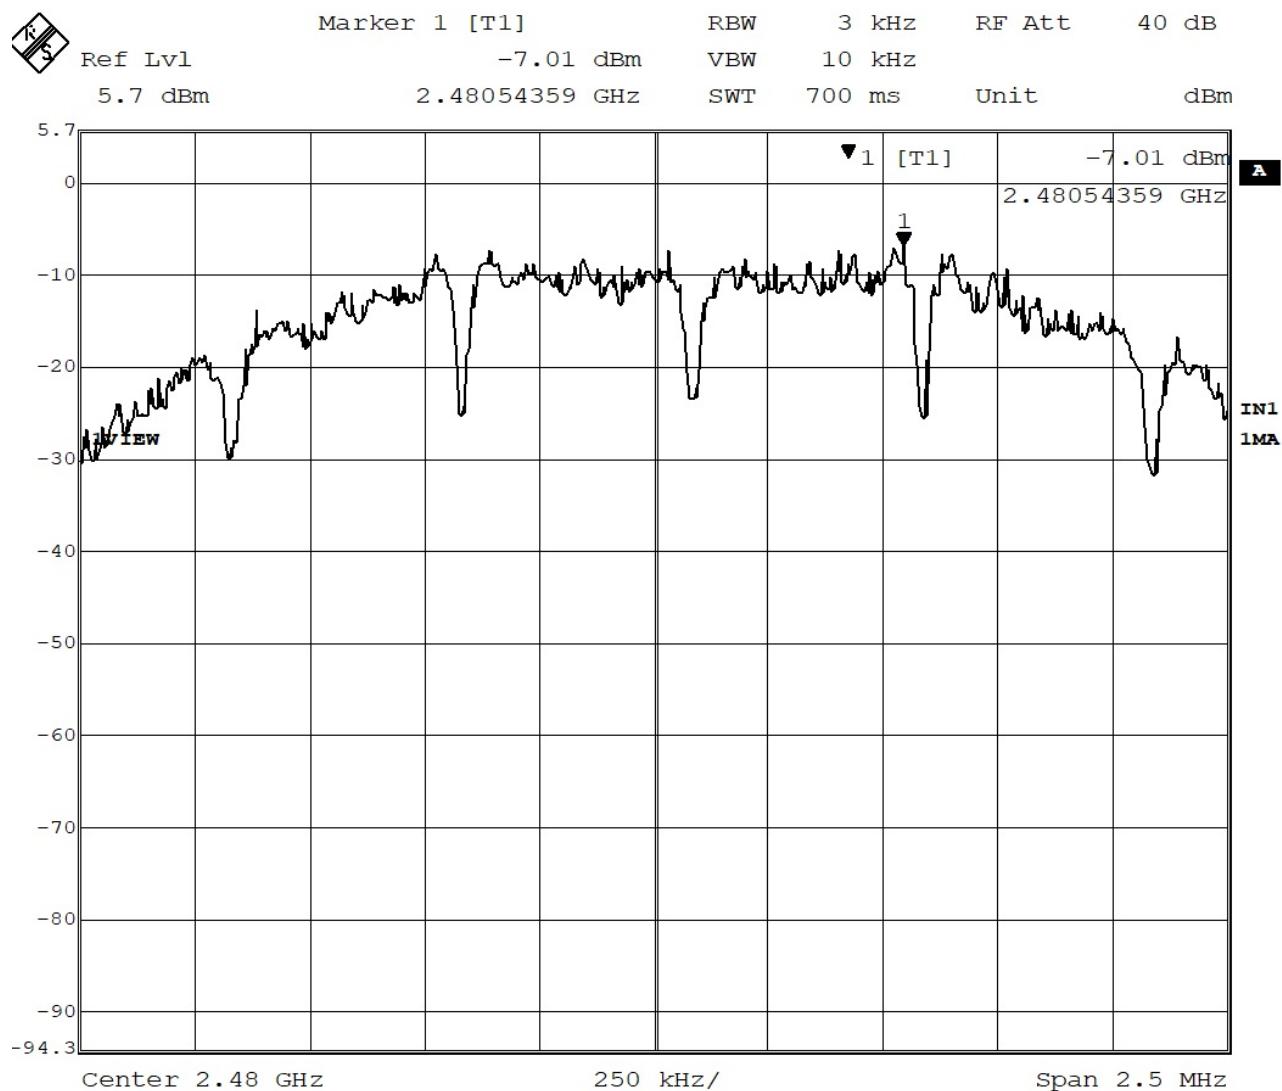

## Requirements and Test Results

### **Requirement: 15.109(a) / 15.209(a), Radiated Emissions, General Requirements**


Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in Table 1.

Table 1 - Radiated Emission Limits

Frequency of Emission (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 to 88	100	3
88 to 216	150	3
216 to 960	200	3
Above 960	500	3

- **Results:**

The field strength of spurious radiated emissions did not exceed the limits specified in Table 1.

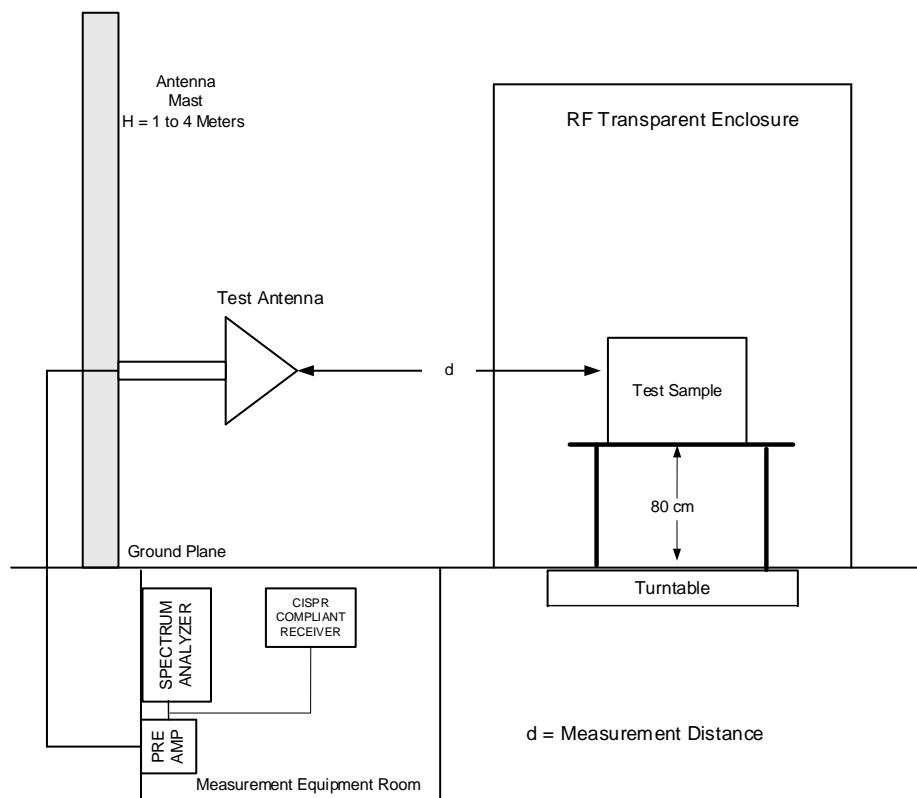

## EQUIPMENT LIST

<b>EN</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Description</b>	<b>Serial No.</b>	<b>Due Date</b>
127A 8080	ETS / EMCO ROHDE &	3104 354- 3000.56ESVP	ANTENNA, BICONICAL, 20 - 200 MHz RECEIVER, EMI, 20 - 1300 MHz	2319 861744/015	12/31/2023 12/31/2022
8300	RETLIF	RPA	OPEN AREA TEST SITE, ATTENUATION, 3/10 Meter OATS	N/A	5/31/2024
8300C	UNKNOWN	3 METER CABLE	CABLE, COAXIAL, 3/10 METER	N/A	8/31/2022
8644	AGILENT / HP	85662A	ANALYZER, SPECTRUM, 100 Hz - 22 GHz	2848A18175	9/30/2022
8644A	AGILENT / HP	8566B	ANALYZER, SPECTRUM, 100 Hz - 22.5 GHz	2937A06124	9/30/2022
8644B	AGILENT / HP	85685A	ANALYZER, RF PRESELECTOR, 20 Hz - 2 GHz	2724A00532	9/30/2022
8662	DIGI-SENSE	20250-30	HYGROMETER, 0 - 50 deg. c, 10 - 90 % RH	151210305	10/31/2022
8808	ETS / EMCO	3147	ANTENNA, LOG PERIODIC, 200 MHz - 5 GHz	00244881	9/30/2023

## RADIATED EMISSIONS TEST DATA SHEET

<b>Test Specification:</b>	FCC Part 15, Subpart C, Section 15.209(a), Radiated Emissions
<b>Method:</b>	ANSI C63.4, Section 8, Radiated Emission Measurements, 30 MHz to 1GHz
<b>Job Number/Customer:</b>	R-3578P-6B/ Siemens Mobility
<b>Test Sample:</b>	2.4 GHz ZRadio System, Train to Wayside Communications
<b>Model Number:</b>	S25441-B57-A3-1.B; 8708660000 (P/S)
<b>Serial Number:</b>	6101142745-003; 7508000291 (P/S)
<b>Operating Mode:</b>	Transmitting at 2445 MHz
<b>Technician:</b>	M. Nowak
<b>Date(s):</b>	8/12/22
<b>Temperature:</b>	21.9 °C
<b>Relative Humidity:</b>	50.4%
<b>Detector:</b>	Quasi-Peak
<b>Test Distance:</b>	3m

**Notes:** The frequency range was scanned from 30 MHz to 1 GHz  
 The emissions observed from the EUT do not exceed the specified limits. The six highest readings relative to the limit are presented.  
 \*Noise floor measurement, minimum sensitivity of measurement system.

Frequency	Antenna Pol /Height	EUT Orientation	Meter Reading	Correction Factor	Corrected Reading	Converted Reading	Limit
MHz	(V/H) / (m)	Degrees	dBuV	dB	dBuV/m	uV/m	uV/m
30.00							100
*38.00	H / 1.00	180.0	2.2	12.8	15.0	5.63	
88.00							100
88.00							150
*110.00	H / 1.00	180.0	4.9	13.4	18.3	8.26	
*195.00	H / 1.00	180.0	7.2	19.1	26.3	20.66	
216.00							150
216.00							200
*220.00	H / 1.00	180.0	7.5	13.1	20.6	10.72	
*605.00	H / 1.00	180.0	2.2	23.5	25.7	19.28	
960.00							200
960.00							500
*995.00	H / 1.00	180.0	3.8	29.3	33.1	45.19	
1000.00							500