

TEST REPORT

Reference No..... : WTX22X07156173W001
FCC ID : 2A8HY-GLVTSLCM
Applicant : Galvanox
Address..... : 282 Dupont Ave, Newburgh, New York 12550, United States
Manufacturer : Dongguan Haopin Technology Co., Ltd.
Address..... : 5 / F, Building 6, Kusai Kejiyuan, Fumin South Road, Dongguan City,China
Product Name : Wireless Charging Car Mount for MagSafe
Model No..... : GLVTSLCM
Standards : FCC Part 18
Date of Receipt sample : 2022-07-29
Date of Test..... : 2022-07-29 to 2022-08-18
Date of Issue : 2022-08-18
Test Report Form No. : WTX_Part 18W
Test Result..... : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

Jack Huang

Jack Huang

Approved by:

Silin Chen

Silin Chen

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND OPERATION MODE	6
1.6 MEASUREMENT UNCERTAINTY	7
1.7 TEST EQUIPMENT LIST AND DETAILS	8
2. SUMMARY OF TEST RESULTS	9
3. CONDUCTED EMISSIONS	10
3.1 STANDARD APPLICABLE.....	10
3.2 TEST PROCEDURE.....	10
3.3 BASIC TEST SETUP BLOCK DIAGRAM.....	10
3.4 ENVIRONMENTAL CONDITIONS	10
3.5 TEST RECEIVER SETUP	11
3.6 SUMMARY OF TEST RESULTS/PLOTS	11
4. RADIATED EMISSIONS.....	18
4.1 TEST PROCEDURE.....	18
4.2 TEST RECEIVER SETUP	19
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	19
4.4 ENVIRONMENTAL CONDITIONS	20
4.5 SUMMARY OF TEST RESULTS/PLOTS	20
APPENDIX PHOTOGRAPHS.....	30

Report version

Version No.	Date of issue	Description
Rev.00	2022-08-18	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	Wireless Charging Car Mount for MagSafe
Trade Name:	Galvanox
Model No.:	GLVTSLCM
Adding Model(s):	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Frequency Range:	110~205KHz
Power adapter	FSK
Antenna Type:	Coil Antenna
Antenna Gain:	0 dBi
Rated Voltage:	Input: 5V, 9V, 12V
Rated Current:	Input: 2A, 2A, 1.67A
Rated Power:	Output: 5W/7.5W/10W/15W

1.2 Test Standards

The tests were performed according to following standards:

FCC Part 18 Subpart C: Industrial, Scientific, and medical medical equipment.

ANSI C63.4-2014: American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014 and FCC MP-5:1986, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F, Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101)

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

Test Mode	Description	Remark	Power Supply Mode
TM1	Wireless Charging	Output 5W	Input: 5V, 9V, 12V
TM2	Wireless Charging	Output 10W	Input: 5V, 9V, 12V
TM3	Wireless Charging	Output 15W	Input: 5V, 9V, 12V

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
USB-C Cable	1.00	Unshielded	Without Ferrite

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
Adapter	KOSP	CE200A0120V	/
Smart phone	Apple	IPhone 11	/
wireless charging tester	YBZ	YBZ wireless charging tester	/

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
DC Cable	1.25	Unshielded	Without Ferrite

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Conducted Emissions	Conducted	9-150kHz ±3.74dB
		0.15-30MHz ±3.34dB
Radiated Emissions	Radiated	30-200MHz ±4.52dB
		0.2-1GHz ±5.56dB
		1-6GHz ±3.84dB
		6-18GHz ±3.92dB

1.7 Test Equipment List and Details

Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
Spectrum Analyzer	Rohde & Schwarz	FSP	836079/035	2022-03-22	2023-03-21
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
Amplifier	Agilent	8447F	3113A06717	2022-01-07	2023-01-06
Amplifier	C&D	PAP-1G18	2002	2022-03-22	2023-03-21
Trilog Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-20	2023-03-19
Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2023-03-19
Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2023-04-08
Amplifier	Agilent	8447D	2944A10179	2022-03-22	2023-03-21
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2022-03-25	2023-03-24

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing

2. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§ 18.307 (b)	Conducted Emission	Compliant
§ 18.305 (b)	Radiated Emission	Compliant

3. Conducted Emissions

3.1 Standard Applicable

According to FCC 18.307(b), the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies shall not exceed the limits in the following tables:


Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

3.2 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 18.307 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

3.3 Basic Test Setup Block Diagram

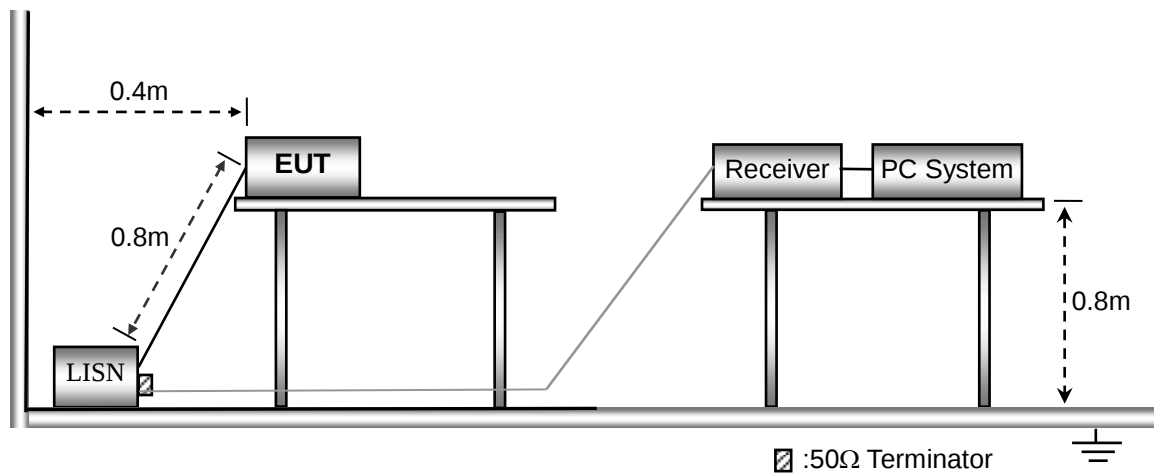

3.4 Environmental Conditions

Temperature:	23.5° C
Relative Humidity:	54%
ATM Pressure:	1016 mbar


3.5 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150 kHz
Stop Frequency.....	30 MHz
Sweep Speed	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth	9 kHz
Quasi-Peak Adapter Mode.....	Normal


3.6 Summary of Test Results/Plots

Test mode:	TM1	Polarity:	Line
------------	-----	-----------	------

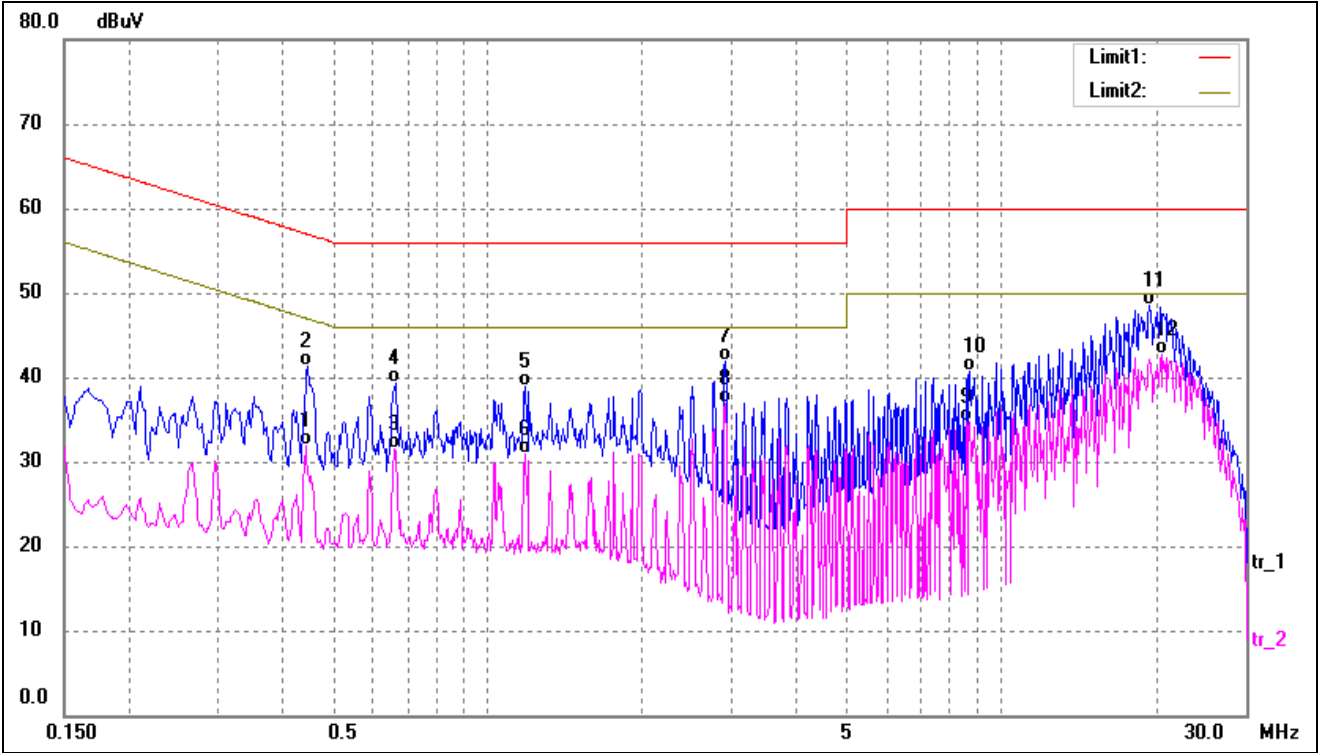


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.4420	21.58	10.23	31.81	47.02	-15.21	AVG
2	0.4460	31.11	10.23	41.34	56.95	-15.61	QP
3	0.6580	21.35	10.20	31.55	46.00	-14.45	AVG
4	0.6620	29.15	10.20	39.35	56.00	-16.65	QP
5	1.1860	28.79	10.16	38.95	56.00	-17.05	QP
6	1.1860	20.76	10.16	30.92	46.00	-15.08	AVG
7	2.9020	31.71	10.27	41.98	56.00	-14.02	QP
8	2.9020	26.72	10.27	36.99	46.00	-9.01	AVG
9	8.5620	24.40	10.34	34.74	50.00	-15.26	AVG
10	8.7180	30.29	10.34	40.63	60.00	-19.37	QP
11	19.4619	38.08	10.36	48.44	60.00	-11.56	QP
12*	20.6820	32.25	10.37	42.62	50.00	-7.38	AVG

Test mode:	TM1	Polarity:	Neutral
------------	-----	-----------	---------

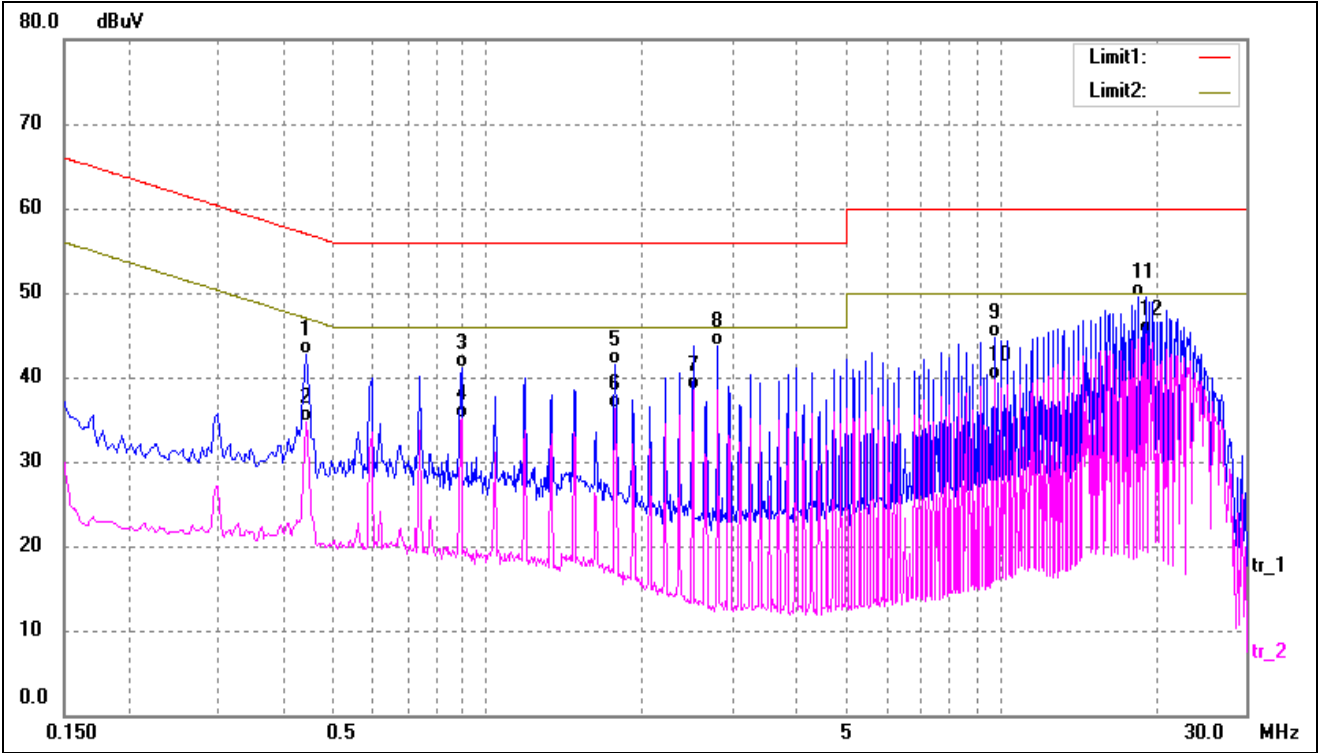


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.4420	32.50	10.23	42.73	57.02	-14.29	QP
2	0.4420	24.46	10.23	34.69	47.02	-12.33	AVG
3	0.8900	30.89	10.16	41.05	56.00	-14.95	QP
4	0.8900	24.96	10.16	35.12	46.00	-10.88	AVG
5	1.7780	31.18	10.23	41.41	56.00	-14.59	QP
6	1.7780	26.13	10.23	36.36	46.00	-9.64	AVG
7	2.5180	28.29	10.26	38.55	46.00	-7.45	AVG
8	2.8140	33.39	10.27	43.66	56.00	-12.34	QP
9	9.7340	34.26	10.35	44.61	60.00	-15.39	QP
10	9.7340	29.26	10.35	39.61	50.00	-10.39	AVG
11	18.5980	39.12	10.33	49.45	60.00	-10.55	QP
12*	19.1980	34.84	10.35	45.19	50.00	-4.81	AVG

Test mode:	TM2	Polarity:	Line
------------	-----	-----------	------

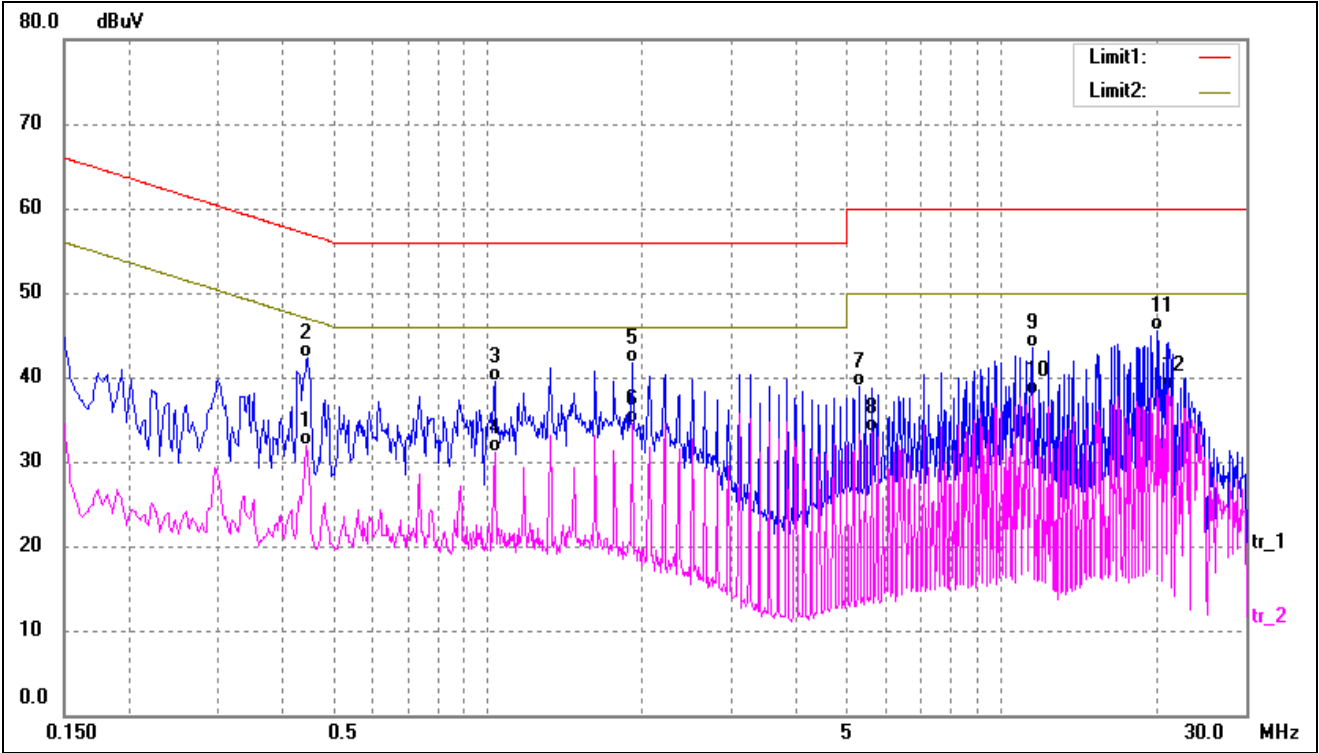


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.4420	21.75	10.23	31.98	47.02	-15.04	AVG
2	0.4460	32.13	10.23	42.36	56.95	-14.59	QP
3	1.0339	29.37	10.14	39.51	56.00	-16.49	QP
4	1.0339	20.90	10.14	31.04	46.00	-14.96	AVG
5	1.9180	31.55	10.24	41.79	56.00	-14.21	QP
6	1.9180	24.25	10.24	34.49	46.00	-11.51	AVG
7	5.3060	28.61	10.33	38.94	60.00	-21.06	QP
8	5.6020	23.19	10.33	33.52	50.00	-16.48	AVG
9	11.5340	33.20	10.32	43.52	60.00	-16.48	QP
10	11.5340	27.67	10.32	37.99	50.00	-12.01	AVG
11	20.1380	35.05	10.37	45.42	60.00	-14.58	QP
12*	21.1780	28.20	10.37	38.57	50.00	-11.43	AVG

Test mode:	TM2	Polarity:	Neutral
------------	-----	-----------	---------

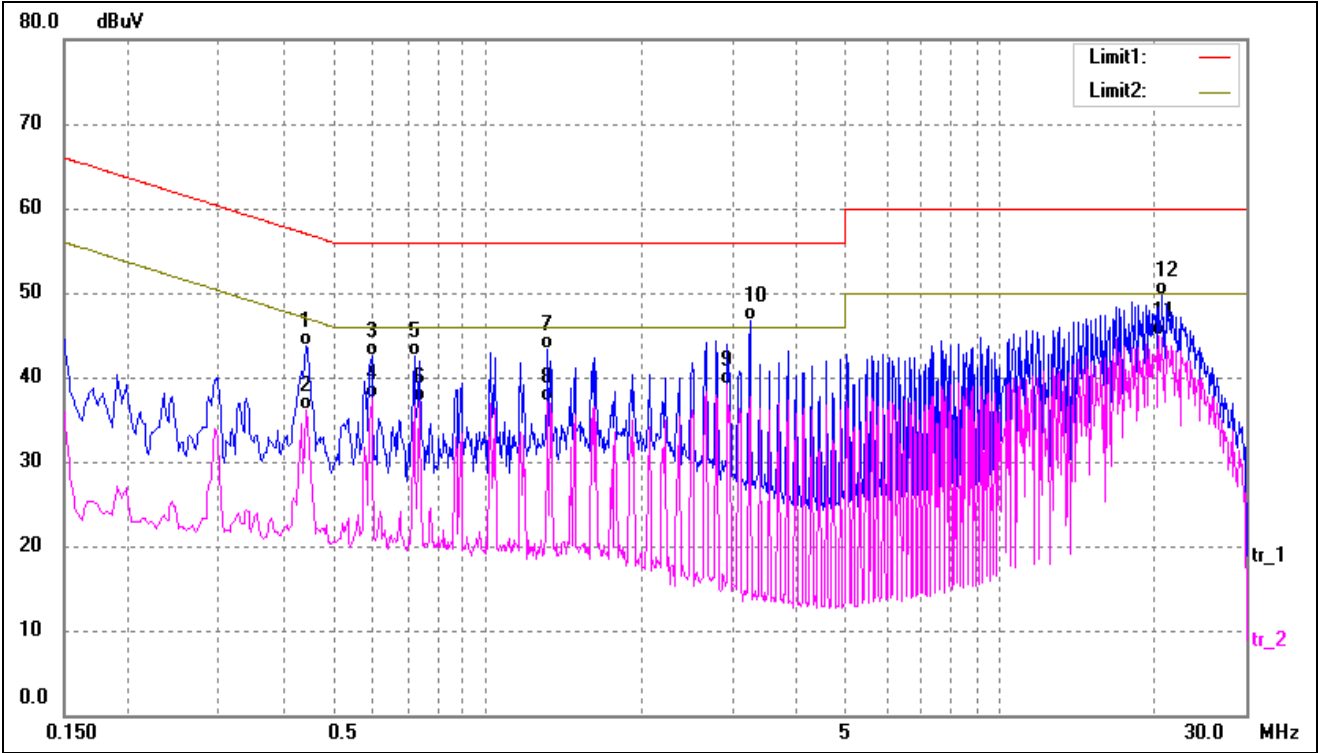


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.4420	33.39	10.23	43.62	57.02	-13.40	QP
2	0.4420	25.90	10.23	36.13	47.02	-10.89	AVG
3	0.5940	32.26	10.21	42.47	56.00	-13.53	QP
4	0.5940	27.21	10.21	37.42	46.00	-8.58	AVG
5	0.7220	32.37	10.19	42.56	56.00	-13.44	QP
6	0.7380	26.87	10.19	37.06	46.00	-8.94	AVG
7	1.3099	33.06	10.17	43.23	56.00	-12.77	QP
8	1.3099	27.00	10.17	37.17	46.00	-8.83	AVG
9	2.9460	28.80	10.28	39.08	46.00	-6.92	AVG
10	3.2420	36.38	10.28	46.66	56.00	-9.34	QP
11*	20.3620	34.50	10.37	44.87	50.00	-5.13	AVG
12	20.6580	39.30	10.37	49.67	60.00	-10.33	QP

Test mode:	TM3	Polarity:	Line
------------	-----	-----------	------

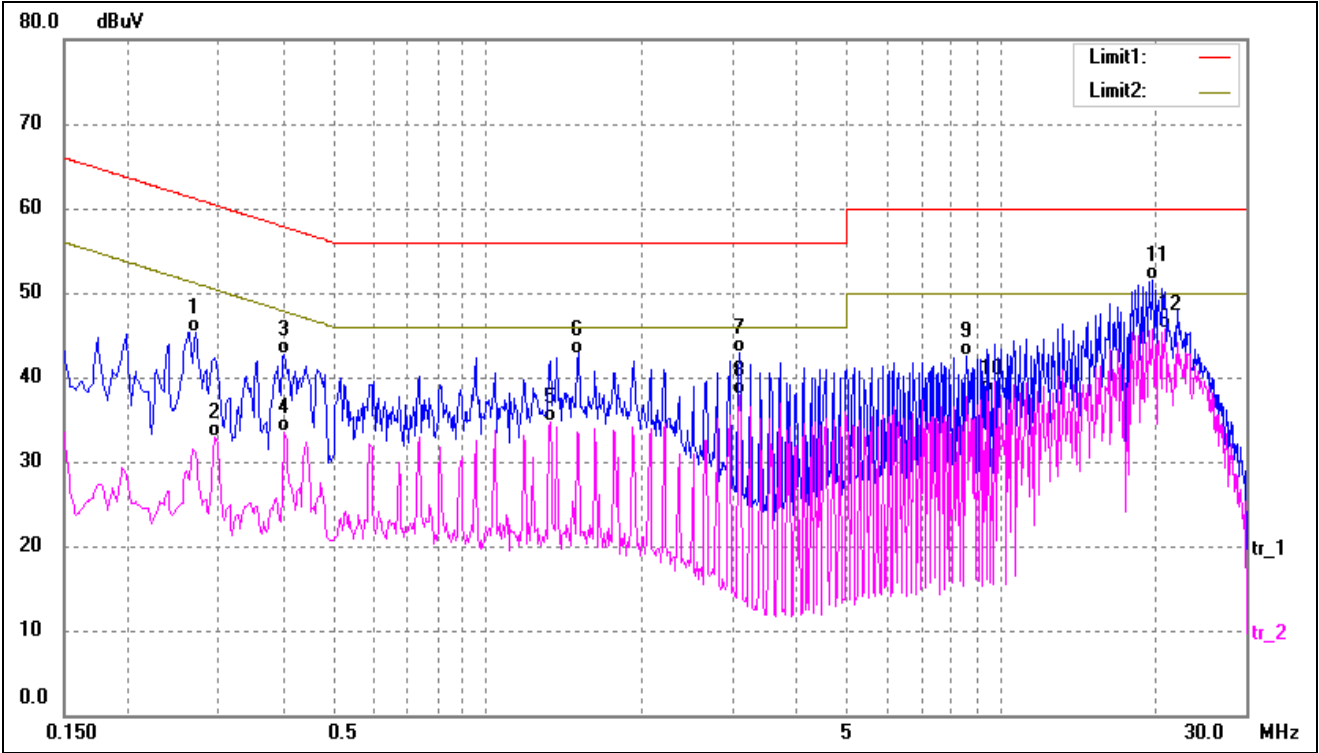

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2700	35.14	10.25	45.39	61.12	-15.73	QP
2	0.2940	22.71	10.24	32.95	50.41	-17.46	AVG
3	0.4020	32.53	10.23	42.76	57.81	-15.05	QP
4	0.4020	23.36	10.23	33.59	47.81	-14.22	AVG
5	1.3260	24.58	10.17	34.75	46.00	-11.25	AVG
6	1.5060	32.61	10.19	42.80	56.00	-13.20	QP
7	3.1060	32.59	10.28	42.87	56.00	-13.13	QP
8	3.1060	27.65	10.28	37.93	46.00	-8.07	AVG
9	8.5659	32.21	10.34	42.55	60.00	-17.45	QP
10	9.4420	27.85	10.35	38.20	50.00	-11.80	AVG
11	19.7460	41.05	10.36	51.41	60.00	-8.59	QP
12*	20.9020	35.37	10.37	45.74	50.00	-4.26	AVG

Test mode:	TM3	Polarity:	Neutral
------------	-----	-----------	---------

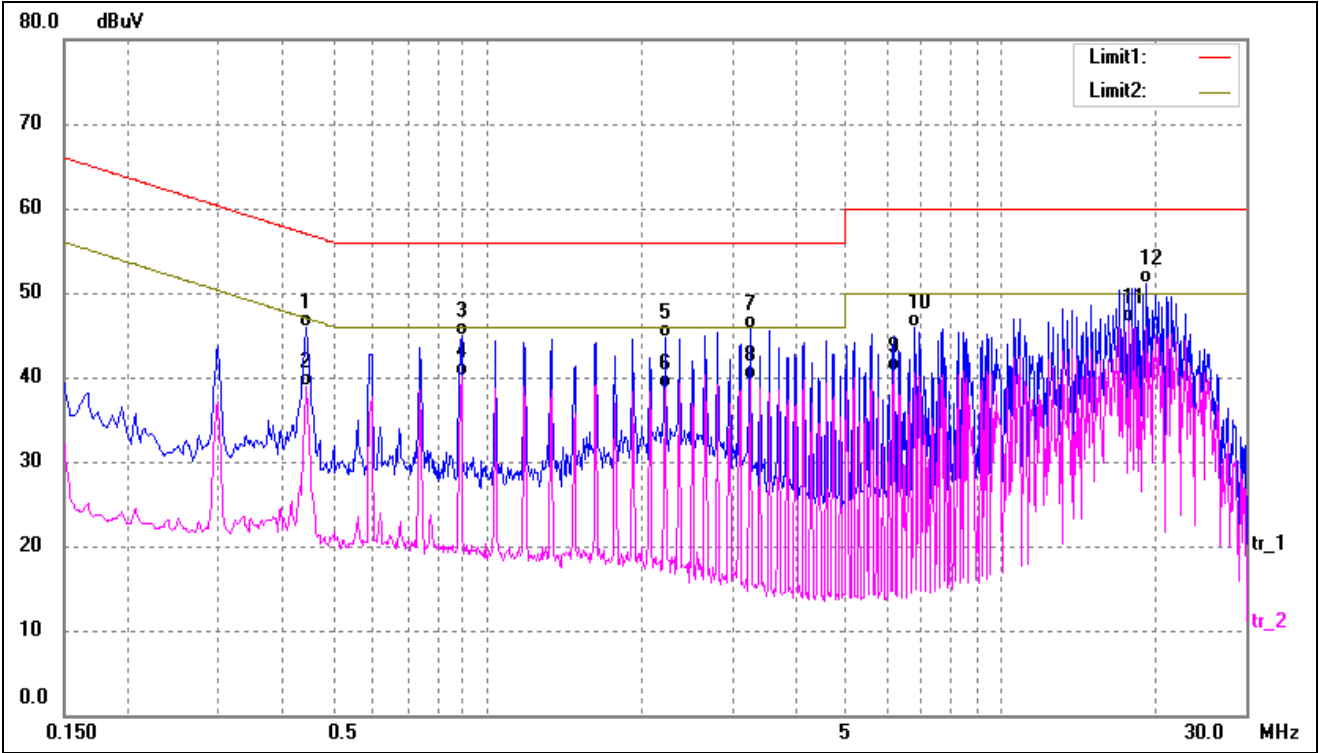

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.4420	35.69	10.23	45.92	57.02	-11.10	QP
2	0.4420	28.58	10.23	38.81	47.02	-8.21	AVG
3	0.8900	34.68	10.16	44.84	56.00	-11.16	QP
4	0.8900	29.85	10.16	40.01	46.00	-5.99	AVG
5	2.2220	34.51	10.26	44.77	56.00	-11.23	QP
6	2.2220	28.51	10.26	38.77	46.00	-7.23	AVG
7	3.2420	35.40	10.28	45.68	56.00	-10.32	QP
8	3.2420	29.51	10.28	39.79	46.00	-6.21	AVG
9	6.2100	30.31	10.33	40.64	50.00	-9.36	AVG
10	6.7740	35.60	10.34	45.94	60.00	-14.06	QP
11*	17.6780	36.12	10.31	46.43	50.00	-3.57	AVG
12	19.1620	40.83	10.34	51.17	60.00	-8.83	QP

4. Radiated Emissions


4.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 18.305 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The test setup for emission measurement below 30MHz..

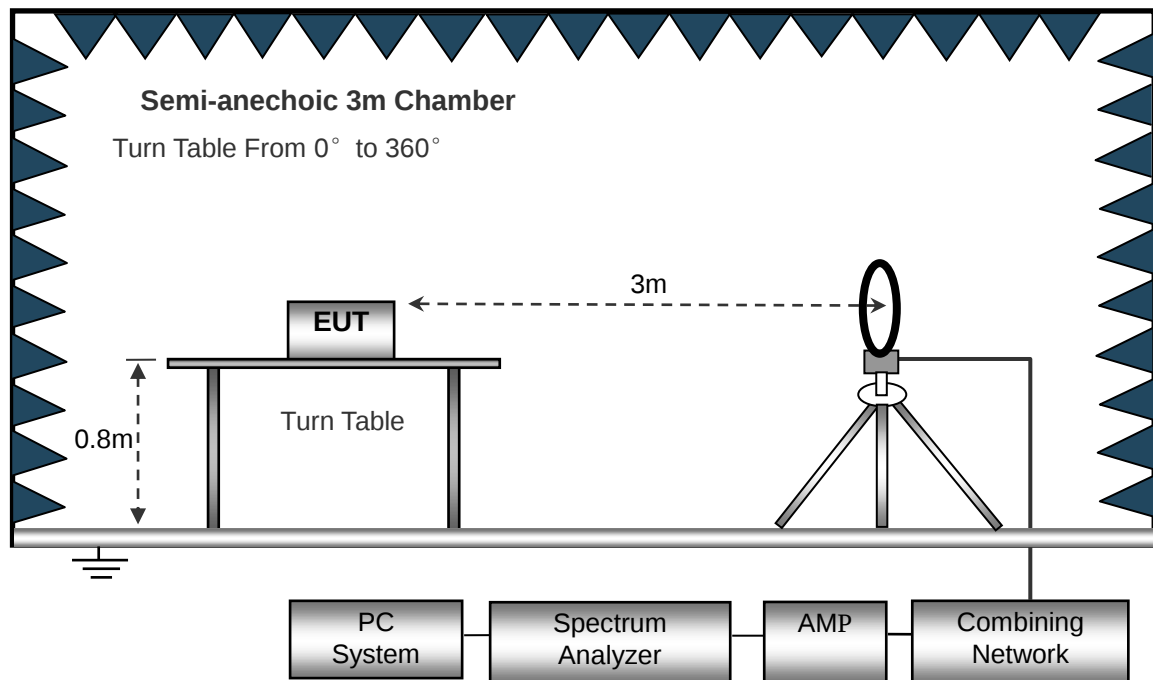

The test setup for emission measurement from 30 MHz to 1 GHz..

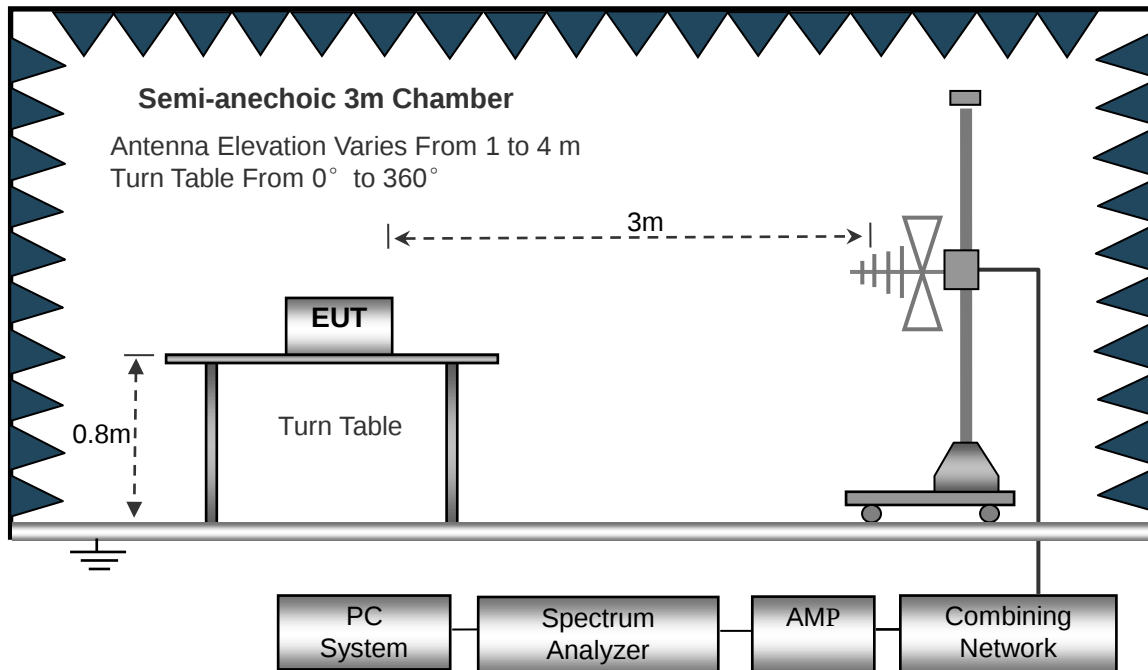

4.2 Test Receiver Setup

Frequency :9kHz-30MHz

RBW=10KHz

VBW =30KHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120KHz,

VBW=300KHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit for Any non-ISM frequency device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 18.305 Limit}$$


4.4 Environmental Conditions

Temperature:	22.5°C
Relative Humidity:	54 %
ATM Pressure:	1011 mbar

4.5 Summary of Test Results/Plots


Plot of Radiated Emissions Test Data (Below 30MHz)

Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

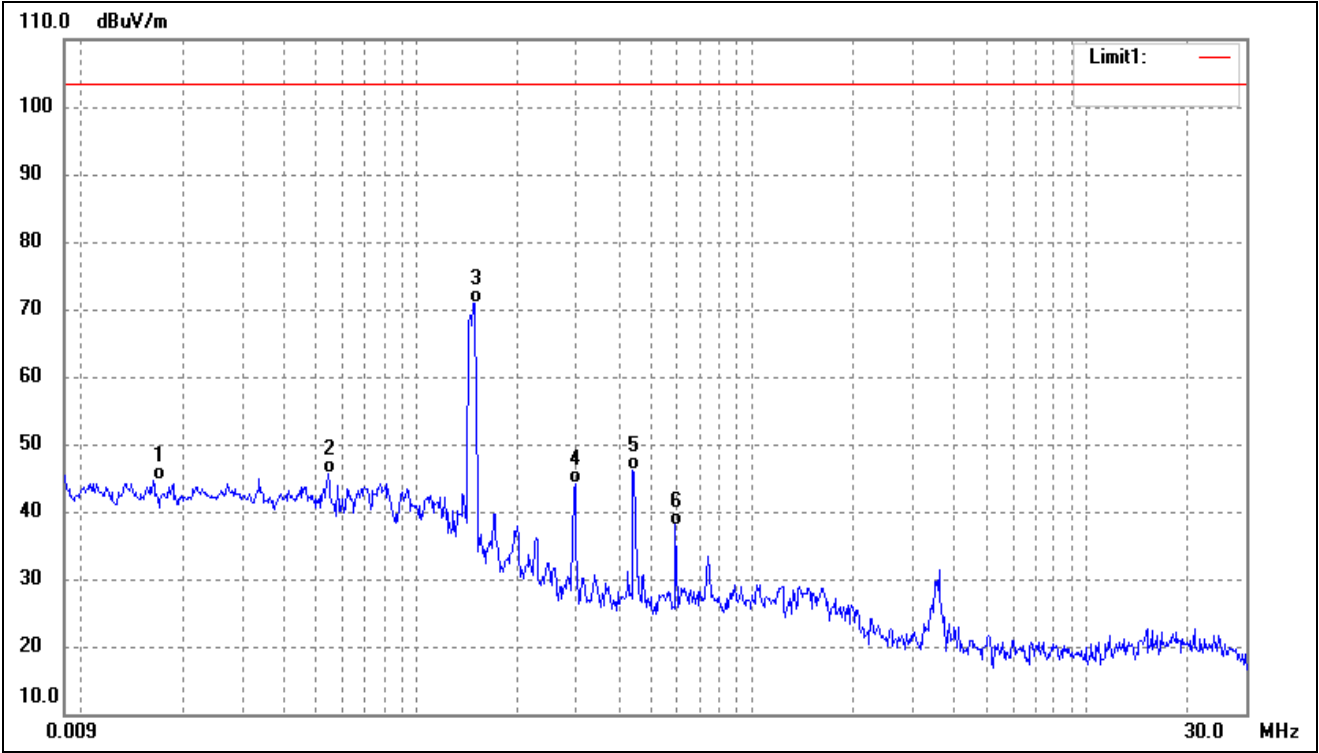


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	0.0164	51.55	-7.01	44.54	103.50	-58.96	-	-	QP
2	0.0543	51.26	-5.61	45.65	103.50	-57.85	-	-	QP
3	0.1482	77.39	-6.47	70.92	103.50	-32.58	-	-	QP
4	0.2955	51.84	-7.82	44.02	103.50	-59.48	-	-	QP
5	0.4421	53.65	-7.63	46.02	103.50	-57.48	-	-	QP
6	0.5916	45.55	-7.55	38.00	103.50	-65.50	-	-	QP

Test mode:	TM2	Polarity:	Vertical
------------	-----	-----------	----------

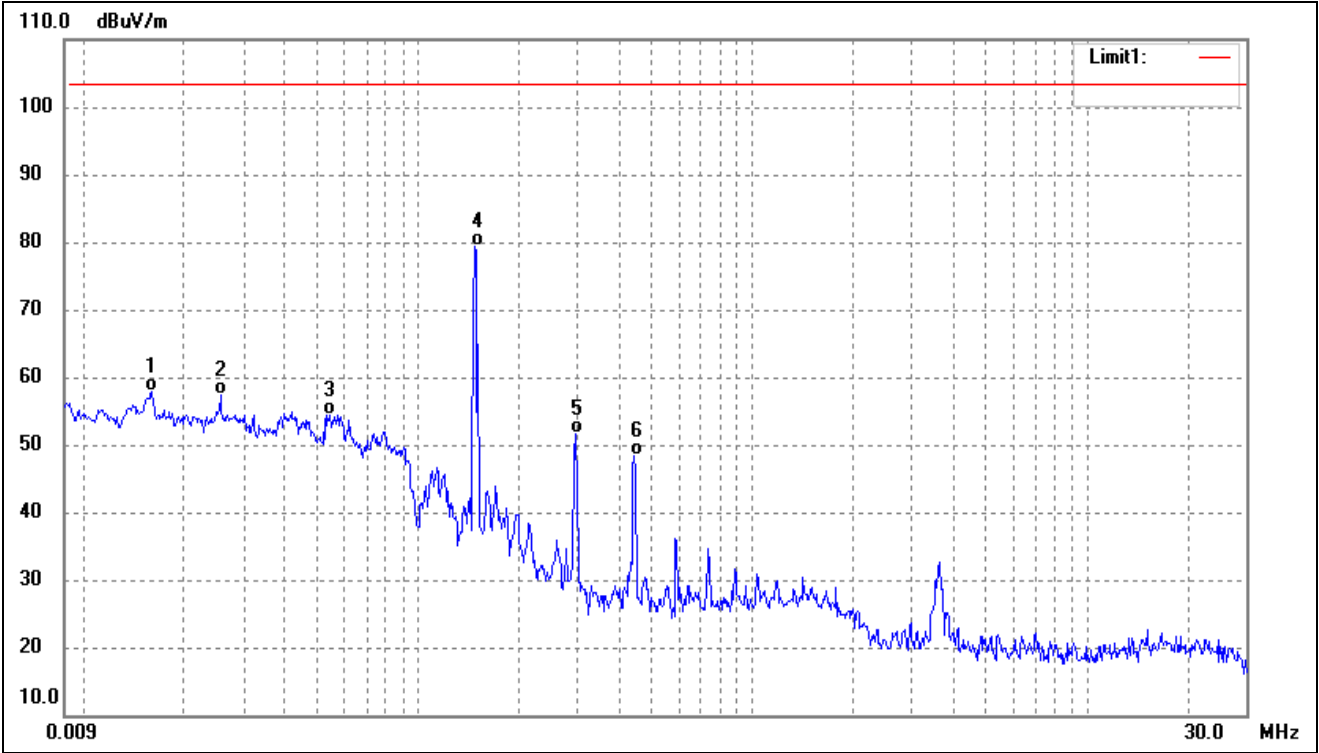

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	0.0160	64.85	-7.02	57.83	103.50	-45.67	-	-	QP
2	0.0258	64.01	-6.73	57.28	103.50	-46.22	-	-	QP
3	0.0533	60.12	-5.77	54.35	103.50	-49.15	-	-	QP
4	0.1479	85.82	-6.50	79.32	103.50	-24.18	-	-	QP
5	0.2938	59.52	-7.81	51.71	103.50	-51.79	-	-	QP
6	0.4420	56.08	-7.63	48.45	103.50	-55.05	-	-	QP


Test mode:	TM3	Polarity:	Vertical
------------	-----	-----------	----------

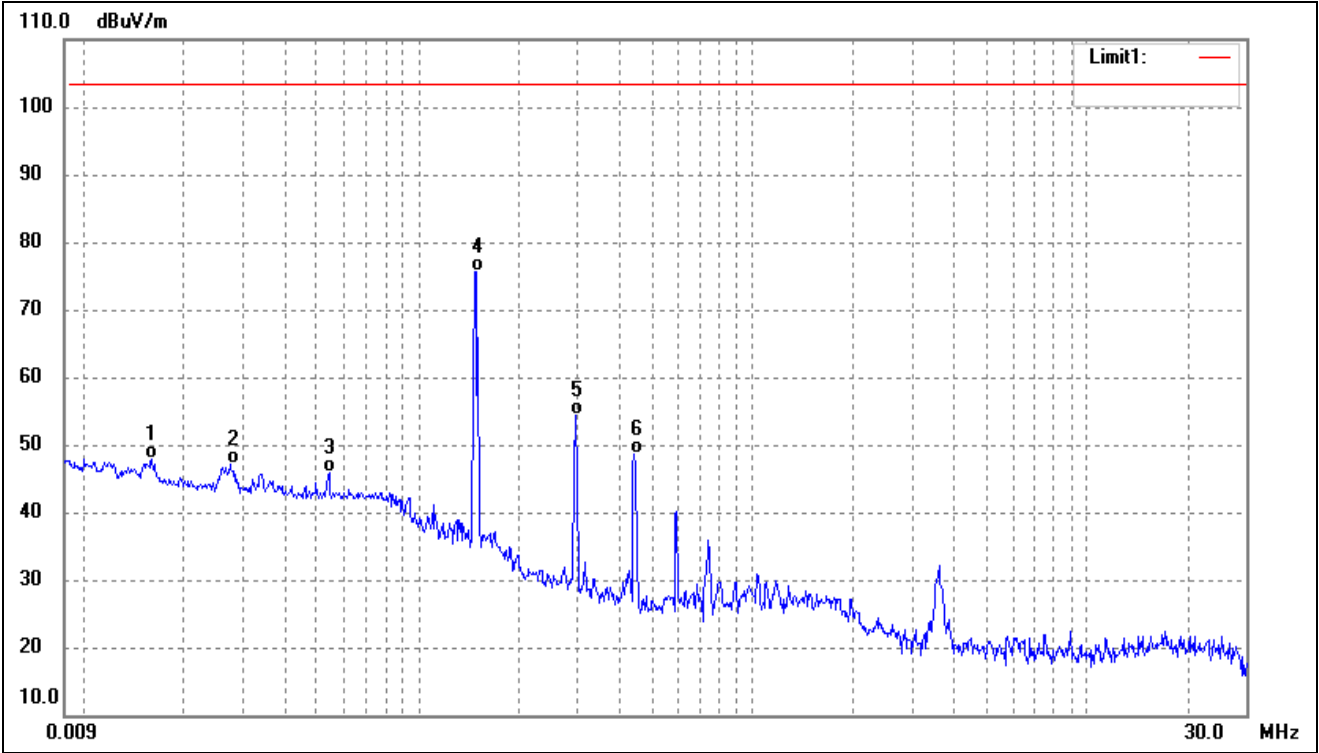

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	0.0160	47.80	0.00	47.80	103.50	-55.70	-	-	QP
2	0.0275	53.75	-6.71	47.04	103.50	-56.46	-	-	QP
3	0.0541	52.64	-6.73	45.91	103.50	-57.59	-	-	QP
4	0.1481	82.38	-6.80	75.58	103.50	-27.92	-	-	QP
5	0.2953	61.36	-6.91	54.45	103.50	-49.05	-	-	QP
6	0.4420	55.75	-7.02	48.73	103.50	-54.77	-	-	QP


Plot of Radiated Emissions Test Data (Above 30MHz)

Test mode:	TM1	Polarity:	Horizontal
------------	-----	-----------	------------

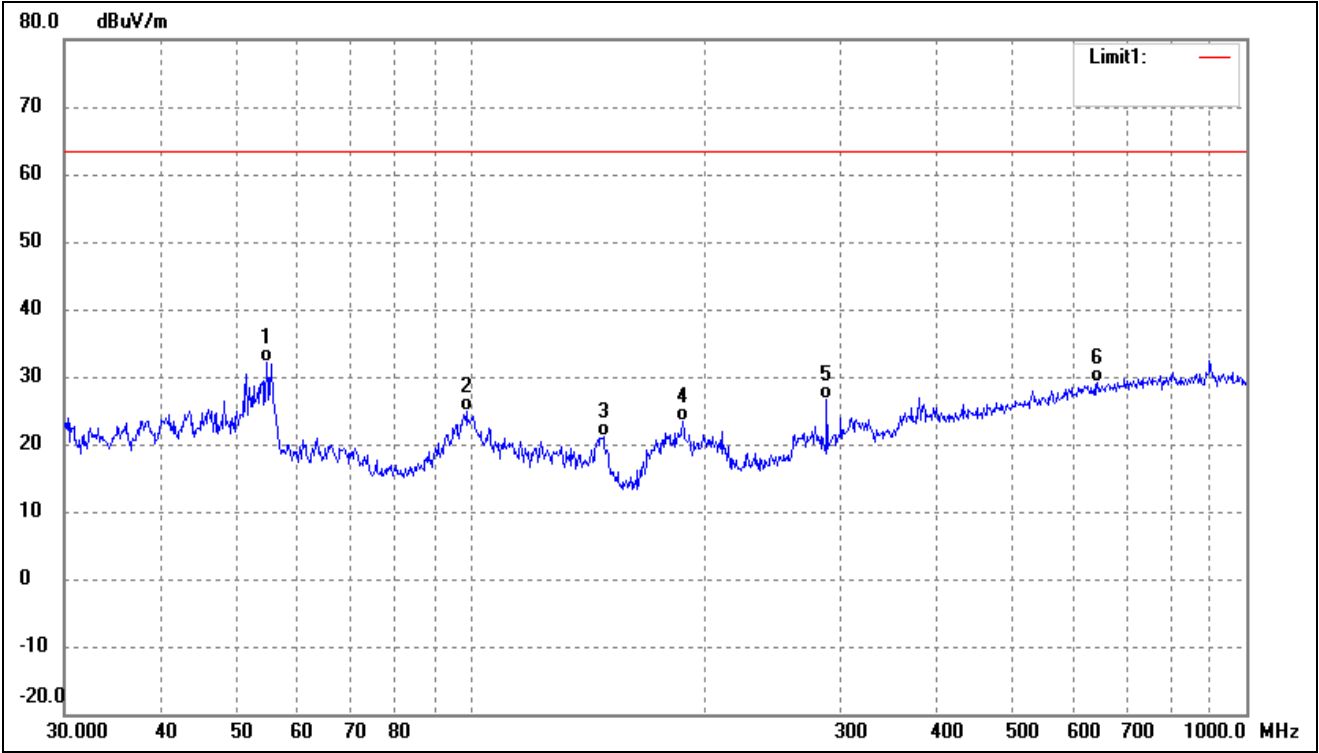


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	54.6429	39.78	-7.64	32.14	63.50	-31.36	-	-	QP
2	98.8326	33.92	-8.94	24.98	63.50	-38.52	-	-	QP
3	148.4410	33.69	-12.55	21.14	63.50	-42.36	-	-	QP
4	187.7530	33.73	-10.32	23.41	63.50	-40.09	-	-	QP
5	287.9904	33.99	-7.28	26.71	63.50	-36.79	-	-	QP
6	642.8613	28.20	0.84	29.04	63.50	-34.46	-	-	QP

Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

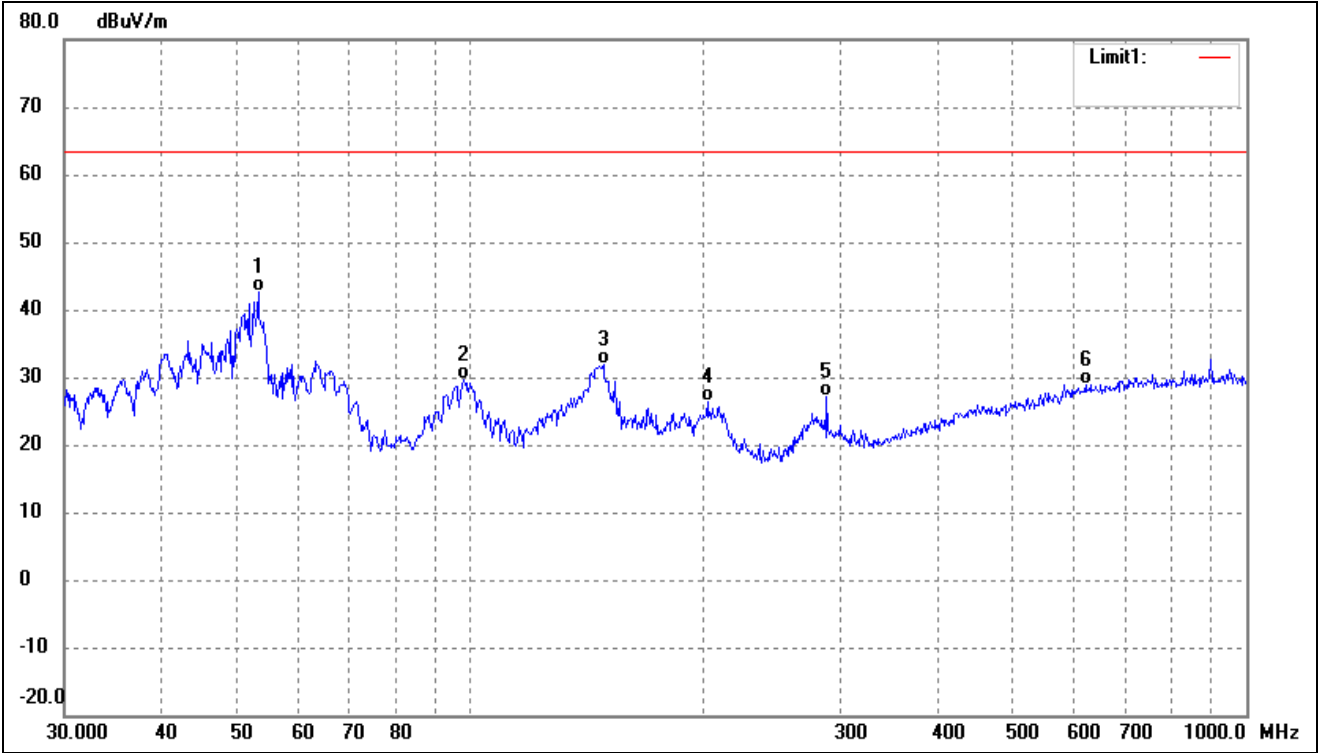


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	53.3179	50.10	-7.45	42.65	63.50	-20.85	-	-	QP
2	98.1419	38.59	-9.07	29.52	63.50	-33.98	-	-	QP
3	148.4410	44.47	-12.55	31.92	63.50	-31.58	-	-	QP
4	202.1005	35.98	-9.65	26.33	63.50	-37.17	-	-	QP
5	287.9904	34.37	-7.28	27.09	63.50	-36.41	-	-	QP
6	620.7096	28.33	0.60	28.93	63.50	-34.57	-	-	QP

Test mode:	TM2	Polarity:	Horizontal
------------	-----	-----------	------------

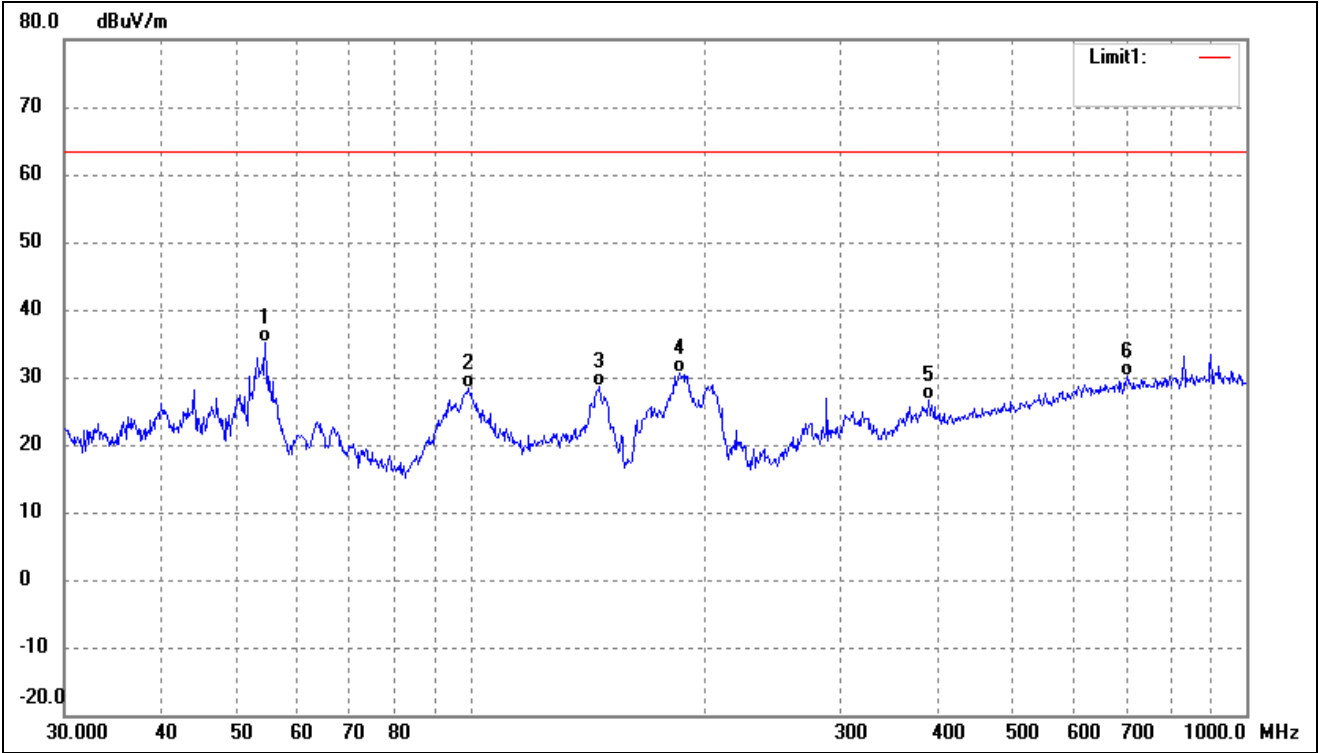


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	54.4516	42.82	-7.62	35.20	63.50	-28.30	-	-	QP
2	99.5281	37.07	-8.81	28.26	63.50	-35.24	-	-	QP
3	146.8877	41.19	-12.51	28.68	63.50	-34.82	-	-	QP
4	186.4409	41.16	-10.49	30.67	63.50	-32.83	-	-	QP
5	389.3549	30.87	-4.20	26.67	63.50	-36.83	-	-	QP
6	701.7610	28.80	1.44	30.24	63.50	-33.26	-	-	QP

Test mode:	TM2	Polarity:	Vertical
------------	-----	-----------	----------

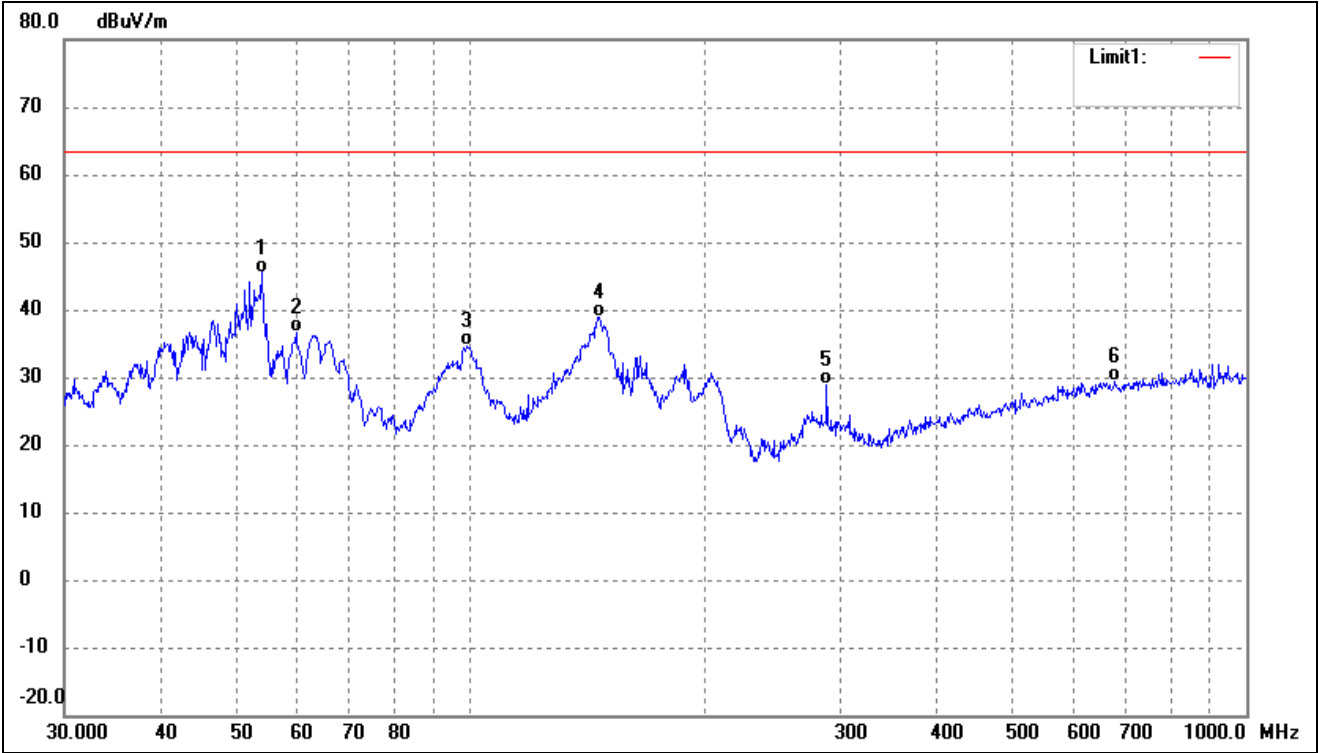


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	53.8818	53.03	-7.53	45.50	63.50	-18.00	-	-	QP
2	59.6493	45.05	-8.37	36.68	63.50	-26.82	-	-	QP
3	99.1797	43.51	-8.88	34.63	63.50	-28.87	-	-	QP
4	146.8877	51.50	-12.51	38.99	63.50	-24.51	-	-	QP
5	287.9904	36.19	-7.28	28.91	63.50	-34.59	-	-	QP
6	677.5798	28.15	1.20	29.35	63.50	-34.15	-	-	QP

Test mode:	TM3	Polarity:	Horizontal
------------	-----	-----------	------------

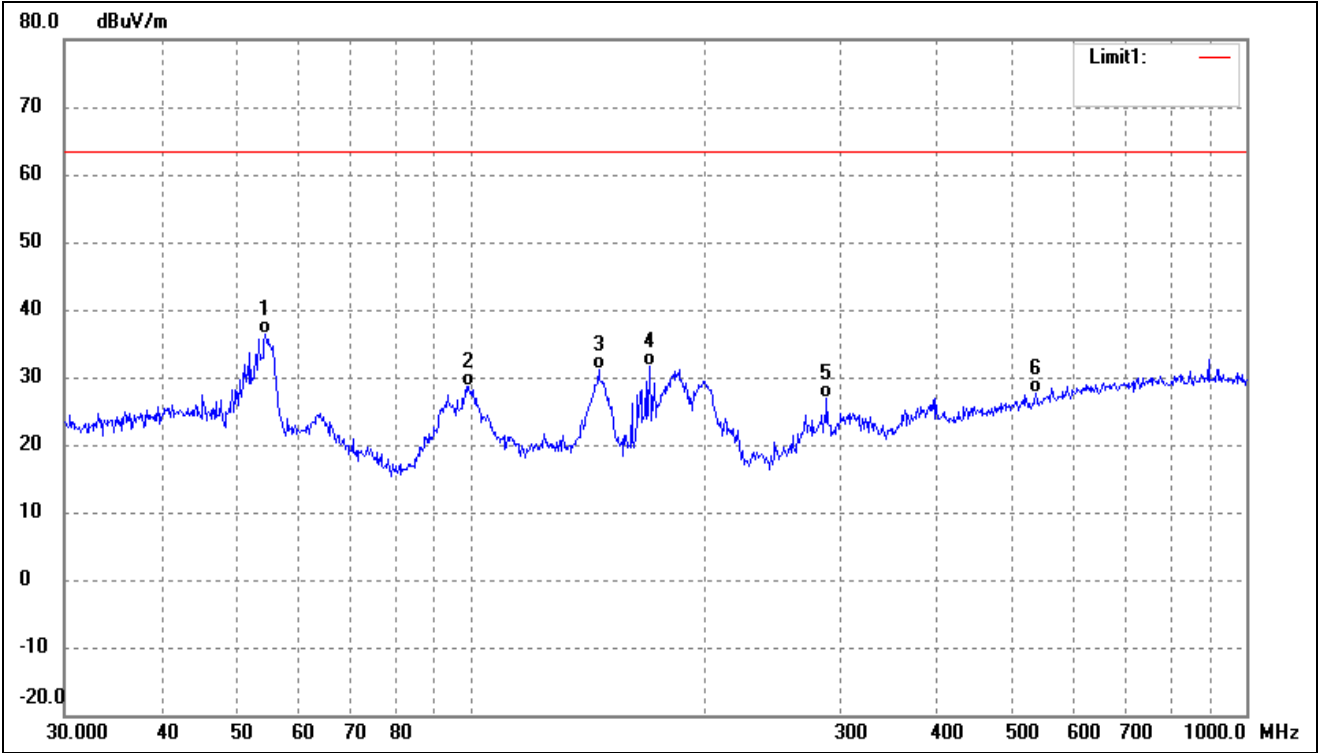

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	54.4516	44.09	-7.62	36.47	63.50	-27.03	-	-	QP
2	99.5281	37.42	-8.81	28.61	63.50	-34.89	-	-	QP
3	146.3735	43.64	-12.49	31.15	63.50	-32.35	-	-	QP
4	170.1948	43.27	-11.72	31.55	63.50	-31.95	-	-	QP
5	287.9904	34.26	-7.28	26.98	63.50	-36.52	-	-	QP
6	535.7073	28.38	-0.70	27.68	63.50	-35.82	-	-	QP

Test mode:	TM3	Polarity:	Vertical
------------	-----	-----------	----------

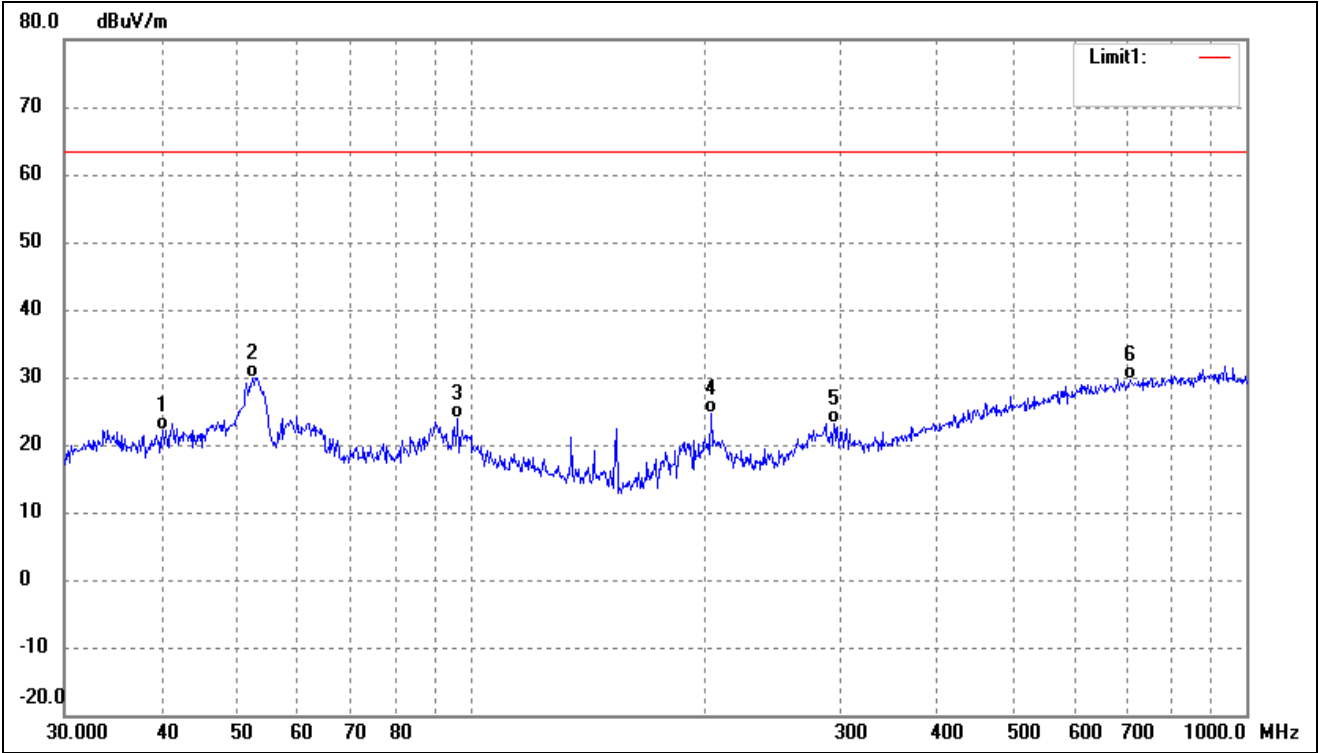

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	40.1347	29.22	-7.00	22.22	63.50	-41.28	-	-	QP
2	52.3912	37.16	-7.31	29.85	63.50	-33.65	-	-	QP
3	96.4362	33.39	-9.40	23.99	63.50	-39.51	-	-	QP
4	204.2377	34.26	-9.58	24.68	63.50	-38.82	-	-	QP
5	294.1137	30.25	-7.12	23.13	63.50	-40.37	-	-	QP
6	709.1823	28.26	1.48	29.74	63.50	-33.76	-	-	QP

Remark: ‘-’Means’ the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

***** END OF REPORT *****