

MEASUREMENT REPORT

FCC ID : 2A8JK-FIDES-LINK3

APPLICANT : ACSL Ltd.

Application Type : Certification

Product : Fides-Link3

Model No. : AC-FIDES-03-A

Brand Name : ACSL

FCC Classification : (DTS) Digital Transmission System

FCC Rule Part(s) : Part 15.247

Test Procedure(s) : ANSI C63.10-2013

Received Date : June 4, 2025

Test Date : July 10 ~ 23, 2025

Tested By : *Kaunaz Lee*
(Kaunaz Lee)

Reviewed By : *Paddy Chen*
(Paddy Chen)

Approved By : *Chenz Ker*
(Chenz Ker)



The test results only relate to the tested sample.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2507TW0101-U1	1.0	Original Report	2025-08-21	

CONTENTS

Description	Page
1. INTRODUCTION	6
1.1. Scope.....	6
1.2. MRT Test Location	6
2. PRODUCT INFORMATION	7
2.1. Equipment Description	7
2.2. Product Specification Subjective to this Standard.....	8
2.3. Test Mode.....	8
2.4. Operation Frequency / Channel List.....	9
2.5. Test Configuration.....	10
2.6. Test System Details	11
2.7. Test Software.....	11
2.8. Duty Cycles.....	11
2.9. EMI Suppression Device(s)/Modifications	11
2.10. Labeling Requirements.....	11
3. DESCRIPTION of TEST	12
3.1. Evaluation Procedure	12
3.2. AC Line Conducted Emissions	12
3.3. Radiated Emissions	13
4. ANTENNA REQUIREMENTS.....	14
5. TEST EQUIPMENT CALIBRATION DATE.....	15
6. MEASUREMENT UNCERTAINTY.....	16
7. TEST RESULT	17
7.1. Summary.....	17
7.2. 6dB Bandwidth Measurement	18
7.2.1. Test Limit.....	18
7.2.2. Test Procedure used	18
7.2.3. Test Setting	18
7.2.4. Test Setup	18
7.2.5. Test Result	19
7.3. Output Power Measurement.....	21
7.3.1. Test Limit.....	21
7.3.2. Test Procedure Used.....	21
7.3.3. Test Setting	21
7.3.4. Test Setup	21
7.3.5. Test Result of Output Power	22
7.4. Power Spectral Density Measurement	24
7.4.1. Test Limit.....	24
7.4.2. Test Procedure Used.....	24
7.4.3. Test Setting	24
7.4.4. Test Setup	24
7.4.5. Test Result	25

7.5.	Out-of-Band Spurious Emissions Emissions Measurement	28
7.5.1.	Test Limit	28
7.5.2.	Test Procedure Used	28
7.5.3.	Test Settling	28
7.5.4.	Test Setup	28
7.5.5.	Test Result	29
7.6.	Radiated Spurious Emission Measurement	34
7.6.1.	Test Limit	34
7.6.2.	Test Procedure Used	34
7.6.3.	Test Setting	34
7.6.4.	Test Setup	36
7.6.5.	Test Result	38
7.7.	Radiated Restricted Band Edge Measurement	68
7.7.1.	Test Limit	68
7.7.2.	Test Procedure Used	68
7.7.3.	Test Setting	68
7.7.4.	Test Setup	70
7.7.5.	Test Result	71
7.8.	AC Conducted Emissions Measurement	95
7.8.1.	Test Limit	95
7.8.2.	Test Setup	95
7.8.3.	Test Result	96
8.	CONCLUSION	98
	Appendix A : Test Photograph	99
	Appendix B : External Photograph	99
	Appendix C : Internal Photograph	99

General Information

Applicant	ACSL Ltd.
Applicant Address	Hulic Kasai Rinkai Building 2F, 3-6-4 Rinkaicho, Edogawa-ku, Tokyo 134-0086, Japan
Manufacturer	ACSL Ltd.
Manufacturer Address	Hulic Kasai Rinkai Building 2F, 3-6-4 Rinkaicho, Edogawa-ku, Tokyo 134-0086, Japan
Test Site	MRT Technology (Taiwan) Co., Ltd
Test Site Address	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)
MRT FCC Registration No.	291082
Test Device Serial No.	#1-1 ☐ Production ☒ Pre-Production ☐ Engineering

Test Facility / Accreditations

1. MRT facility is a FCC registered (Reg. No. 291082) test facility with the site description report on file and is designated by the FCC as an Accredited Test Firm.
2. MRT facility is an IC registered (MRT Reg. No. 21723) test laboratory with the site description on file at Industry Canada.
3. MRT Lab is accredited to ISO 17025 by the Taiwan Accreditation Foundation (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC (Designation Number: TW3261), Industry Canada, EU and TELEC Rules.


1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

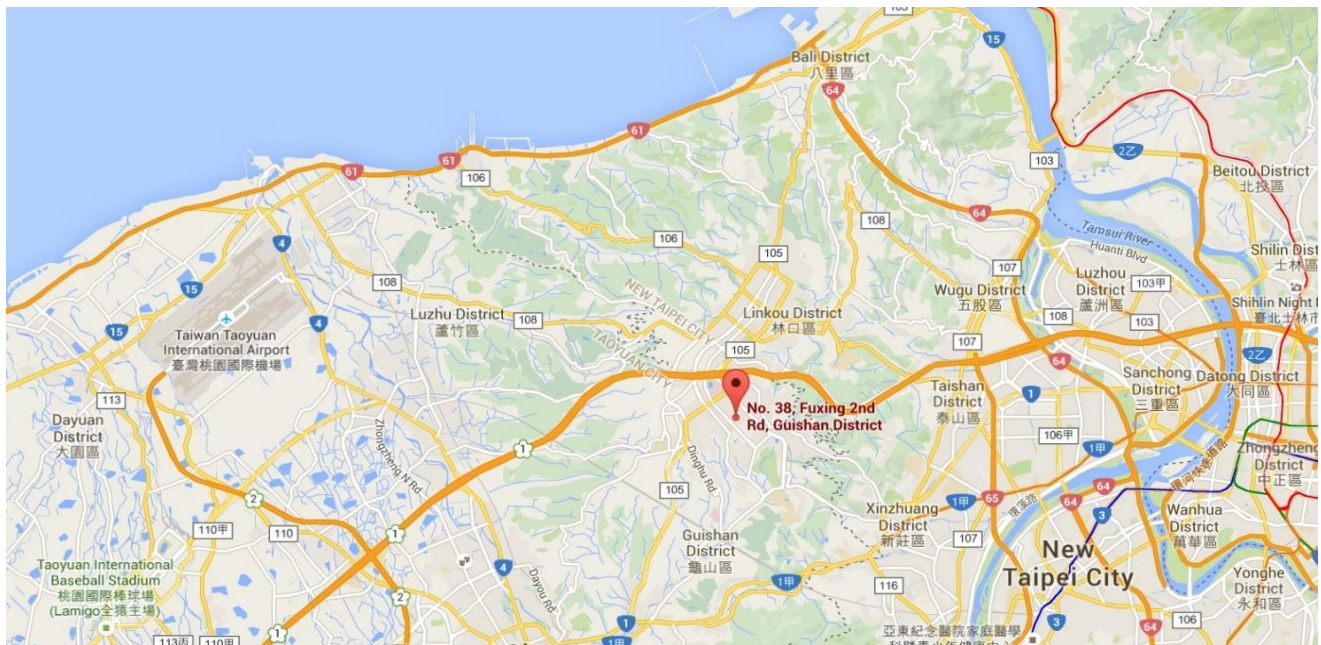

2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name	Fides-Link3
Brand Name	ACSL
Model No.	AC-FIDES-03-A
Specification	SRD 2.4GHz & 5.8GHz

Remark:

1. The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.
2. The firmware of the two MCU models is different. The AIR model (PN: EO-00021-01) can choose to transmit with either RF1 or RF2 or RF3 or RF4, whereas the GND model (PN: EO-00022-01) supports transmission only with RF1 or RF3.
3. The difference between the two models is only MCU firmware and does not affect the RF.
4. We use AIR model (PN: EO-00021-01) to perform tests.

2.2. Product Specification Subjective to this Standard

Operating Frequency	2417~2477MHz
Channel Number	4
Type of modulation	OFDM
Channel Bandwidth	10MHz
Data Rate	2.08Mbps ~ 6.57Mbps
RF Port	4

Note: The product works with only one port at a time.

2.3. Test Mode

Test Mode	Mode 1: EO-00021-01 Transmit by 2.4GHz with PCB Ant 1 Mode 2: EO-00021-01 Transmit by 2.4GHz with PCB Ant 2 Mode 3: EO-00021-01 Transmit by 2.4GHz with PCB Ant 3 Mode 4: EO-00021-01 Transmit by 2.4GHz with PCB Ant 4 Mode 5: EO-00022-01 Transmit by 2.4GHz with Dipole Ant 1 Mode 6: EO-00022-01 Transmit by 2.4GHz with Dipole Ant 3
-----------	--

Note1: Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.

Note2: Test Item Definition

Model No.	Output Power Item	Conducted Item	Radiated Item
EO-00021-01_ Ant 1	Test	Test	Test
EO-00021-01_ Ant 2	Test	--	--
EO-00021-01_ Ant 3	Test	Test	Test
EO-00021-01_ Ant 4	Test	--	--
EO-00022-01_ Ant 1	Test	--	Test
EO-00022-01_ Ant 3	Test	--	--


Note3: During RAD testing, EO-00021-01_ Ant 3 and EO-00021-01_ Ant 4 was tested with F-0G-CC-9044-003-00(H), EO-00021-01_ Ant 1 and EO-00021-01_ Ant 2 was tested with F-0G-CC-9044-003-00(V), and EO-00022-01 was tested with N12-7498-R0A.

2.4. Operation Frequency / Channel List

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2417 MHz	02	2432 MHz	03	2462 MHz
04	2477 MHz	--	--	--	--

2.5. Test Configuration

This device was tested per the guidance of ANSI C63.10-2013. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

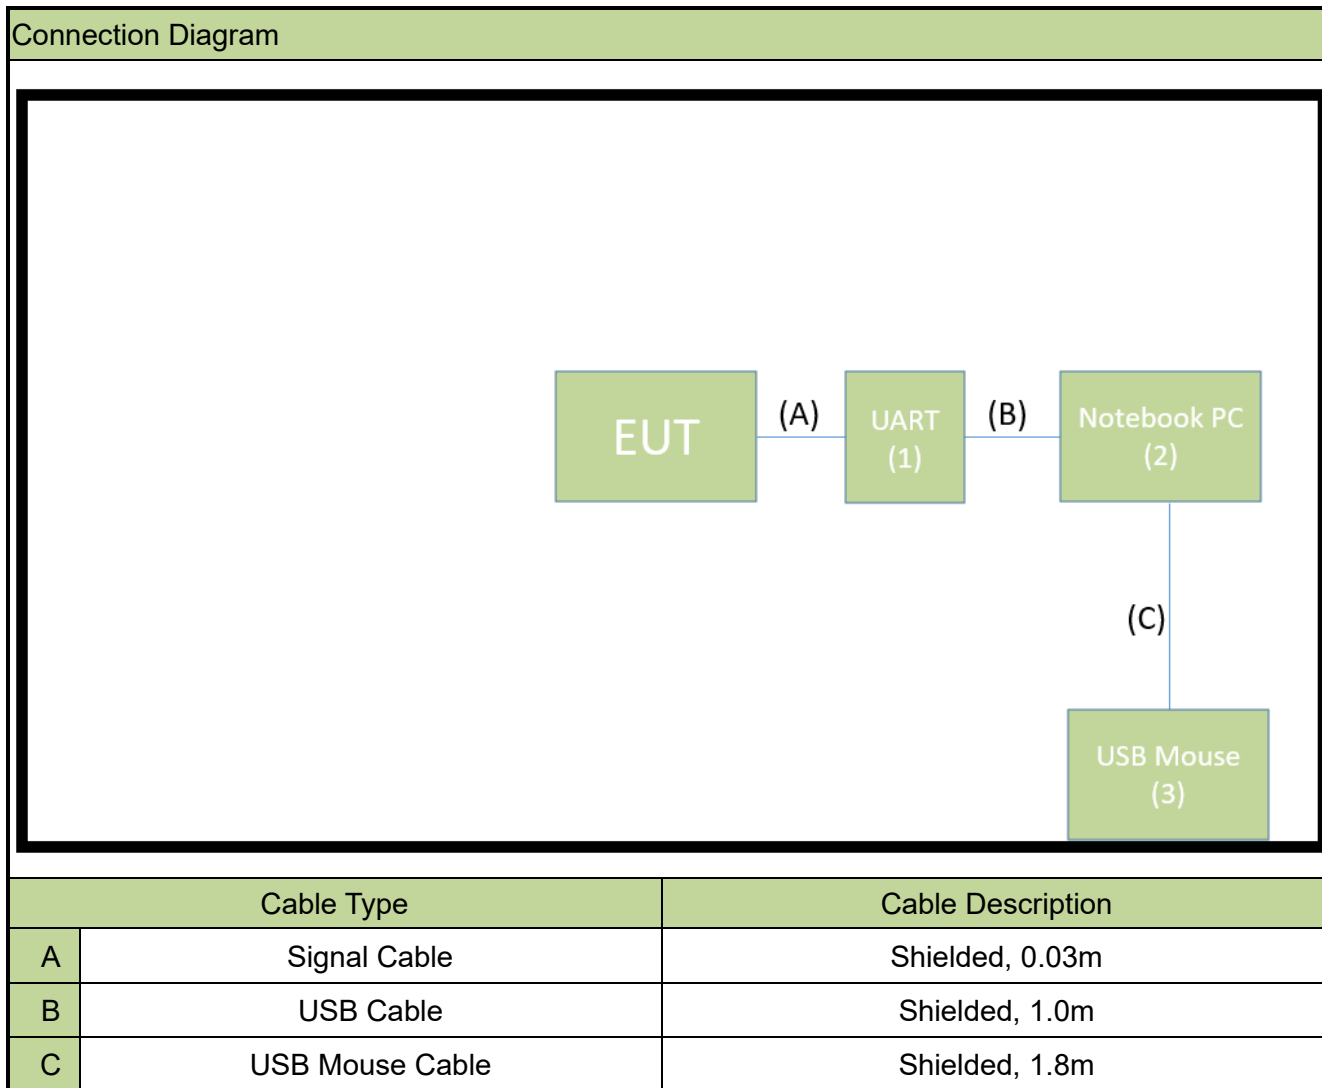

2.6. Test System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	UART	Taisync	CH340G	N/A	N/A
2	Notebook PC	DELL	P65F	N/A	Non-shielded, 0.8m
3	USB Mouse	Lenovo	M110	N/A	N/A

2.7. Test Software

The test utility software used during testing was “cktszsss32 version: 1.0.0.21”.

2.8. Duty Cycles

Test Mode	Duty Cycle
2.4GHz	100%

2.9. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.10. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION of TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 558074 D01v05r02 were used in the measurement

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 9'x4'x3' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50 Ω /50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment which determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

Line conducted emissions test results are shown in Section 7.8.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, which produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

Radiated emissions test results are shown in Section 7.6 & 7.7 .

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the **Fides-Link3**, is permanently attached.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT unit complies with the requirement of §15.203.

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	SPEED	F-0G-CC-9044-003-00 (H)	PCB	2.4G: 0.15dBi 5.8G: 2.02dBi
2	SPEED	F-0G-CC-9044-003-00 (V)	PCB	2.4G: 1.83dBi 5.8G: 2.07dBi
3	Be-Comfortable	N12-7498-R0A	Dipole	2.4G: 5.02dBi 5.8G: 4.95dBi

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Two-Line V-Network	R&S	ENV216	MRTTWA00019	1 year	2026/3/5
Two-Line V-Network	R&S	ENV216	MRTTWA00020	1 year	2026/4/14
EMI Test Receiver	R&S	ESR3	MRTTWA00045	1 year	2026/5/13

Radiated Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	MRTTWA00002	1 year	2026/4/16
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00001	1 year	2025/11/5
Broadband Hornantenna	SCHWARZBECK	BBHA 9120D	MRTTWA00003	1 year	2026/2/11
Broadband Preamplifier	SCHWARZBECK	BBV 9718	MRTTWA00005	1 year	2026/2/11
Breitband Hornantenna	SCHWARZBECK	BBHA 9170	MRTTWA00004	1 year	2026/3/27
Broadband Amplifier	SCHWARZBECK	BBV 9721	MRTTWA00006	1 year	2026/3/20
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2026/3/4
Signal Analyzer	R&S	FSV40	MRTTWA00007	1 year	2026/5/20

Conducted Test Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2025/9/24
EXA Signal Analyzer	KEYSIGHT	N9010B	MRTTWA00074	1 year	2026/7/14
USB Wideband Power Sensor	KEYSIGHT	U2021XA	MRTTWA00014	1 year	2026/4/15

Software	Manufacturer	Version No.
e3	Audix	9.160520a

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Conducted Emission- Power Line
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.15MHz~30MHz: $\pm 2.53\text{dB}$
Radiated Spurious Emission
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 9kHz~30MHz: $\pm 3.92\text{dB}$ 30MHz~1GHz: $\pm 4.25\text{dB}$ 1GHz~18GHz: $\pm 4.40\text{dB}$ 18GHz~40GHz: $\pm 4.45\text{dB}$
Frequency Error
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): $\pm 78.4\text{Hz}$
Conducted Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): $\pm 0.84\text{dB}$
Conducted Spurious Emission
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): $\pm 2.65\text{ dB}$
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): $\pm 3.3\%$
Temp. / Humidity
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): $\pm 0.82^\circ\text{C}/ \pm 3\%$
DC Voltage
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): $\pm 0.3\%$

7. TEST RESULT

7.1. Summary

Product Name: Fides-Link3

FCC Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	6dB Bandwidth	$\geq 500\text{kHz}$	Conducted	Pass	Section 7.2
15.247(b)(3)	Output Power	$\leq 30.00\text{dBm}$		Pass	Section 7.3
15.247(e)	Power Spectral Density	$\leq 8.00\text{dBm}/3\text{kHz}$		Pass	Section 7.4
15.247(d)	Out-of-Band Emissions	Conducted $\geq 20\text{dBc}$		Pass	Section 7.5
15.205 15.209	Spurious Emission	< FCC 15.209 limits	Radiated	Pass	Section 7.6
15.205 15.209	Band Edge Measurement	$\leq 74\text{dBuV/m(Peak)}$ $\leq 54\text{dBuV/m(Average)}$		Pass	Section 7.7
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.8

Notes:

- Determining compliance is based on the test results met the regulation limits or requirements declared by clients, and the test results don't take into account the value of measurement uncertainty.

7.2. 6dB Bandwidth Measurement

7.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


7.2.2. Test Procedure used

KDB 558074 D01v05r02- Section 8.2 Option 2

7.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace was allowed to stabilize

7.2.4. Test Setup

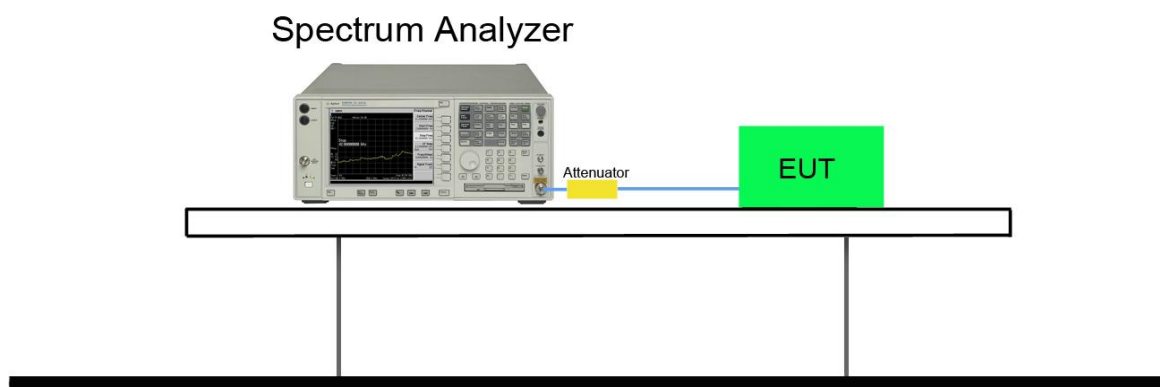


7.2.5. Test Result

Product	Fides-Link3	Temperature	24°C
Test Engineer	Fran	Relative Humidity	56%
Test Site	SR6	Test Date	2025/7/17

Test Mode	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
2.4GHz_Ant 1	CH01	2417	9.030	≥ 0.5	Pass
	CH02	2432	9.057	≥ 0.5	Pass
	CH03	2462	9.018	≥ 0.5	Pass
	CH04	2477	9.049	≥ 0.5	Pass

Ant 1


CH01 (2417MHz)

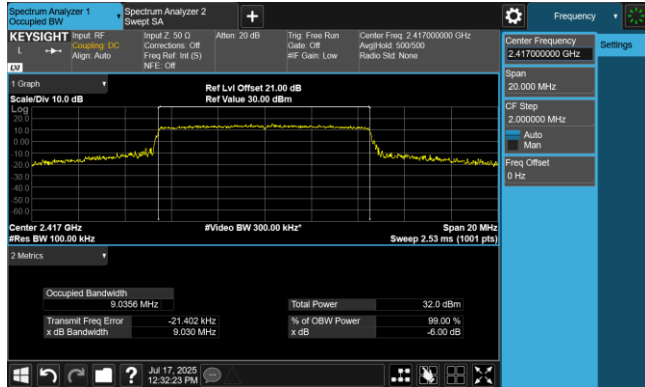


CH02 (2432MHz)



CH03 (2462MHz)

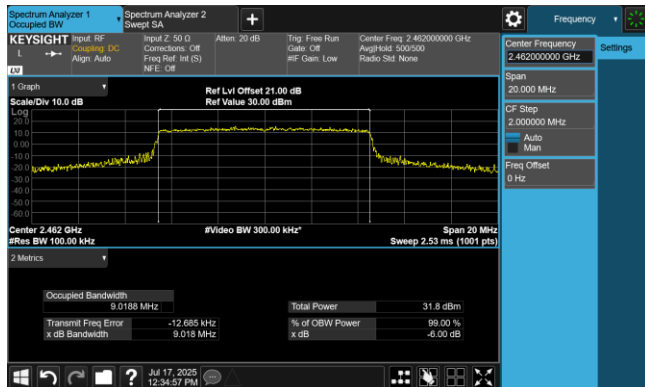

CH04 (2477MHz)

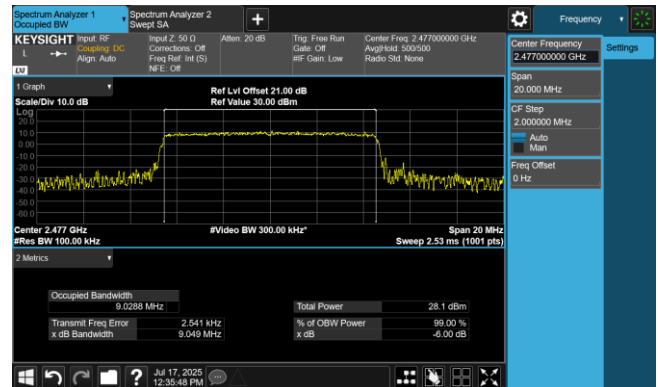

7.3. Output Power Measurement

7.3.1. Test Limit

The maximum out power shall be less 1 Watt (30dBm).

7.3.2. Test Procedure Used

KDB 558074 D01v05r02 - Section 8.3

7.3.3. Test Setting


Peak Power Measurement

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

7.3.4. Test Setup

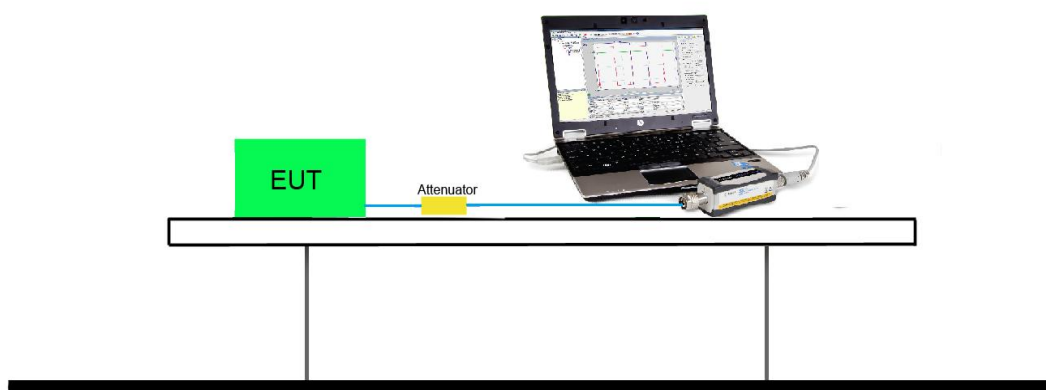

7.3.5. Test Result of Output Power

Product	Fides-Link3	Temperature	24°C
Test Engineer	Fran	Relative Humidity	56%
Test Site	SR6	Test Date	2025/7/17

AIR:

Test Mode	Channel No.	Frequency (MHz)	Average Power (dBm)	Power Limit (dBm)
2.4GHz_Ant 1	CH01	2417	24.61	< 30
	CH02	2432	24.59	< 30
	CH03	2462	24.51	< 30
	CH04	2477	20.65	< 30
2.4GHz_Ant 2	CH01	2417	26.32	< 30
	CH02	2432	25.92	< 30
	CH03	2462	25.88	< 30
	CH04	2477	21.09	< 30
2.4GHz_Ant 3	CH01	2417	24.33	< 30
	CH02	2432	24.40	< 30
	CH03	2462	24.47	< 30
	CH04	2477	19.32	< 30
2.4GHz_Ant 4	CH01	2417	25.96	< 30
	CH02	2432	25.49	< 30
	CH03	2462	25.57	< 30
	CH04	2477	19.88	< 30

Note1: Average Power =Reading value on power meter + cable loss.

GND:

Test Mode	Channel No.	Frequency (MHz)	Average Power (dBm)	Power Limit (dBm)
2.4GHz_Ant 1	CH01	2417	23.95	< 30
	CH02	2432	23.92	< 30
	CH03	2462	24.01	< 30
	CH04	2477	20.10	< 30
2.4GHz_Ant 3	CH01	2417	23.78	< 30
	CH02	2432	23.87	< 30
	CH03	2462	23.89	< 30
	CH04	2477	18.76	< 30

Note1: Average Power =Reading value on power meter + cable loss.

7.4. Power Spectral Density Measurement

7.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

7.4.2. Test Procedure Used


KDB 558074 D01v05r02 - Section 8.4 Method PKPSD

7.4.3. Test Setting

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: 3 kHz.
- d) Set the VBW $\geq 3 \times$ RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.

7.4.4. Test Setup

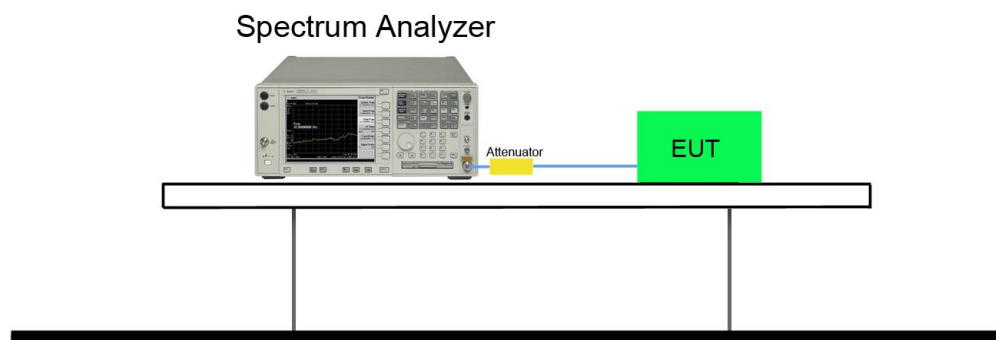

7.4.5. Test Result


Product	Fides-Link3	Temperature	24°C
Test Engineer	Fran	Relative Humidity	56%
Test Site	SR6	Test Date	2025/7/17

Test Mode	Channel No.	Frequency (MHz)	Average PSD (dBm / 10kHz)	Duty Cycle (%)	Total PSD (dBm / 10kHz)	Limit (dBm / 3kHz)	Result
2.4GHz_Ant 1	CH01	2417	-2.681	100.00%	-2.681	≤ 8	Pass
	CH02	2432	-2.878	100.00%	-2.878	≤ 8	Pass
	CH03	2462	-2.885	100.00%	-2.885	≤ 8	Pass
	CH04	2477	-6.564	100.00%	-6.564	≤ 8	Pass
2.4GHz_Ant 3	CH01	2417	-2.954	100.00%	-2.954	≤ 8	Pass
	CH02	2432	-2.910	100.00%	-2.910	≤ 8	Pass
	CH03	2462	-3.037	100.00%	-3.037	≤ 8	Pass
	CH04	2477	-7.721	100.00%	-7.721	≤ 8	Pass


Note: Total PSD= Average PSD + + 10*log (1/Duty Cycle).

Ant 1


CH01 (2417MHz)

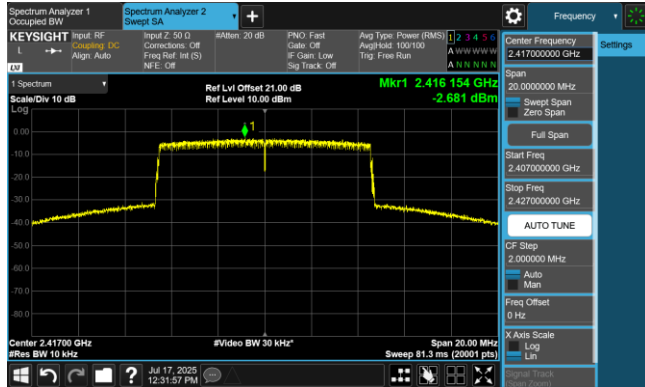


CH02 (2432MHz)

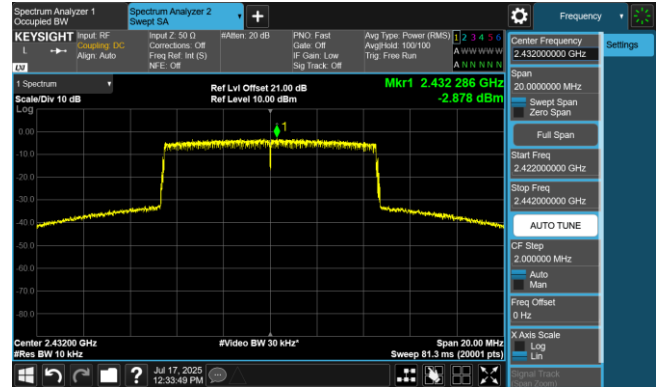

CH03 (2462MHz)

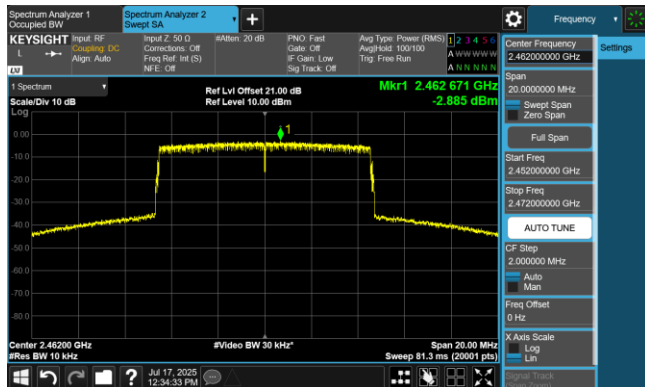


CH04 (2477MHz)

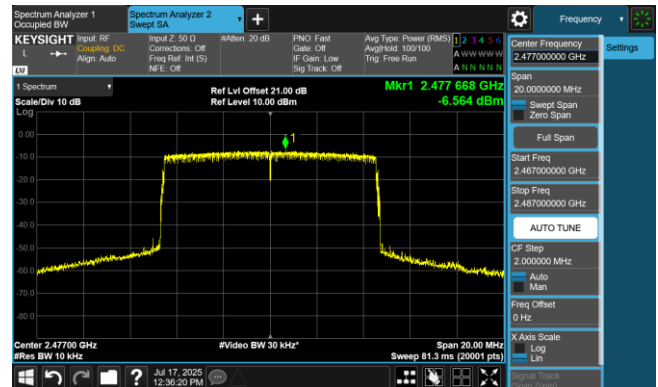


Ant 3


CH01 (2417MHz)

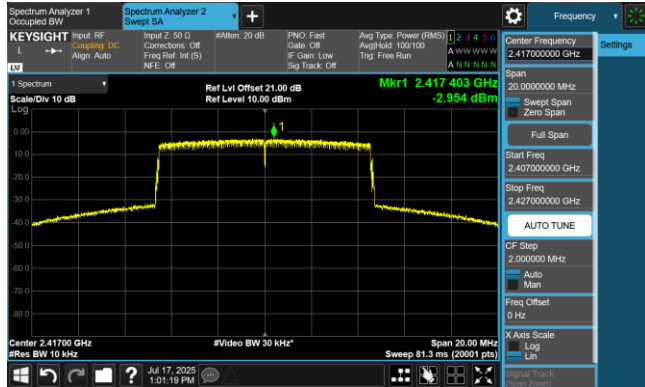


CH02 (2432MHz)

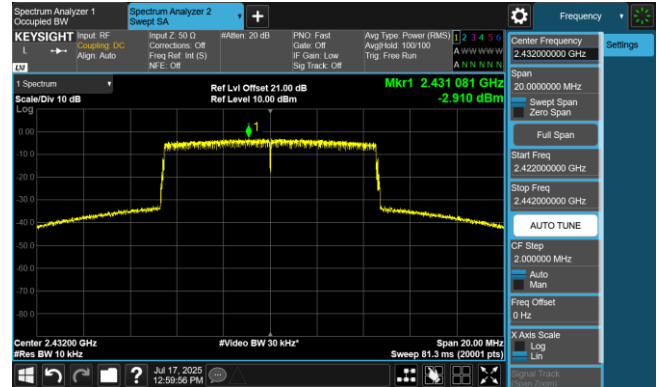

CH03 (2462MHz)

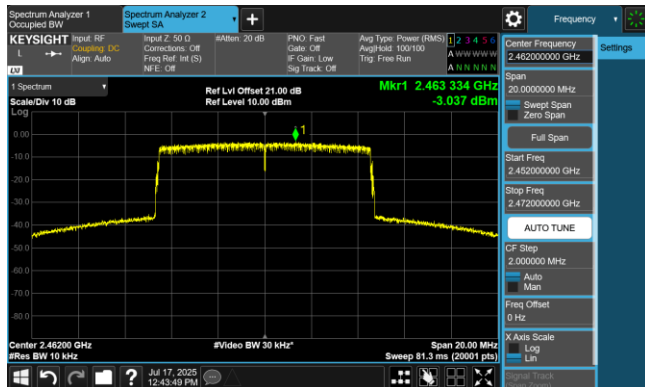

CH04 (2477MHz)

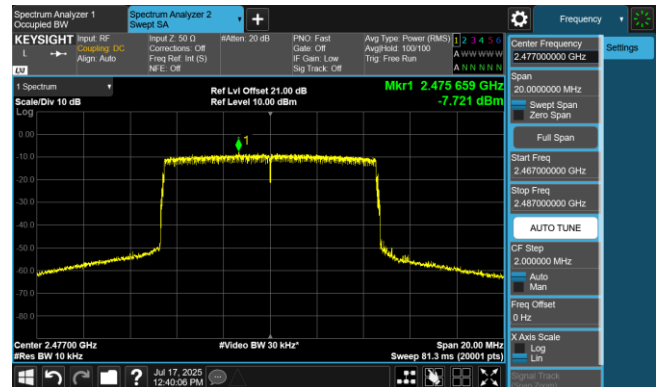

7.5. Out-of-Band Spurious Emissions Emissions Measurement

7.5.1. Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on RF conducted measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


7.5.2. Test Procedure Used

ANSI C63.10- Section 11.1 & 11.2

7.5.3. Test Setting

- (a) Set instrument center frequency to DTS channel center frequency
- (b) Set the span to ≥ 1.5 times the DTS bandwidth
- (c) Set the RBW = 100 kHz
- (d) Set the VBW $\geq 3 \times$ RBW
- (e) Detector = peak
- (f) Sweep time = auto couple
- (g) Trace mode = max hold
- (h) Allow trace to fully stabilize

7.5.4. Test Setup

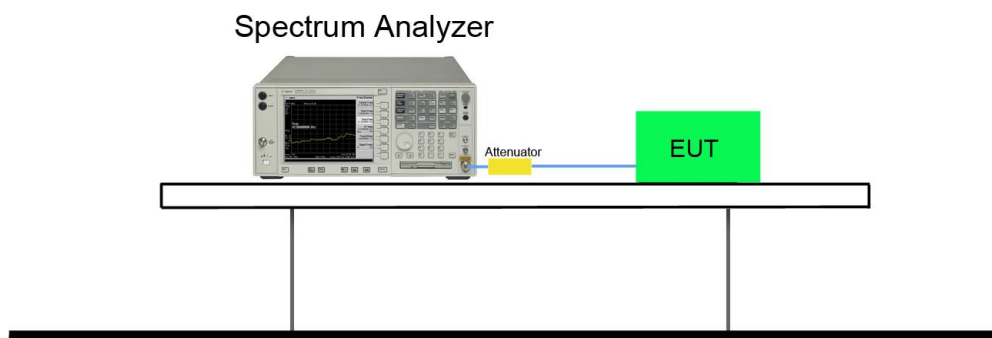


7.5.5. Test Result

Product	Fides-Link3	Temperature	24°C
Test Engineer	Fran	Relative Humidity	56%
Test Site	SR6	Test Date	2025/7/17


Test Mode	Channel No.	Frequency (MHz)	Limit	Result
2.4GHz_Ant 1	CH01	2417	30dBc	Pass
	CH02	2432	30dBc	Pass
	CH03	2462	30dBc	Pass
	CH04	2477	30dBc	Pass
2.4GHz_Ant 3	CH01	2417	30dBc	Pass
	CH02	2432	30dBc	Pass
	CH03	2462	30dBc	Pass
	CH04	2477	30dBc	Pass

Ant 1


CH01 (2417MHz)

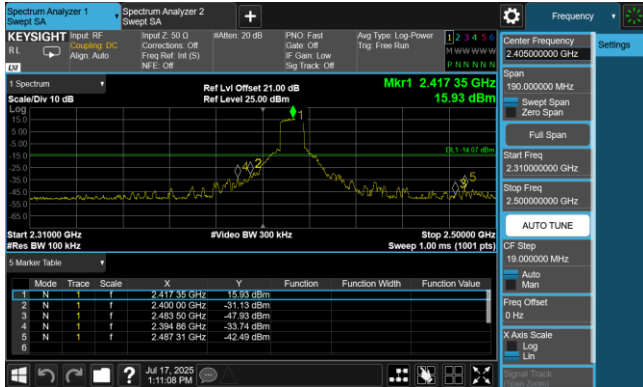


CH01 (2417MHz)

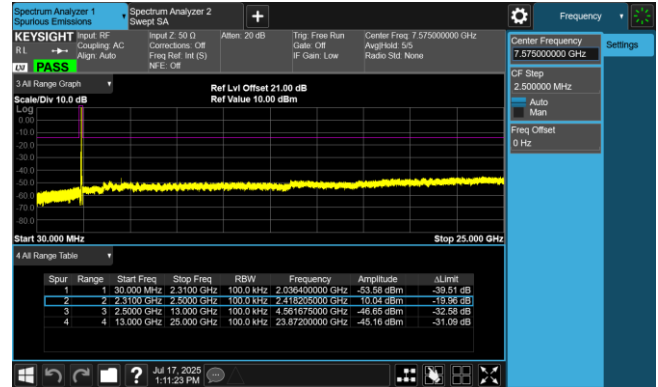


CH02 (2432MHz)

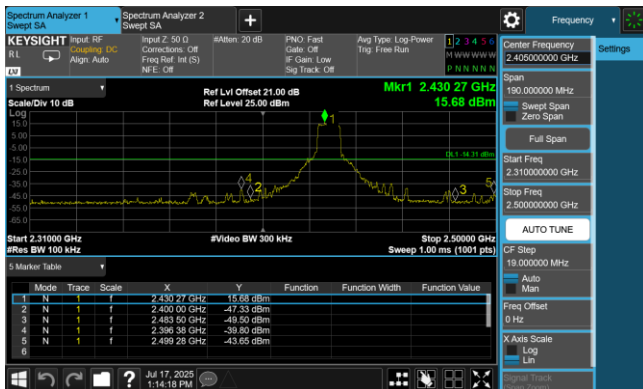


CH02 (2432MHz)

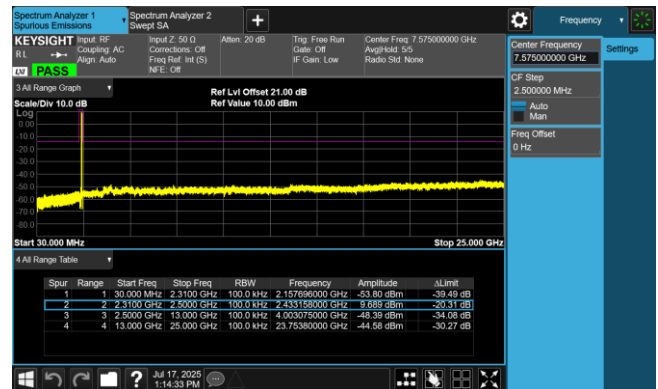


CH03 (2462MHz)

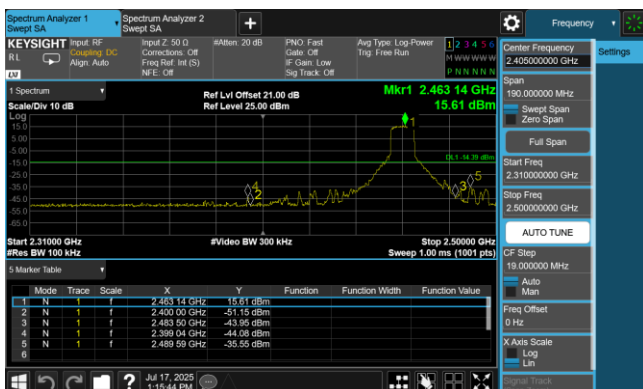


CH03 (2462MHz)

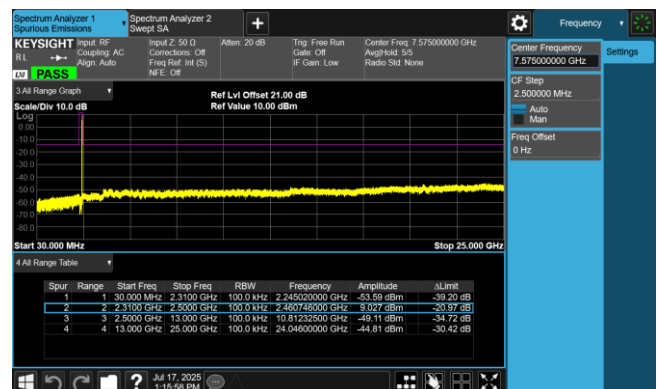

CH04 (2477MHz)

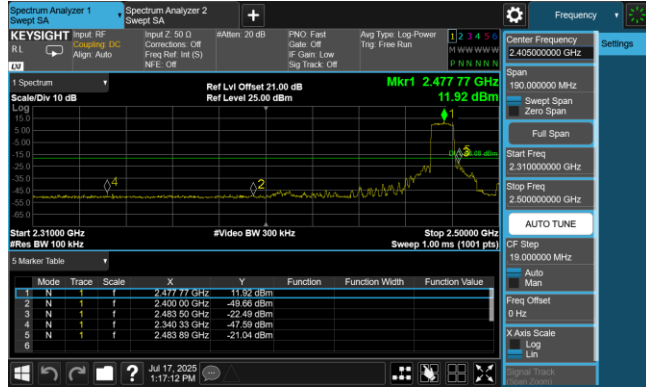


CH04 (2477MHz)

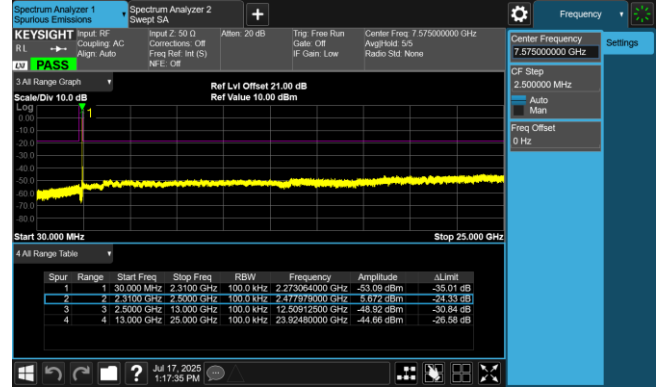


Ant 3


CH01 (2417MHz)

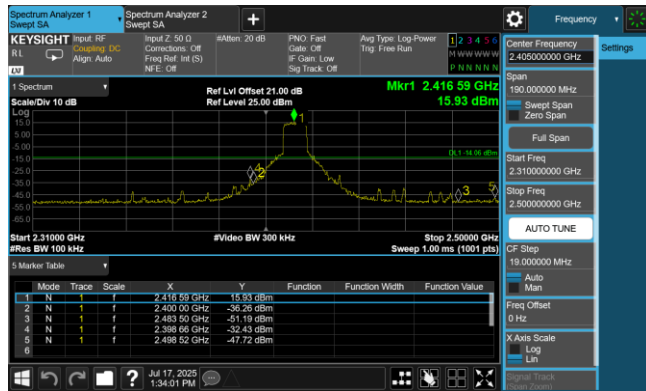


CH01 (2417MHz)

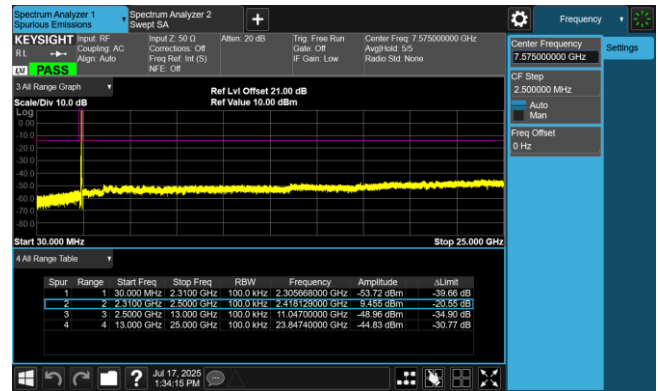


CH02 (2432MHz)

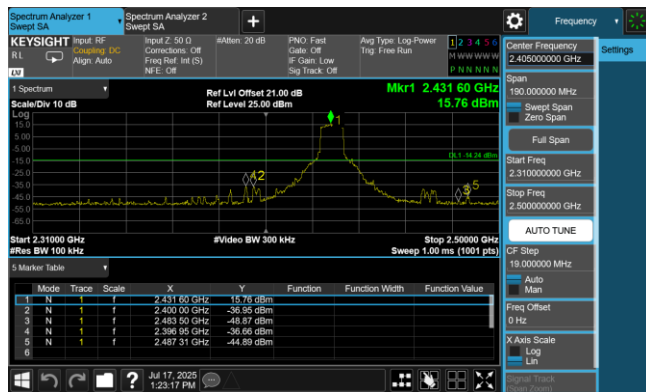


CH02 (2432MHz)

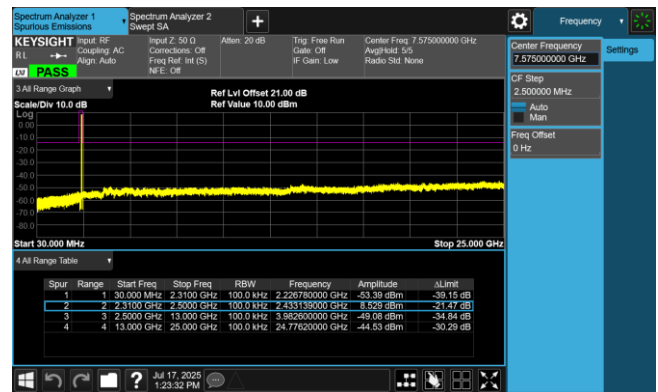


CH03 (2462MHz)

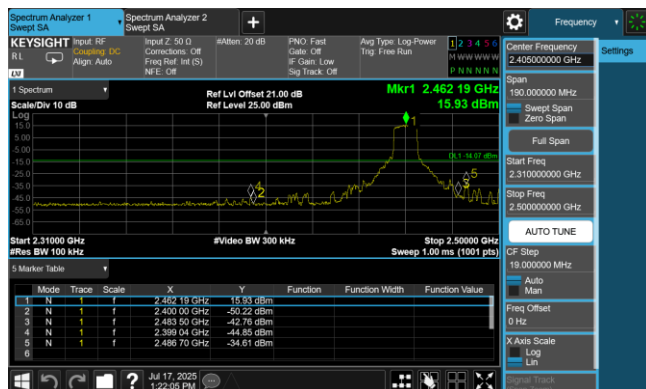


CH03 (2462MHz)

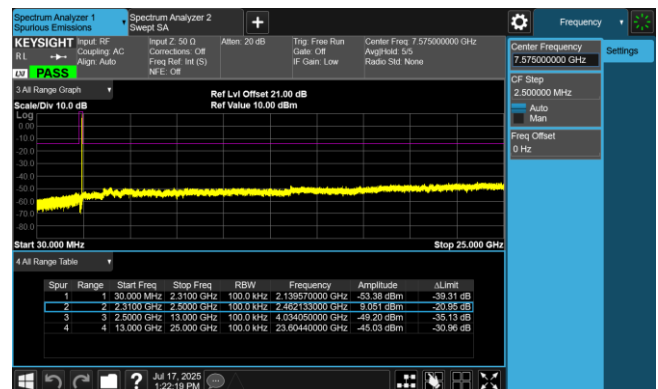

CH04 (2477MHz)

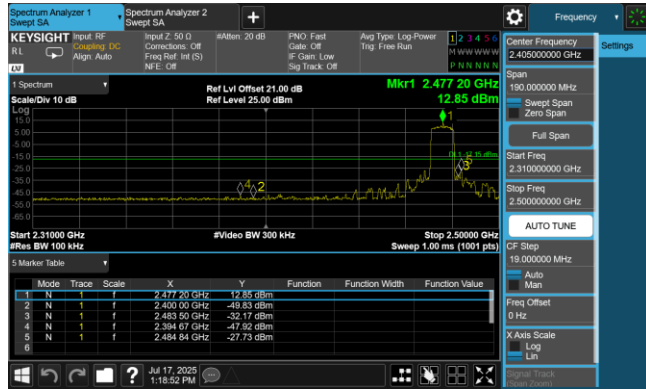

CH04 (2477MHz)

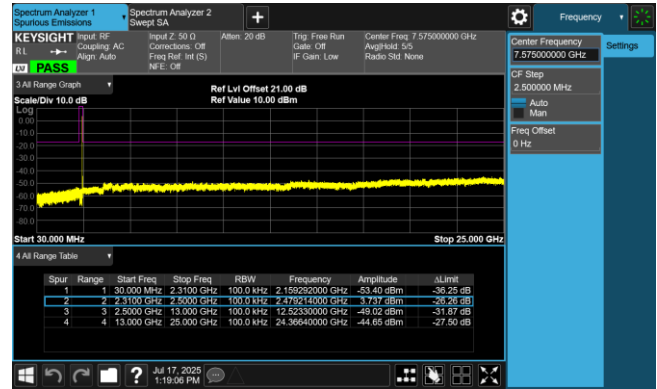

7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

ANSI C63.10 - Section 11.12.2.3 (quasi-peak measurements)

ANSI C63.10 - Section 11.12.2.4 (peak power measurements)

ANSI C63.10 - Section 11.12.2.5 (average power measurements)

7.6.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple

6. Trace mode = max hold

7. Trace was allowed to stabilize

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest

2. RBW = 1MHz

3. VBW $\geq 1/T$

4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode

5. Detector = Peak


6. Sweep time = auto

7. Trace mode = max hold


8. Allow max hold to run for at least 50 times (1/duty cycle) traces

7.6.4. Test Setup


9kHz ~ 30MHz Test Setup:

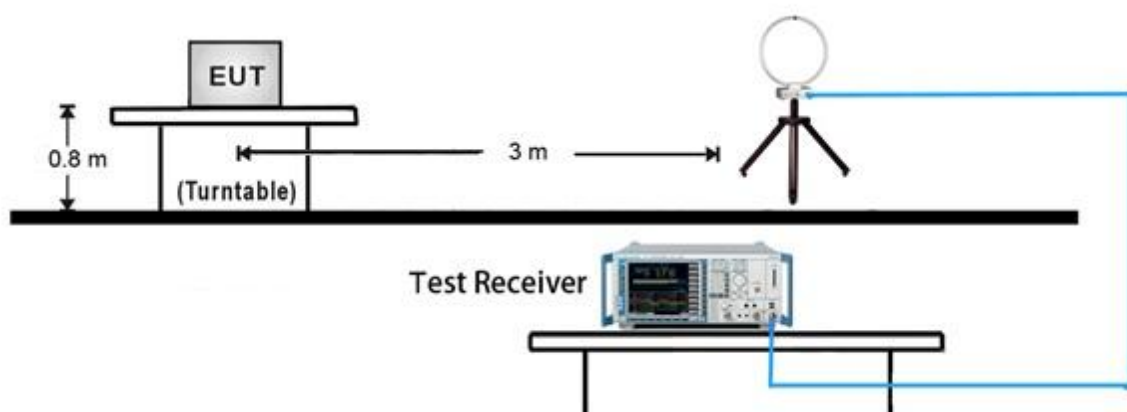


30MHz ~ 1GHz Test Setup:

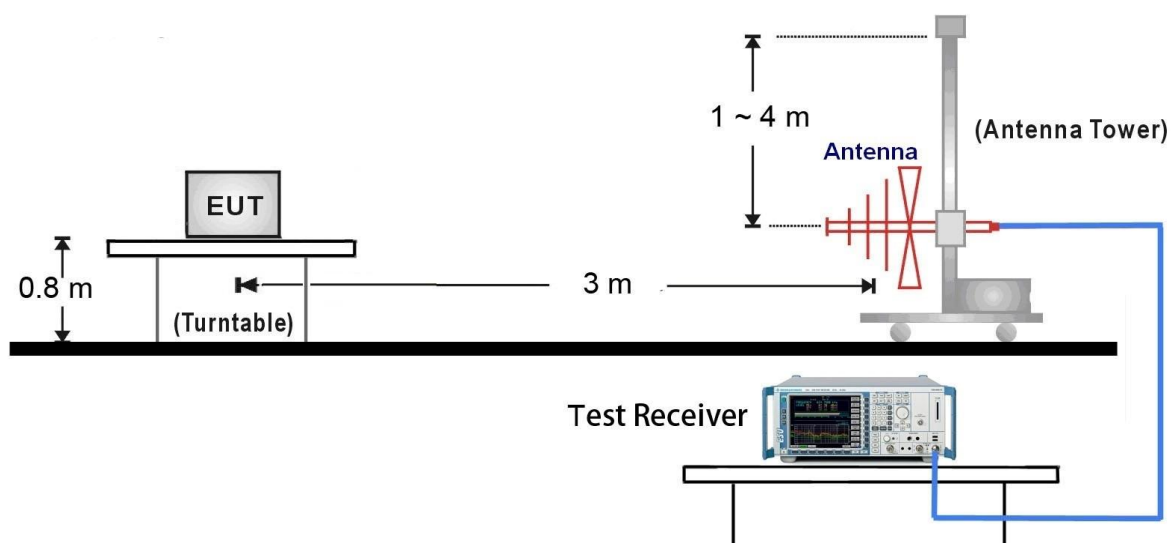

1GHz ~ 18GHz Test Setup:

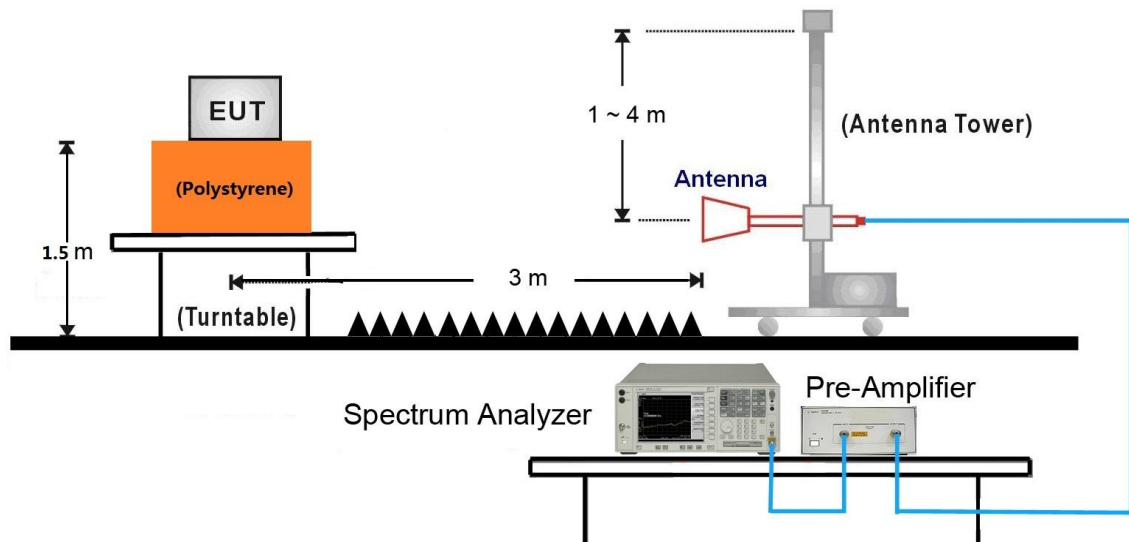


18GHz ~ 25GHz Test Setup:

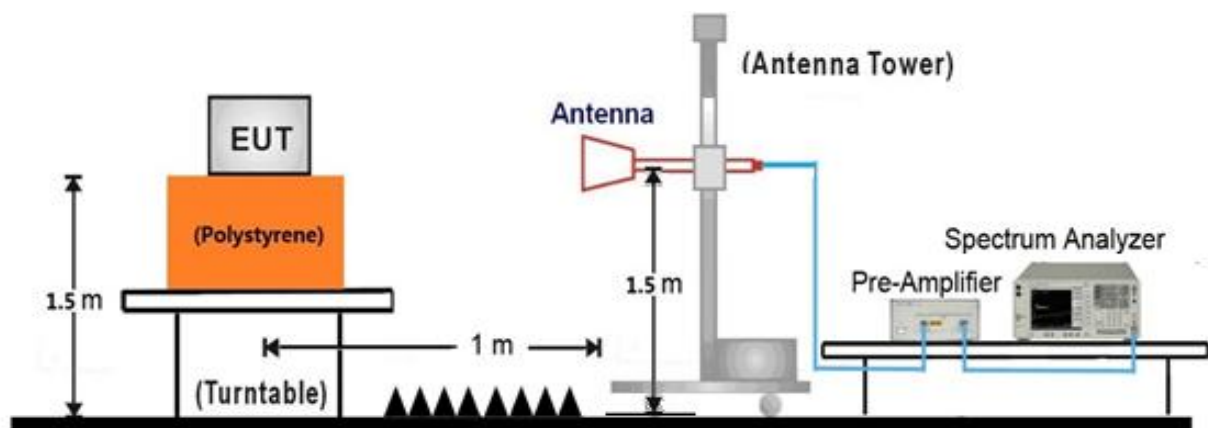

7.6.5. Test Result

EUT	Fides-Link3	Date of Test	2025-07-18
Factor	VULB 9162	Temp. / Humidity	24°C /58%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Air_SRD 2.4G_TX_Ant 1_CH 2462MHz	Test Voltage	AC 120V/60Hz

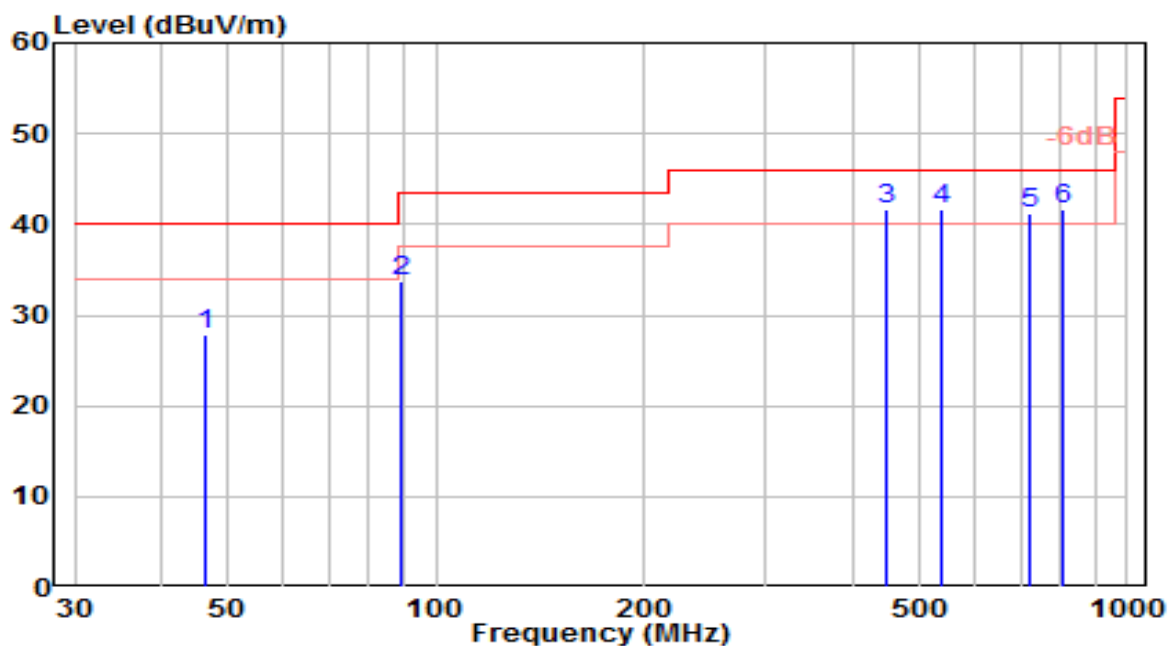


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	46.490	6.79	21.08	27.87	-12.13	40.00	100	260	QP
2	89.170	16.87	16.90	33.76	-9.74	43.50	150	300	QP
3	450.010	17.34	24.30	41.64	-4.36	46.00	100	325	QP
4	540.220	15.67	25.98	41.64	-4.36	46.00	150	50	QP
5	720.640	12.25	29.07	41.32	-4.68	46.00	100	225	QP
6	* 809.880	11.40	30.32	41.72	-4.28	46.00	150	230	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-18
Factor	VULB 9162	Temp. / Humidity	24°C /58%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Air_SRD 2.4G_TX_Ant 1_CH 2462MHz	Test Voltage	AC 120V/60Hz

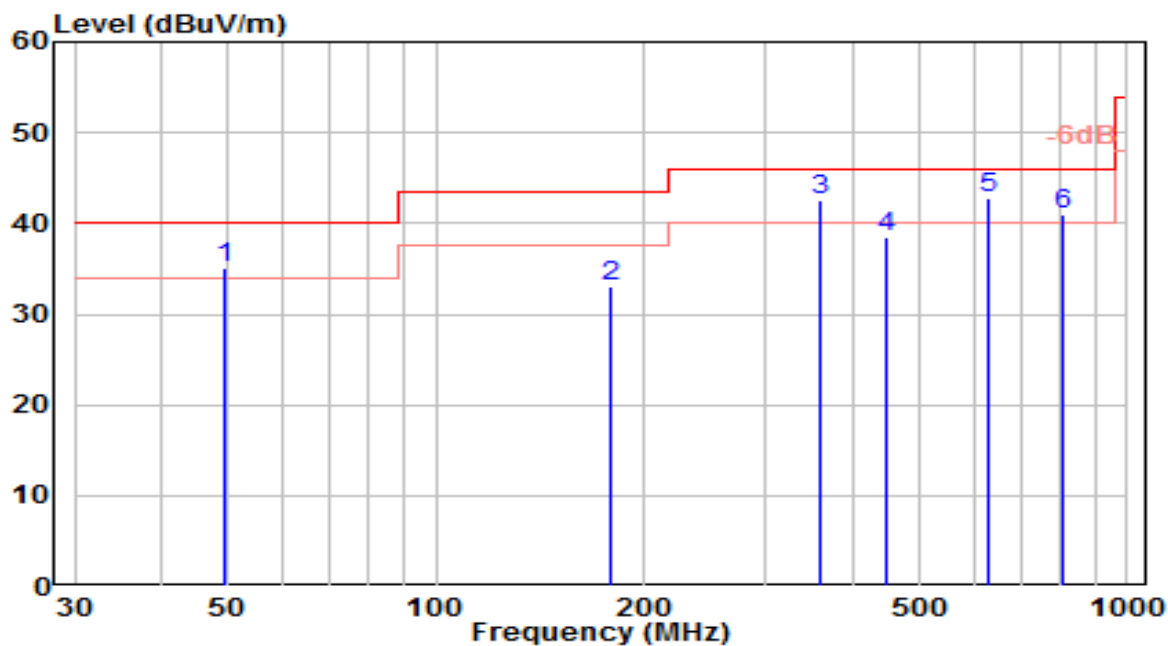


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	49.400	13.80	21.21	35.01	-4.99	40.00	100	175	QP
2	179.380	16.34	16.76	33.10	-10.40	43.50	100	265	QP
3	359.800	19.40	23.14	42.54	-3.46	46.00	100	170	QP
4	450.010	14.29	24.30	38.59	-7.41	46.00	100	75	QP
5	* 630.430	15.70	27.01	42.71	-3.29	46.00	100	230	QP
6	809.880	10.73	30.32	41.05	-4.95	46.00	150	190	QP

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-18
Factor	VULB 9162	Temp. / Humidity	24°C /58%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Air_SRD 2.4G_TX_Ant 3_CH 2462MHz	Test Voltage	AC 120V/60Hz

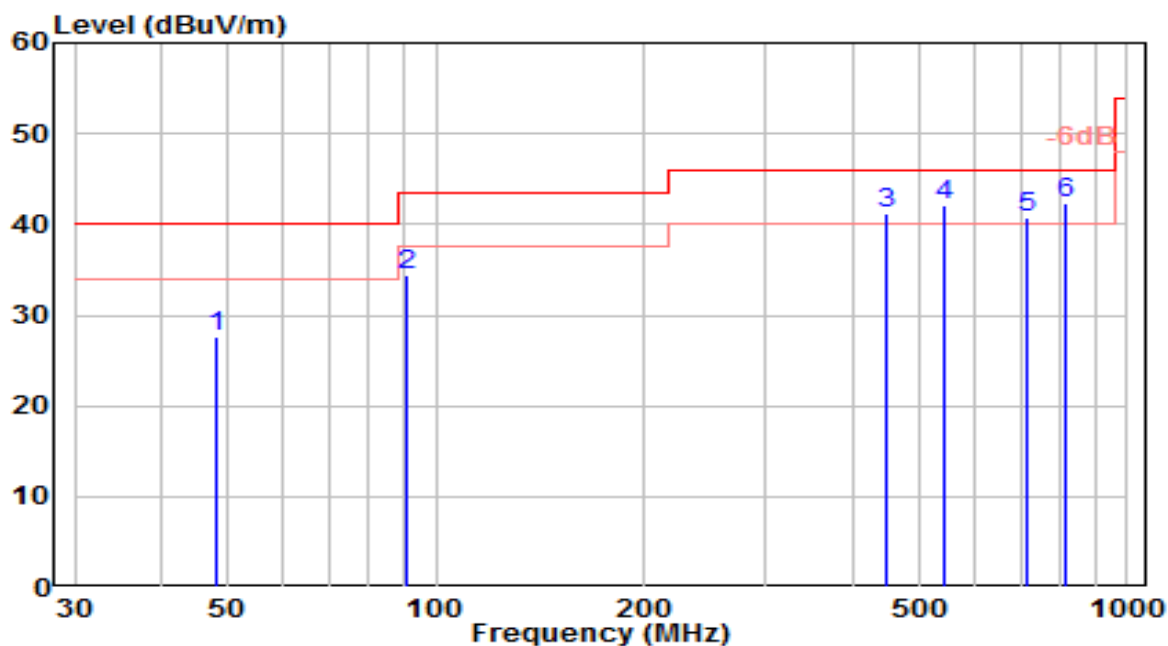


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	48.255	6.38	21.16	27.54	-12.46	40.00	100	260	QP
2	91.028	17.18	17.33	34.50	-9.00	43.50	150	300	QP
3	448.346	16.89	24.28	41.17	-4.83	46.00	100	325	QP
4	541.876	16.17	26.00	42.17	-3.83	46.00	150	50	QP
5	718.957	11.74	29.04	40.78	-5.22	46.00	100	225	QP
6	* 811.702	11.90	30.37	42.27	-3.73	46.00	150	230	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-18
Factor	VULB 9162	Temp. / Humidity	24°C /58%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Air_SRD 2.4G_TX_Ant 3_CH 2462MHz	Test Voltage	AC 120V/60Hz

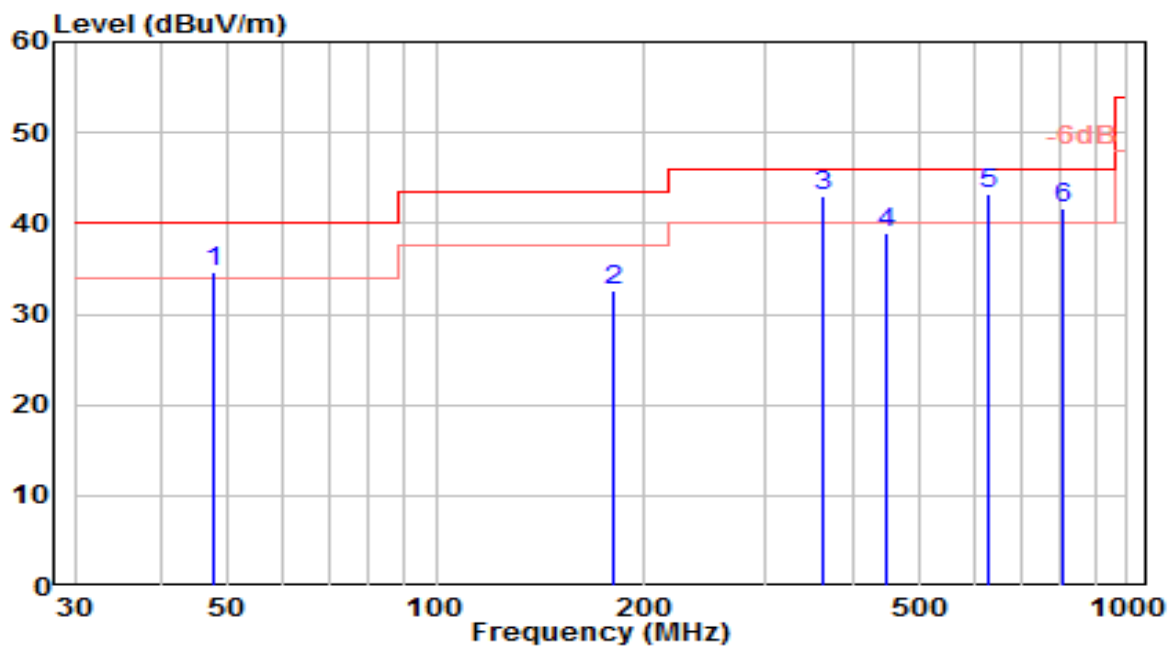


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	47.523	13.47	21.13	34.60	-5.40	40.00	100	175	QP
2	180.917	15.61	16.91	32.52	-10.98	43.50	100	265	QP
3	361.769	19.84	23.18	43.01	-2.99	46.00	100	170	QP
4	448.872	14.64	24.29	38.93	-7.07	46.00	100	75	QP
5	* 631.956	16.17	26.99	43.15	-2.85	46.00	100	230	QP
6	807.766	11.33	30.27	41.60	-4.40	46.00	150	190	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-18
Factor	VULB 9162	Temp. / Humidity	24°C /58%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	GND_SRD 2.4G_TX_Ant 1_CH 2462MHz	Test Voltage	AC 120V/60Hz

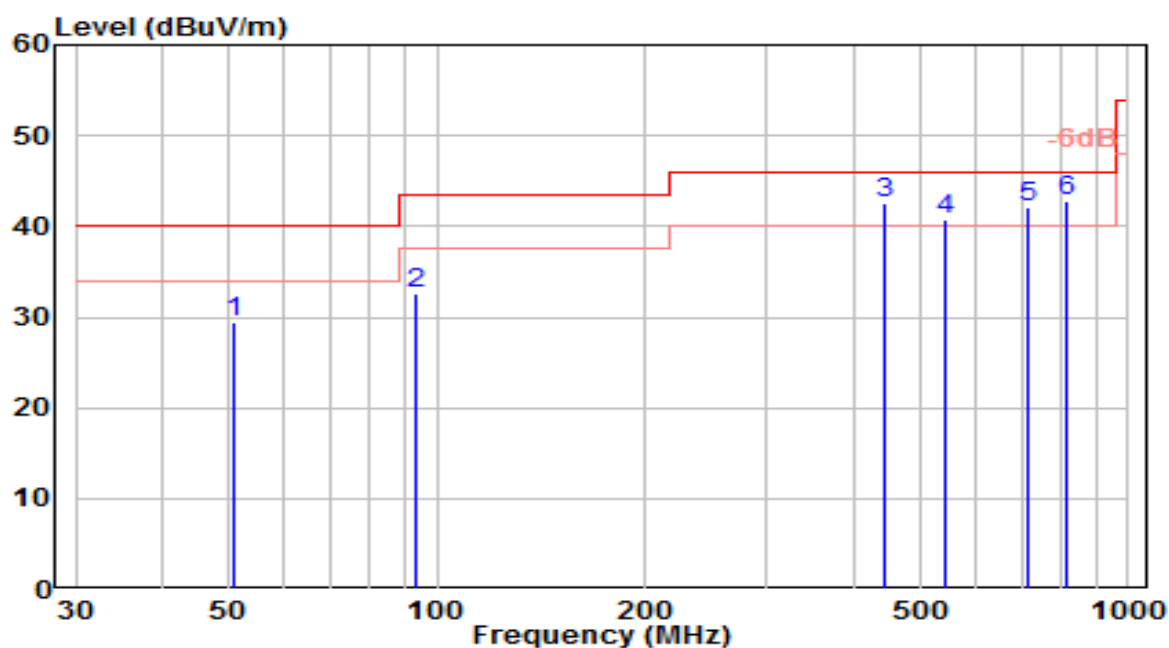


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	50.940	8.24	21.11	29.35	-10.65	40.00	100	260	QP
2	93.432	14.92	17.75	32.67	-10.83	43.50	150	300	QP
3	445.102	18.42	24.25	42.67	-3.33	46.00	100	325	QP
4	543.114	14.68	26.01	40.70	-5.30	46.00	150	50	QP
5	715.948	13.16	28.99	42.14	-3.86	46.00	100	225	QP
6	* 814.788	12.38	30.44	42.82	-3.18	46.00	150	230	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-18
Factor	VULB 9162	Temp. / Humidity	24°C /58%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	GND_SRD 2.4G_TX_Ant 1_CH 2462MHz	Test Voltage	AC 120V/60Hz

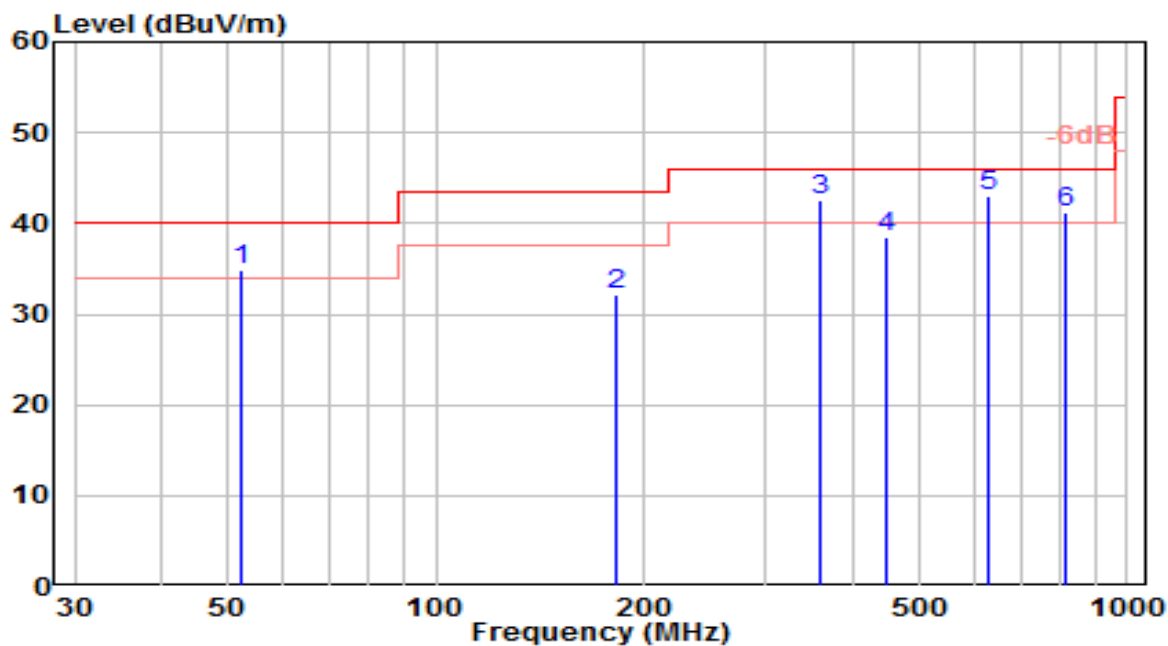


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	52.239	13.93	20.94	34.88	-5.12	40.00	100	175	QP
2	182.203	15.04	17.08	32.12	-11.38	43.50	100	265	QP
3	360.005	19.35	23.15	42.50	-3.50	46.00	100	170	QP
4	450.184	14.29	24.30	38.59	-7.41	46.00	100	75	QP
5	* 630.389	15.90	27.01	42.91	-3.09	46.00	100	230	QP
6	813.073	10.73	30.40	41.13	-4.87	46.00	150	190	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	26°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	Air_SRD 2.4G_TX_Ant1_2417MHz	Test Voltage	AC 120V/60Hz

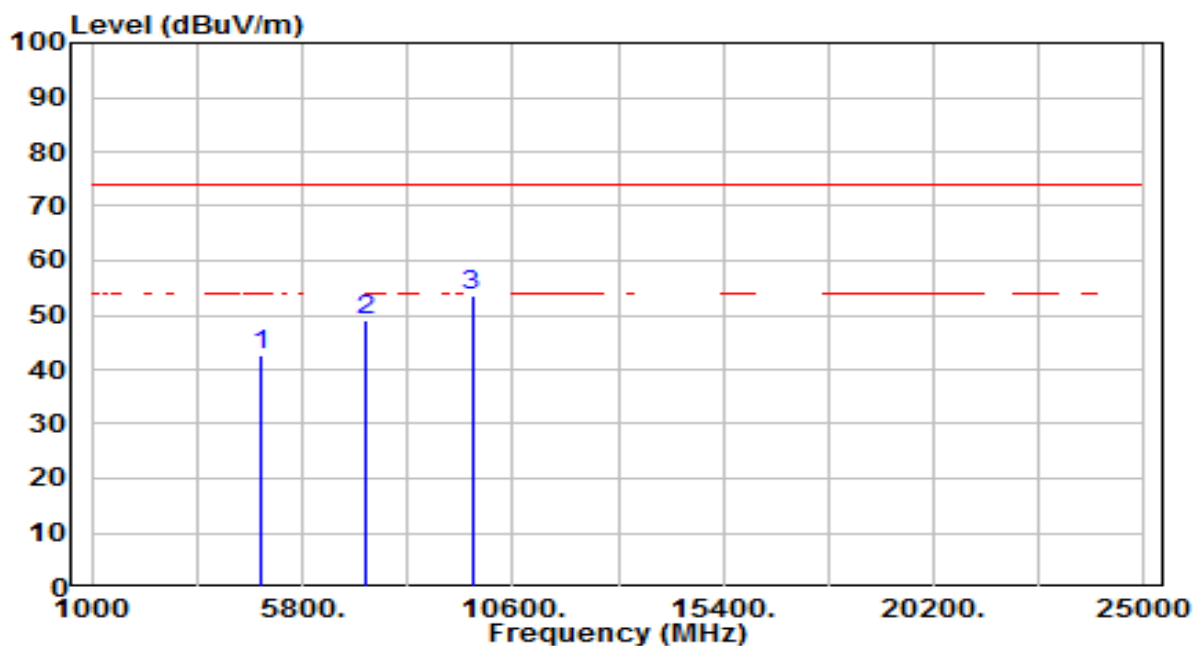


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4834.000	38.25	4.37	42.61	-31.39	74.00	200	93	Peak
2	7251.000	36.11	12.81	48.92	-25.08	74.00	200	306	Peak
3	* 9668.000	36.90	16.76	53.66	-20.34	74.00	200	227	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	26°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	Air_SRD 2.4G_TX_Ant1_2417MHz	Test Voltage	AC 120V/60Hz

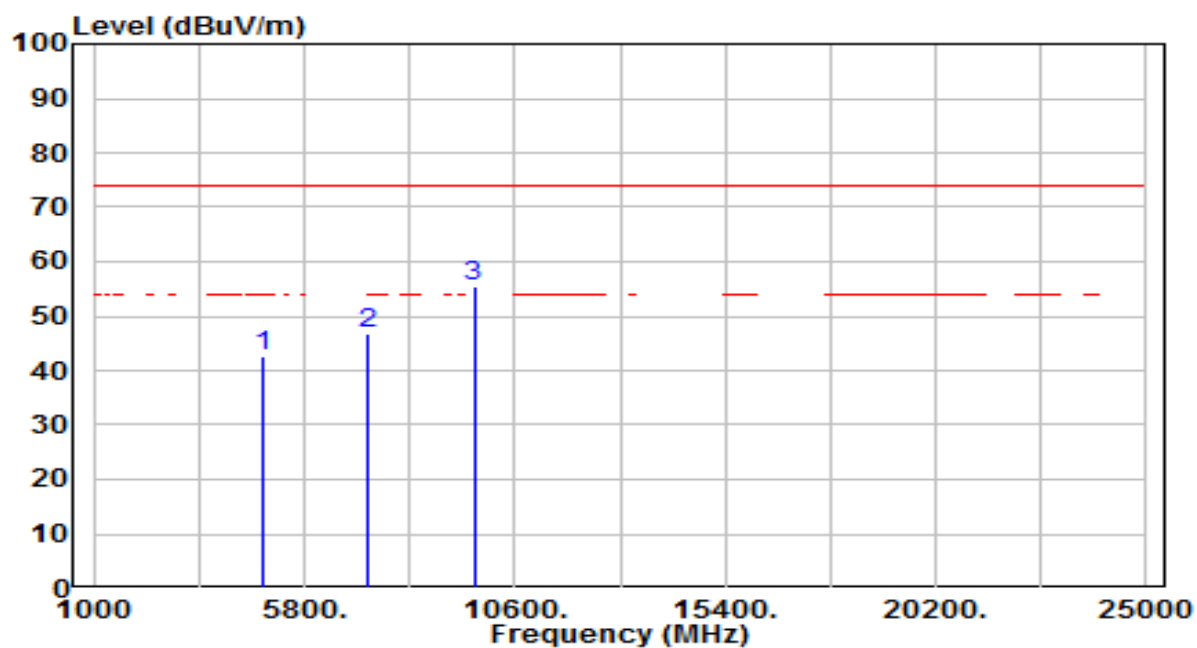


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4834.000	38.20	4.37	42.57	-31.43	74.00	200	195	Peak
2	7251.000	34.08	12.81	46.89	-27.11	74.00	200	129	Peak
3	* 9668.000	38.56	16.76	55.32	-18.68	74.00	200	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	26°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	Air_SRD 2.4G_TX_Ant1_2432MHz	Test Voltage	AC 120V/60Hz

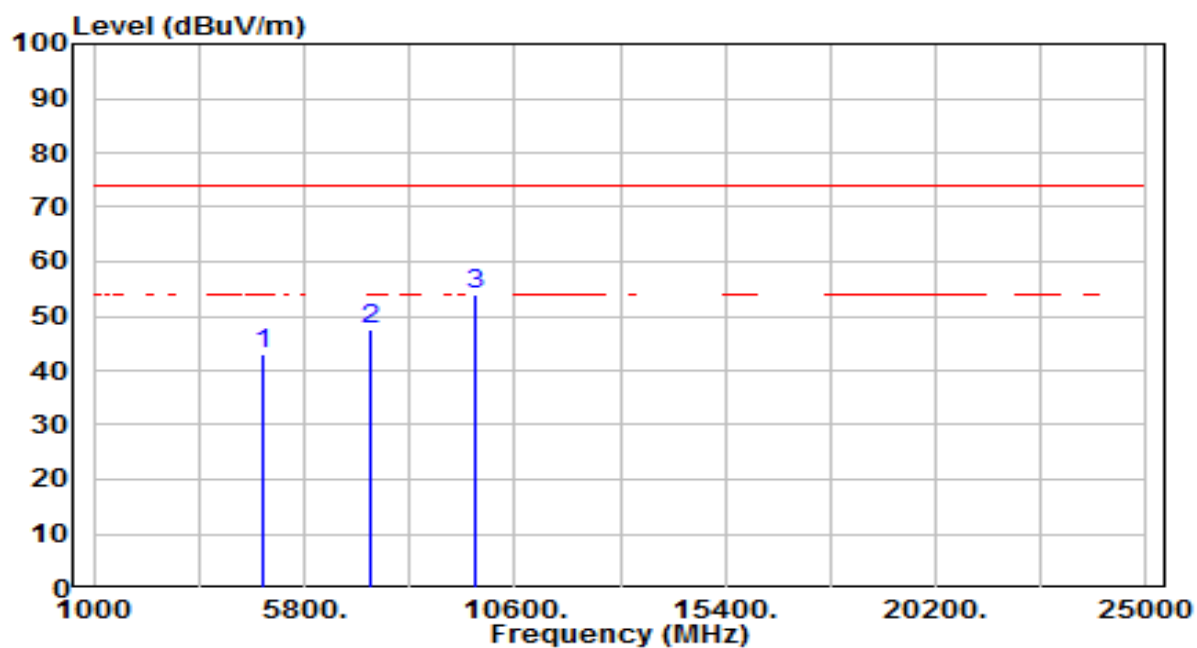


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4864.000	38.66	4.44	43.10	-30.90	74.00	200	67	Peak
2	7296.000	34.55	13.05	47.60	-26.40	74.00	200	99	Peak
3	* 9728.000	36.93	16.87	53.80	-20.20	74.00	200	143	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	26°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	Air_SRD 2.4G_TX_Ant1_2432MHz	Test Voltage	AC 120V/60Hz

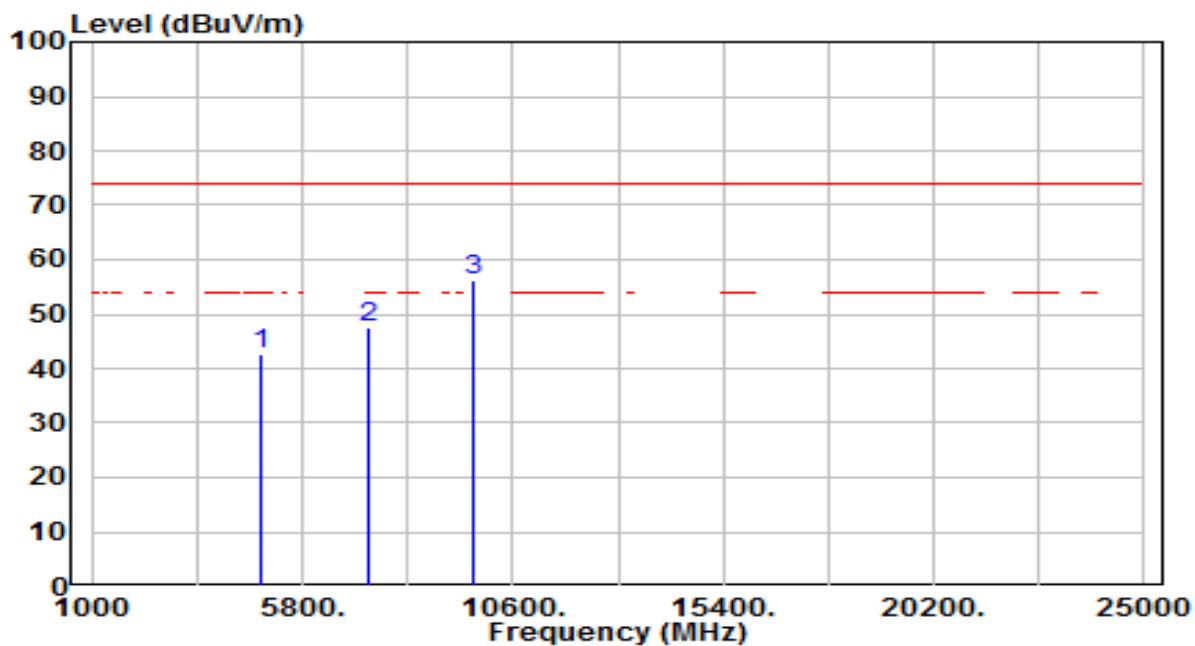


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4864.000	38.37	4.44	42.81	-31.19	74.00	200	275	Peak
2	7296.000	34.55	13.05	47.60	-26.40	74.00	200	63	Peak
3	* 9728.000	39.21	16.87	56.08	-17.92	74.00	200	159	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	26°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	Air_SRD 2.4G_TX_Ant1_2462MHz	Test Voltage	AC 120V/60Hz

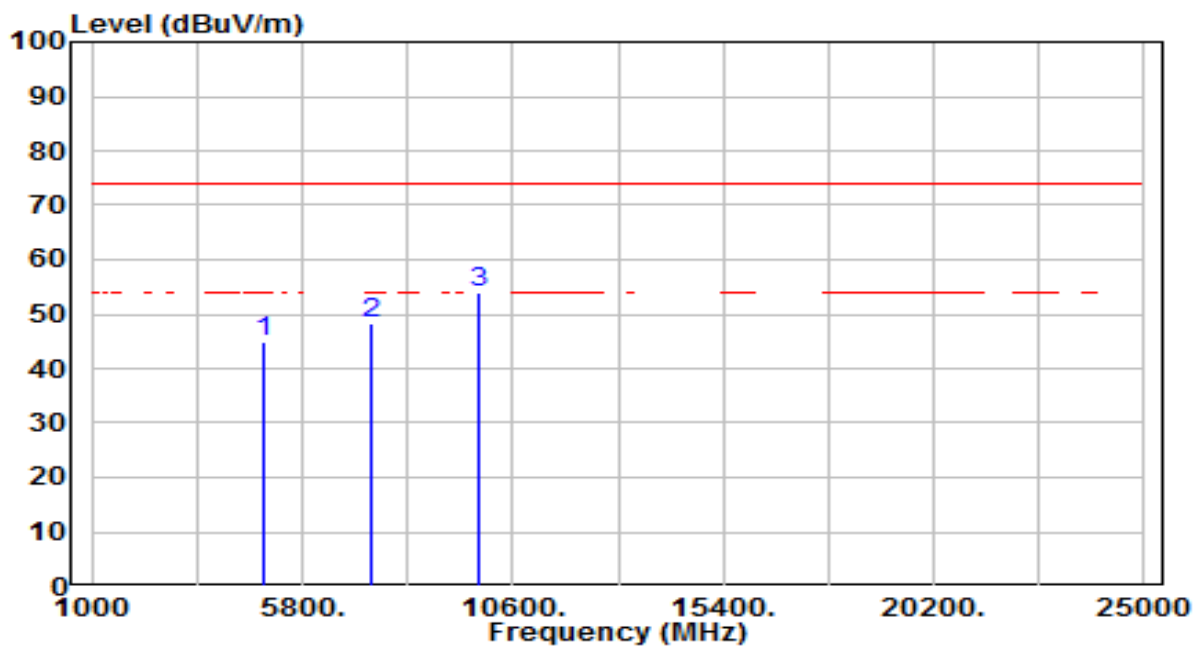


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.19	4.61	44.80	-29.20	74.00	200	341	Peak
2	7386.000	34.78	13.49	48.28	-25.72	74.00	200	214	Peak
3	* 9848.000	36.79	17.14	53.93	-20.07	74.00	200	84	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	26°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	Air_SRD 2.4G_TX_Ant1_2462MHz	Test Voltage	AC 120V/60Hz

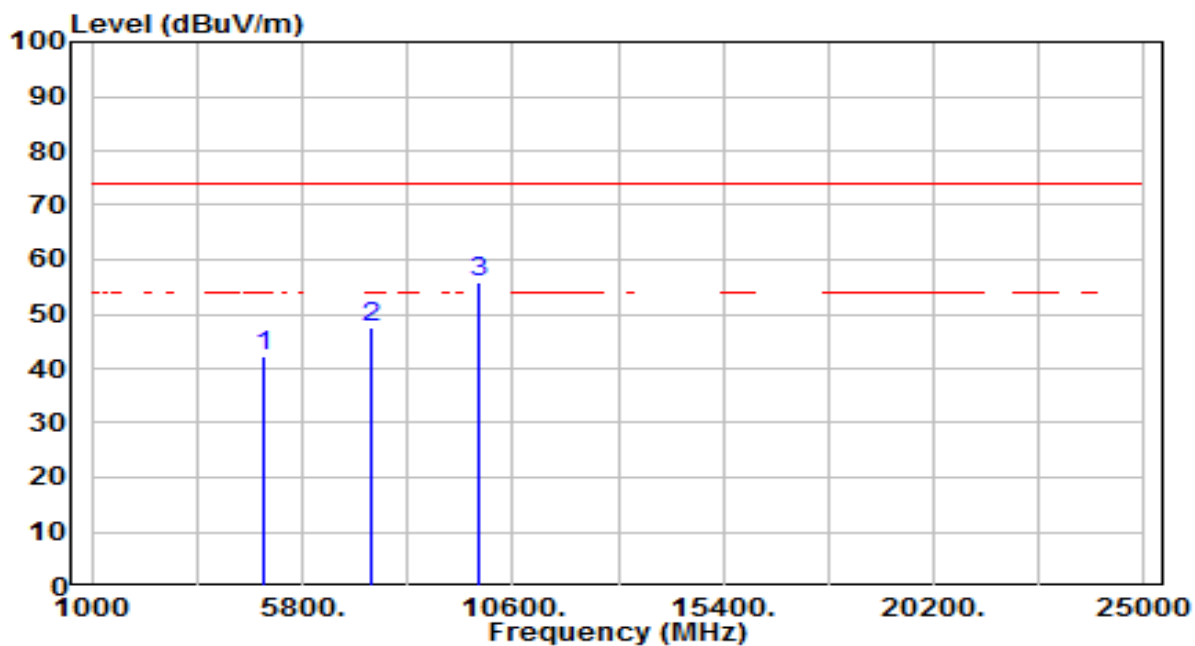


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	37.77	4.61	42.39	-31.61	74.00	200	205	Peak
2	7386.000	33.88	13.49	47.38	-26.62	74.00	200	245	Peak
3	* 9848.000	38.66	17.14	55.80	-18.20	74.00	200	350	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	26°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	Air_SRD 2.4G_TX_Ant1_2477MHz	Test Voltage	AC 120V/60Hz

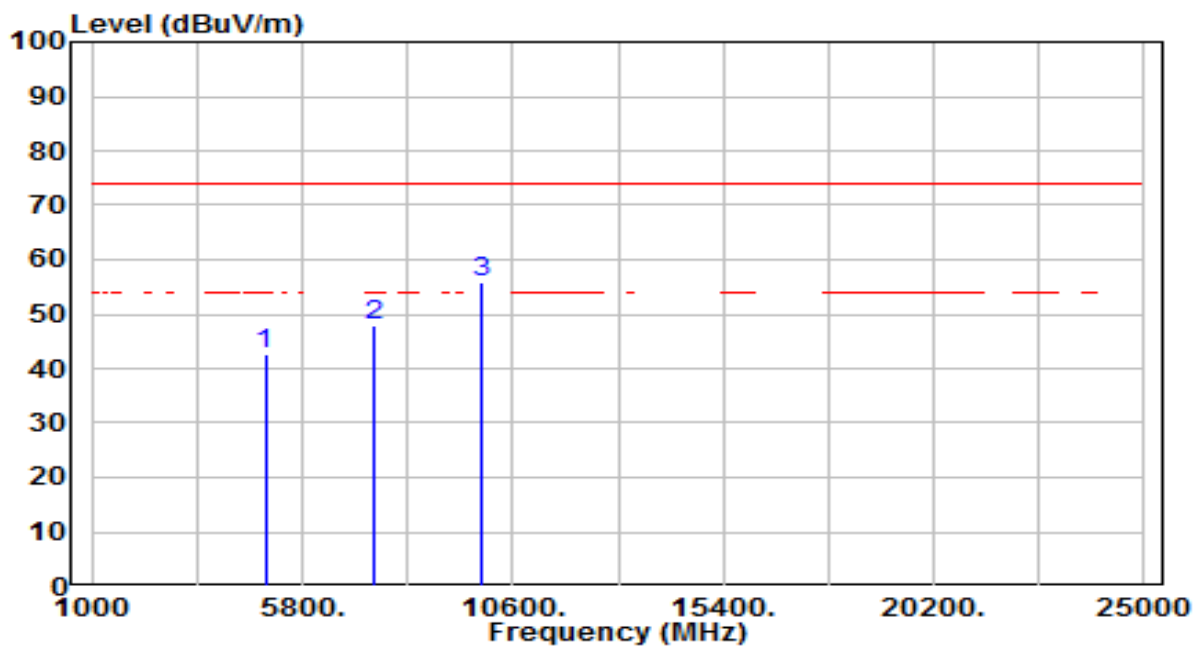


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4954.000	37.83	4.73	42.55	-31.45	74.00	200	39	Peak
2	7431.000	34.34	13.73	48.07	-25.93	74.00	200	317	Peak
3	* 9908.000	38.73	17.26	55.99	-18.01	74.00	200	83	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	26°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	Air_SRD 2.4G_TX_Ant1_2477MHz	Test Voltage	AC 120V/60Hz

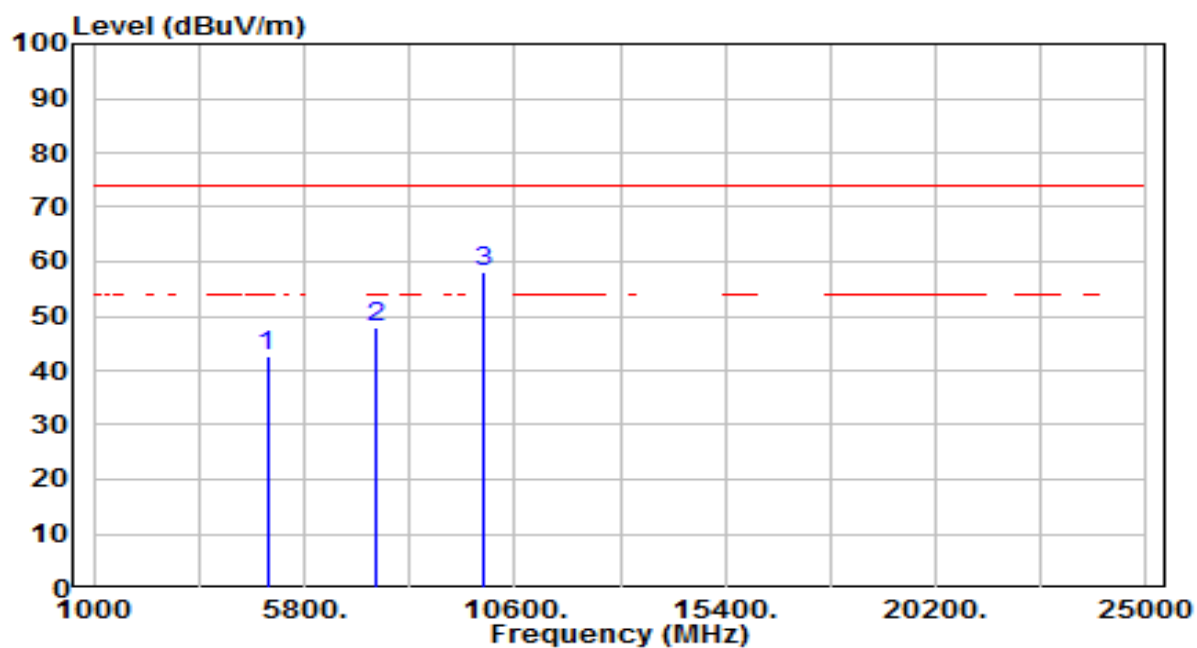


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4954.000	37.74	4.73	42.47	-31.53	74.00	200	336	Peak
2	7431.000	34.16	13.73	47.89	-26.11	74.00	200	2	Peak
3	* 9908.000	40.80	17.26	58.06	-15.94	74.00	200	149	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	26°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	Air_SRD 2.4G_TX_Ant3_2417MHz	Test Voltage	AC 120V/60Hz

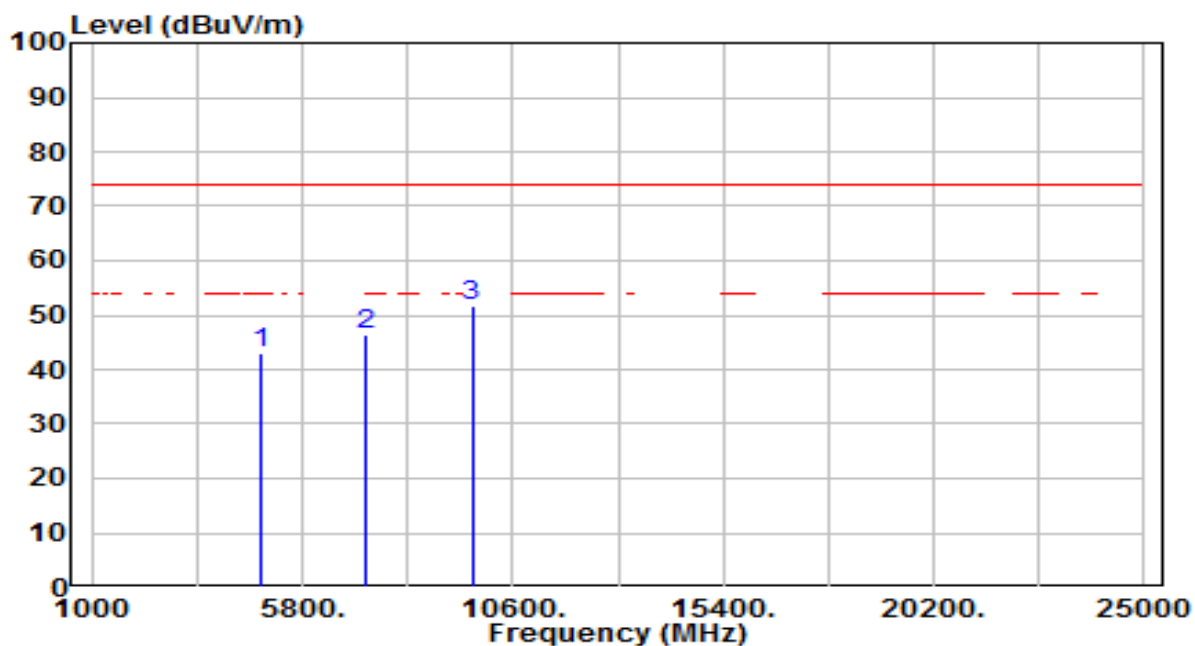


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4834.000	38.76	4.37	43.13	-30.87	74.00	200	154	Peak
2	7251.000	33.53	12.81	46.34	-27.66	74.00	200	251	Peak
3	* 9668.000	34.82	16.76	51.59	-22.41	74.00	200	140	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	26°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	Air_SRD 2.4G_TX_Ant3_2417MHz	Test Voltage	AC 120V/60Hz

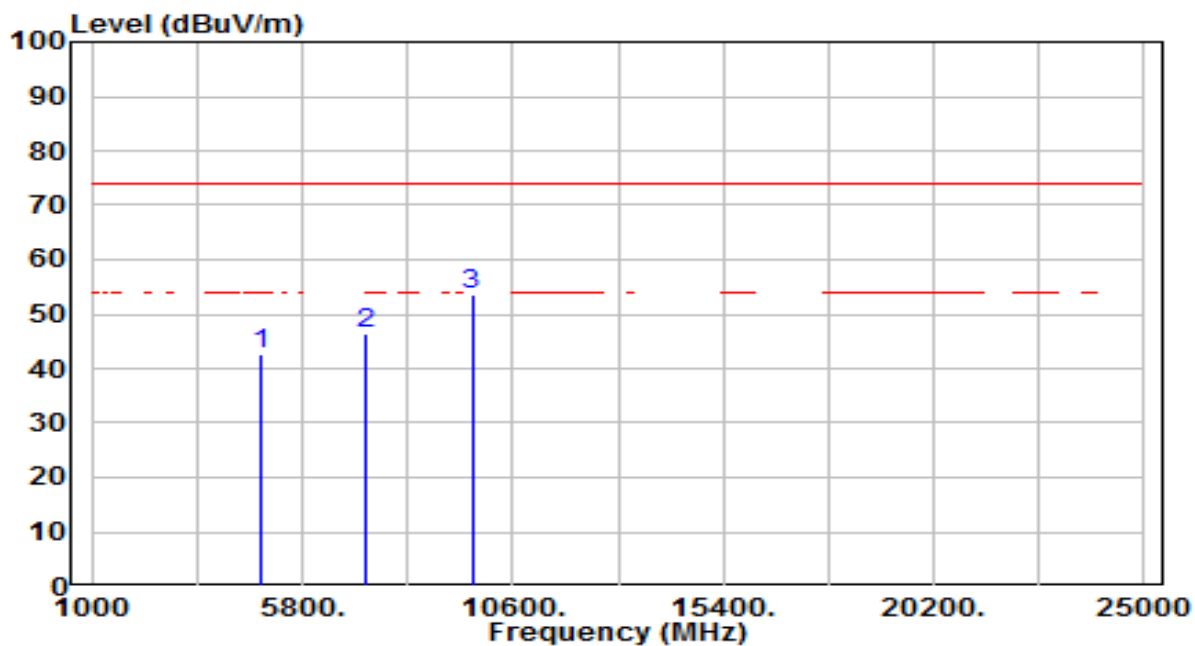


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4834.000	38.28	4.37	42.65	-31.35	74.00	200	102	Peak
2	7251.000	33.76	12.81	46.57	-27.43	74.00	200	41	Peak
3	* 9668.000	36.75	16.76	53.52	-20.48	74.00	200	204	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	26°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	Air_SRD 2.4G_TX_Ant3_2432MHz	Test Voltage	AC 120V/60Hz

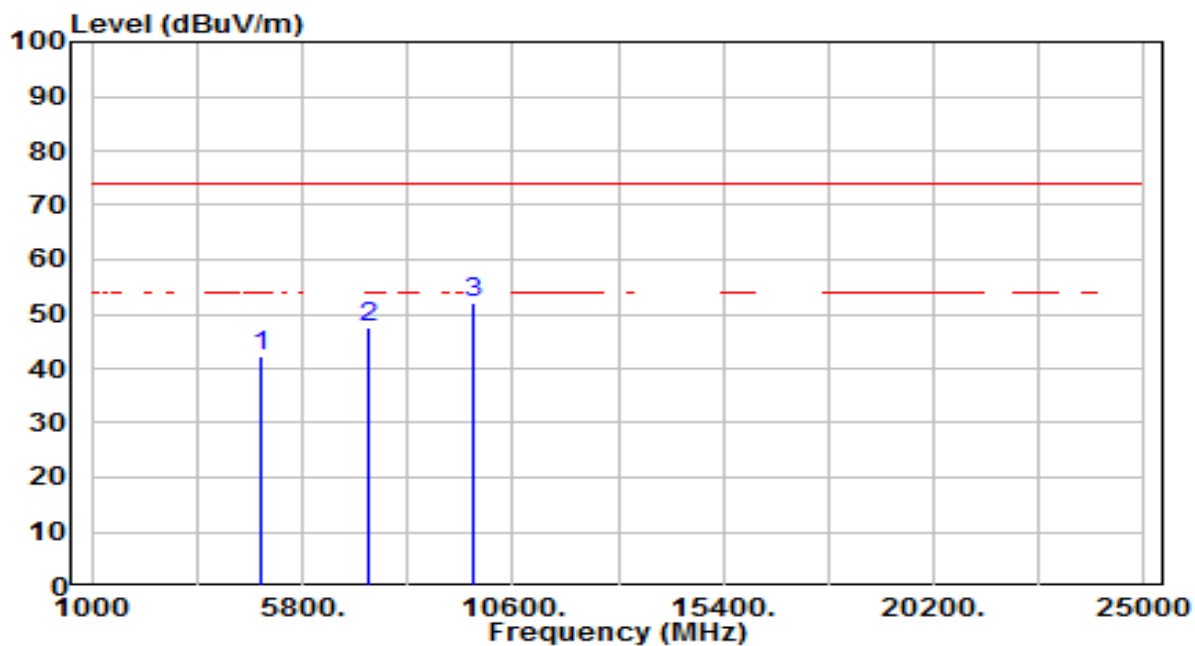


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4864.000	37.64	4.44	42.08	-31.92	74.00	200	35	Peak
2	7296.000	34.67	13.05	47.72	-26.28	74.00	200	247	Peak
3	* 9728.000	35.08	16.87	51.94	-22.06	74.00	200	57	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	26°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	Air_SRD 2.4G_TX_Ant3_2432MHz	Test Voltage	AC 120V/60Hz

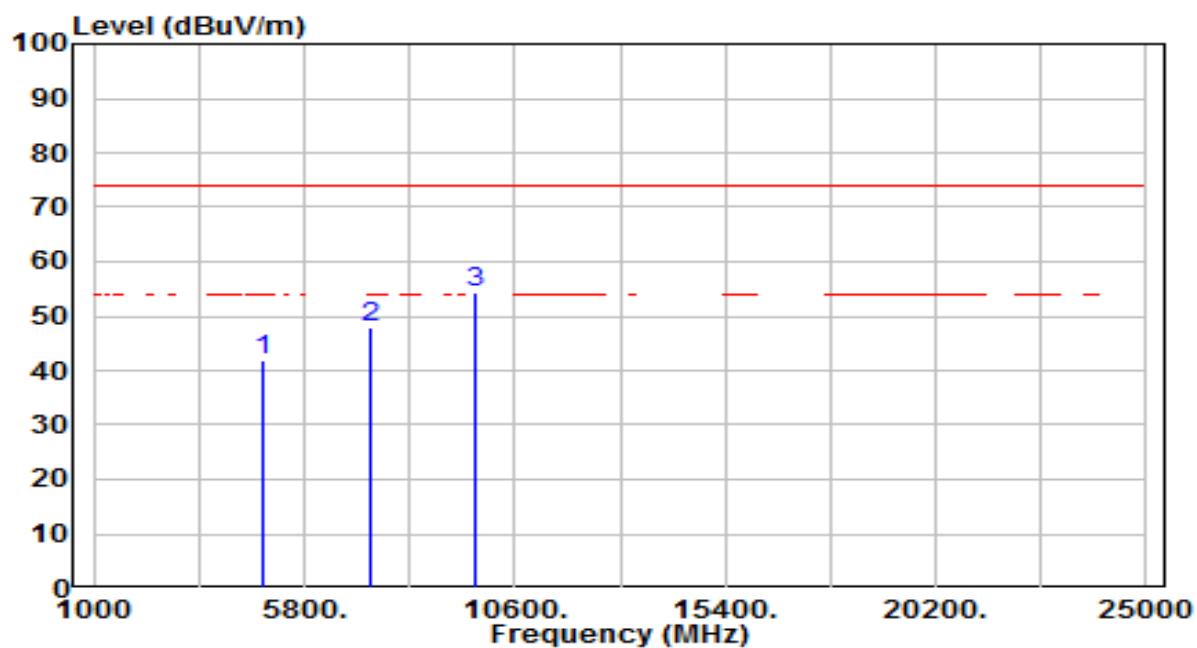


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4864.000	37.60	4.44	42.04	-31.96	74.00	200	360	Peak
2	7296.000	34.76	13.05	47.81	-26.19	74.00	200	300	Peak
3	* 9728.000	37.40	16.87	54.26	-19.74	74.00	200	354	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	26°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	Air_SRD 2.4G_TX_Ant3_2462MHz	Test Voltage	AC 120V/60Hz

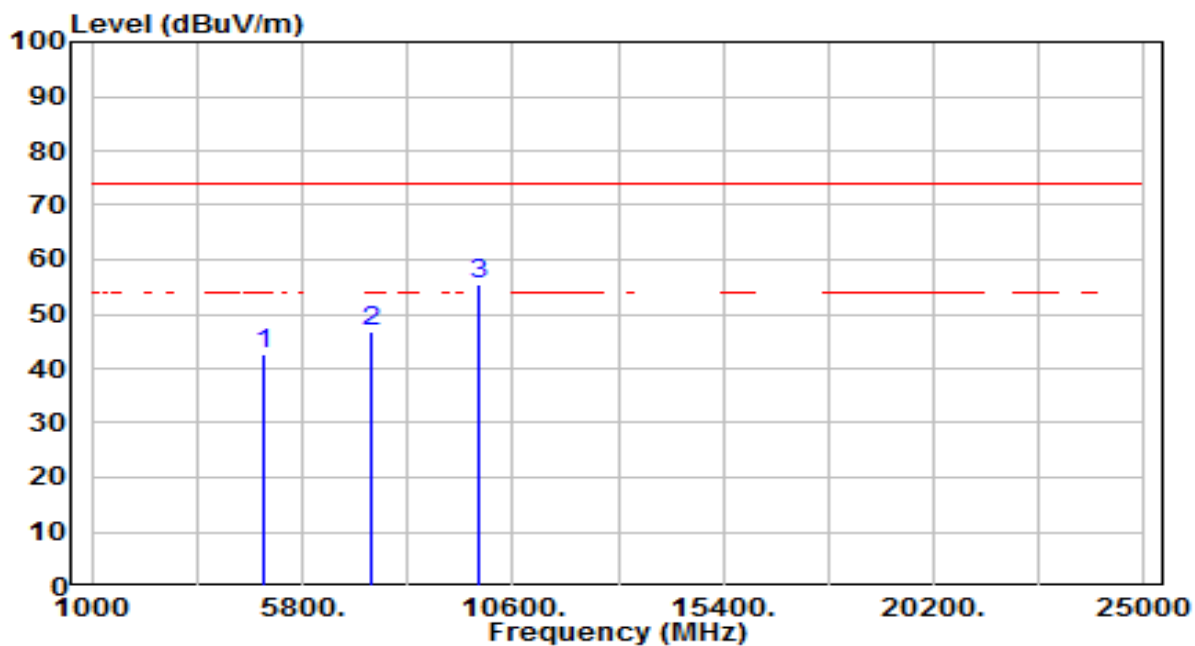


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	37.85	4.61	42.47	-31.53	74.00	200	27	Peak
2	7386.000	33.37	13.49	46.86	-27.14	74.00	200	34	Peak
3	* 9848.000	38.33	17.14	55.47	-18.53	74.00	200	146	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	26°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	Air_SRD 2.4G_TX_Ant3_2462MHz	Test Voltage	AC 120V/60Hz

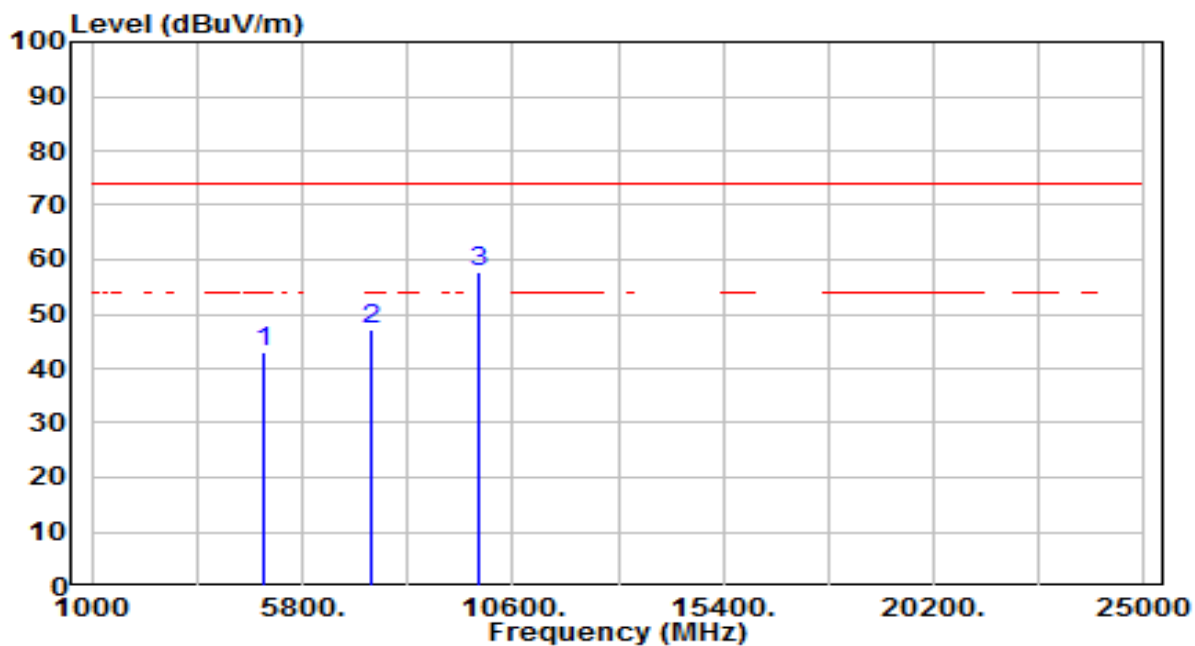


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	38.23	4.61	42.84	-31.16	74.00	200	167	Peak
2	7386.000	33.71	13.49	47.21	-26.79	74.00	200	164	Peak
3	* 9848.000	40.71	17.14	57.85	-16.15	74.00	200	153	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	26°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	Air_SRD 2.4G_TX_Ant3_2477MHz	Test Voltage	AC 120V/60Hz

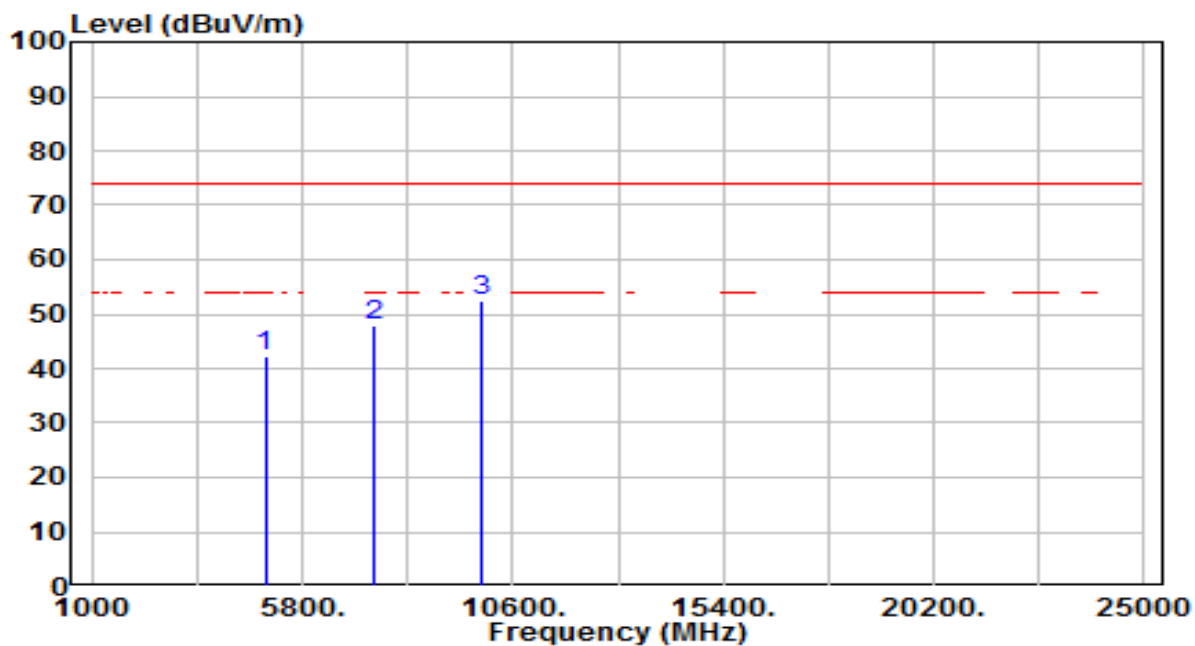


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4954.000	37.69	4.73	42.42	-31.58	74.00	200	78	Peak
2	7431.000	34.26	13.73	47.99	-26.01	74.00	200	342	Peak
3	* 9908.000	35.10	17.26	52.35	-21.65	74.00	200	102	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	26°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	Air_SRD 2.4G_TX_Ant3_2477MHz	Test Voltage	AC 120V/60Hz

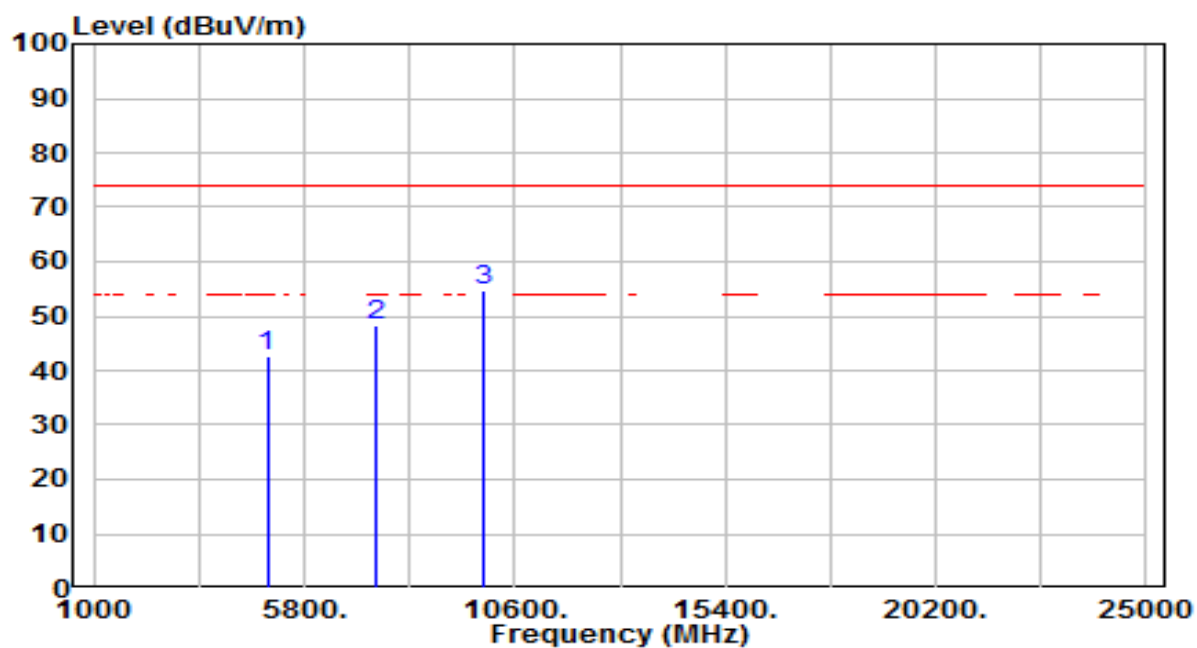


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4954.000	37.83	4.73	42.56	-31.44	74.00	200	240	Peak
2	7431.000	34.65	13.73	48.38	-25.62	74.00	200	33	Peak
3	* 9908.000	37.35	17.26	54.60	-19.40	74.00	200	183	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	26°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	GND_SRD 2.4G_TX_Ant1_2417MHz	Test Voltage	AC 120V/60Hz

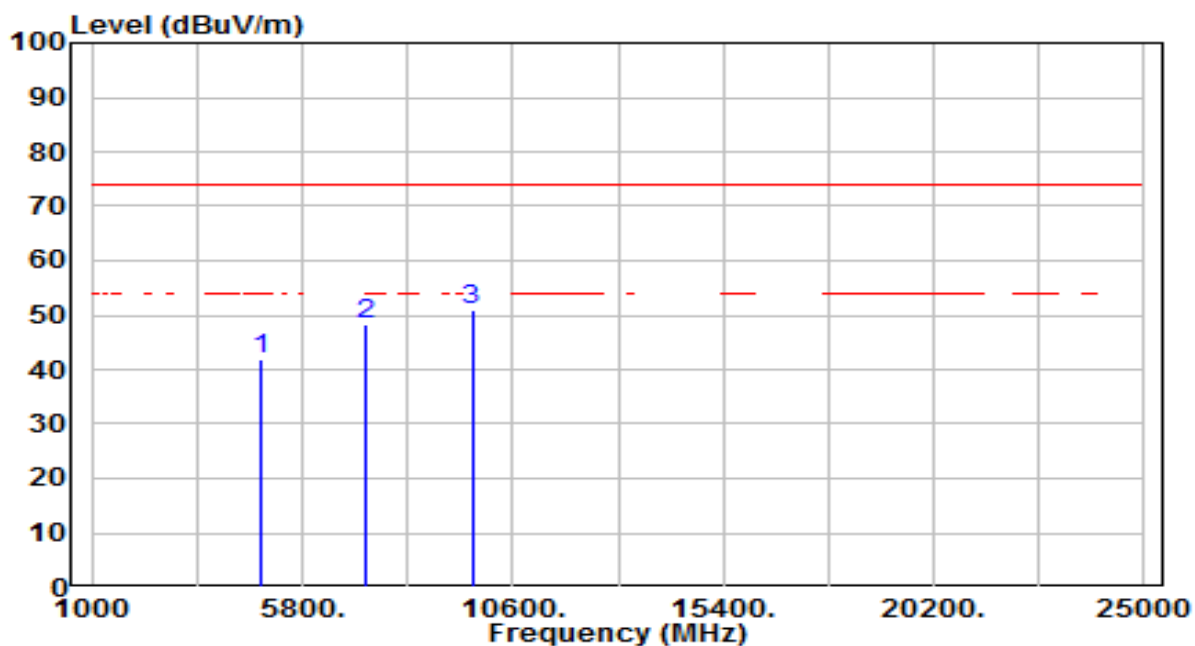


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4834.000	37.55	4.37	41.92	-32.08	74.00	200	13	Peak
2	7251.000	35.40	12.81	48.21	-25.79	74.00	200	210	Peak
3	* 9668.000	34.30	16.76	51.06	-22.94	74.00	200	121	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	26°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	GND_SRD 2.4G_TX_Ant1_2417MHz	Test Voltage	AC 120V/60Hz

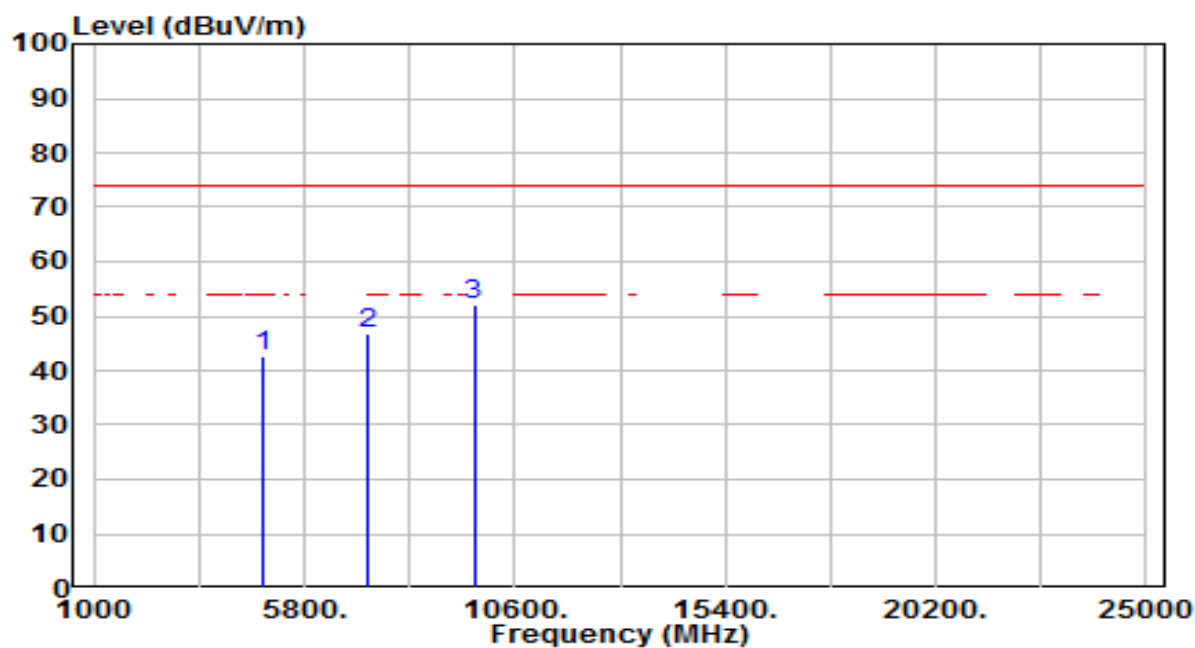


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4834.000	38.21	4.37	42.58	-31.42	74.00	200	306	Peak
2	7251.000	34.12	12.81	46.93	-27.07	74.00	200	171	Peak
3	* 9668.000	35.36	16.76	52.12	-21.88	74.00	200	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	26°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	GND_SRD 2.4G_TX_Ant1_2432MHz	Test Voltage	AC 120V/60Hz

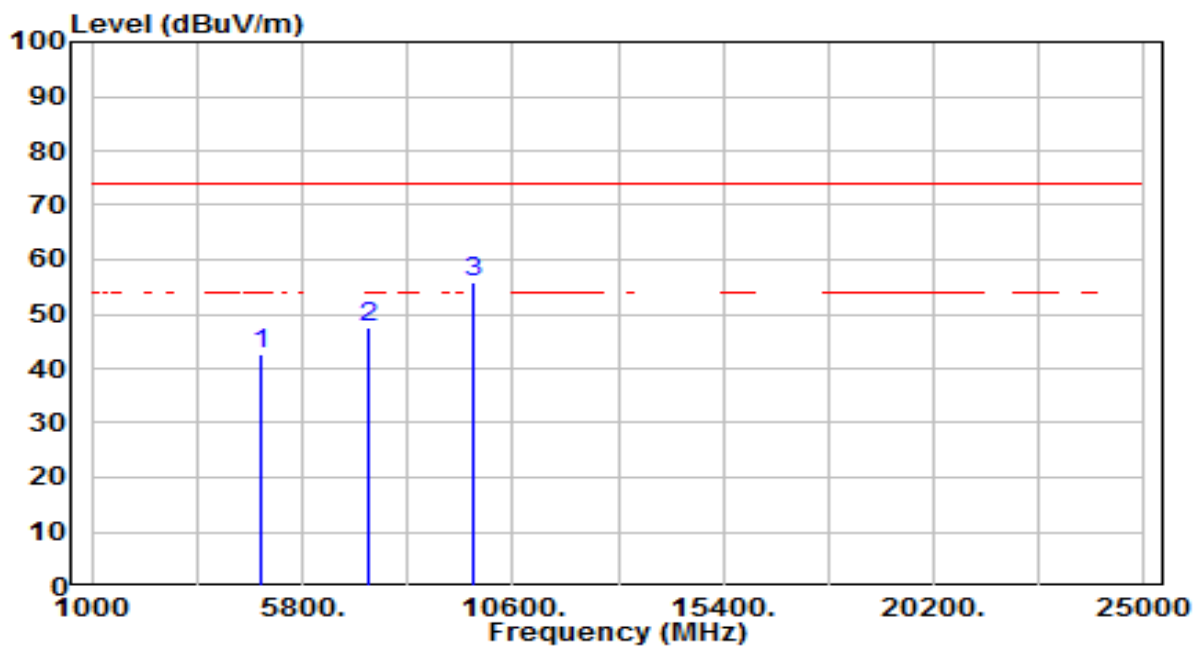


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4864.000	38.09	4.44	42.53	-31.47	74.00	200	194	Peak
2	7296.000	34.66	13.05	47.71	-26.29	74.00	200	317	Peak
3	* 9728.000	38.80	16.87	55.66	-18.34	74.00	200	130	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	26°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	GND_SRD 2.4G_TX_Ant1_2432MHz	Test Voltage	AC 120V/60Hz

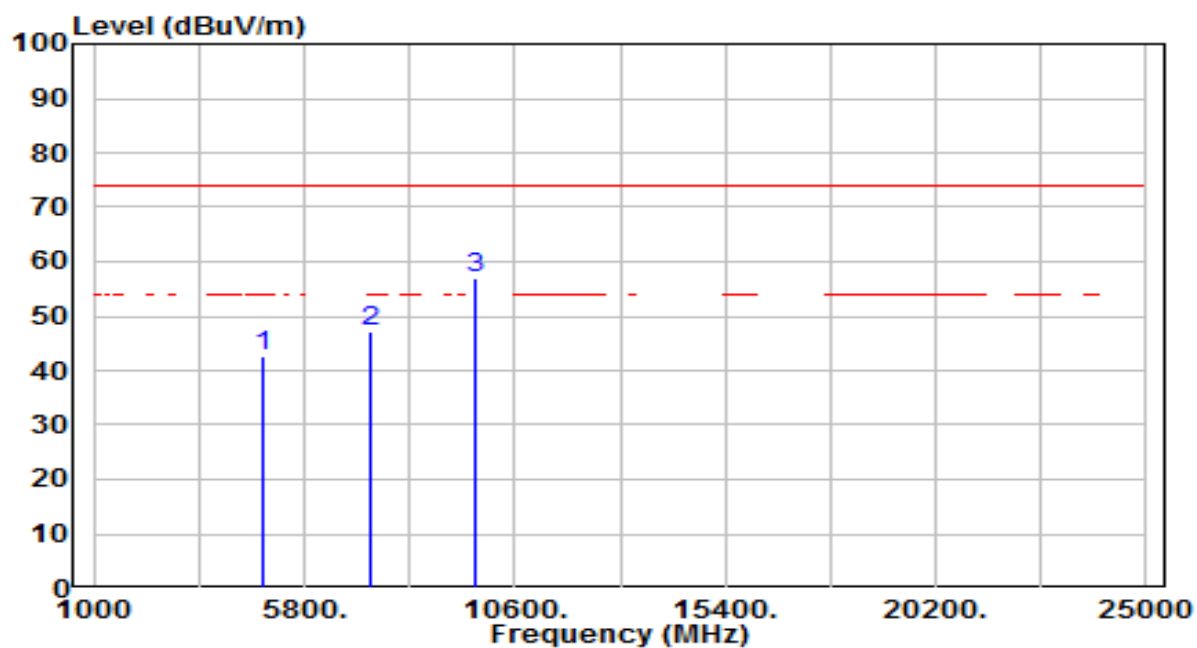


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4864.000	38.24	4.44	42.67	-31.33	74.00	200	329	Peak
2	7296.000	33.96	13.05	47.01	-26.99	74.00	200	226	Peak
3	* 9728.000	39.95	16.87	56.81	-17.19	74.00	200	152	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	26°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	GND_SRD 2.4G_TX_Ant1_2462MHz	Test Voltage	AC 120V/60Hz

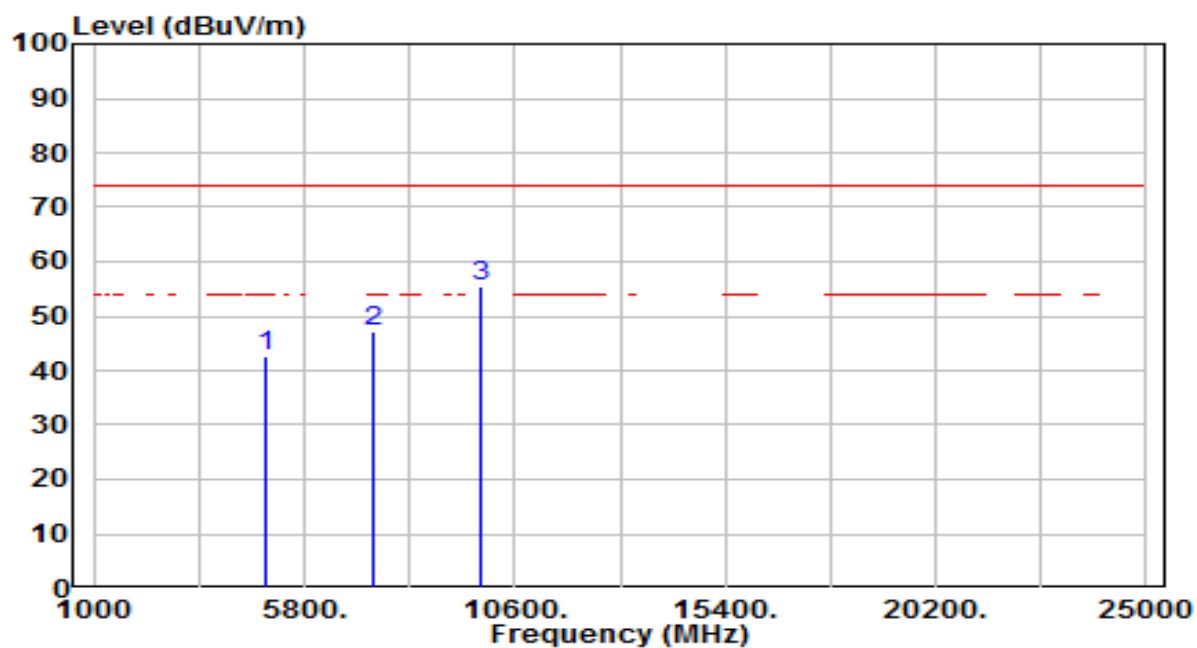


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	37.85	4.61	42.46	-31.54	74.00	200	123	Peak
2	7386.000	33.52	13.49	47.01	-26.99	74.00	200	289	Peak
3	* 9848.000	38.29	17.14	55.43	-18.57	74.00	200	176	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	26°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	GND_SRD 2.4G_TX_Ant1_2462MHz	Test Voltage	AC 120V/60Hz

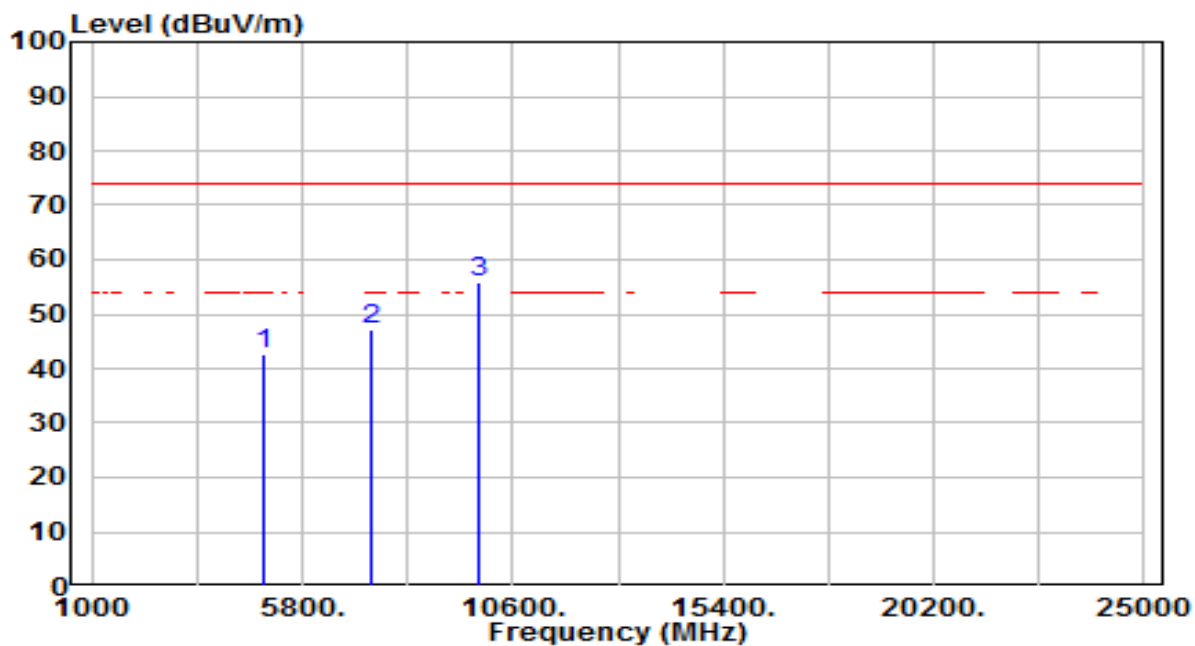


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	38.06	4.61	42.67	-31.33	74.00	200	204	Peak
2	7386.000	33.69	13.49	47.18	-26.82	74.00	200	154	Peak
3	* 9848.000	38.87	17.14	56.01	-17.99	74.00	200	151	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	26°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	GND_SRD 2.4G_TX_Ant1_2477MHz	Test Voltage	AC 120V/60Hz

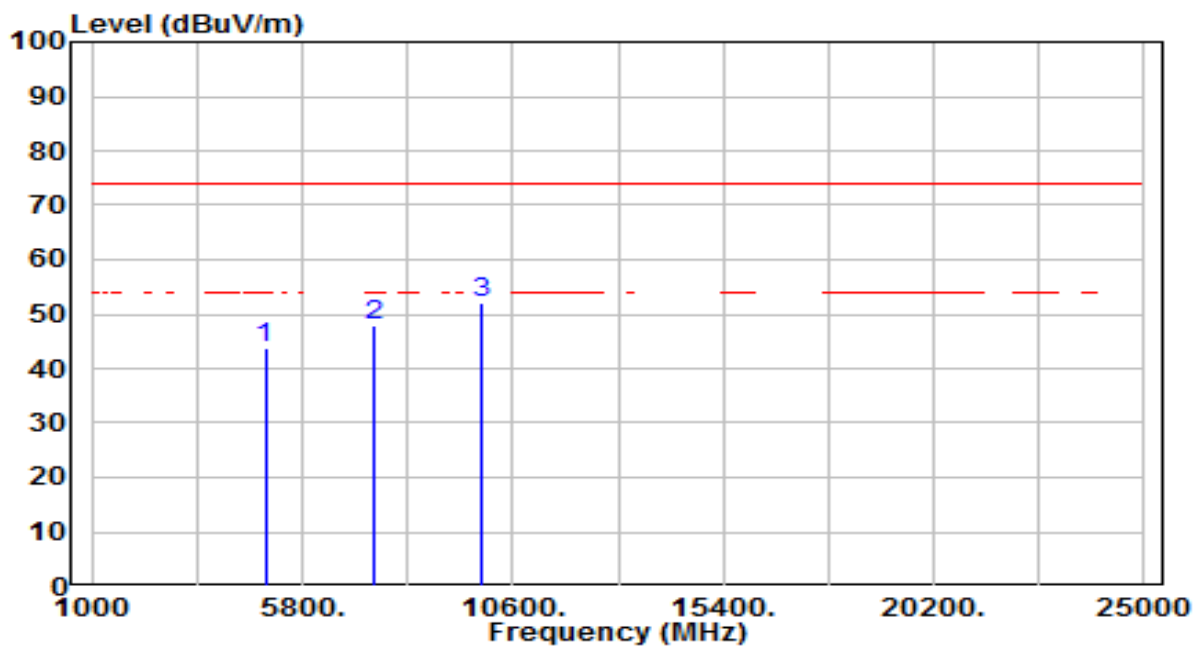


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4954.000	39.21	4.73	43.93	-30.07	74.00	200	283	Peak
2	7431.000	34.20	13.73	47.93	-26.07	74.00	200	283	Peak
3	* 9908.000	34.82	17.26	52.08	-21.92	74.00	200	134	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	26°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	GND_SRD 2.4G_TX_Ant1_2477MHz	Test Voltage	AC 120V/60Hz

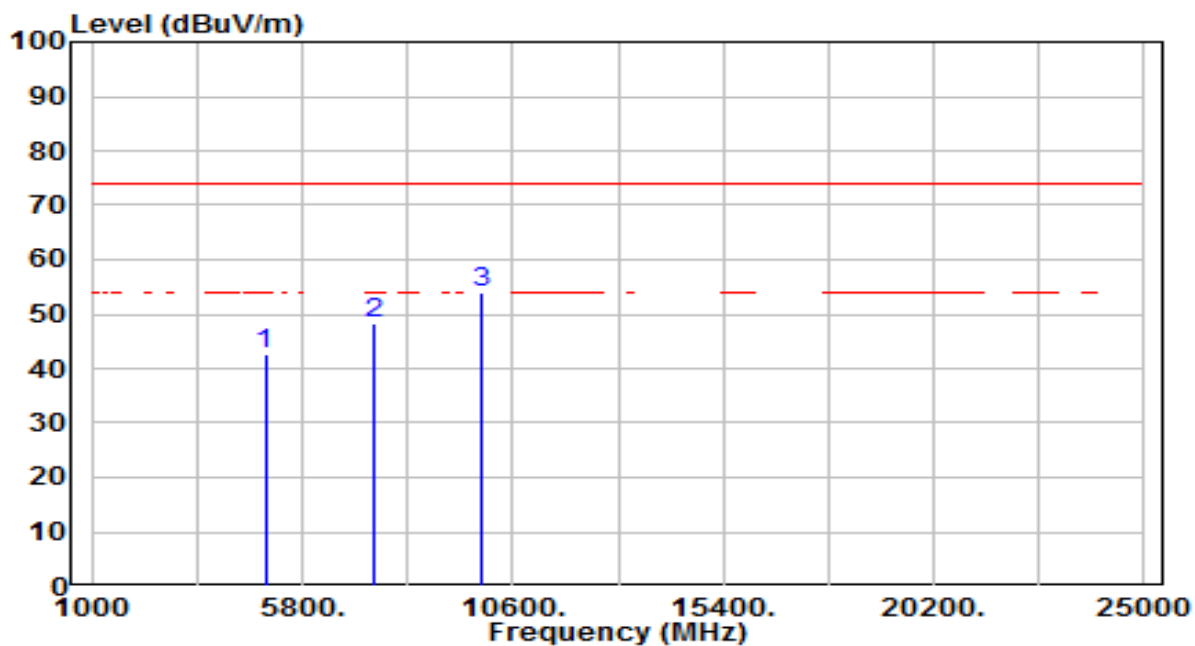

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4954.000	37.79	4.73	42.51	-31.49	74.00	200	317	Peak
2	7431.000	34.70	13.73	48.44	-25.56	74.00	200	149	Peak
3	* 9908.000	36.76	17.26	54.01	-19.99	74.00	200	195	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

7.7.2. Test Procedure Used

ANSI C63.10-2013 - Section 11.13

7.7.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3 * RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Table 1 - RBW as a function of frequency


Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW $\geq 1/T$
4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces


7.7.4. Test Setup

1GHz ~ 18GHz Test Setup:

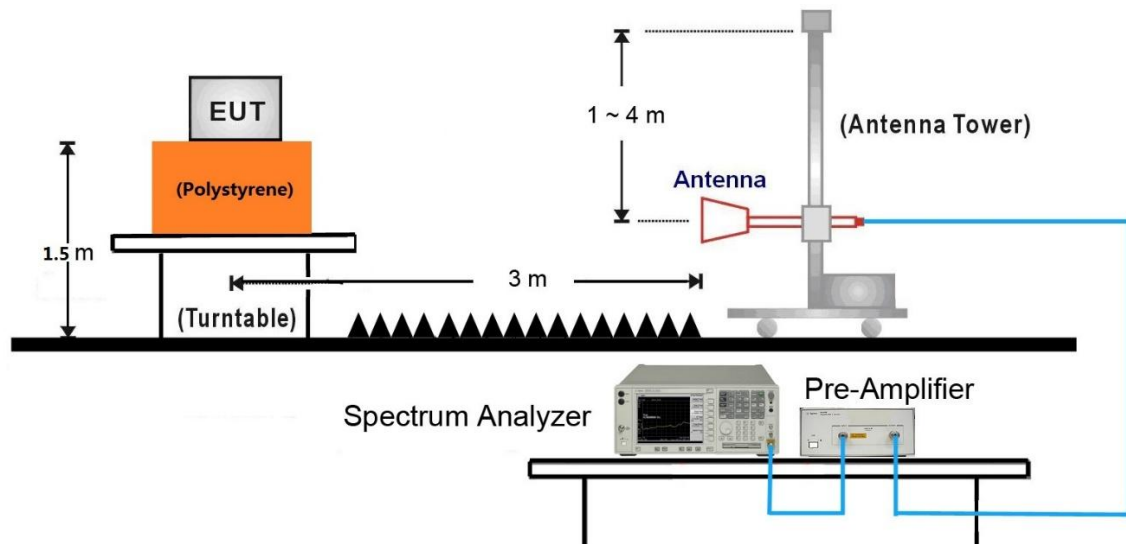

7.7.5. Test Result

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D	Temp. / Humidity	26°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	Air_SRD 2.4G_TX_Ant1_2417MHz	Test Voltage	AC 120V/60Hz

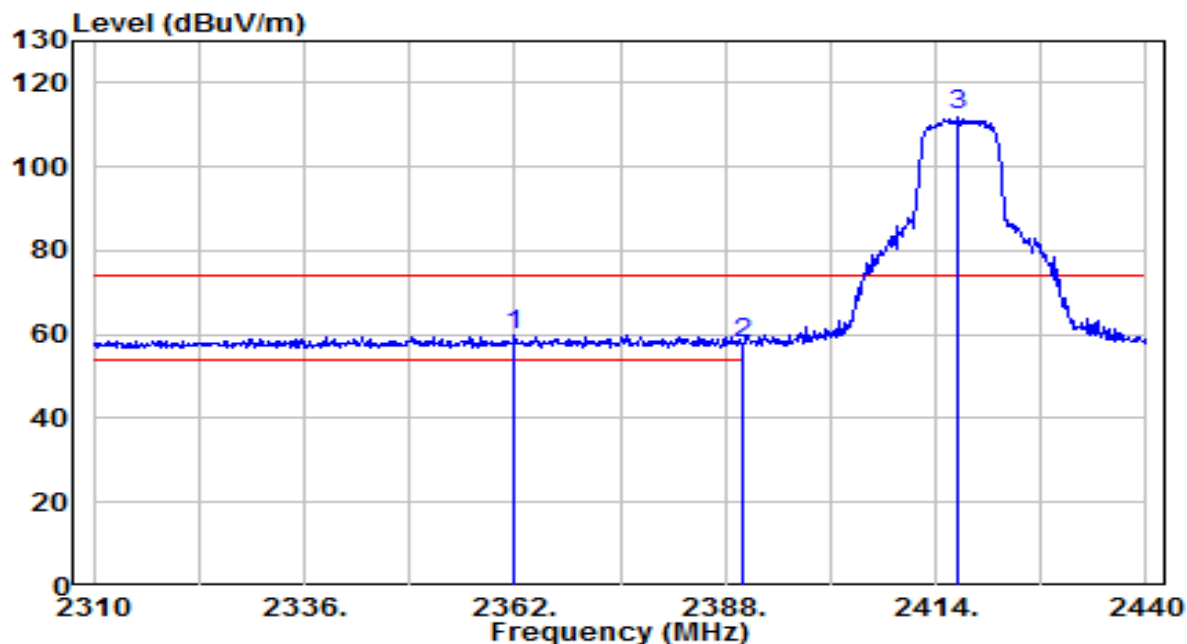


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2361.870	27.35	32.62	59.96	-14.04	74.00	210	220	Peak
2	2390.000	25.23	32.73	57.95	-16.05	74.00	210	220	Peak
3	2416.730	79.70	32.83	112.53	N/A	N/A	210	220	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D	Temp. / Humidity	26°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	Air_SRD 2.4G_TX_Ant1_2417MHz	Test Voltage	AC 120V/60Hz

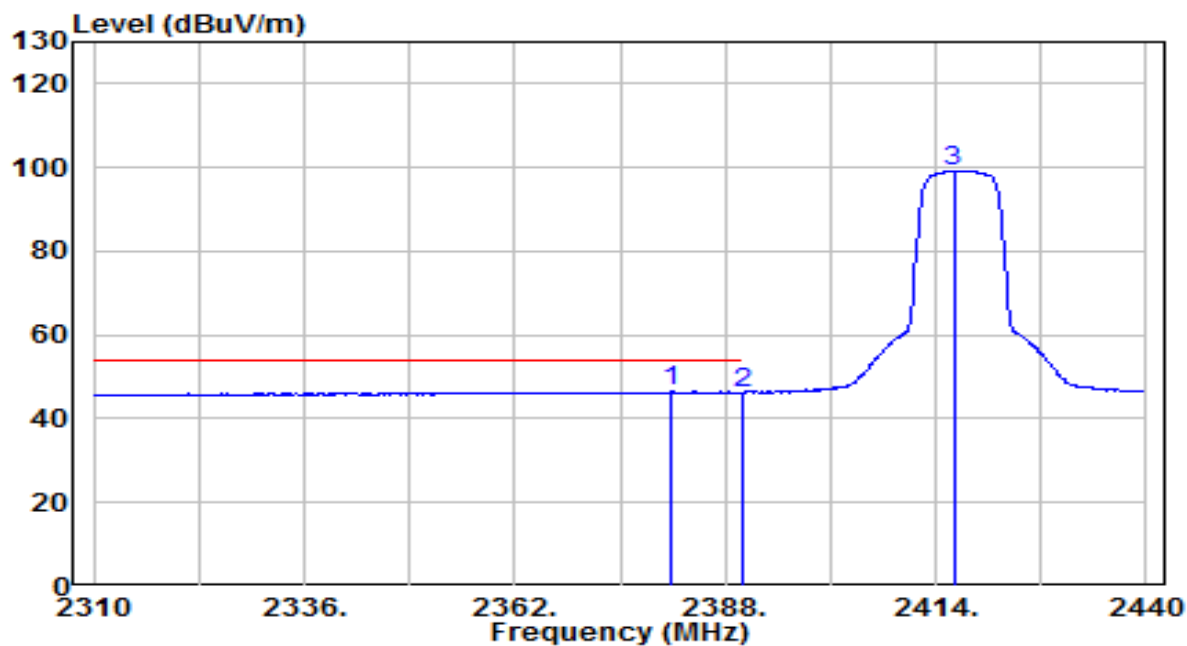


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2381.370	13.73	32.69	46.43	-7.57	54.00	210	220	Average
2		2390.000	13.47	32.73	46.20	-7.80	54.00	210	220	Average
3		2416.210	66.46	32.83	99.29	N/A	N/A	210	220	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D	Temp. / Humidity	26°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	Air_SRD 2.4G_TX_Ant1_2417MHz	Test Voltage	AC 120V/60Hz

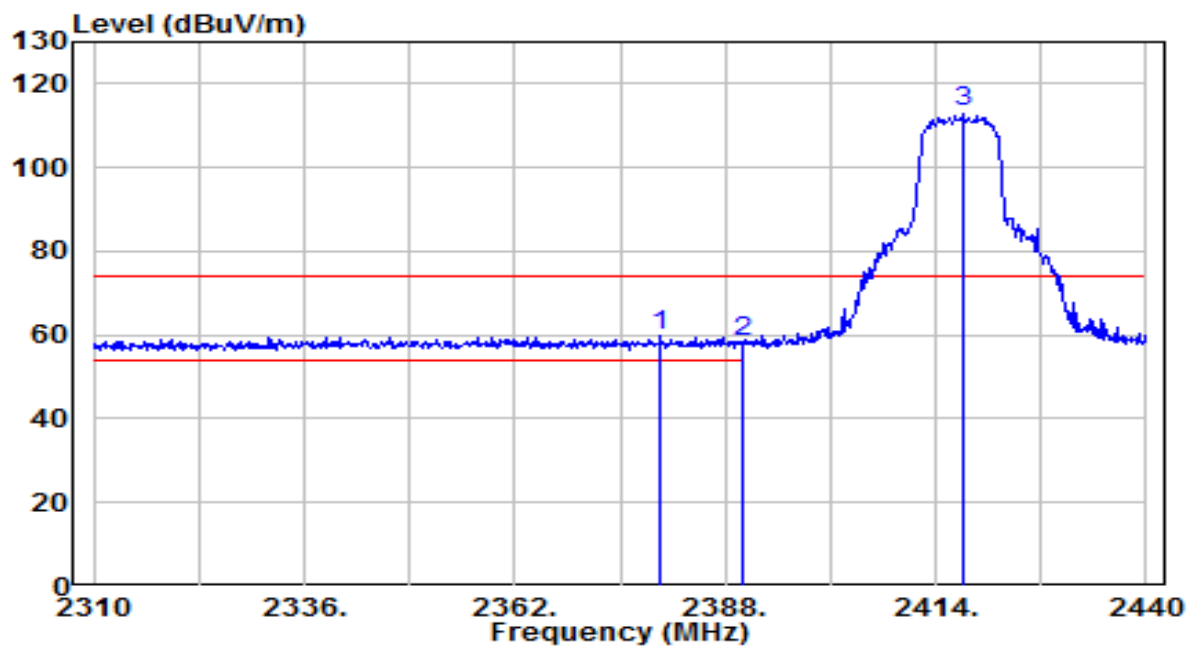


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2380.070	26.98	32.69	59.66	-14.34	74.00	105	235	Peak
2		2390.000	25.77	32.73	58.49	-15.51	74.00	105	235	Peak
3		2417.250	80.37	32.83	113.21	N/A	N/A	105	235	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D	Temp. / Humidity	26°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	Air_SRD 2.4G_TX_Ant1_2417MHz	Test Voltage	AC 120V/60Hz

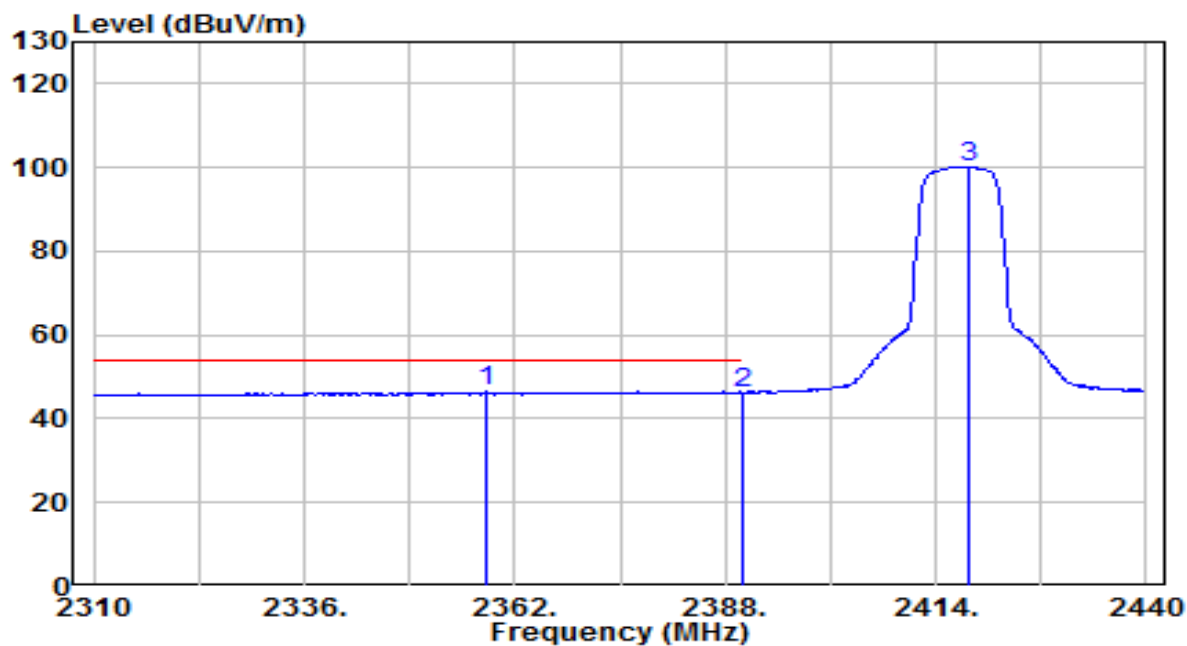


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2358.490	13.88	32.60	46.49	-7.51	54.00	105	235	Average
2		2390.000	13.61	32.73	46.34	-7.66	54.00	105	235	Average
3		2418.030	67.27	32.84	100.10	N/A	N/A	105	235	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D	Temp. / Humidity	26°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	Air_SRD 2.4G_TX_Ant1_2477MHz	Test Voltage	AC 120V/60Hz

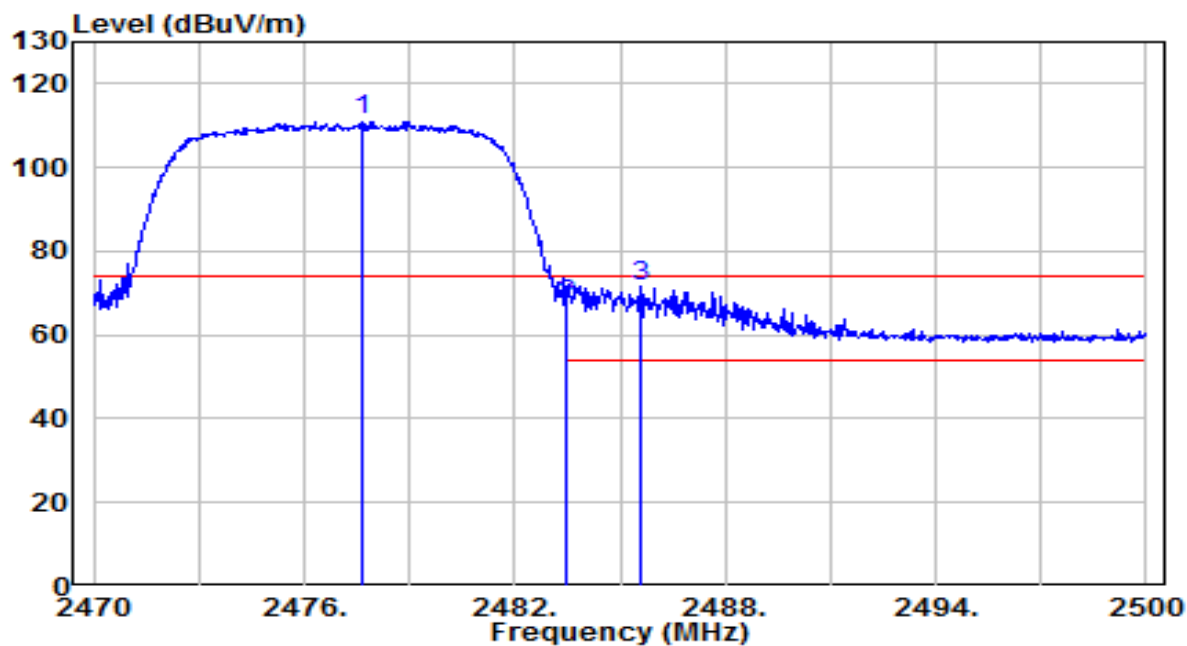


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2477.620	78.13	33.07	111.20	N/A	N/A	180	110	Peak
2	2483.500	34.31	33.09	67.41	-6.59	74.00	180	110	Peak
3	* 2485.600	38.64	33.10	71.75	-2.25	74.00	180	110	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D	Temp. / Humidity	26°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	Air_SRD 2.4G_TX_Ant1_2477MHz	Test Voltage	AC 120V/60Hz

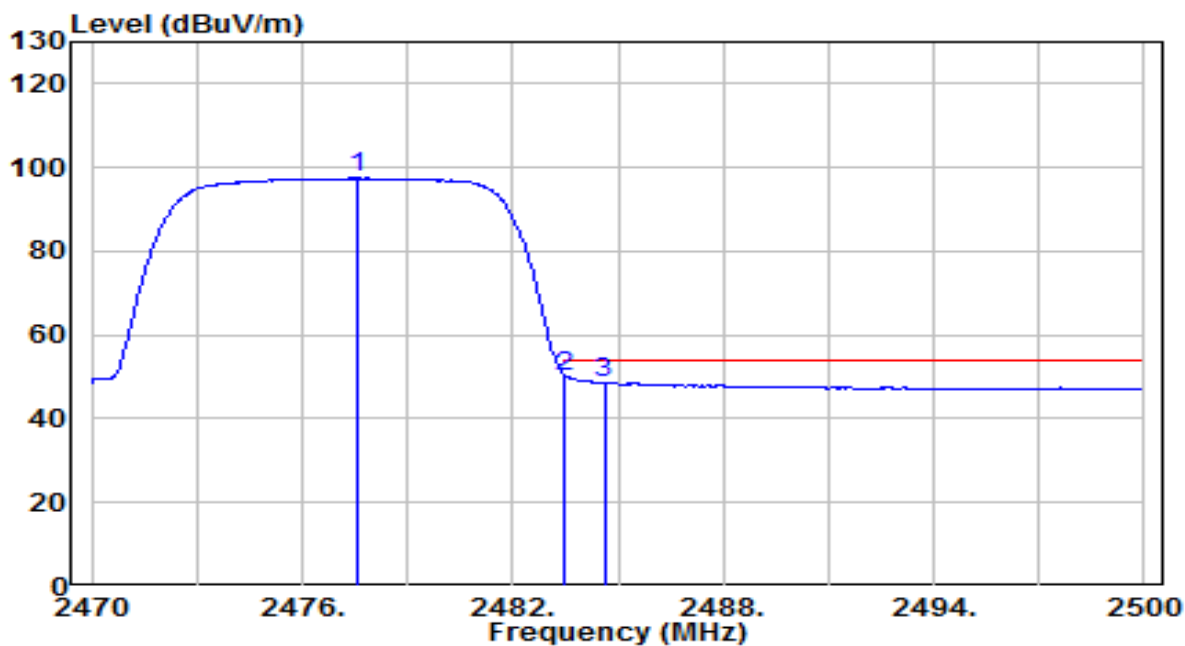


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2477.590	64.38	33.07	97.45	N/A	N/A	180	110	Average
2	* 2483.500	17.08	33.09	50.18	-3.82	54.00	180	110	Average
3	2484.610	15.56	33.10	48.66	-5.34	54.00	180	110	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D	Temp. / Humidity	26°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	Air_SRD 2.4G_TX_Ant1_2477MHz	Test Voltage	AC 120V/60Hz

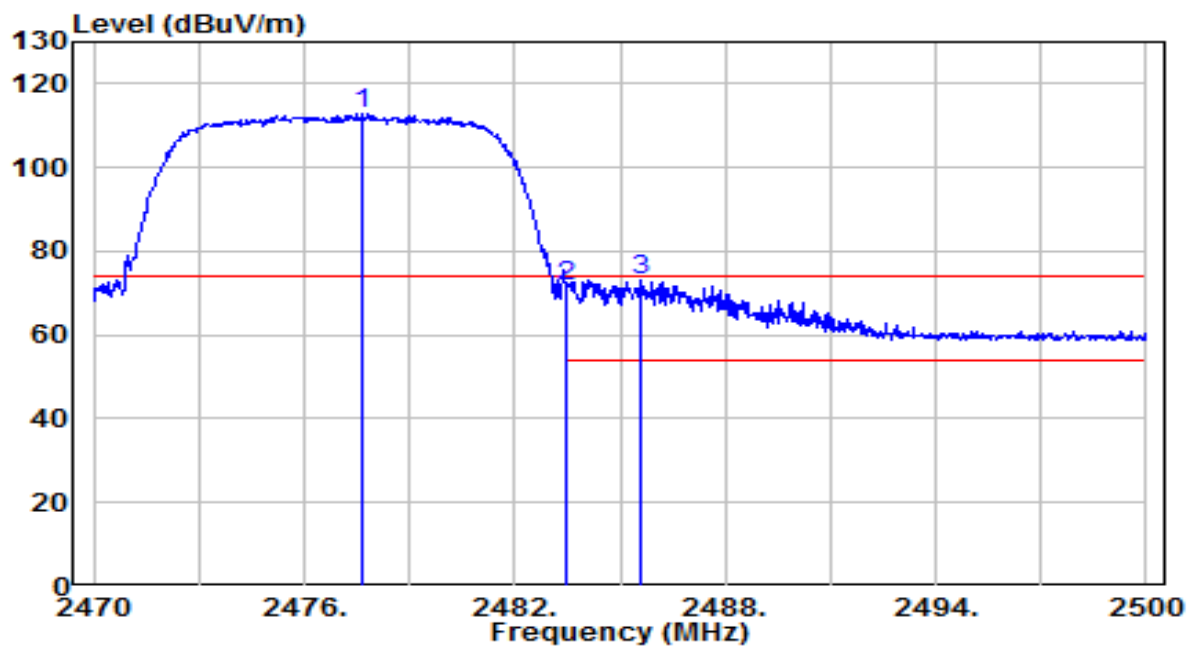


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2477.680	79.77	33.07	112.84	N/A	N/A	100	200	Peak
2	2483.500	38.38	33.09	71.47	-2.53	74.00	100	200	Peak
3	* 2485.600	40.14	33.10	73.24	-0.76	74.00	100	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D	Temp. / Humidity	26°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	Air_SRD 2.4G_TX_Ant1_2477MHz	Test Voltage	AC 120V/60Hz

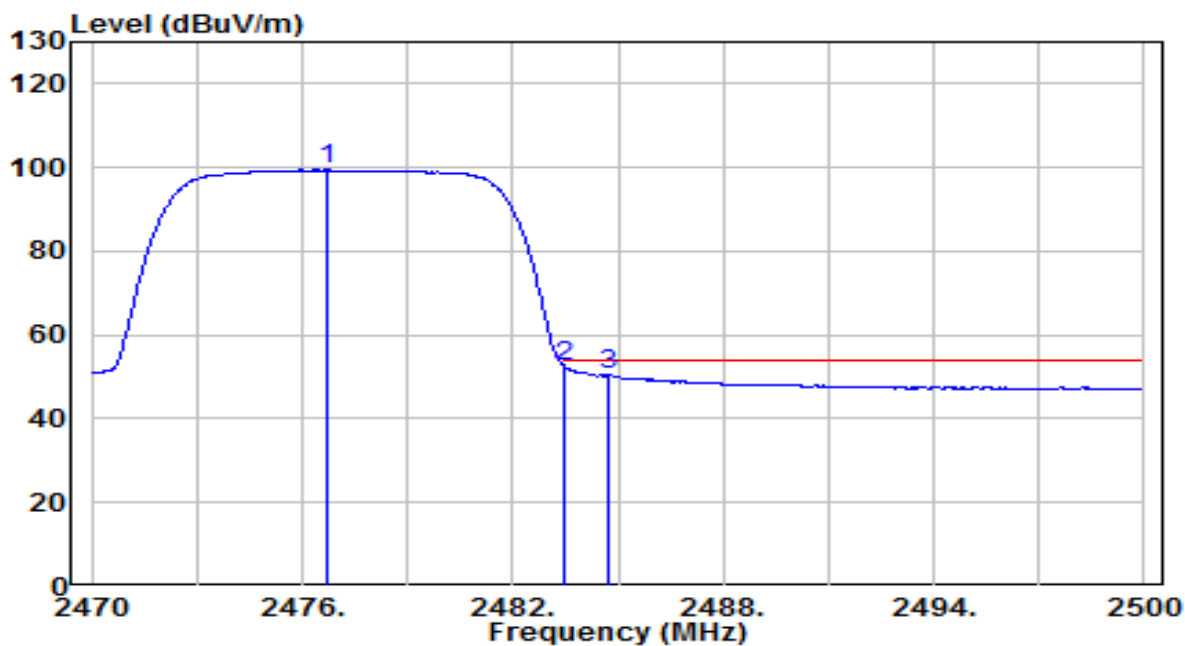


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2476.690	66.36	33.07	99.42	N/A	N/A	100	200	Average
2	* 2483.500	19.23	33.09	52.32	-1.68	54.00	100	200	Average
3	2484.760	17.34	33.10	50.44	-3.56	54.00	100	200	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D	Temp. / Humidity	26°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	Air_SRD 2.4G_TX_Ant3_2417MHz	Test Voltage	AC 120V/60Hz

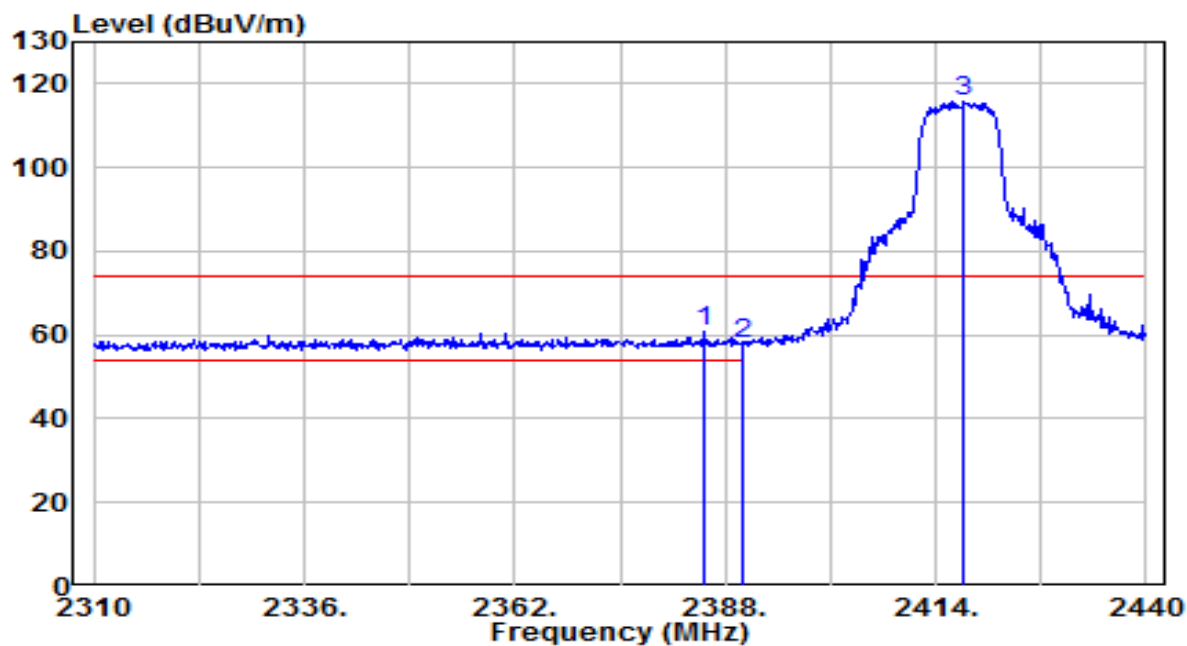


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.530	28.05	32.71	60.76	-13.24	74.00	105	145	Peak
2		2390.000	25.04	32.73	57.77	-16.23	74.00	105	145	Peak
3		2417.380	82.97	32.83	115.81	N/A	N/A	105	145	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D	Temp. / Humidity	26°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	Air_SRD 2.4G_TX_Ant3_2417MHz	Test Voltage	AC 120V/60Hz

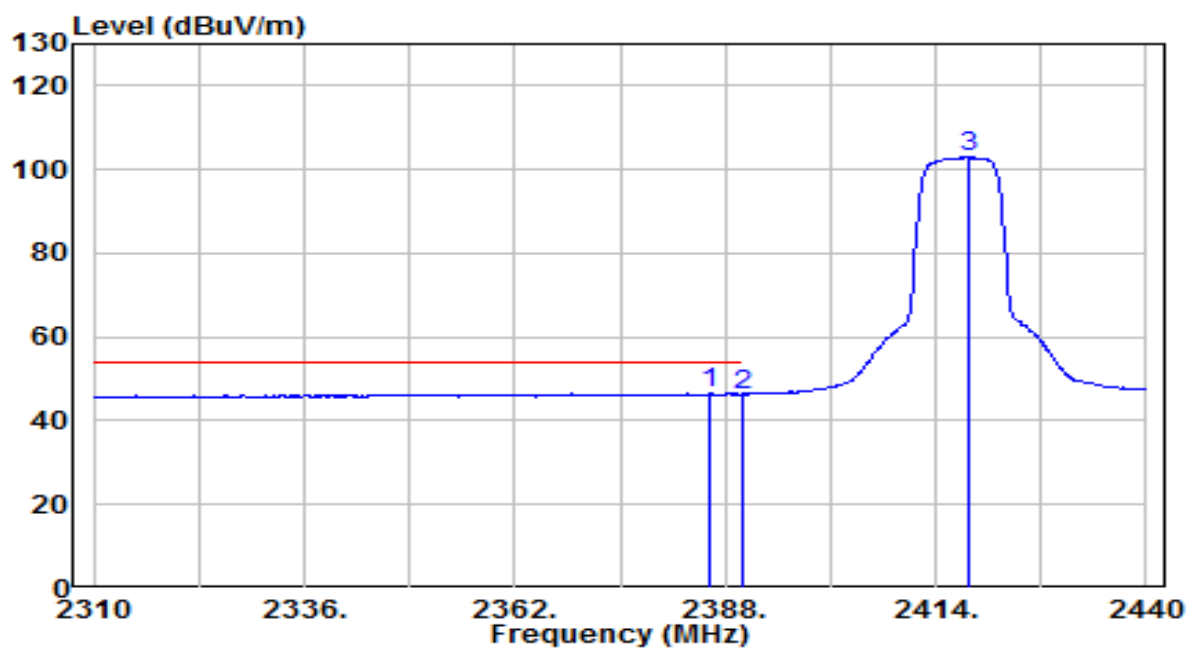


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.920	13.91	32.71	46.62	-7.38	54.00	105	145	Average
2		2390.000	13.54	32.73	46.27	-7.73	54.00	105	145	Average
3		2418.030	70.05	32.84	102.89	N/A	N/A	105	145	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D	Temp. / Humidity	26°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	Air_SRD 2.4G_TX_Ant3_2417MHz	Test Voltage	AC 120V/60Hz

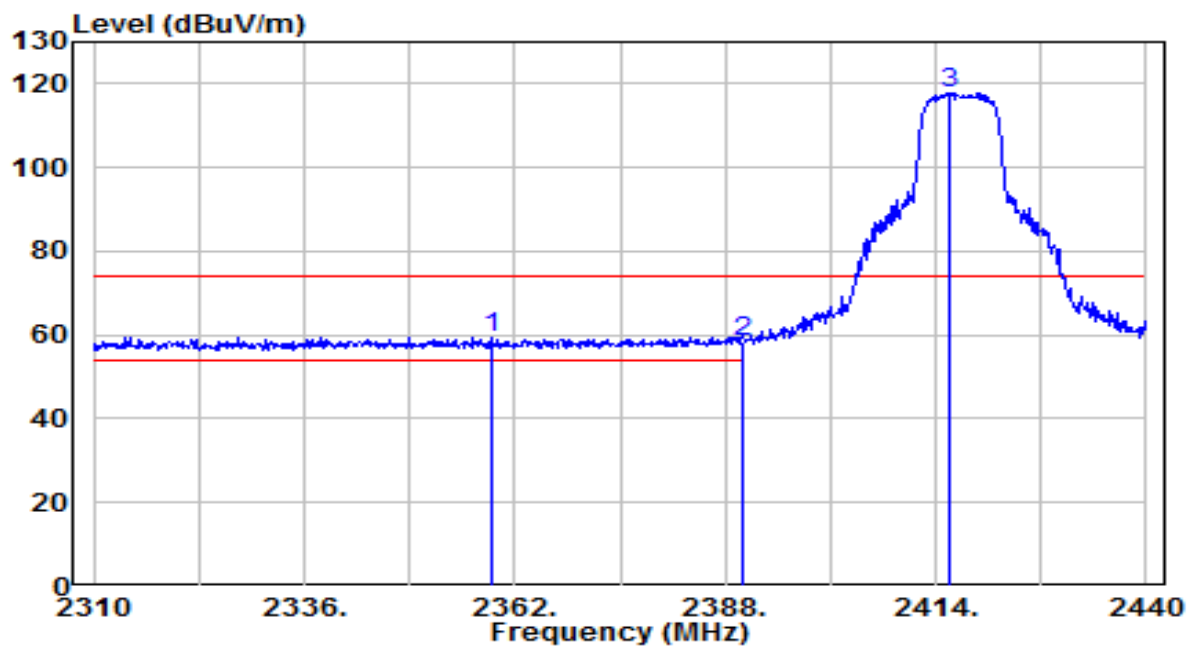


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2359.010	26.97	32.60	59.58	-14.42	74.00	125	205	Peak
2		2390.000	25.68	32.73	58.40	-15.60	74.00	125	205	Peak
3		2415.690	85.04	32.83	117.86	N/A	N/A	125	205	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D	Temp. / Humidity	26°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	Air_SRD 2.4G_TX_Ant3_2417MHz	Test Voltage	AC 120V/60Hz

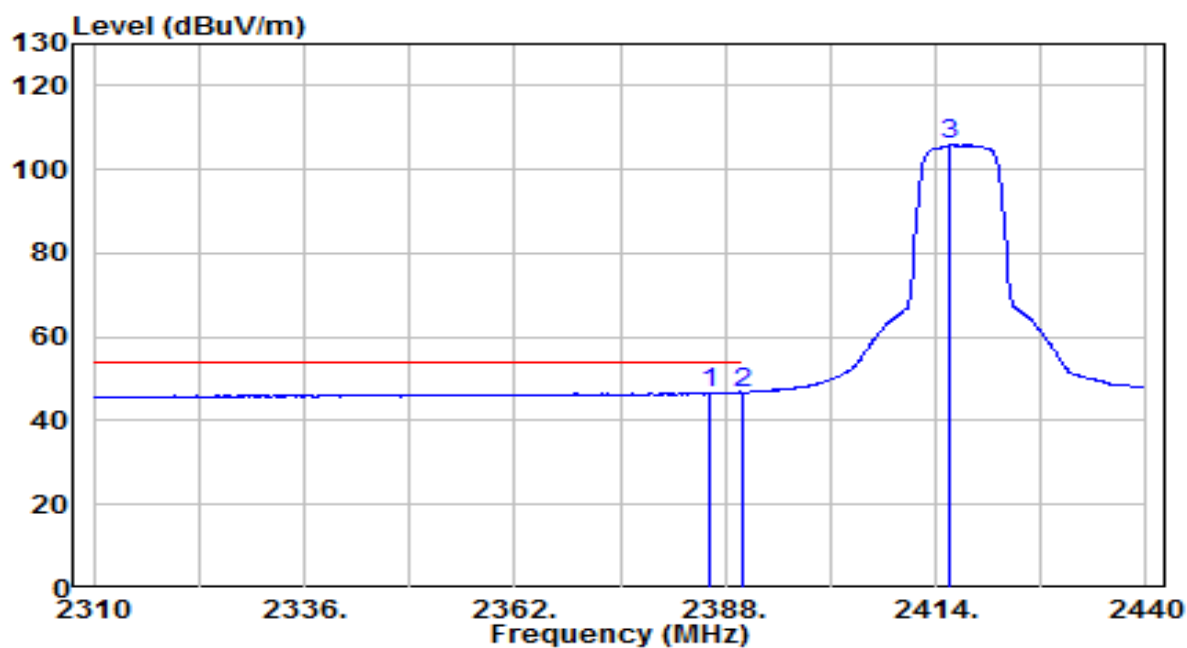


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.180	14.04	32.71	46.75	-7.25	54.00	125	205	Average
2	* 2390.000	14.03	32.73	46.76	-7.24	54.00	125	205	Average
3	2415.820	73.02	32.83	105.85	N/A	N/A	125	205	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D	Temp. / Humidity	26°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	Air_SRD 2.4G_TX_Ant3_2477MHz	Test Voltage	AC 120V/60Hz

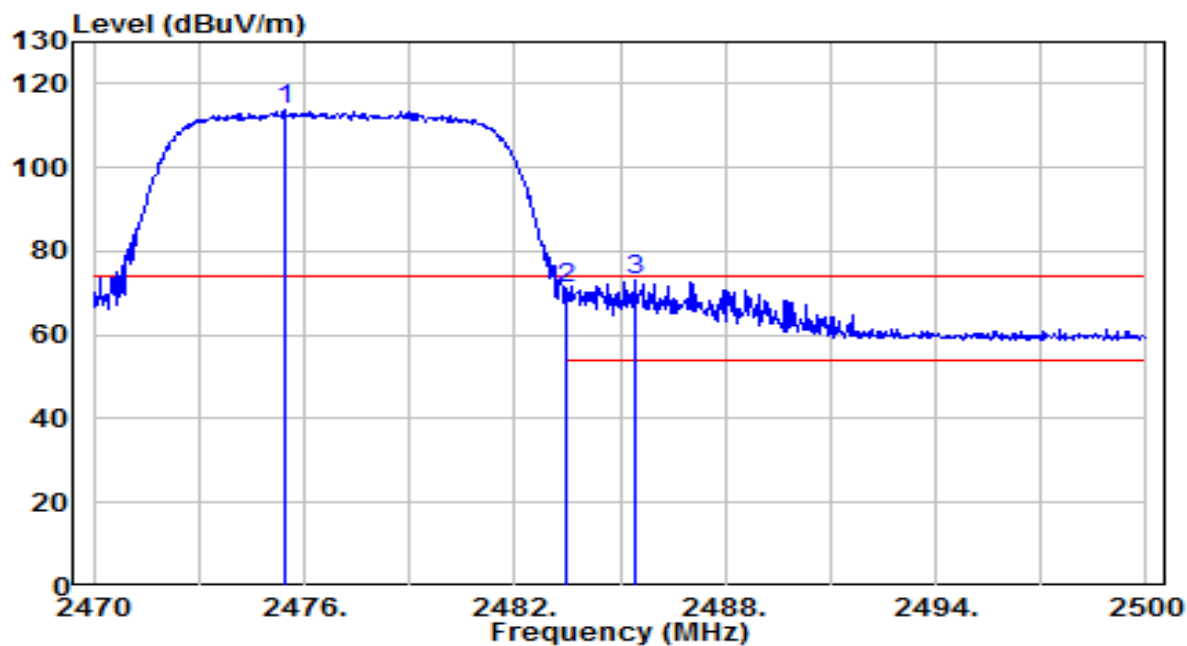


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2475.460	80.71	33.06	113.77	N/A	N/A	100	145	Peak
2	2483.500	37.80	33.09	70.89	-3.11	74.00	100	145	Peak
3	* 2485.420	39.97	33.10	73.07	-0.93	74.00	100	145	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D	Temp. / Humidity	26°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	Air_SRD 2.4G_TX_Ant3_2477MHz	Test Voltage	AC 120V/60Hz

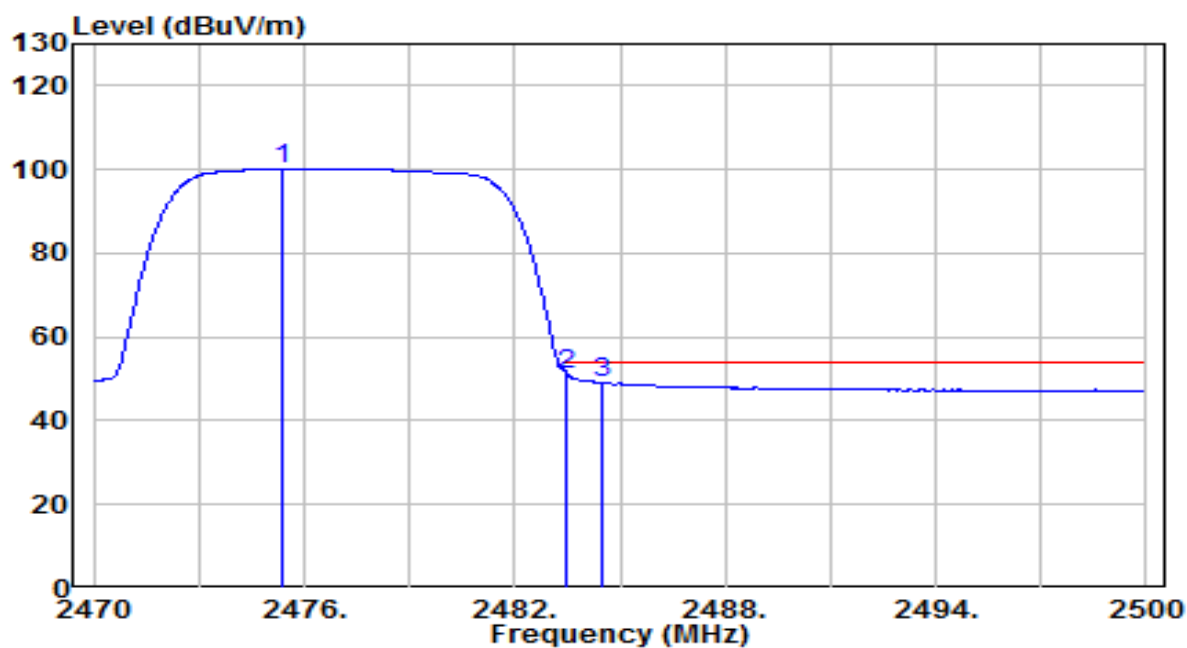


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2475.370	67.18	33.06	100.25	N/A	N/A	100	145	Average
2	* 2483.500	18.00	33.09	51.09	-2.91	54.00	100	145	Average
3	2484.520	15.99	33.10	49.09	-4.91	54.00	100	145	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D	Temp. / Humidity	26°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	Air_SRD 2.4G_TX_Ant3_2477MHz	Test Voltage	AC 120V/60Hz

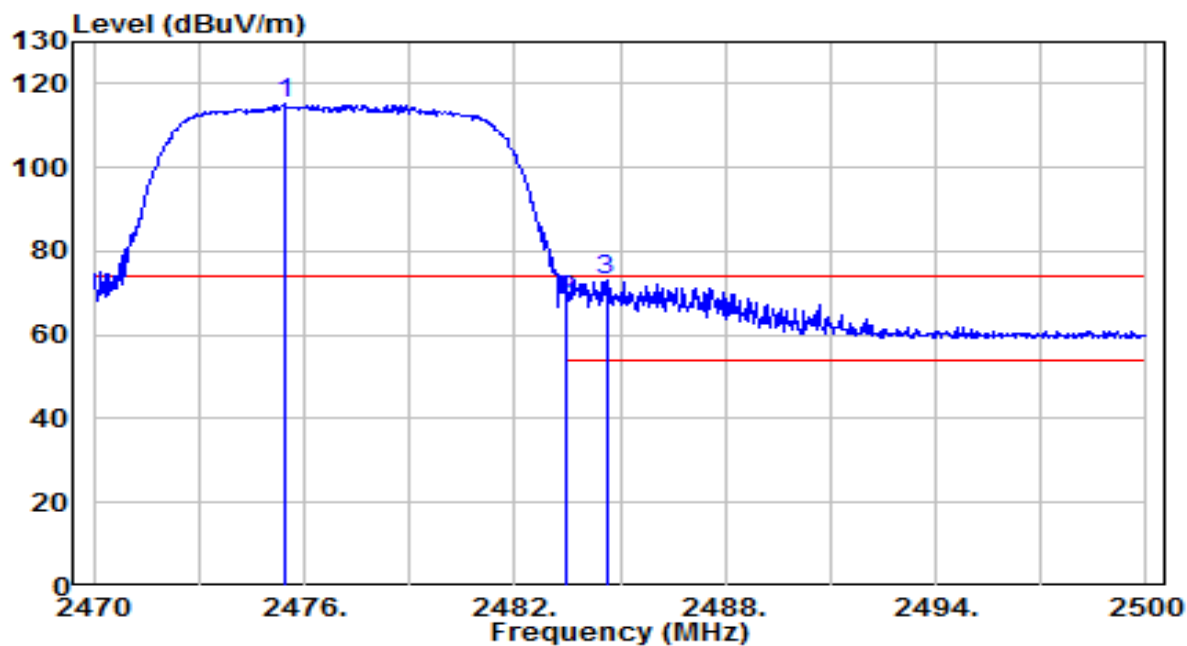


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2475.430	82.18	33.06	115.24	N/A	N/A	100	180	Peak
2	2483.500	34.88	33.09	67.97	-6.03	74.00	100	180	Peak
3	* 2484.610	40.19	33.10	73.29	-0.71	74.00	100	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D	Temp. / Humidity	26°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	Air_SRD 2.4G_TX_Ant3_2477MHz	Test Voltage	AC 120V/60Hz

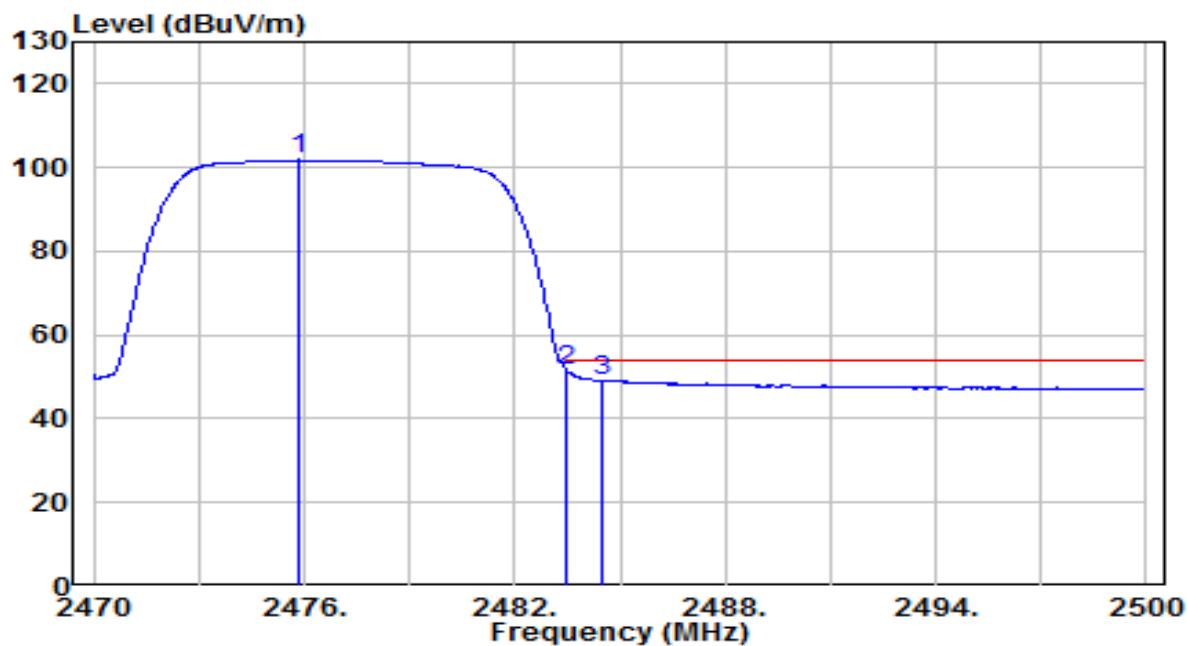


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2475.850	68.75	33.06	101.81	N/A	N/A	100	180	Average
2	* 2483.500	18.38	33.09	51.48	-2.52	54.00	100	180	Average
3	2484.520	16.06	33.10	49.16	-4.84	54.00	100	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D	Temp. / Humidity	26°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	GND_SRD 2.4G_TX_Ant1_2417MHz	Test Voltage	AC 120V/60Hz

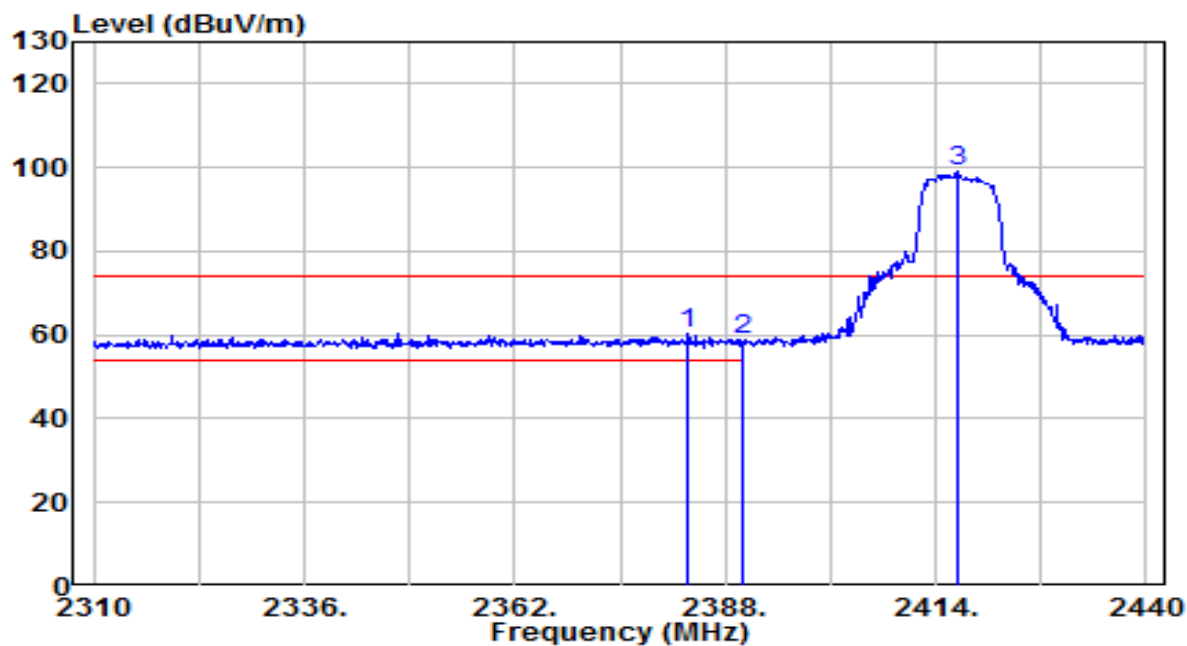


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2383.450	27.82	32.70	60.52	-13.48	74.00	110	65	Peak
2		2390.000	26.23	32.73	58.95	-15.05	74.00	110	65	Peak
3		2416.730	66.02	32.83	98.85	N/A	N/A	110	65	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D	Temp. / Humidity	26°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	GND_SRD 2.4G_TX_Ant1_2417MHz	Test Voltage	AC 120V/60Hz

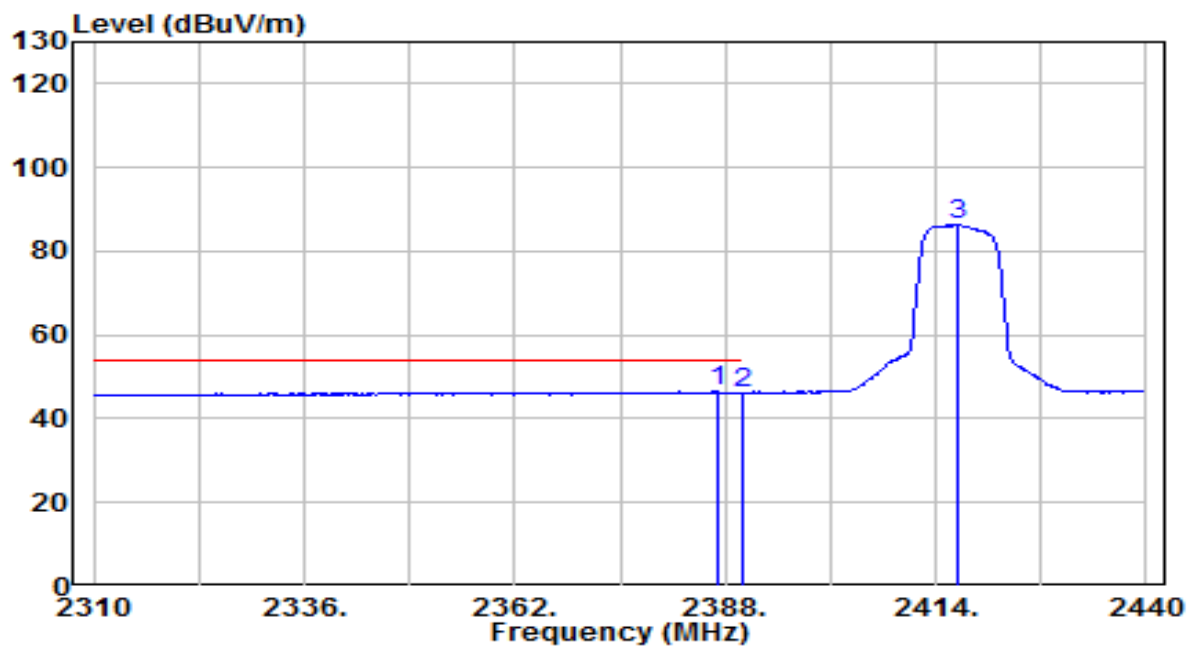


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.960	13.74	32.71	46.46	-7.54	54.00	110	65	Average
2		2390.000	13.51	32.73	46.23	-7.77	54.00	110	65	Average
3		2416.730	53.44	32.83	86.27	N/A	N/A	110	65	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D	Temp. / Humidity	26°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	GND_SRD 2.4G_TX_Ant1_2417MHz	Test Voltage	AC 120V/60Hz

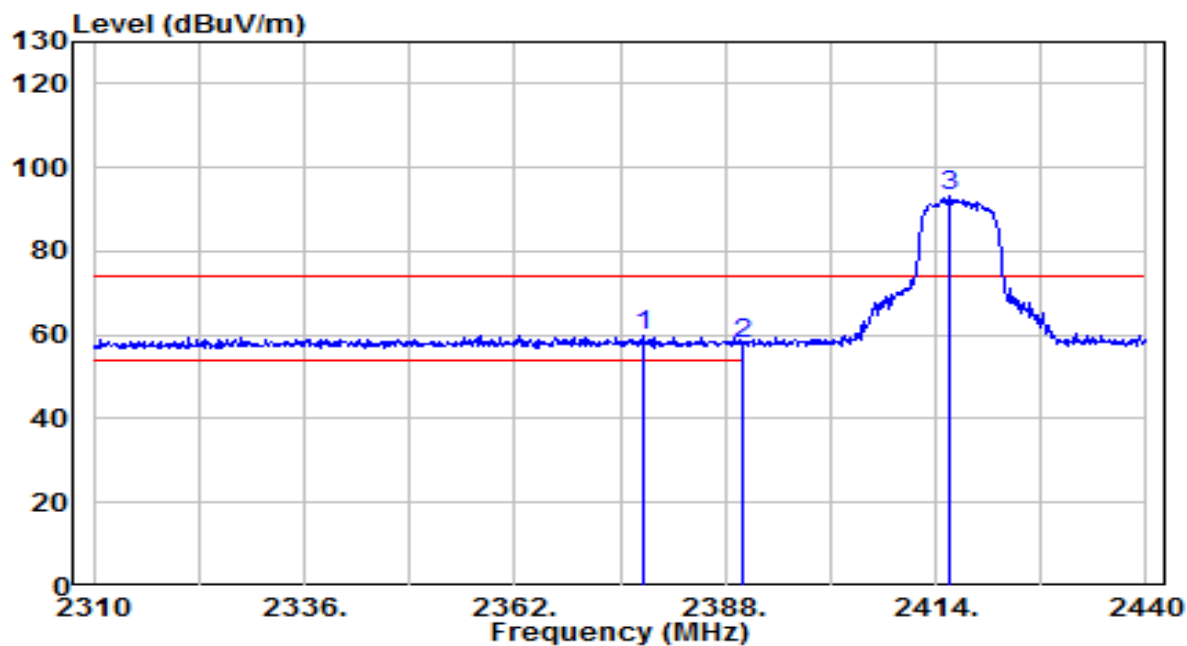


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2377.860	27.23	32.68	59.91	-14.09	74.00	100	60	Peak
2	2390.000	25.31	32.73	58.04	-15.96	74.00	100	60	Peak
3	2415.690	60.22	32.83	93.05	N/A	N/A	100	60	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D	Temp. / Humidity	26°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	GND_SRD 2.4G_TX_Ant1_2417MHz	Test Voltage	AC 120V/60Hz

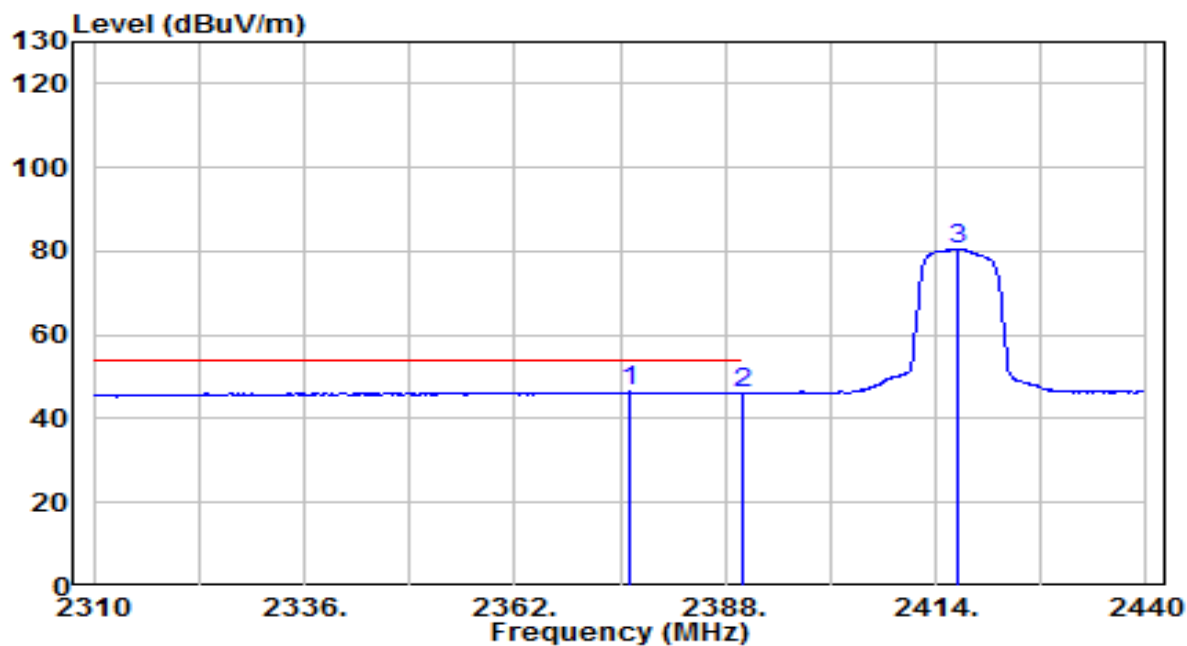


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2376.170	13.72	32.67	46.39	-7.61	54.00	100	60	Average
2		2390.000	13.35	32.73	46.08	-7.92	54.00	100	60	Average
3		2416.730	47.73	32.83	80.57	N/A	N/A	100	60	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D	Temp. / Humidity	26°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	GND_SRD 2.4G_TX_Ant1_2477MHz	Test Voltage	AC 120V/60Hz

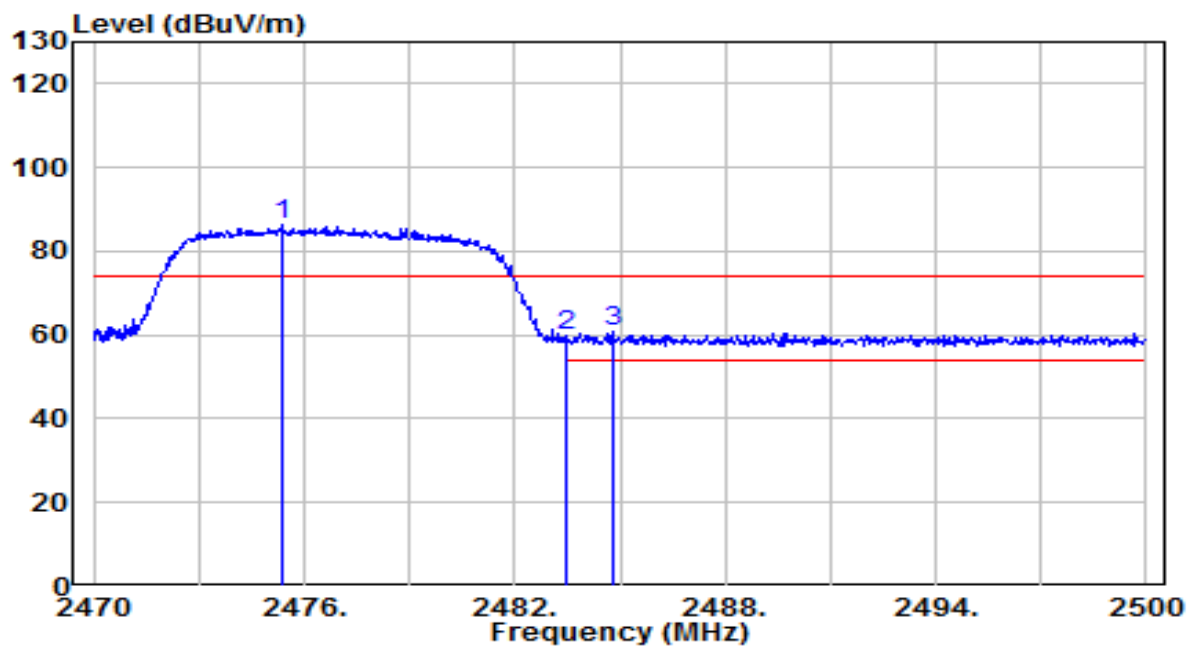


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2475.340	53.07	33.06	86.13	N/A	N/A	105	75	Peak
2	2483.500	26.54	33.09	59.64	-14.36	74.00	105	75	Peak
3	* 2484.790	27.66	33.10	60.76	-13.24	74.00	105	75	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D	Temp. / Humidity	26°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	GND_SRD 2.4G_TX_Ant1_2477MHz	Test Voltage	AC 120V/60Hz

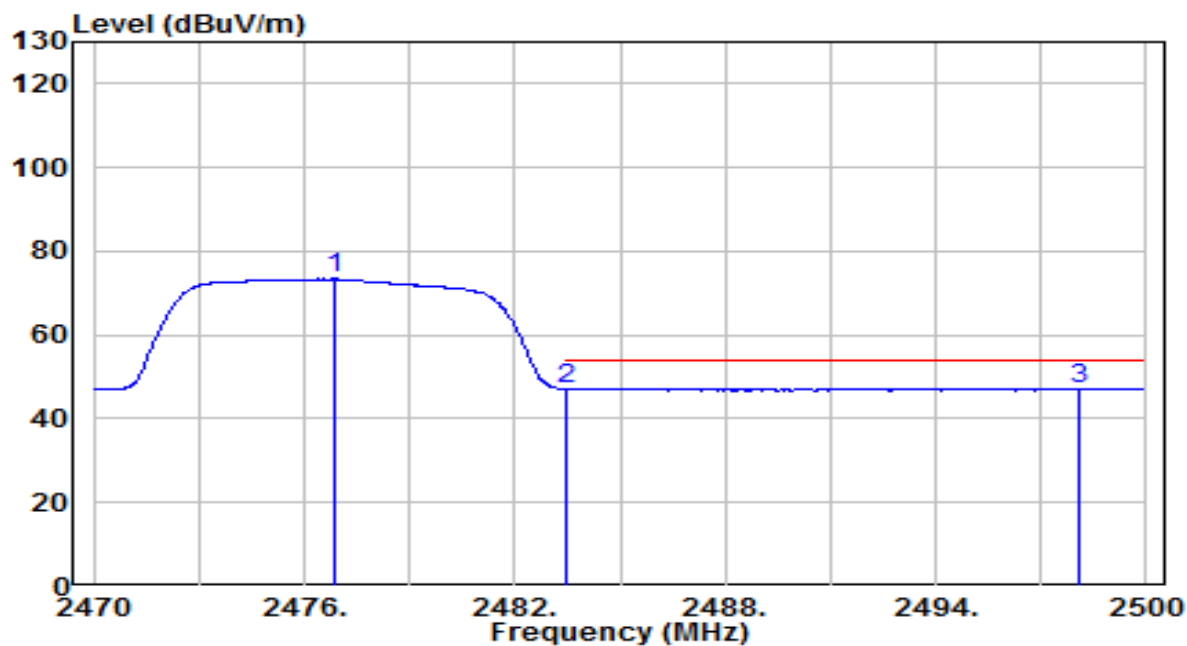


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2476.840	40.33	33.07	73.40	N/A	N/A	105	75	Average
2	2483.500	14.01	33.09	47.10	-6.90	54.00	105	75	Average
3	* 2498.050	14.07	33.15	47.22	-6.78	54.00	105	75	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D	Temp. / Humidity	26°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	GND_SRD 2.4G_TX_Ant1_2477MHz	Test Voltage	AC 120V/60Hz

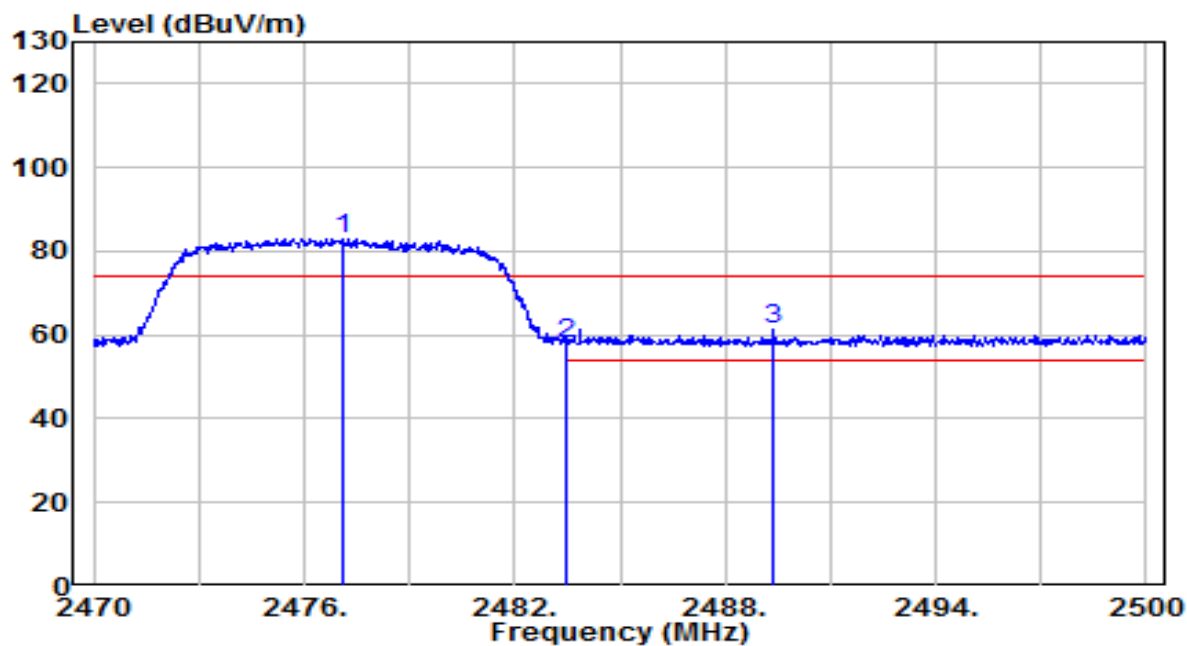


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2477.140	49.86	33.07	82.93	N/A	N/A	110	175	Peak
2	2483.500	24.86	33.09	57.96	-16.04	74.00	110	175	Peak
3	* 2489.380	28.16	33.12	61.28	-12.72	74.00	110	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link3	Date of Test	2025-07-17
Factor	BBHA 9120D	Temp. / Humidity	26°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	GND_SRD 2.4G_TX_Ant1_2477MHz	Test Voltage	AC 120V/60Hz

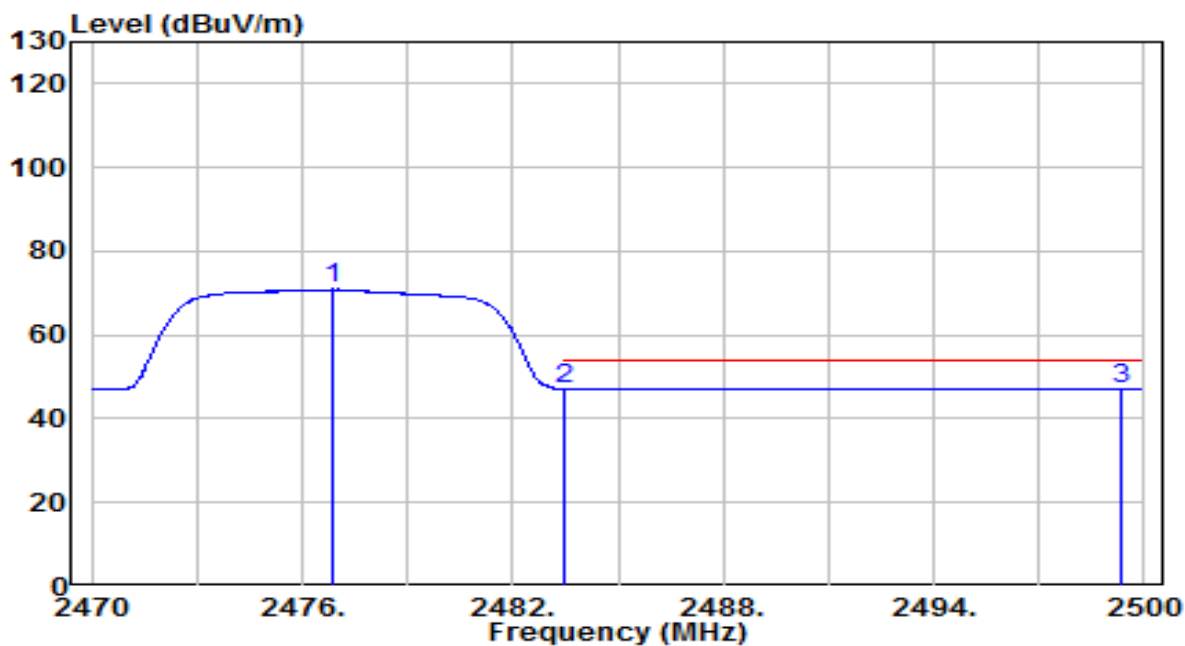

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2476.870	37.83	33.07	70.90	N/A	N/A	110	175	Average
2	2483.500	13.96	33.09	47.06	-6.94	54.00	110	175	Average
3	* 2499.340	14.12	33.16	47.28	-6.72	54.00	110	175	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 / RSS-Gen Limits		
Frequency (MHz)	QP (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

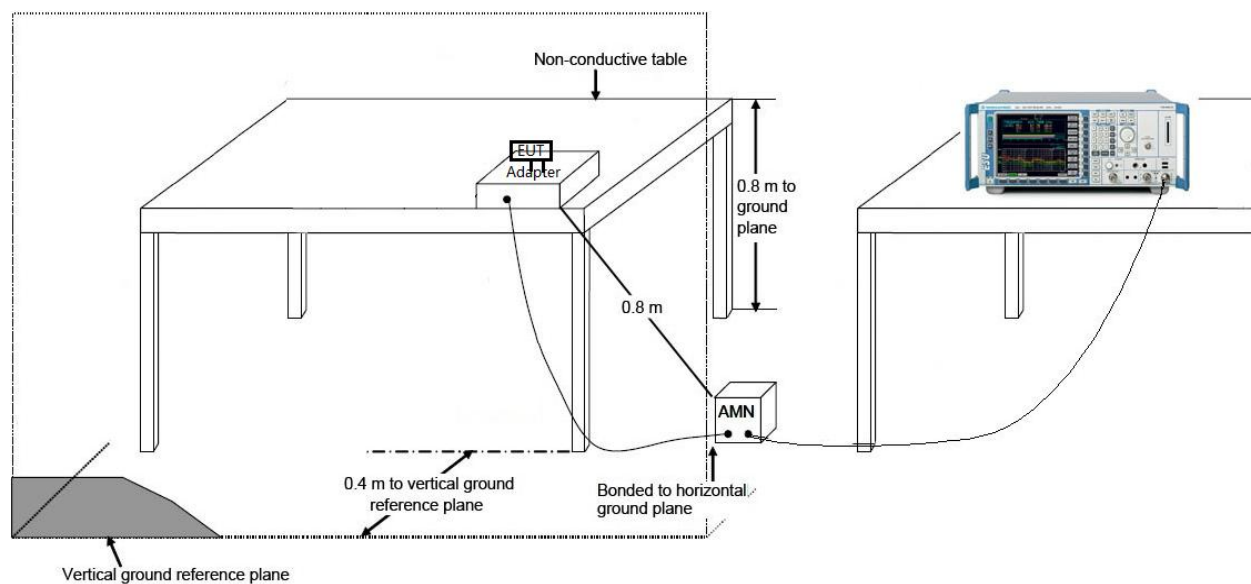

7.8.3. Test Result

EUT	Fides-Link3	Date of Test	2025-07-15
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	25.9°C /57%
Polarity	Line1	Site / Test Engineer	SR2 / Ryan
Test Mode	Air_SRD 2.4G_TX_Ant 1_2432MHz	Test Voltage	AC 120V/60Hz

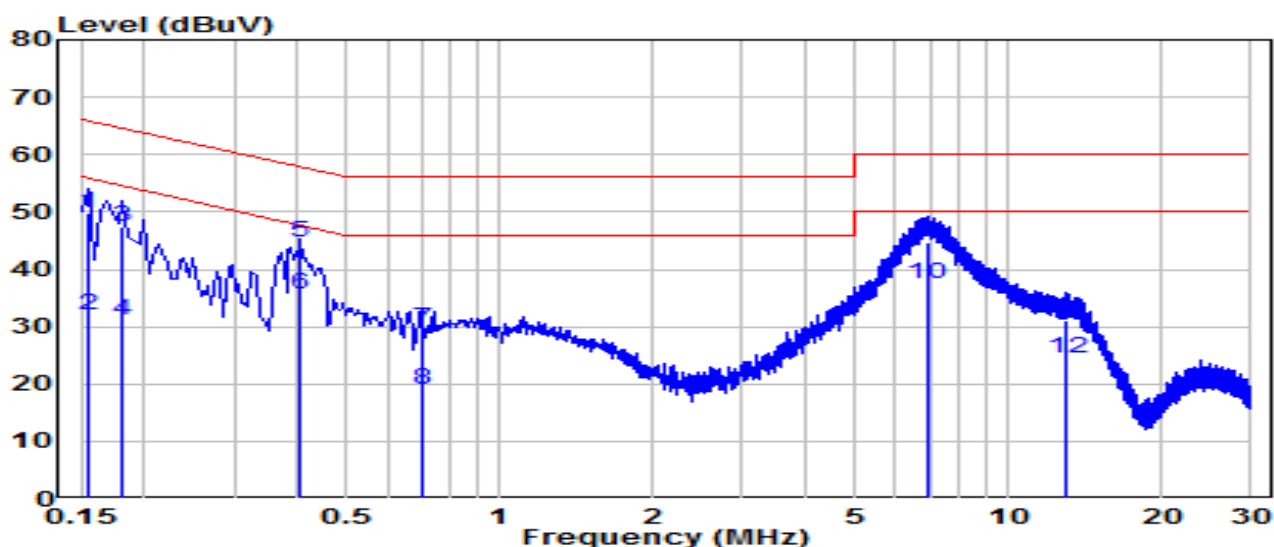


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1		0.154	40.04	9.63	49.67	-16.08	65.75	QP
2		0.154	22.40	9.63	32.03	-23.73	55.75	Average
3		0.181	37.69	9.63	47.32	-17.10	64.42	QP
4		0.181	21.44	9.63	31.06	-23.35	54.42	Average
5	*	0.406	34.91	9.63	44.55	-13.17	57.72	QP
6	*	0.406	26.04	9.63	35.67	-12.05	47.72	Average
7		0.703	20.05	9.65	29.71	-26.30	56.00	QP
8		0.703	9.45	9.65	19.10	-26.90	46.00	Average
9		6.904	34.98	9.79	44.77	-15.23	60.00	QP
10		6.904	27.79	9.79	37.58	-12.42	50.00	Average
11		12.965	21.13	9.89	31.02	-28.98	60.00	QP
12		12.965	14.59	9.89	24.47	-25.53	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Fides-Link3	Date of Test	2025-07-15
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	25.9°C /57%
Polarity	Neutral	Site / Test Engineer	SR2 / Ryan
Test Mode	Air_SRD 2.4G_TX_Ant 1_2432MHz	Test Voltage	AC 120V/60Hz

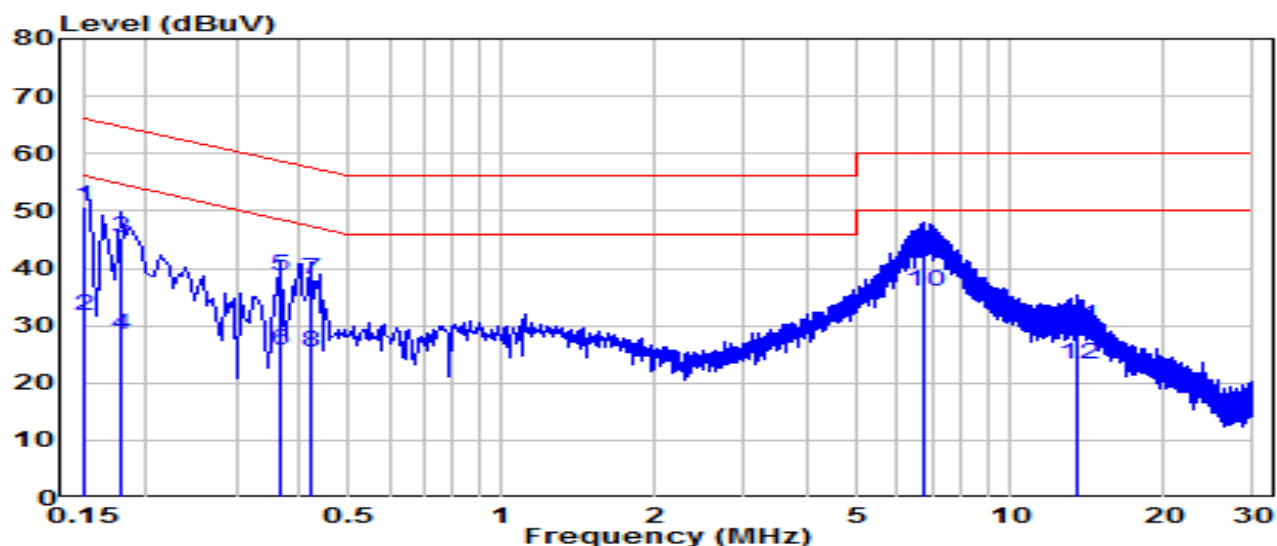

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1		0.150	41.10	9.63	50.73	-15.27	66.00	QP
2		0.150	22.15	9.63	31.78	-24.22	56.00	Average
3		0.177	35.61	9.63	45.24	-19.39	64.63	QP
4		0.177	18.79	9.63	28.42	-26.21	54.63	Average
5		0.366	28.93	9.63	38.56	-20.03	58.59	QP
6		0.366	16.15	9.63	25.78	-22.81	48.59	Average
7		0.420	28.40	9.64	38.04	-19.41	57.45	QP
8		0.420	15.86	9.64	25.49	-21.96	47.45	Average
9	*	6.751	32.97	9.79	42.76	-17.24	60.00	QP
10	*	6.751	26.21	9.79	36.00	-14.00	50.00	Average
11		13.622	20.09	9.91	30.00	-30.00	60.00	QP
12		13.622	13.42	9.91	23.32	-26.68	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Fides-Link3** is in compliance with Part 15C of the FCC Rules.

Appendix A : Test Photograph

Refer to “2507TW0101-UT” file.

Appendix B : External Photograph

Refer to “2507TW0101-UE” file.

Appendix C : Internal Photograph

Refer to “2507TW0101-UI” file.

_____ The End _____