

7.5. Out-of-Band Spurious Emissions Emissions Measurement

7.5.1. Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on RF conducted measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


7.5.2. Test Procedure Used

ANSI C63.10- Section 11.1 & 11.2

7.5.3. Test Setting

- (a) Set instrument center frequency to DTS channel center frequency
- (b) Set the span to ≥ 1.5 times the DTS bandwidth
- (c) Set the RBW = 100 kHz
- (d) Set the VBW $\geq 3 \times$ RBW
- (e) Detector = peak
- (f) Sweep time = auto couple
- (g) Trace mode = max hold
- (h) Allow trace to fully stabilize

7.5.4. Test Setup

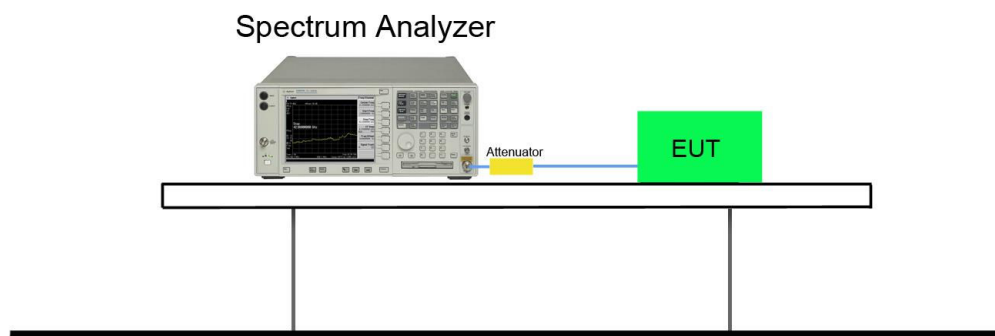


7.5.5. Test Result

Product	Fides-Link2	Temperature	25°C
Test Engineer	Fran	Relative Humidity	54%
Test Site	SR6	Test Date	2024/12/31


Test Mode	Channel No.	Frequency (MHz)	Limit	Result
2.4GHz_Ant 1	CH01	2417	30dBc	Pass
	CH02	2432	30dBc	Pass
	CH03	2462	30dBc	Pass
	CH04	2477	30dBc	Pass
2.4GHz_Ant 2	CH01	2417	30dBc	Pass
	CH02	2432	30dBc	Pass
	CH03	2462	30dBc	Pass
	CH04	2477	30dBc	Pass

Ant 1


CH01 (2417MHz)

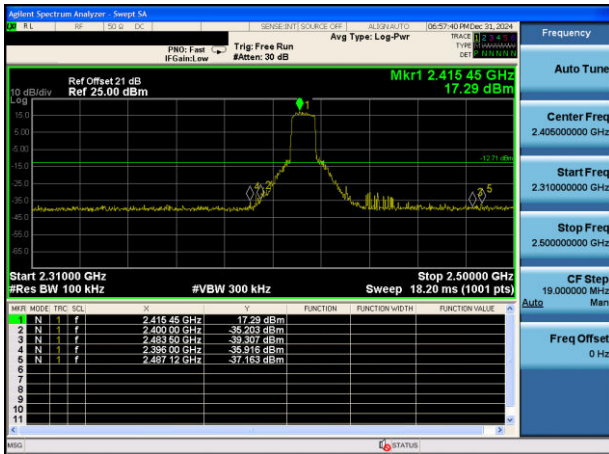


CH01 (2417MHz)

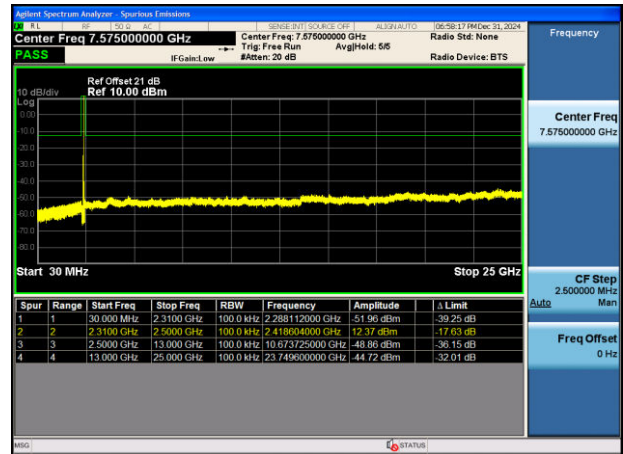


CH02 (2432MHz)

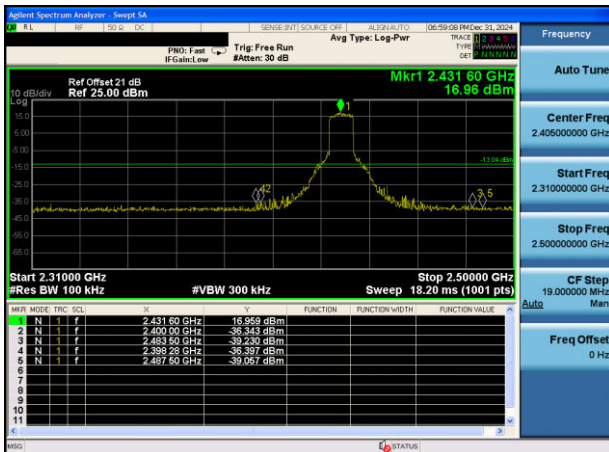


CH02 (2432MHz)

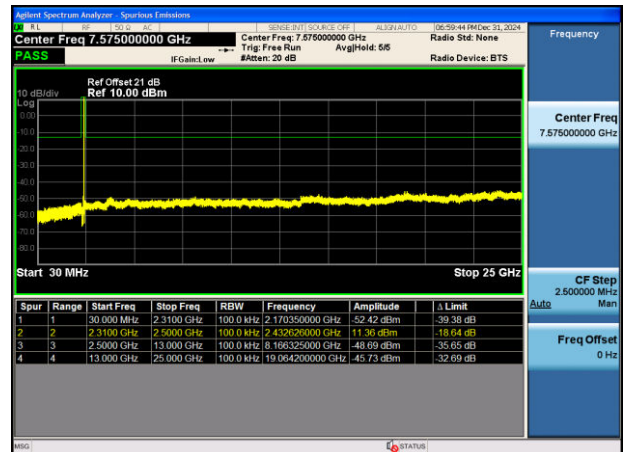

CH03 (2462MHz)

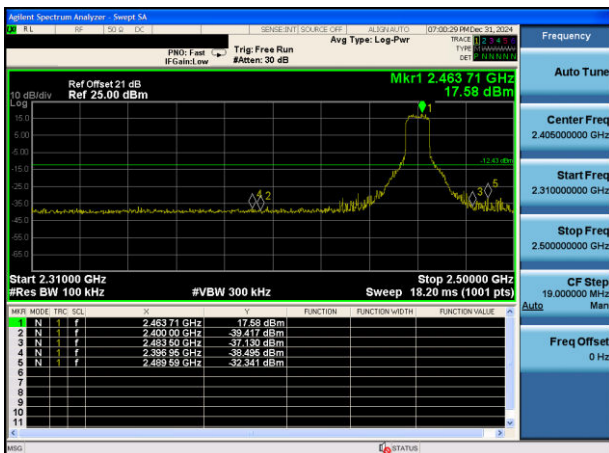


CH03 (2462MHz)

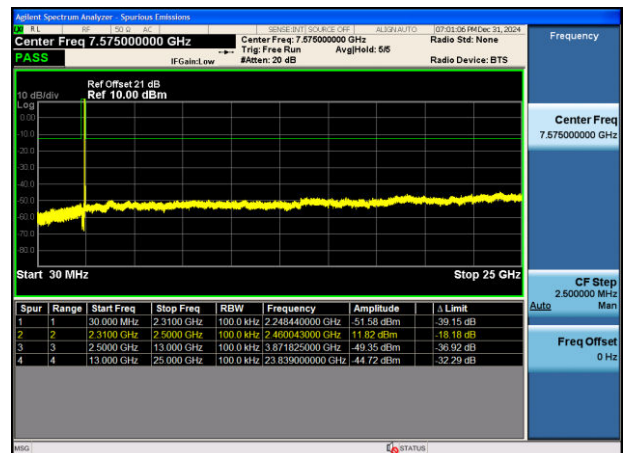

CH04 (2477MHz)




CH04 (2477MHz)

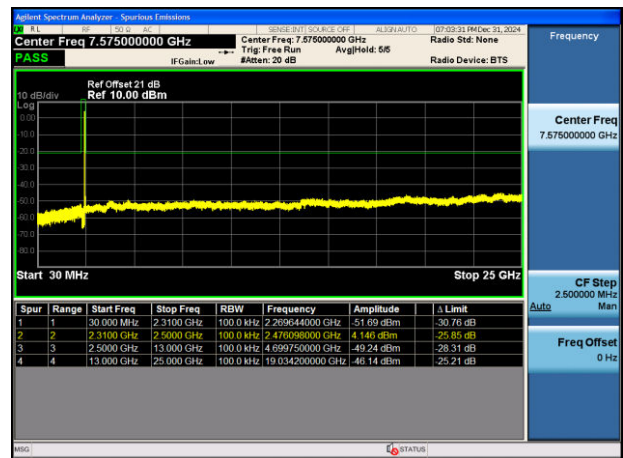


Ant 2


CH01 (2417MHz)

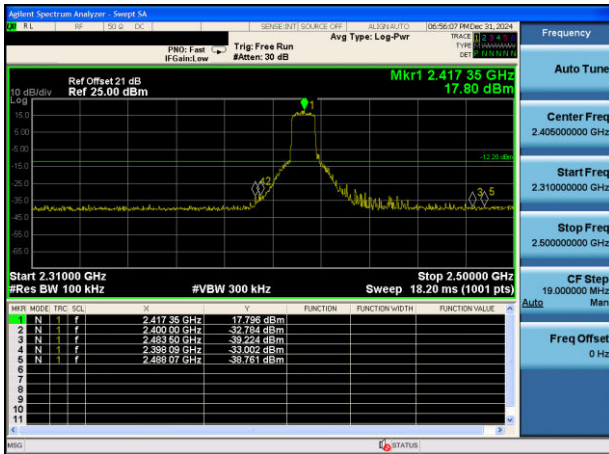


CH01 (2417MHz)

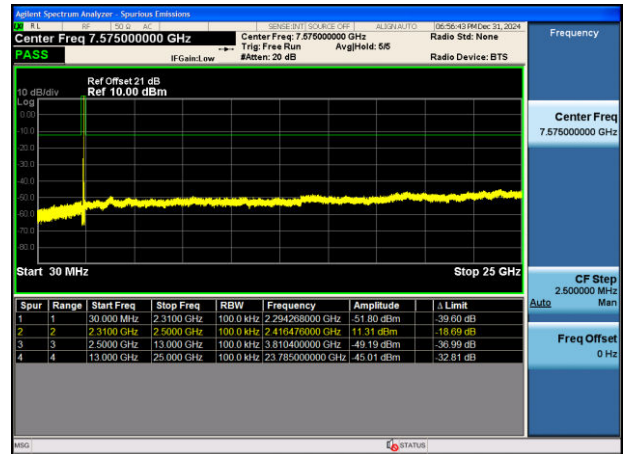


CH02 (2432MHz)

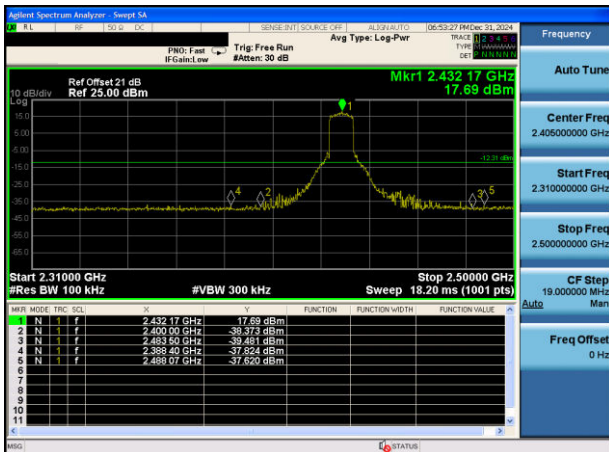


CH02 (2432MHz)

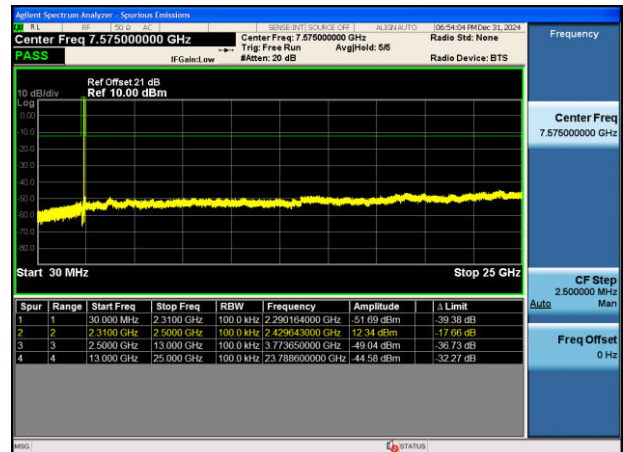


CH03 (2462MHz)

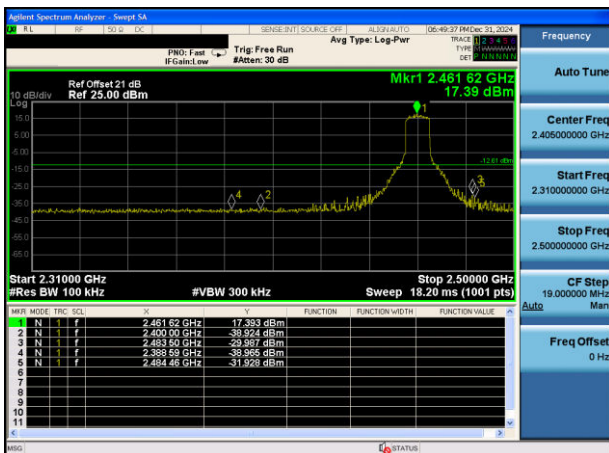


CH03 (2462MHz)

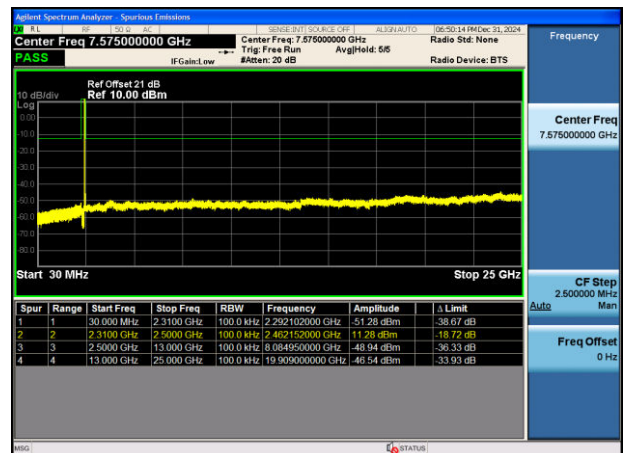

CH04 (2477MHz)

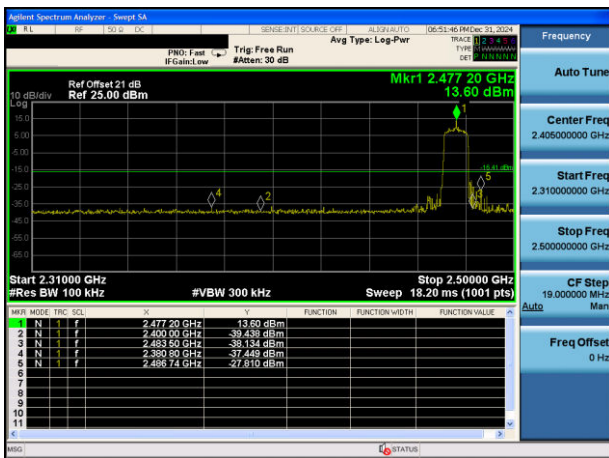

CH04 (2477MHz)

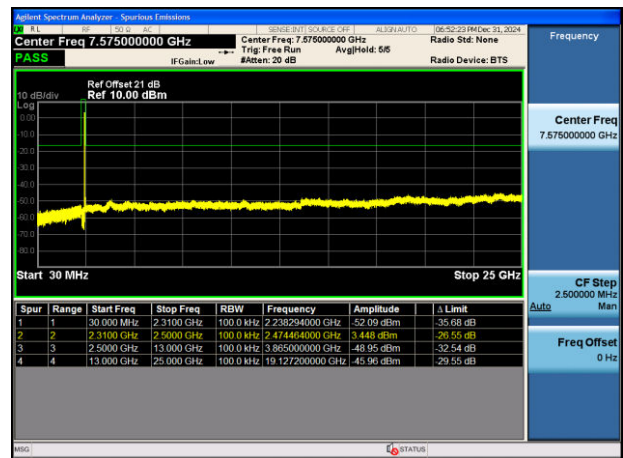

7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

ANSI C63.10 - Section 11.12.2.3 (quasi-peak measurements)

ANSI C63.10 - Section 11.12.2.4 (peak power measurements)

ANSI C63.10 - Section 11.12.2.5 (average power measurements)

7.6.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple

6.Trace mode = max hold

7.Trace was allowed to stabilize

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements

1.Analyzer center frequency was set to the frequency of the radiated spurious emission of interest

2.RBW = 1MHz

3.VBW $\geq$ 1/T

4.De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to “Voltage” regardless of the display mode

5.Detector = Peak


6.Sweep time = auto

7.Trace mode = max hold


8.Allow max hold to run for at least 50 times (1/duty cycle) traces

7.6.4. Test Setup


9kHz ~ 30MHz Test Setup:

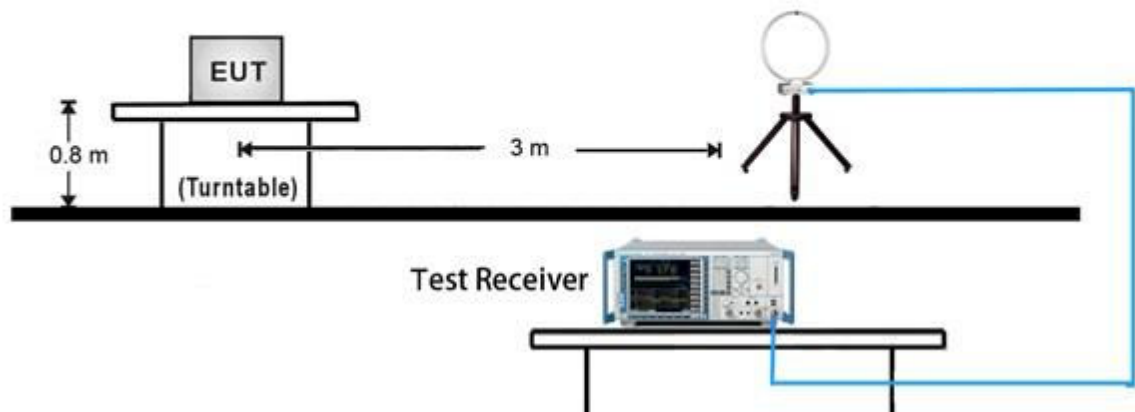


30MHz ~ 1GHz Test Setup:

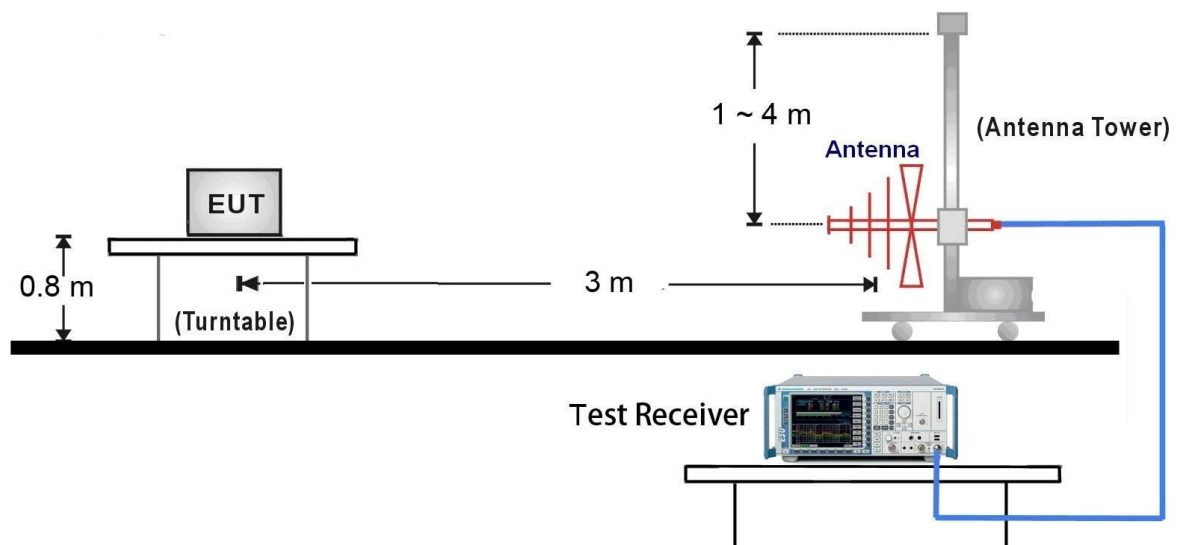

1GHz ~ 18GHz Test Setup:

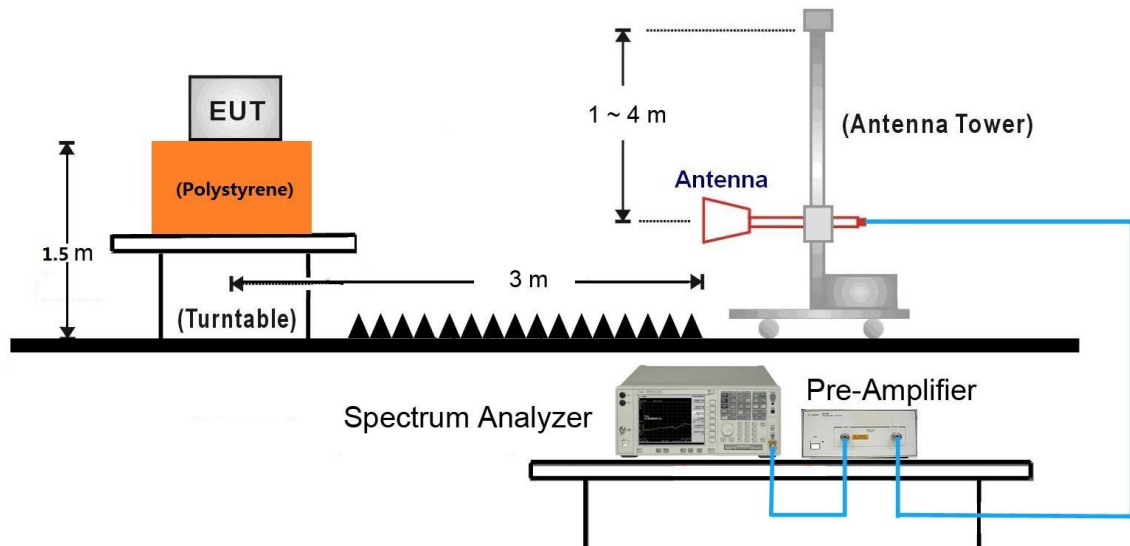


18GHz ~25GHz Test Setup:

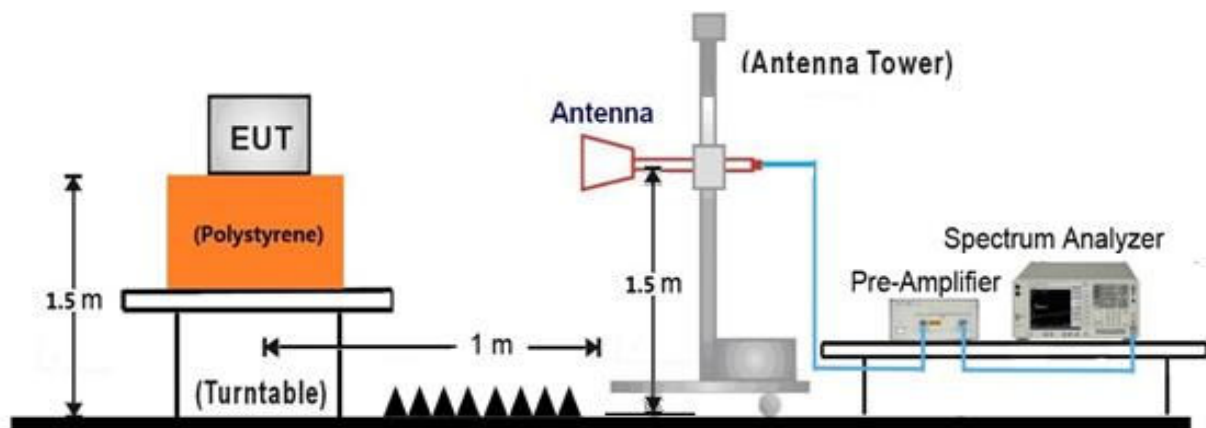

7.6.5. Test Result

EUT	Fides-Link2	Date of Test	2024-12-20
Factor	VULB 9162	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	SRD 2.4G_TX_Ant 1_2462MHz	Test Voltage	AC 120V/60Hz

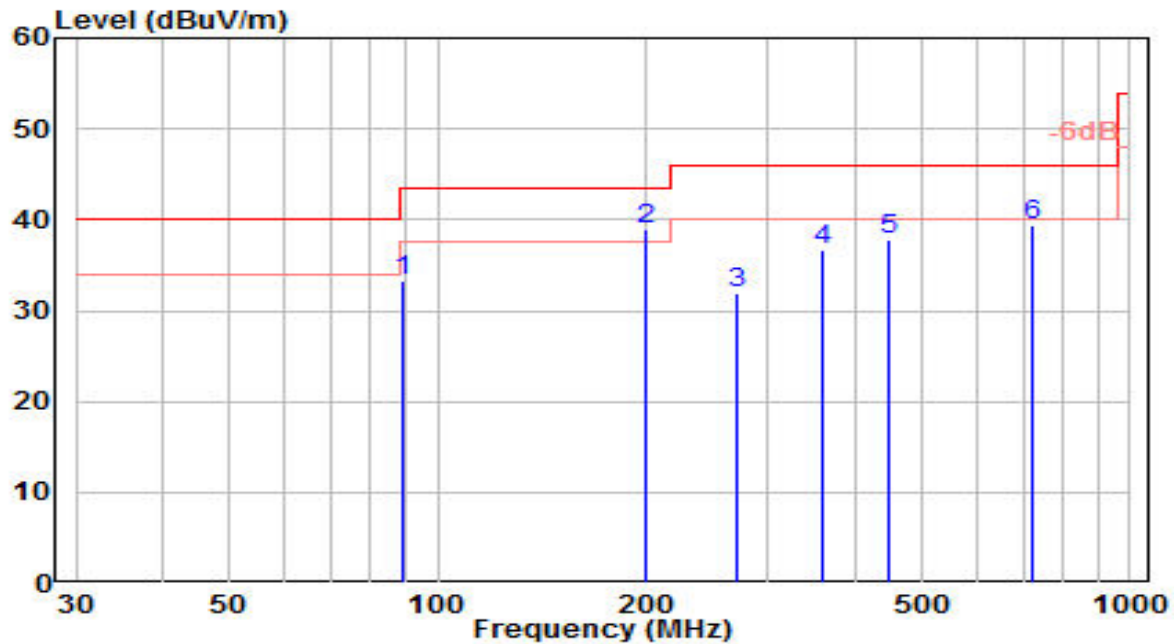


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	89.170	16.39	16.90	33.29	-10.21	43.50	150	355	QP
2	* 199.750	20.46	18.55	39.01	-4.49	43.50	150	285	QP
3	269.590	11.34	20.48	31.82	-14.18	46.00	100	215	QP
4	359.800	13.58	23.14	36.72	-9.28	46.00	100	350	QP
5	450.010	13.50	24.30	37.80	-8.20	46.00	100	355	QP
6	720.640	10.32	29.07	39.39	-6.61	46.00	100	215	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link2	Date of Test	2024-12-20
Factor	VULB 9162	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	SRD 2.4G_TX_Ant 1_2462MHz	Test Voltage	AC 120V/60Hz

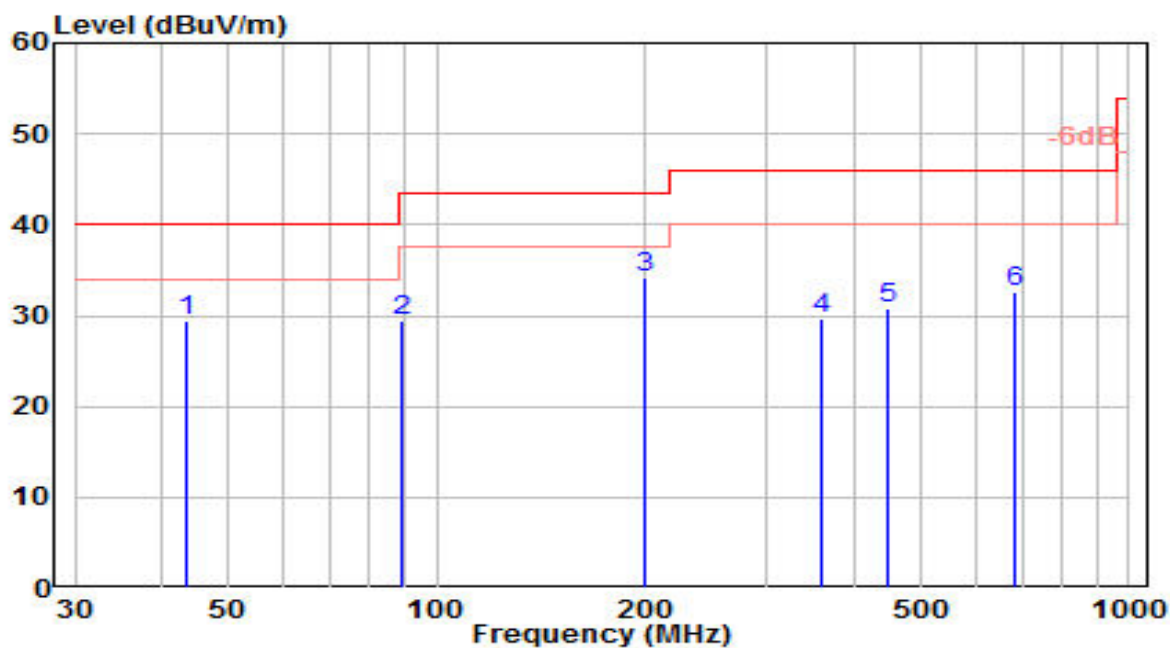


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	43.580	8.79	20.75	29.54	-10.46	40.00	100	145	QP
2	89.170	12.55	16.90	29.44	-14.06	43.50	150	60	QP
3	* 199.750	15.70	18.55	34.25	-9.25	43.50	150	250	QP
4	359.800	6.55	23.14	29.69	-16.31	46.00	150	70	QP
5	450.010	6.42	24.30	30.72	-15.28	46.00	100	235	QP
6	684.750	4.47	28.09	32.56	-13.44	46.00	100	310	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link2	Date of Test	2024-12-20
Factor	VULB 9162	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	SRD 2.4G_TX_Ant 2_2462MHz	Test Voltage	AC 120V/60Hz

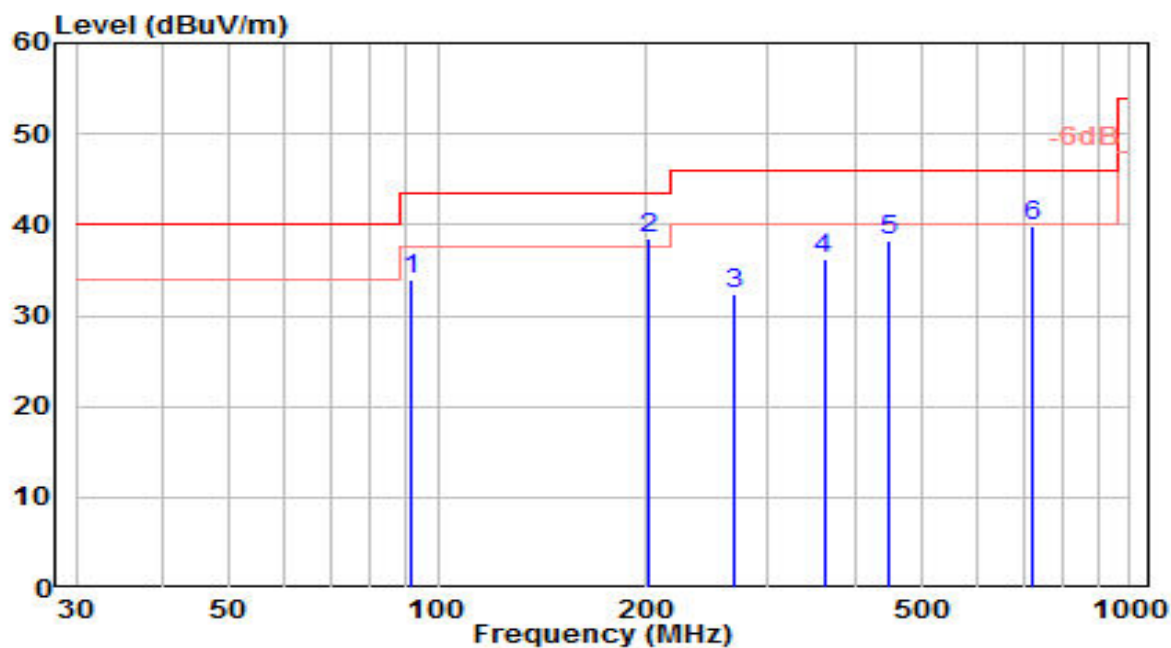


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	91.395	16.64	17.39	34.03	-9.47	43.50	150	355	QP
2	* 201.881	19.95	18.51	38.46	-5.04	43.50	150	285	QP
3	267.136	11.84	20.50	32.34	-13.66	46.00	100	215	QP
4	361.247	13.08	23.17	36.25	-9.75	46.00	100	350	QP
5	447.664	13.94	24.28	38.21	-7.79	46.00	100	355	QP
6	723.094	10.82	29.11	39.94	-6.06	46.00	100	215	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link2	Date of Test	2024-12-20
Factor	VULB 9162	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	SRD 2.4G_TX_Ant 2_2462MHz	Test Voltage	AC 120V/60Hz

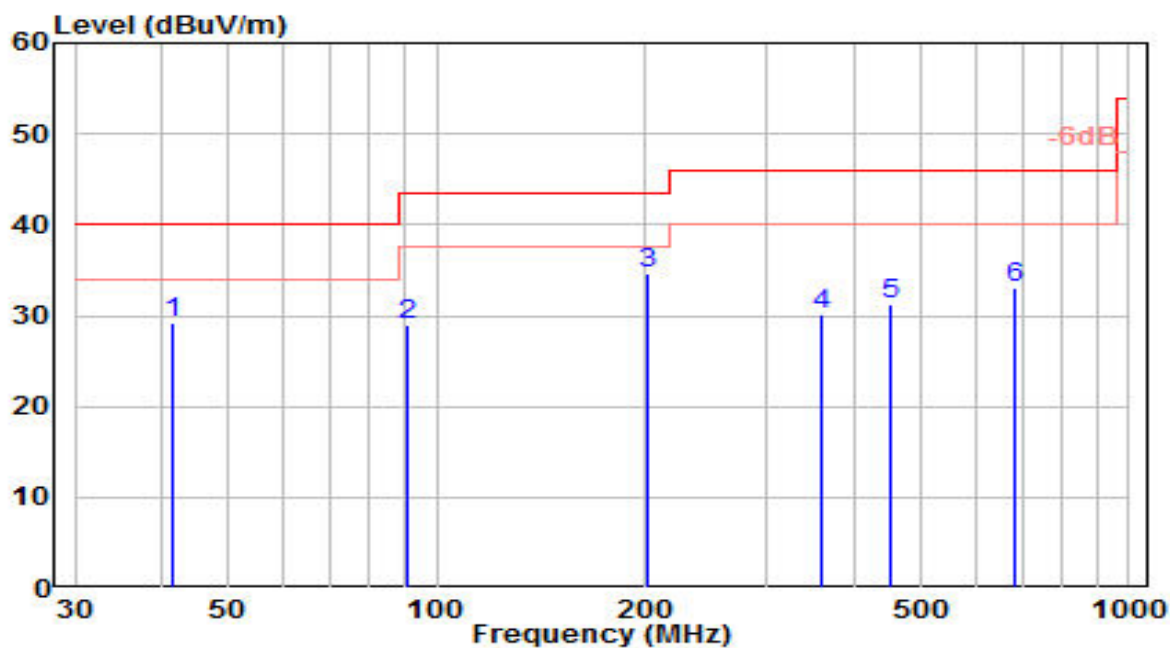


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	41.703	8.73	20.41	29.13	-10.87	40.00	100	145	QP
2	90.707	11.60	17.27	28.87	-14.63	43.50	150	60	QP
3	* 201.719	16.21	18.51	34.72	-8.78	43.50	150	250	QP
4	358.662	6.90	23.12	30.03	-15.97	46.00	150	70	QP
5	451.536	6.83	24.34	31.16	-14.84	46.00	100	235	QP
6	682.636	5.11	28.01	33.11	-12.89	46.00	100	310	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link2	Date of Test	2024-12-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	SRD 2.4G_TX_Ant 1_2417MHz	Test Voltage	AC 120V/60Hz

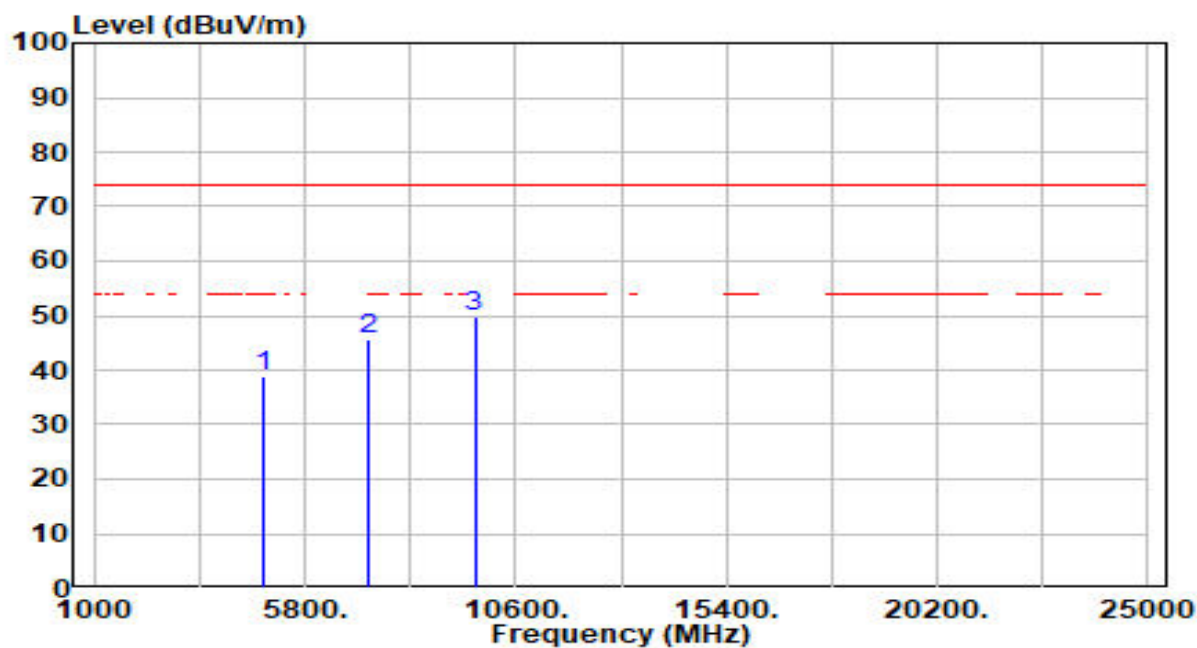


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4834.000	34.93	3.76	38.69	-35.31	74.00	300	55	Peak
2	7251.000	33.85	11.73	45.58	-28.42	74.00	300	240	Peak
3	* 9668.000	34.18	15.81	49.99	-24.01	74.00	300	240	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link2	Date of Test	2024-12-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	SRD 2.4G_TX_Ant 1_2417MHz	Test Voltage	AC 120V/60Hz

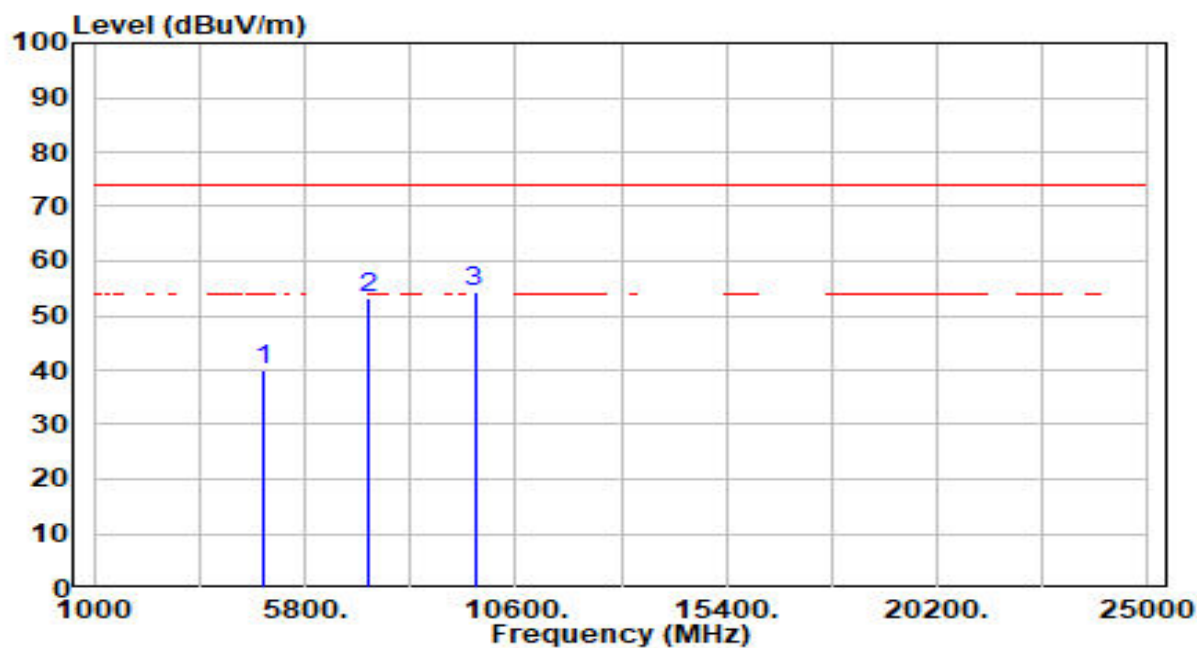


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4834.000	36.39	3.76	40.16	-33.84	74.00	300	329	Peak
2	7251.000	41.32	11.73	53.05	-20.95	74.00	300	163	Peak
3	* 9668.000	38.51	15.81	54.32	-19.68	74.00	300	201	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link2	Date of Test	2024-12-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	SRD 2.4G_TX_Ant 1_2432MHz	Test Voltage	AC 120V/60Hz

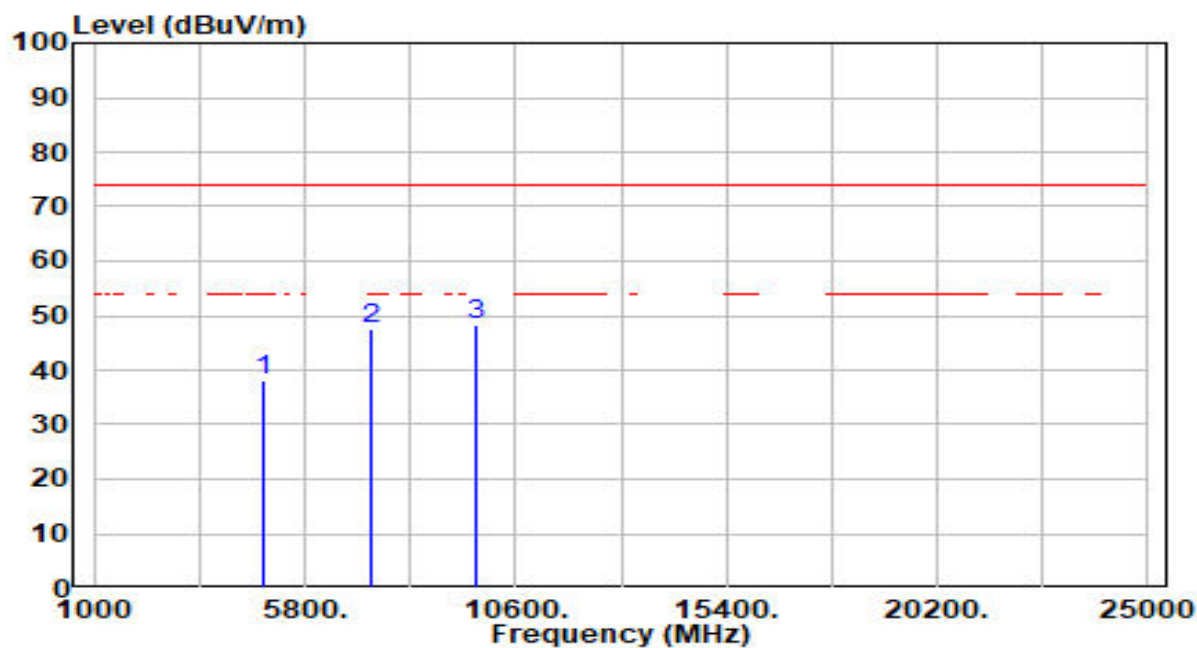


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4864.000	34.43	3.82	38.25	-35.75	74.00	300	204	Peak
2	7296.000	35.47	11.89	47.36	-26.64	74.00	300	98	Peak
3	* 9728.000	32.28	15.92	48.20	-25.80	74.00	300	324	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link2	Date of Test	2024-12-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	SRD 2.4G_TX_Ant 1_2432MHz	Test Voltage	AC 120V/60Hz

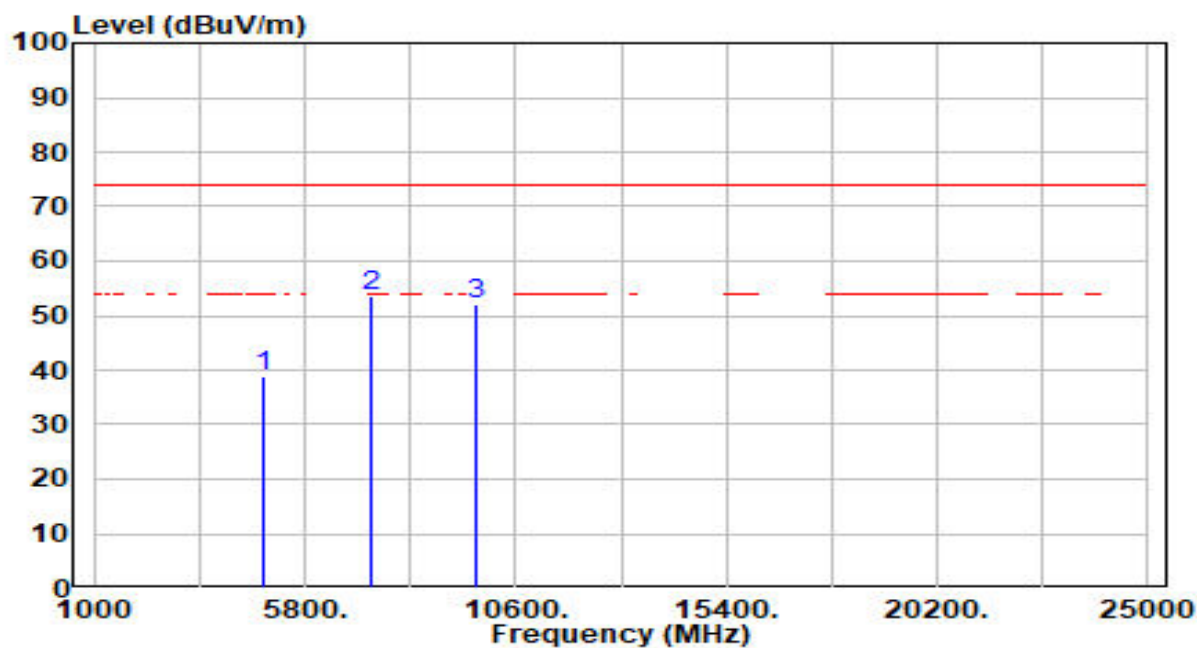


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4864.000	34.88	3.82	38.70	-35.30	74.00	300	127	Peak
2	* 7296.000	41.58	11.89	53.47	-20.53	74.00	300	351	Peak
3	9728.000	36.25	15.92	52.17	-21.83	74.00	300	333	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link2	Date of Test	2024-12-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	SRD 2.4G_TX_Ant 1_2462MHz	Test Voltage	AC 120V/60Hz

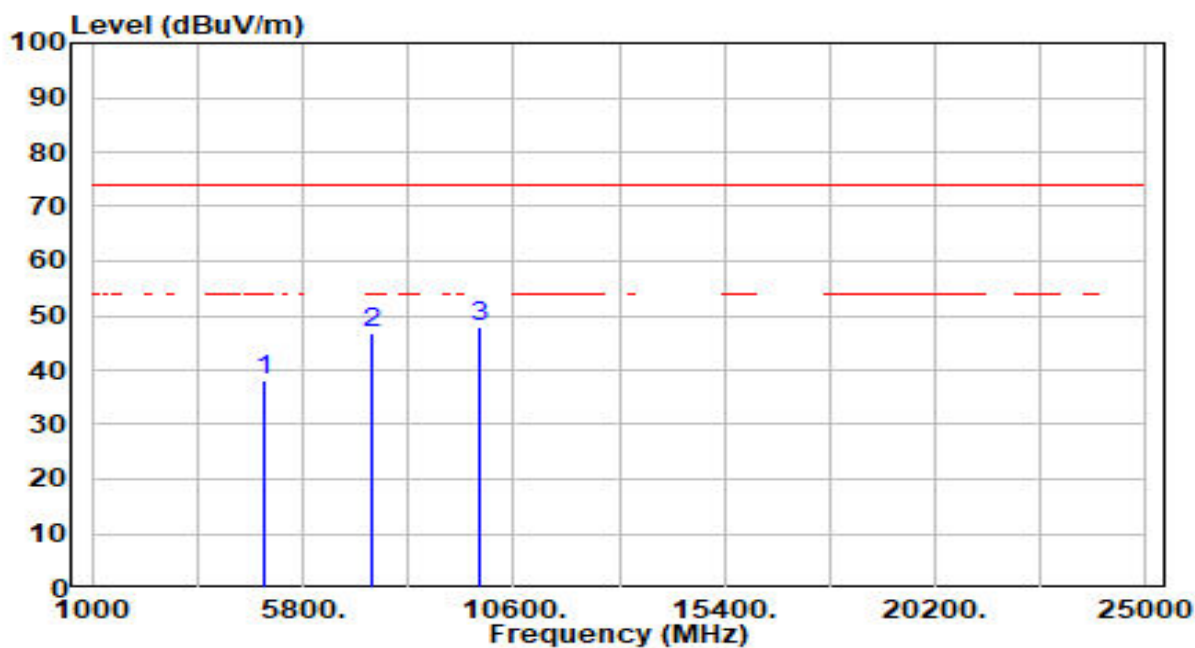


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	34.05	3.92	37.98	-36.02	74.00	300	244	Peak
2	7386.000	34.44	12.21	46.65	-27.35	74.00	300	233	Peak
3	* 9848.000	31.77	16.14	47.91	-26.09	74.00	300	98	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link2	Date of Test	2024-12-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	SRD 2.4G_TX_Ant 1_2462MHz	Test Voltage	AC 120V/60Hz

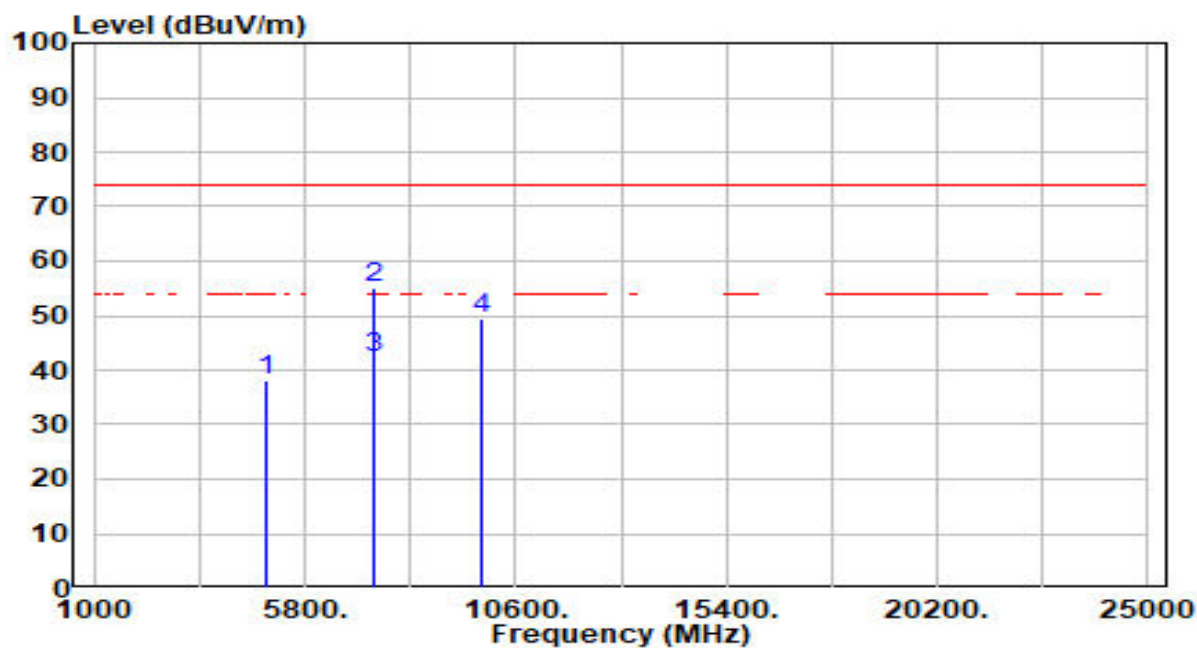


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	34.06	3.92	37.99	-36.01	74.00	300	85	Peak
2	* 7386.000	43.04	12.21	55.25	-18.75	74.00	300	210	Peak
3	* 7386.000	29.90	12.21	42.11	-11.89	54.00	300	210	Average
4	9848.000	33.22	16.14	49.36	-24.64	74.00	300	213	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link2	Date of Test	2024-12-26
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /67%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	SRD 2.4G_TX_Ant 1_2477MHz	Test Voltage	AC 120V/60Hz

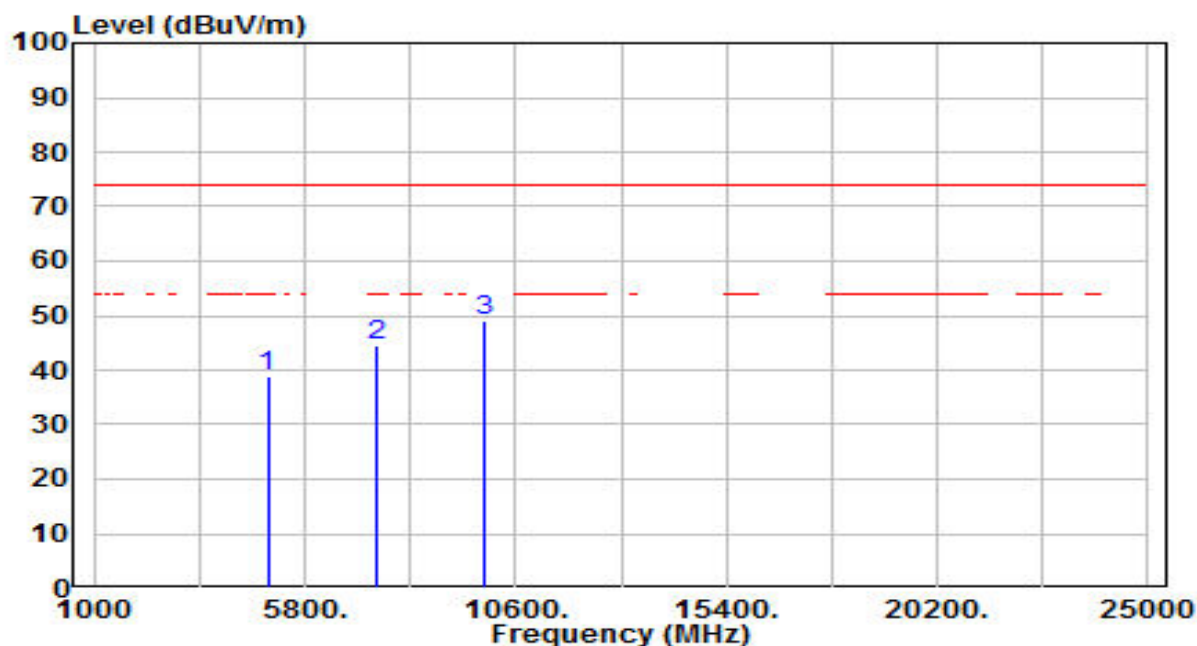


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4954.000	34.73	3.98	38.71	-35.29	74.00	300	77	Peak
2	7431.000	32.28	12.37	44.65	-29.35	74.00	300	167	Peak
3	* 9908.000	32.89	16.25	49.14	-24.86	74.00	300	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link2	Date of Test	2024-12-26
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	23°C /67%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	SRD 2.4G_TX_Ant 1_2477MHz	Test Voltage	AC 120V/60Hz

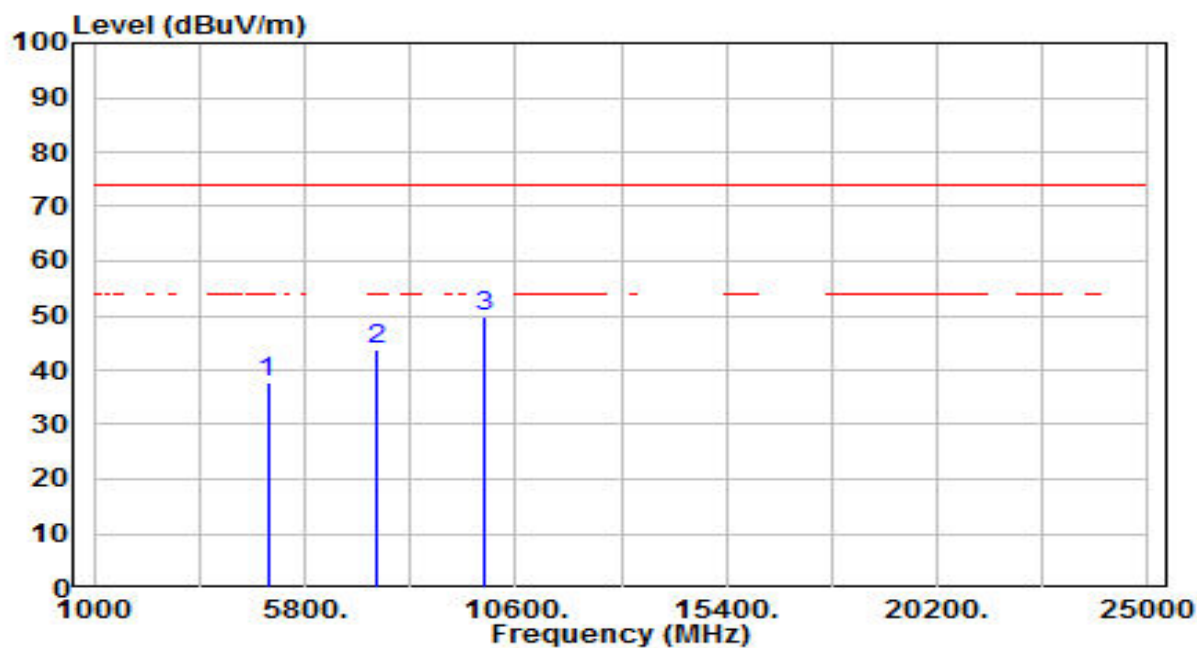


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4954.000	33.69	3.98	37.67	-36.33	74.00	300	85	Peak
2	7431.000	31.54	12.37	43.90	-30.10	74.00	300	107	Peak
3	* 9908.000	33.70	16.25	49.95	-24.05	74.00	300	243	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link2	Date of Test	2024-12-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	SRD 2.4G_TX_Ant 2_2417MHz	Test Voltage	AC 120V/60Hz

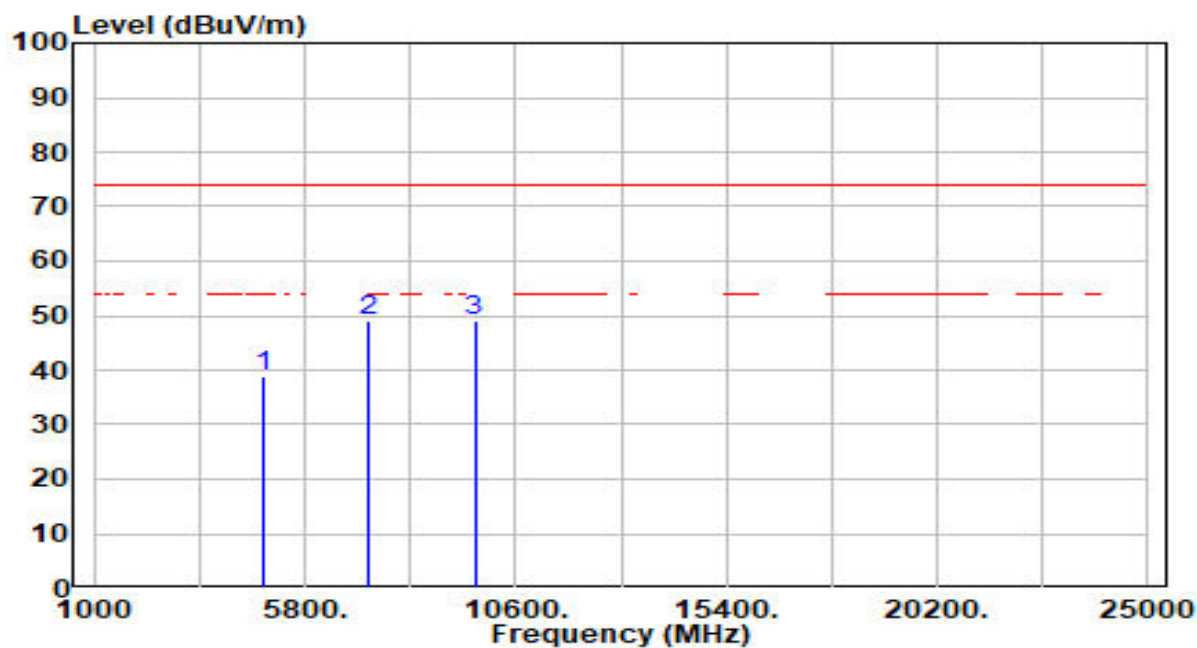


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4834.000	34.94	3.76	38.71	-35.29	74.00	300	233	Peak
2	* 7251.000	37.24	11.73	48.97	-25.03	74.00	300	215	Peak
3	9668.000	33.12	15.81	48.93	-25.07	74.00	300	240	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link2	Date of Test	2024-12-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	SRD 2.4G_TX_Ant 2_2417MHz	Test Voltage	AC 120V/60Hz

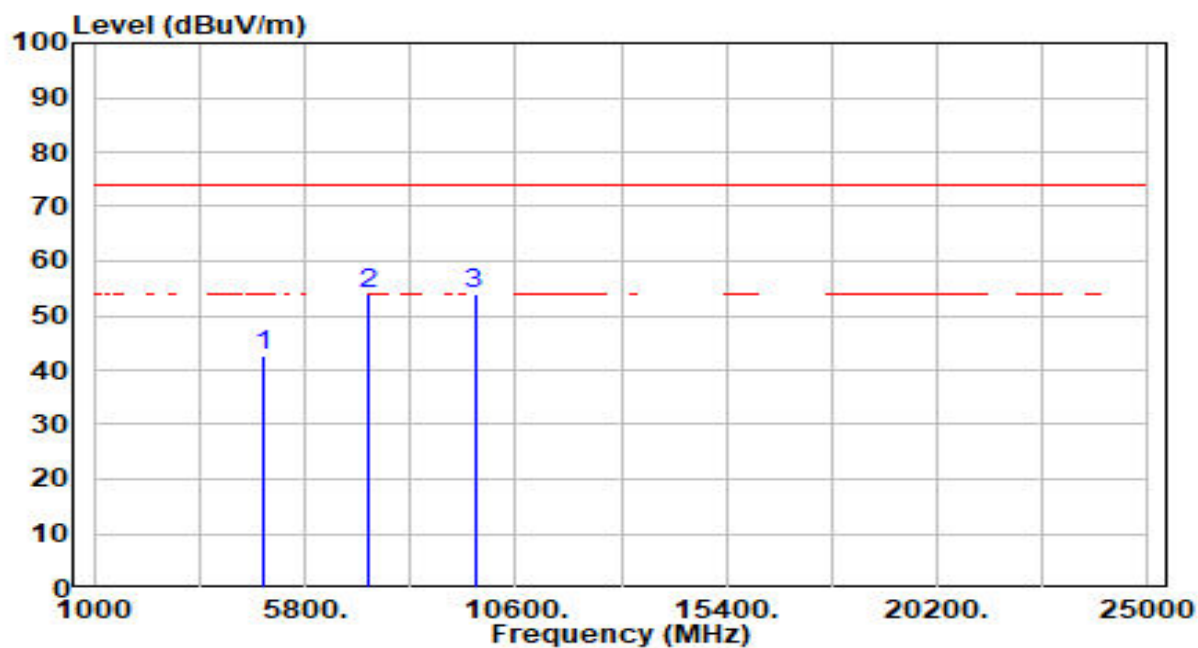


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4834.000	39.05	3.76	42.82	-31.18	74.00	300	216	Peak
2	7251.000	42.09	11.73	53.82	-20.18	74.00	300	347	Peak
3	* 9668.000	38.25	15.81	54.06	-19.94	74.00	300	330	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link2	Date of Test	2024-12-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	SRD 2.4G_TX_Ant 2_2432MHz	Test Voltage	AC 120V/60Hz

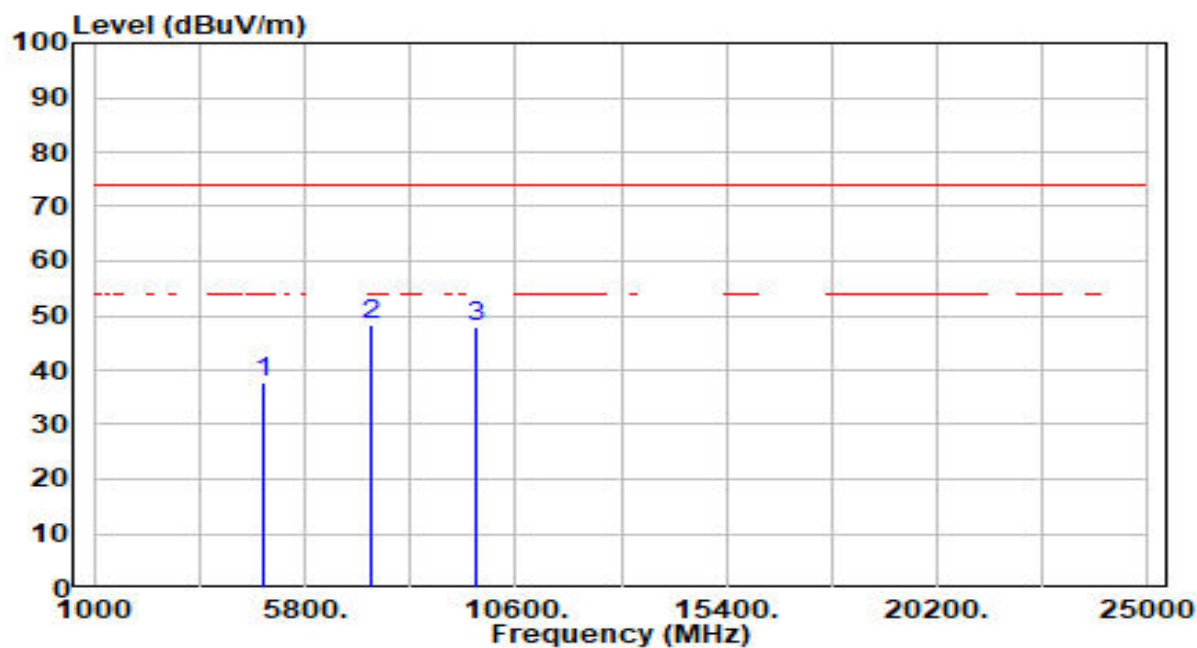


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4864.000	33.88	3.82	37.70	-36.30	74.00	300	289	Peak
2	* 7296.000	36.59	11.89	48.48	-25.52	74.00	300	335	Peak
3	9728.000	32.05	15.92	47.97	-26.03	74.00	300	232	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link2	Date of Test	2024-12-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	SRD 2.4G_TX_Ant 2_2432MHz	Test Voltage	AC 120V/60Hz

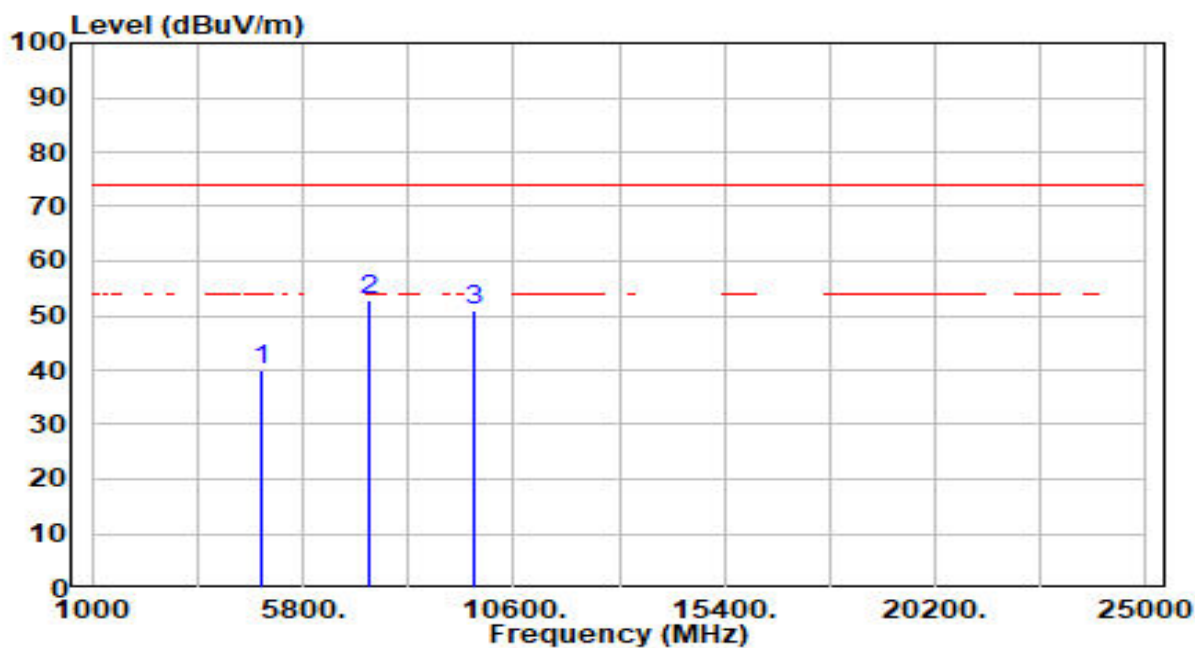

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4864.000	36.25	3.82	40.07	-33.93	74.00	300	227	Peak
2	* 7296.000	41.04	11.89	52.93	-21.07	74.00	300	2	Peak
3	9728.000	35.08	15.92	51.00	-23.00	74.00	300	209	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.