


Test report No:
2520983R.704

FCC TEST REPORT

Product Name	Smart Controller
Trademark	N/A
Model and /or type reference	TENSO-DUAL
FCC ID	2A8JK-TENSO-2BAND
Applicant's name / address	ACSL Ltd. Hulic Kasai Rinkai Building 2F, 3-6-4 Rinkaicho, Edogawa-ku, Tokyo 134-0086, Japan
Test method requested, standard	47 CFR FCC Part 15 (Section 15.407) ANSI C63.10: 2013
Verdict Summary	IN COMPLIANCE
Documented by (name / position & signature)	Tim Cao / Project Manager 
Approved by (name / position & signature)	Frank He / Technical Manager 
Date of issue	2025-04-20
Report Version	V1.0
Report template No	Template_FCC Part 15C-RF-V1.0

INDEX

	page
General conditions	5
Environmental conditions	5
Possible test case verdicts	6
Abbreviations.....	6
Document History.....	7
Remarks and Comments	7
Used Equipment.....	8
Uncertainty	12
1 General Information	13
1.1 General Description of the Item(s).....	13
1.2 Channel List.....	14
2 Description of Test Setup.....	15
2.1 Auxiliary equipment / Test software for the EUT	15
3 Verdict summary section.....	16
3.1 Standards	16
3.2 Deviation(s) from the Standard(s) / Test Specification(s).....	16
3.3 Overview of results	17
3.4 Power setting in test	19
3.5 Test Facility.....	21
4 Test Items Of Limit/Setup/Procedure.....	22
4.1 AC Power Line Conducted Emission.....	22
4.1.1 Limit	22
4.1.2 Test Setup	22
4.1.3 Test Procedure	22
4.2 Radiated Emissions	23
4.2.1 Limit	23
4.2.2 Test Setup	24
4.2.3 Test Procedure	25
4.3 Emission bandwidth.....	27
4.3.1 Limit	27
4.3.2 Test Setup	27
4.3.3 Test Procedure	27
Test Method.....	27
4.4 6dB bandwidth	28

4.4.1	Limit	28
4.4.2	Test Setup	28
4.4.3	Test Procedure	28
4.5	Duty cycle	29
4.5.1	Limit	29
4.5.2	Test Setup	29
4.5.3	Test Procedure	29
4.6	Power Output.....	30
4.6.1	Limit	30
4.6.2	Test Setup	30
4.6.3	Test Procedure	31
4.7	Maximum Power Spectral Density.....	33
4.7.1	Limit	33
4.7.2	Test Setup	34
4.7.3	Test Procedure	34
4.8	Radiated Emission Band Edge	35
4.8.1	Limit	35
4.8.2	Test Setup	36
4.8.3	Test Procedure	37
4.9	Frequency Stability	38
4.9.1	Limit	38
4.9.2	Test Setup	38
4.9.3	Test Procedure	38
4.10	Dynamic Frequency Selection (DFS)	39
4.10.1	Limit	39
4.10.2	Test Setup	40
4.10.3	Test Procedure	42
4.11	Antenna Requirement.....	48
4.11.1	Limit	48
4.11.2	Antenna Connector Construction:	48
5	Test setup photo and EUT Photo	49
6	Test Result	50
	Appendix A: AC Power Line Conducted Emissions	50
	Appendix B: Radiated Emission	52
	Appendix C: Emission bandwidth and occupied bandwidth	130
	Appendix D: 6dB Emission Bandwidth	194
	Appendix E: Duty cycle	202



Appendix F: Power Output.....	234
Appendix G: Peak Power Spectral Density	236
Appendix H: Radiated Emission Band Edge	268
Appendix I: Frequency Stability	342
Appendix J: Dynamic Frequency Selection	358

COMPETENCES AND GUARANTEES

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

GENERAL CONDITIONS

Test Location A	No. 99, Hongye Road, Suzhou Industrial Park Suzhou, 215006, P.R. China
Test Location B	No. 8213, Fanhua Avenue, Baohe District, Hefei City, Anhui Province, China
Date(receive sample)	Feb. 20, 2025
Date (start test)	Mar. 10, 2025
Date (finish test)	Mar. 30, 2025

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or Competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA.

ENVIRONMENTAL CONDITIONS

The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:

Ambient temperature	15 °C – 35 °C
Relative Humidity air	30% - 60%

If explicitly required in the basic standard or applied product / product family standard the climatic values are recorded and documented separately in this test report.

POSSIBLE TEST CASE VERDICTS

Test case does not apply to test object	N/A
Test object does meet requirement	P (Pass) / PASS
Test object does not meet requirement	F (Fail) / FAIL
Not measured	N/M

ABBREVIATIONS

For the purposes of the present document, the following abbreviations apply:

EUT	: Equipment Under Test
QP	: Quasi-Peak
CAV	: CISPR Average
AV	: Average
CDN	: Coupling Decoupling Network
SAC	: Semi-Anechoic Chamber
OATS	: Open Area Test Site
BW	: Bandwidth
AM	: Amplitude Modulation
PM	: Pulse Modulation
HCP	: Horizontal Coupling Plane
VCP	: Vertical Coupling Plane
U_N	: Nominal voltage
Tx	: Transmitter
Rx	: Receiver
N/A	: Not Applicable
N/M	: Not Measured

DOCUMENT HISTORY

Report No.	Version	Description	Issued Date
2520983R.704	V1.0	Initial issue of report.	2025-04-20

REMARKS AND COMMENTS

1. The equipment under test (EUT) does meet the essential requirements of the stated standard(s)/test(s).
2. These test results on a sample of the device are for the purpose of demonstrating Compliance with 47 CFR FCC Part 15 (Section 15.407).
3. The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to account the uncertainty associated with the measurement result.
4. The test results presented in this report relate only to the object tested.
5. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification (Suzhou) Co., Ltd.
6. This report will not be used for social proof function in China market.
7. DEKRA declines any responsibility with the following test data provided by customer that may affect the validity of result:
 - Chapter 1.1 General Description of the Item(s);
 - Chapter 1.2 Channel List.

USED EQUIPMENT

Test Location A :AC Power Line Conducted Emission / TR1

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EMI Test Receiver	R&S	ESCI	100726	2024.07.06	2025.07.05
Two-Line V-Network	R&S	ENV 216	101044	2024.10.26	2025.10.25
Two-Line V-Network	R&S	ENV 216	101189	2024.07.06	2025.07.05
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	2024.04.20	2025.04.19
Coaxial Cable	Huber+Suhner	RG 223	TR1-C1	2024.04.27	2025.04.26
Impedance Stabilization Network	Teseq GmbH	ISN T800	57318	2024.02.27	2025.02.26
Impedance Stabilization Network	Teseq GmbH	ISN T800	57318	2025.02.25	2026.02.24
Temperature/Humidity Meter	RTS	RTS-8S	EMC01	2024.07.04	2025.07.03
Dekra test software	Dekra	N/A	N/A	N/A	N/A

Test Location A :Conducted Test/ TR8

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Wireless Connectivity Tester	R&S	CMW 270	102593	2024.05.15	2025.05.14
Coaxial Cable	N/A	N/A	2477	2024.06.11	2025.06.10
Coaxial Cable	N/A	N/A	2478	2024.06.11	2025.06.10
High and low temperature and fast temperature change test box	ASTUOD	ASTD-FBT-225K	N/A	2024.04.21	2025.04.20
Temperature/Humidity Meter	RTS	RTS-8S	RF07	2024.07.04	2025.07.03
Test system					
Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
MAX Signal Analyzer	Keysight	N9010A	MY48030494	2024.10.26	2025.10.25
RF Control Unit	Tonscend	JS0806-2	22G8060594	2025.01.26	2026.01.25
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY61252529	2024.05.12	2025.05.11
Frequency extender for EXG or MXG	Keysight	N5182BX07	MY59362500	2024.05.12	2025.05.11
EXG-B MW Analog Signal Generator	Keysight	N5173B	MY61252566	2024.07.06	2025.07.05
Test Software	Tonscend	TS1120	JS1120-3	N/A	N/A

Test Location A :Radiated Emission(9KHz-1GHz) / AC2

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
------------	--------------	-----------	------------	-----------	----------------

EMI Test Receiver	R&S	ESCI	100176	2024.05.12	2025.05.11
Loop Antenna	R&S	HFH2-Z2E	101149	2024.03.27	2025.03.26
Bilog Antenna	Teseq GmbH	CBL6112D	27613	2024.09.08	2025.09.07
Temperature/Humidity Meter	RTS	RTS-8S	AC2-TH	2024.07.04	2025.07.03
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC2-C	2024.04.27	2025.04.26
Dekra test software	Dekra	N/A	N/A	N/A	N/A

Test Location B: Radiated Emission Band Edge / AC103

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Signal analyzer	keysight	N9020B	MY63490118	2024.07.26	2025.07.25
Bilog Antenna	TESEQ	CBL6112D	64164	2024.11.23	2025.11.22
Horn Antenna	RF SPIN	DRH18-E	KV2D11A18ES	2024.11.02	2025.11.01
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	01312	2024.10.28	2025.10.27
Amplifier	ESE	LNA0118	LNA23100009	2024.08.10	2025.08.09
Amplifier	Tonscend	TAP01018048S	AP23J8060307	2024.11.16	2025.11.15
Band Reject Filter Group	Tonscend	JS0806-F	23G806F0701	2024.11.20	2025.11.19
Temperature/Humidity Meter	RTS	RTS-8S	026	2024.09.04	2025.09.03
Test Software	Tonscend	JS36	N/A	N/A	N/A

Test Location A :AC Power Line Conducted Emission / TR1

Instrument	Manufacturer	Model No.	Serial No.	Firmware Version	Software version
EMI Test Receiver	R&S	ESCI	100726	4.42 SP1	N/A
Two-Line V-Network	R&S	ENV 216	101044	N/A	N/A
Two-Line V-Network	R&S	ENV 216	101189	N/A	N/A
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	N/A	N/A
Coaxial Cable	Huber+Suhner	RG 223	TR1-C1	N/A	N/A
Impedance Stabilization Network	Teseq GmbH	ISN T800	57318	N/A	N/A
Impedance Stabilization Network	Teseq GmbH	ISN T800	57318	N/A	N/A
Temperature/Humidity Meter	RTS	RTS-8S	EMC01	N/A	N/A
Dekra test software	Dekra	N/A	N/A	N/A	N/A

Test Location A :Conducted Test/ TR8

Instrument	Manufacturer	Model No.	Serial No.	Firmware Version	Software version
Wireless Connectivity Tester	R&S	CMW 270	102593	V 4.0.60	N/A
Coaxial Cable	N/A	N/A	2477	N/A	N/A
Coaxial Cable	N/A	N/A	2478	N/A	N/A
High and low temperature and fast temperature change test box	ASTUOD	ASTD-FBT-225K	N/A	N/A	N/A
Temperature/Humidity Meter	RTS	RTS-8S	RF07	N/A	N/A

Test system

Instrument	Manufacturer	Model No.	Serial No.	Firmware Version	Software version
MAX Signal Analyzer	Keysight	N9010A	MY48030494	A.14.03	N/A
RF Control Unit	Tonscend	JS0806-2	22G8060594	N/A	N/A
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY61252529	B.01.96	N/A
Frequency extender for EXG or MXG	Keysight	N5182BX07	MY59362500	N/A	N/A
EXG-B MW Analog Signal Generator	Keysight	N5173B	MY61252566	B.01.95	N/A
Test Software	Tonscend	TS1120	JS1120-3	N/A	V3.0.22

Test Location A :Radiated Emission(9KHz-1GHz) / AC2

Instrument	Manufacturer	Model No.	Serial No.	Firmware Version	Software version
EMI Test Receiver	R&S	ESCI	100176	4.42 SP3	N/A
Loop Antenna	R&S	HFH2-Z2E	101149	N/A	N/A

Bilog Antenna	Teseq GmbH	CBL6112D	27613	N/A	N/A
Temperature/Humidity Meter	RTS	RTS-8S	AC2-TH	N/A	N/A
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC2-C	N/A	N/A
Dekra test software	Dekra	N/A	N/A	N/A	3

Test Location B: Radiated Emission Band Edge / AC103

Instrument	Manufacturer	Model No.	Serial No.	Firmware Version	Software version
Signal analyzer	keysight	N9020B	MY63490118	A 08.54	N/A
Bilog Antenna	TESEQ	CBL6112D	64164	N/A	N/A
Horn Antenna	RF SPIN	DRH18-E	KV2D11A18ES	N/A	N/A
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	01312	N/A	N/A
Amplifier	ESE	LNA0118	LNA23100009	N/A	N/A
Amplifier	Tonscend	TAP01018048S	AP23J8060307	N/A	N/A
Band Reject Filter Group	Tonscend	JS0806-F	23G806F0701	N/A	N/A
Temperature/Humidity Meter	RTS	RTS-8S	026	N/A	N/A
Test Software	Tonscend	JS36	N/A	N/A	5.0.0

UNCERTAINTY

Uncertainties have been calculated according to the DEKRA internal document. The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95% .

Test item Test Location A	Uncertainty
AC Power Line Conducted Emission	9kHz~150kHz: 2.8 dB 150kHz~30MHz: 2.4 dB
Peak Power Output	± 1.3 dB
Radiated Emission(30MHz~1GHz)	Horizontal: 30MHz~300MHz: 3.5 dB, 300MHz~1GHz: 3.6 dB Vertical: 30MHz~300MHz: 3.6 dB, 300MHz~1GHz: 3.5 dB
Radiated Emission(1GHz~40GHz)	Horizontal: 1GHz~40GHz: 5.0 dB Vertical: 1GHz~40GHz: 4.8 dB
RF antenna conducted test	± 1.3 dB
Radiated Emission Band Edge	± 5.0 dB
DTS Bandwidth	± 1 kHz
Occupied Bandwidth	± 1 kHz
Power Density	± 1.3 dB

Test item Test Location B	Uncertainty
Radiated Emission(30MHz~1GHz)	Horizontal: 30MHz~300MHz: 4.9 dB, 300MHz~1GHz: 4.9 dB Vertical: 30MHz~300MHz: 4.9 dB, 300MHz~1GHz: 4.9 dB
Radiated Emission(1GHz~40GHz)	Horizontal: 1GHz~40GHz: 6.0 dB Vertical: 1GHz~40GHz: 5.8 dB
Radiated Emission Band Edge	± 6.0 dB

1 GENERAL INFORMATION

1.1 General Description of the Item(s)

Product Name	Smart Controller	
Trademark	N/A	
Model No.	TENSO-DUAL	
FCC ID.....	2A8JK-TENSO-2BAND	
Hardware Version.....	V1.1	
Software Version	T44	
Operating Temperature	-40°C ~ 70°C	
Power Supply	DC 3.3 V, 4.5 A 15 W from internal rechargeable battery which can be charged by AC/DC adapter.	
Manufacturer	Aerora North America, Inc.	
Manufacturer address	2445 Augustine Drive, Suites 150, Santa Clara, CA 95054	
Factory.....	ROTOTEK VIETNAM CO., LTD	
Factory address.....	House S4_2nd floor, Hap Linh Industrial Park, Bac Ninh City, Vietnam	
Test Matrix/ IMEI	RF Conducted	G55V462337F3B00203
	RSE	G55V462337F3B00216
Wireless specification	802.11a / n / ac	
Frequency Range	U-NII-1: 5150 MHz to 5250 MHz	
	U-NII-2A: 5250 MHz to 5350 MHz	
	U-NII-2C: 5470 MHz to 5725 MHz	
	U-NII-3: 5725 MHz to 5850 MHz	
Channel Bandwidth	802.11a 20 MHz	
	802.11n 20 MHz, 40 MHz	
	802.11ac 20 MHz, 40 MHz, 80 MHz	
Modulation technology	OFDM / OFDMA	
DFS Function.....	☐	Master device
	☐	Slave with radar detection
	☒	Slave without radar detection
Antenna Type	FPC	
Antenna Gain	5150 MHz to 5350 MHz: 1.92 dBi	
	5470 MHz to 5900 MHz: 0.15 dBi	

1.2 Channel List

802.11a/n/ac (20MHz) Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz	48	5240 MHz
52	5260 MHz	56	5280 MHz	60	5300 MHz	64	5320 MHz
100	5500 MHz	104	5520 MHz	108	5540 MHz	112	5550 MHz
116	5580 MHz	120	5600 MHz	124	5620 MHz	128	5640 MHz
132	5660 MHz	136	5680 MHz	140	5700 MHz	144	5720 MHz
149	5745 MHz	153	5765 MHz	157	5785 MHz	161	5805 MHz
165	5825 MHz	N/A	N/A	N/A	N/A	N/A	N/A

802.11n/ac (40MHz) Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	54	5270 MHz	62	5310 MHz
102	5510 MHz	110	5550 MHz	118	5590 MHz	126	5630 MHz
134	5670 MHz	142	5710 MHz	151	5755 MHz	159	5795 MHz

802.11ac (80MHz) Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210 MHz	58	5290 MHz	106	5530MHz	122	5610 MHz
138	5690 MHz	155	5775 MHz	N/A	N/A	N/A	N/A

Note: The General Description of the Item , antenna information and Channel List for the EUT in clause 1 are provided and confirmed by the client.

2 DESCRIPTION OF TEST SETUP

2.1 Auxiliary equipment / Test software for the EUT

Auxiliary equipment	Type / Version	Manufacturer	Supplied by
(1) N/A	N/A	N/A	N/A
(2) N/A	N/A	N/A	N/A
(3) N/A	N/A	N/A	N/A
software	Type / Version	Manufacturer	Supplied by
QRCT	N/A	N/A	N/A

3 VERDICT SUMMARY SECTION

This chapter presents an overview of standards and results. Refer to the next chapters for details of measured test results and applied test levels.

3.1 Standards

Standard	Year	Description
FCC CFR Title 47 Part 15 Subpart E	2024	FCC CFR Title 47 Part 15 Subpart E
ANSI C63.10	2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 789033	2017	This document provides guidance for determining emissions compliance of U-NII devices under Part 15, Subpart E of the FCC rules.
KDB 662911	2020	Provision to Allow Measurement of Directional Gain of Multi-Antenna Systems for Compliance Verification
KDB 905462	2016	UNII DFS Compliance Procedures New Rules

3.2 Deviation(s) from the Standard(s) / Test Specification(s)

The following deviation(s) was / were made from the published requirements of the listed standards: N/A.

(Please define the deviations from the standard(s) if applicable)

3.3 Overview of results

Test Item	Band ^[1]	FCC rules No.	Test Requirements	Result
Antenna Requirement	--	15.203/15.407(a)	--	PASS
26dB Emission Bandwidth	Band I	15.407(a)(1)	No limit.	PASS
	Band II-A	15.407(a)(2)		
	Band II-C	15.407(a)(2)		
6dB Emission Bandwidth	Band III	15.407(e)	≥ 500 kHz.	PASS
99% Occupied Bandwidth	Band I	KDB 789033 D02§ D	No limit.	PASS
	Band II-A			
	Band II-C			
	Band III			
Duty Cycle	Band I Band II-A Band II-C Band III	--	No limit.	PASS
Maximum Conducted Output Power	Band I	15.407(a)	< 250mW	PASS
	Band II-A	15.407(a)(2)	<MIN{250mW,11dBm+10*lg(EBW)}	
	Band II-C		< 1W	
	Band III	15.407(a)(3)		
Maximum Power Spectral Density	Band I	15.407(a)	<11dBm/MHz	PASS
	Band II-A	15.407(a)(2)	<11dBm/MHz	
	Band II-C			
	Band III	15.407(a)(3)	<30dBm/500KHz	
Unwanted Emissions that fall Out of the Restricted Bands (Radiated)	Band I	15.209 15.407(b)	F<1GHz: §15.209/§7.2.5 limit (QP). F≥1GHz & out-restricted: <-27dBm/MHz PK e.i.r.p. (exl. 5.15-5.35 GHz). F≥1GHz & in-restricted: §15.209/§7.2.5 limit (AV&PK).	PASS
	Band II-A	15.407(b) 15.209	F<1GHz: §15.209/§7.2.5 limit (QP). F≥1GHz & out-restricted: <-27dBm/MHz PK e.i.r.p. (exl. 5.25-5.35 GHz). F≥1GHz & in-restricted: §15.209/§7.2.5 limit (AV&PK).	PASS
	Band II-C	15.407(b) 15.209	F<1GHz: §15.209/§7.2.5 limit (QP). F≥1GHz & out-restricted: <-27dBm/MHz PK e.i.r.p. (exl. 5.47-5.725 GHz). F≥1GHz & in-restricted: §15.209/§7.2.5 limit (AV&PK).	PASS
	Band III	15.407(b) 15.209	F<1GHz: §15.209/§7.2.5 limit (QP) F≥1GHz &out-restricted:(QP) a) 27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges; b) 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges; c) 10 dBm/MHz at 25 MHz above or below	PASS

			the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and d) -27 dBm/MHz at frequencies more than 75 MHz above or below the band edges. F≥1GHz & in-restricted: §15.209/§7.2.5 limit (AV&PK).	
Unwanted Emissions in the Restricted Bands (Radiated)	Band I Band II-A Band II-C Band III	15.209	---	PASS
AC Power Line Conducted Emissions	Band I Band II-A Band II-C Band III	15.207	---	PASS
Frequency Stability	Band I Band II-A Band II-C Band III	15.407(g)	Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual	PASS
Dynamic Frequency Selection (DFS)	Band II-A Band II-C	15.407(h)	---	PASS
Remark: Band I: 5150-5250MHz Band II-A: 5250-5350MHz Band II-C: 5470-5725MHz Band III: 5725-5850MHz				

Requirement – Test case of FCC	Tset Location	Remark
AC Power Line Conducted Emissions	A	Test data please refer to Appendix A
Radiated Emission	B	Test data please refer to Appendix B
Emission bandwidth and occupied bandwidth	A	Test data please refer to Appendix C
6dB Emission Bandwidth	A	Test data please refer to Appendix D
Duty cycle	A	Test data please refer to Appendix E
Power Output	A	Test data please refer to Appendix F
Peak Power Spectral Density	A	Test data please refer to Appendix G
Radiated Emission Band Edge	B	Test data please refer to Appendix H

Requirement – Test case of FCC	Tset Location	Remark
Frequency Stability	A	Test data please refer to Appendix I
Dynamic Frequency Selection (DFS)	A	Test data please refer to Appendix J
Antenna Requirement	---	---

3.4 Power setting in test

Mode	Channel	Frequency (MHz)	Power Setting
802.11a 6Mbps	36	5180	Default
	40	5200	Default
	48	5240	Default
	52	5260	Default
	60	5300	Default
	64	5320	Default
	100	5500	Default
	116	5580	Default
	140	5700	Default
	149	5745	Default
	157	5785	Default
	165	5825	Default
802.11n-HT20 MCS0	36	5180	Default
	40	5200	Default
	48	5240	Default
	52	5260	Default
	60	5300	Default
	64	5320	Default
	100	5500	Default
	116	5580	Default
	140	5700	Default
	149	5745	Default
	157	5785	Default
	165	5825	Default
802.11n-HT40 MCS0	38	5190	Default
	46	5230	Default
	54	5270	Default
	62	5310	Default
	102	5510	Default
	110	5550	Default
	134	5670	Default

	151	5755	Default
	159	5795	Default
802.11ac-VHT20 MCS0	36	5180	Default
	40	5200	Default
	48	5240	Default
	52	5260	Default
	60	5300	Default
	64	5320	Default
	100	5500	Default
	116	5580	Default
	140	5700	Default
	149	5745	Default
	157	5785	Default
	165	5825	Default
802.11ac-VHT40 MCS0	38	5190	Default
	46	5230	Default
	54	5270	Default
	62	5310	Default
	102	5510	Default
	110	5550	Default
	134	5670	Default
	151	5755	Default
	159	5795	Default
802.11ac-VHT80 MCS0	42	5210	Default
	58	5290	Default
	106	5530	Default
	122	5610	Default
	155	5775	Default

3.5 Test Facility

Tset Location A	:	FCC Designation Number: CN1199
------------------------	----------	---------------------------------------

Tset Location B	:	FCC Designation Number: CN1321
------------------------	----------	---------------------------------------

4 TEST ITEMS OF LIMIT/SETUP/PROCEDURE

4.1 AC Power Line Conducted Emission

VERDICT: PASS

4.1.1 Limit

Standard			FCC Part 15 Subpart C Paragraph 15.207
Frequency range [MHz]	Limit: QP [dB(μV) ¹⁾]	Limit: AV [dB(μV) ¹⁾]	
0,15 - 0,50	66 - 56 ²⁾	56 - 46 ²⁾	
0,50 - 5,0	56	46	
5,0 - 30	60	50	


¹⁾ At the transition frequency, the lower limit applies.

²⁾ The limit decreases linearly with the logarithm of the frequency.

NOTE 1: The exclusion band for transmitters shall be considered for transmitters operating at frequencies below 30 MHz.

NOTE 2: Where the AC output port is directly connected (or via a circuit breaker) to the AC power input port of the EUT the AC power output port need not to be tested.

4.1.2 Test Setup

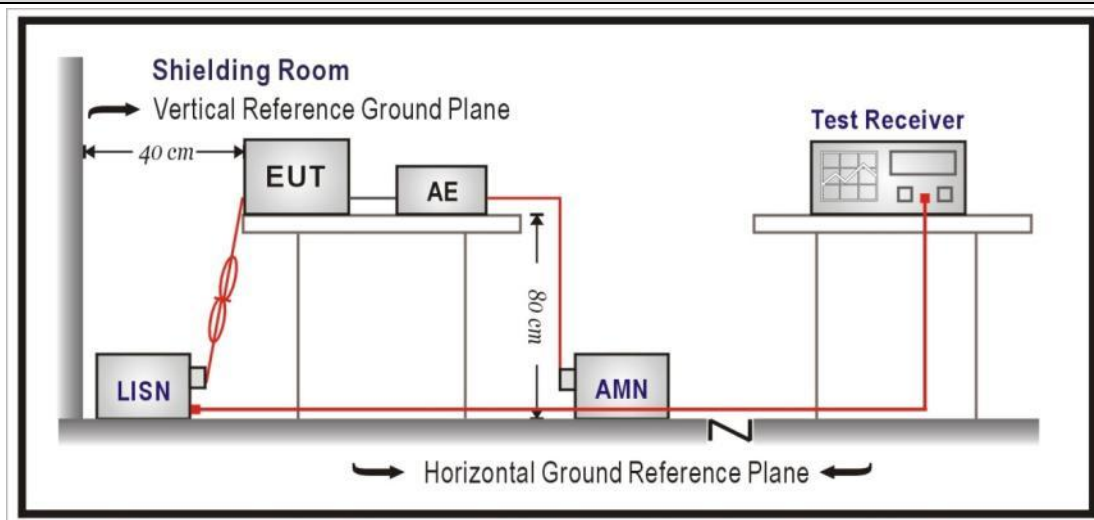

4.1.3 Test Procedure

	References Rule	Chapter	Item
☒	ANSI C63.10-2013	6.2	Standard test method for ac power-line conducted emissions from unlicensed wireless devices

4.2 Radiated Emissions

VERDICT: PASS

4.2.1 Limit

Standard FCC Part 15 Subpart C Paragraph 15.205

Restricted Bands of operation

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.


²Above 38.6


FCC Part 15 Subpart C Paragraph 15.209 (Restricted Band Emissions Limit)

Frequency (MHz)	Field strength (μ V/m)	Field strength (dB μ V/m)	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 - 13.8	300 _(Note 1)
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30 _(Note 1)
1.705 - 30	30	29.5	30 _(Note 1)
30 - 88	100	40	3 _(Note 2)
88 - 216	150	43.5	3 _(Note 2)
216 - 960	200	46	3 _(Note 2)
Above 960	500	54	3 _(Note 2)


Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

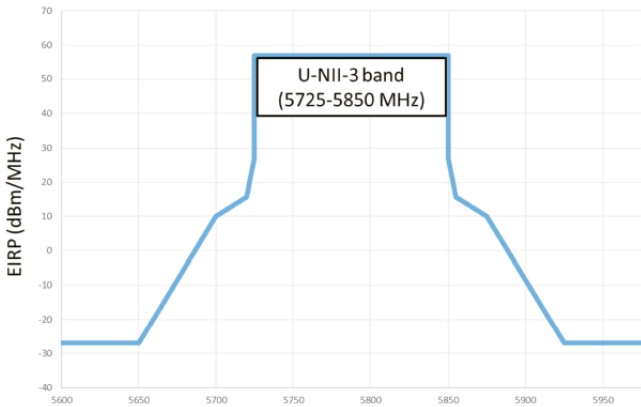
FCC Part 15 Subpart C Paragraph 15.407(5)(b) (Unrestricted Band Emissions Limit)		
Operating Frequency Band (MHz)	EIRP Limit (dBm/MHz)	Equivalent Field Strength at 3m (dBμV/m)
5150 - 5250	-27	68.3
5250 - 5350	-27	68.3
5470 - 5725	-27	68.3
Operating Frequency Band (MHz)	EIRP Limit (dBm/MHz)	
5725 - 5850		

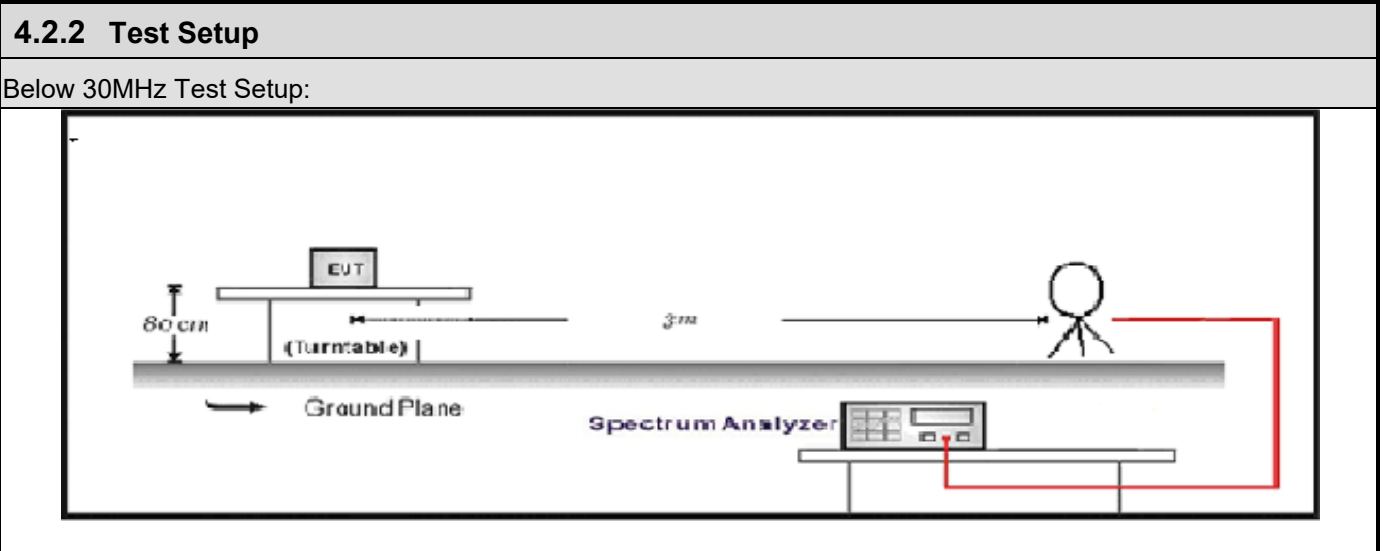

30MHz-1GHz Test Setup:

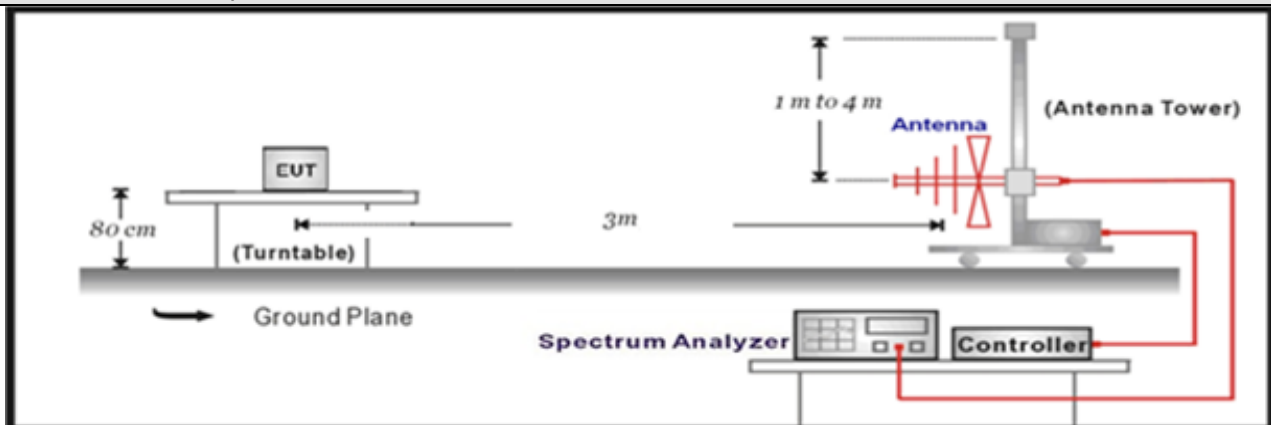

Above 1GHz Test Setup:

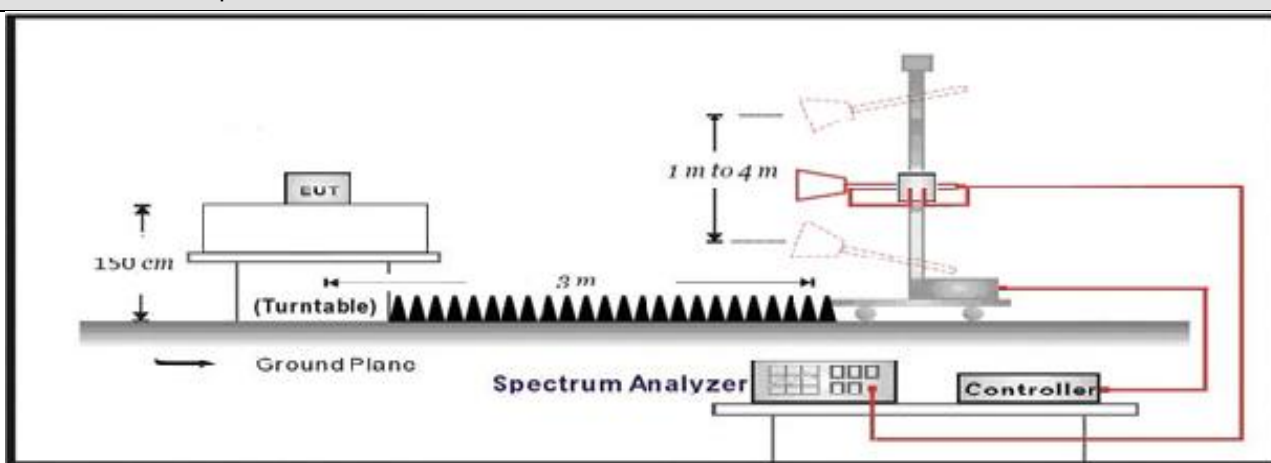

4.2.3 Test Procedure

Test Method			
	References Rule	Chapter	Description
☐	ANSI C63.10	12.7.3	Emissions in non-restricted frequency bands
☒	ANSI C63.10	12.7.2	Emissions in restricted frequency bands
☒	ANSI C63.10	12.7.5	Radiated emission measurements
☒	ANSI C63.10	12.7.6	Procedure for peak unwanted emissions measurements above 1000 MHz
☒	ANSI C63.10	12.7.7	Procedures for average unwanted emissions measurements above 1000 MHz
☐	ANSI C63.10	12.7.7.2	Method AD (average detection)—primary method
☒	ANSI C63.10	12.7.7.3	Method VB-A (Alternative)
☒	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz

	☒	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
	☒	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz

4.3 Emission bandwidth


VERDICT: PASS

4.3.1 Limit

Standard FCC CFR Title 47 Part 15 Subpart E: Section 15.407

Within the Frequency band.

4.3.2 Test Setup

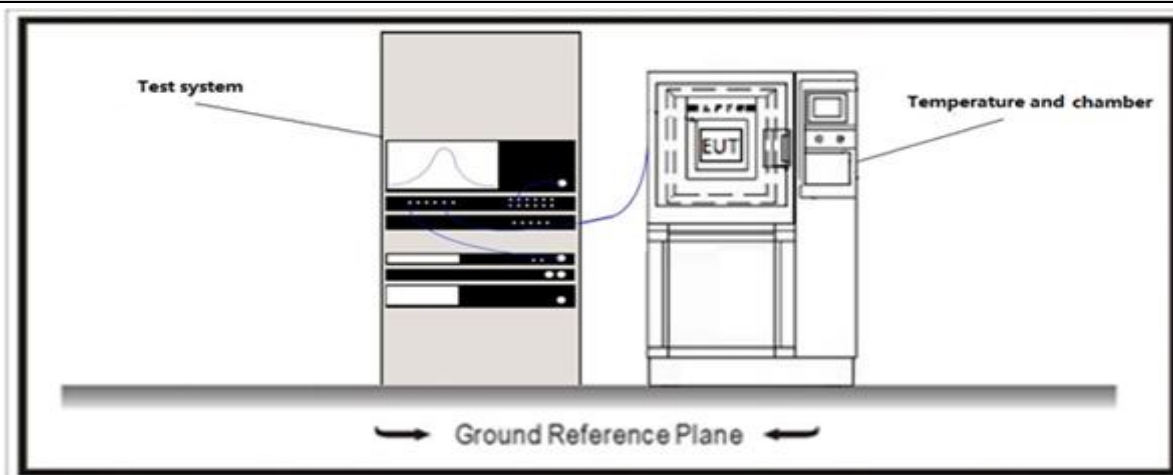


4.3.3 Test Procedure

Test Method

	References Rule	Chapter	Description
☐	ANSI C63.10	12.4	Emission bandwidth and occupied bandwidth
☐	ANSI C63.10	12.4.1	Emission bandwidth (26dB)
☐	ANSI C63.10	12.4.2	Occupied bandwidth (99%)
☒	FCC KDB 789033 D02v02r01	C	Bandwidth Measurement
☒	FCC KDB 789033 D02v02r01	C.1	Emission Bandwidth (26dB)
☐	FCC KDB 789033 D02v02r01	C.2	Minimum Emission Bandwidth for the band 5.725-5.85 GHz (6dB)
☒	FCC KDB 789033 D02v02r01	D	99 Percent Occupied Bandwidth

4.4 6dB bandwidth**VERDICT: PASS****4.4.1 Limit****Standard**

FCC CFR Title 47 Part 15 Subpart E: Section 15.407(e)

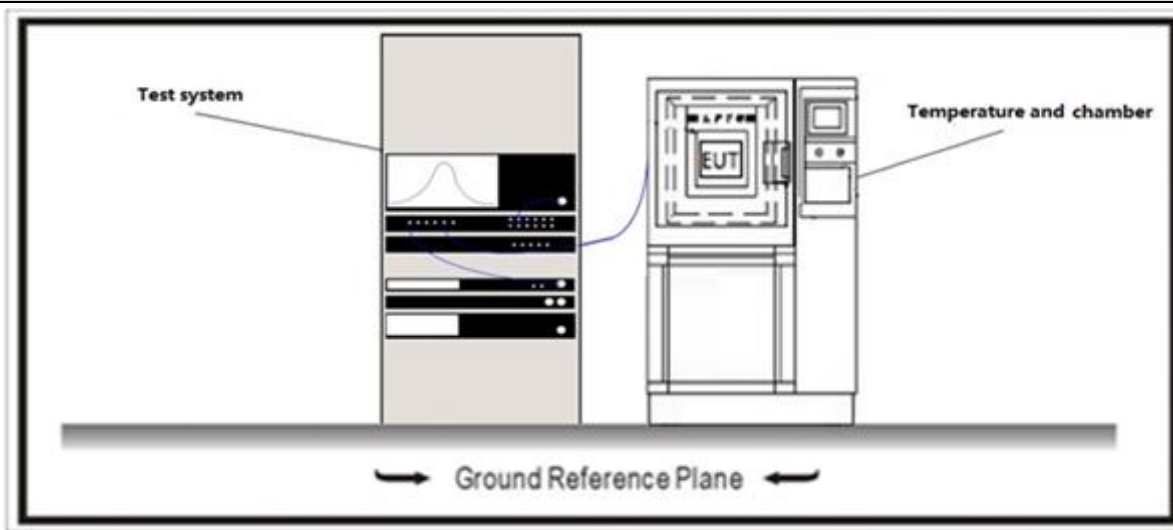6dB Bandwith $\geq 500\text{KHz}$ **4.4.2 Test Setup****4.4.3 Test Procedure****Test Method**

	References Rule	Chapter	Description
☐	ANSI C63.10	12.4	Emission bandwidth and occupied bandwidth
☐	ANSI C63.10	12.4.1	Emission bandwidth (26dB)
☐	ANSI C63.10	12.4.2	Occupied bandwidth (99%)
☒	FCC KDB 789033 D02v02r01	C	Bandwidth Measurement
☐	FCC KDB 789033 D02v02r01	C.1	Emission Bandwidth (26dB)
☒	FCC KDB 789033 D02v02r01	C.2	Minimum Emission Bandwidth for the band 5.725-5.85 GHz (6dB)
☐	FCC KDB 789033 D02v02r01	D	99 Percent Occupied Bandwidth


4.5 Duty cycle

VERDICT: PASS

4.5.1 Limit

N/A

4.5.2 Test Setup

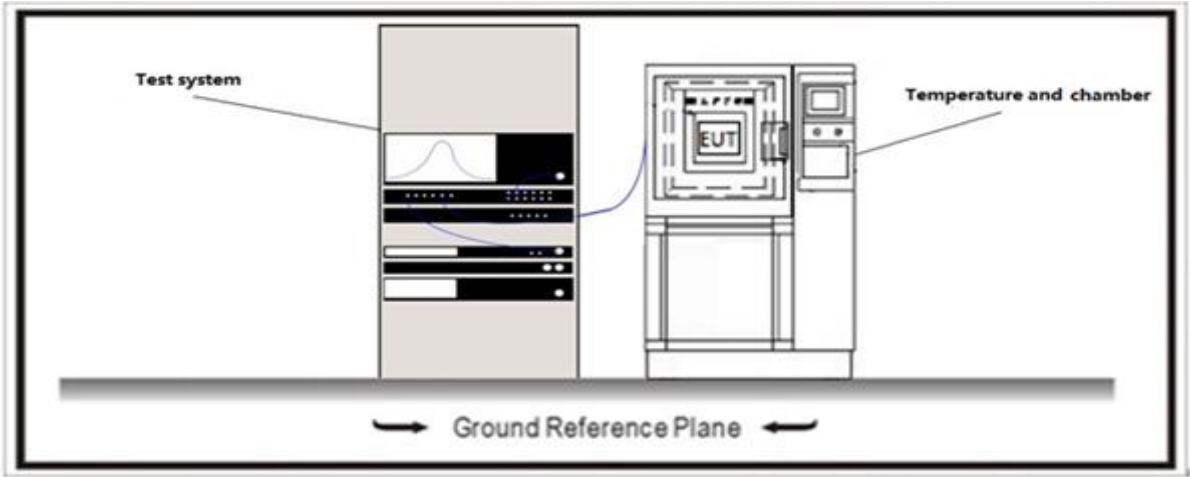

4.5.3 Test Procedure

References Rule		Chapter	Description
☒	ANSI C63.10	11.6	Duty cycle (D), transmission duration (T), and maximum power control level

4.6 Power Output

VERDICT: PASS


4.6.1 Limit

Standard		FCC Part 15 Subpart E Paragraph 15.407 (a)
☒	For the band 5.15-5.25 GHz	
☐	Outdoor access point: the maximum conducted output power shall not exceed 1 W. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 30 - (G_{TX} - 6)$ and $\leq 125\text{mW}$ at any angle above 30 degrees	
☐	Indoor access point: the maximum conducted output power shall not exceed 1 W. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 30 - (G_{TX} - 6)$	
☐	Fixed point-to-point access points: the maximum conducted output power shall not exceed 1 W. If $G_{TX} > 23\text{dBi}$, then $P_{out} \leq 30 - (G_{TX} - 23)$	
☒	Mobile and portable client devices: the maximum conducted output power shall not exceed 250mW. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 24 - (G_{TX} - 6)$	
☒	For the band 5.25-5.35 GHz:	
☒	The maximum conducted output power shall not exceed 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in MHz. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq (\text{The lesser of } 24 \text{ or } 11\text{dBm} + 10 \log B) - (G_{TX} - 6)$	
☒	For the 5.47-5.725 GHz:	
☒	The maximum conducted output power shall not exceed 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in MHz. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq (\text{The lesser of } 24 \text{ or } 11\text{dBm} + 10 \log B) - (G_{TX} - 6)$	
☒	For the band 5.725-5.85 GHz:	
☒	Point-to-multipoint systems (P2M): the maximum conducted output power (P_{out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6 \text{ dBi}$, then $P_{out} = 30 - (G_{TX} - 6)$	
☐	Point-to-point systems (P2P): the maximum conducted output power (P_{out}) shall not exceed the lesser of 1 W	

Note 1 : GTX directional gain of transmitting antennas.

Note 2 : Pout is maximum conducted output power .

4.6.2 Test Setup

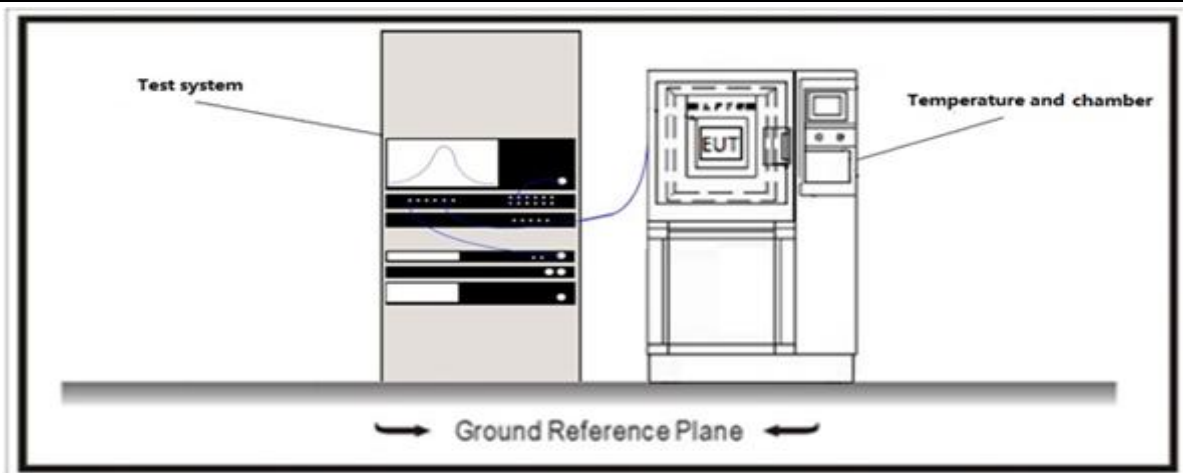

4.6.3 Test Procedure

	References Rule		Chapter	Description
☒	ANSI C63.10		12.3	Maximum conducted output power
	☒	ANSI C63.10	12.3.2	Maximum conducted output power measurement using a spectrum analyzer (SA) or EMI receiver
		☐ ANSI C63.10	12.3.2.2	Method SA-1
		☐ ANSI C63.10	12.3.2.3	Method SA-1A (alternative)
		☒ ANSI C63.10	12.3.2.4	Method SA-2
		☐ ANSI C63.10	12.3.2.5	Method SA-2A (alternative)
		☐ ANSI C63.10	12.3.2.6	Method SA-3
		☐ ANSI C63.10	12.3.2.7	Method SA-3A (alternative)
	☒	ANSI C63.10	12.3.3	Maximum conducted output power using a power meter
		☐ ANSI C63.10	12.3.3.1	Method PM
		☒ ANSI C63.10	12.3.3.2	Method PM-G

Directional Gain Calculations for In-Band test method

	References Rule		Chapter	Description
☐	KDB 662911		F2)a)	Basic methodology
	☐	KDB 662911	F2)a) (i)	transmit signals are correlated
	☐	KDB 662911	F2)a) (ii)	transmit signals are uncorrelated
☐	KDB 662911		F2)b)	Sectorized antenna systems.
☐	KDB 662911		F2)c)	Cross-polarized antennas
	☐	ANSI C63.10	F2)c) (i)	Cross-polarized antennas
	☐	ANSI C63.10	F2)c) (ii)	Multiple antennas
☐	KDB 662911		F2)e)	Spatial stream
	☐	KDB 662911	F2)e) (i)	Antennas have the same gain
	☐	KDB 662911	F2)e) (ii)	Antenna have the different gain with one spatial stream
	☐	KDB 662911	F2)e) (iii)	Antenna have the different gain with more than one spatial stream
☐	KDB 662911		F2)f)	Cyclic Delay Diversity (CDD)
	☐	KDB 662911	F2)f) (i)	Antennas have the same gain
	☐	KDB 662911	F2)f) (ii)	Antenna have the different gain with one spatial stream



	☐	KDB 662911	F2)f) (iii)	Antenna have the different gain with more than one spatial stream
--	--------------------------	------------	-------------	---

4.7 Maximum Power Spectral Density**VERDICT: PASS****4.7.1 Limit**


Standard		FCC Part 15 Subpart E Paragraph 15.407 (a)
☒	For the band 5.15-5.25 GHz	
☐	Outdoor access point: the maximum power spectral density shall not exceed 17 dBm/MHz. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 17 - (G_{TX} - 6)$	
☐	Indoor access point: the maximum power spectral density shall not exceed 17 dBm/MHz. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 17 - (G_{TX} - 6)$	
☐	Fixed point-to-point access points: the maximum power spectral density shall not exceed 17 dBm/MHz. If $G_{TX} > 23\text{dBi}$, then $P_{out} \leq 17 - (G_{TX} - 23)$	
☒	Mobile and portable client devices: the maximum power spectral density shall not exceed 11 dBm/MHz. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 11 - (G_{TX} - 6)$	
☒	For the 5.25-5.35 GHz:	
☒	The maximum power spectral density shall not exceed 11 dBm/MHz. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 11 - (G_{TX} - 6)$	
☒	For the 5.47-5.725 GHz:	
☒	The maximum power spectral density shall not exceed 11 dBm/MHz. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 11 - (G_{TX} - 6)$	
☒	For the band 5.725-5.85 GHz:	
☒	The maximum power spectral density shall not exceed 30 dBm/500KHz. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 30 - (G_{TX} - 6)$	
Note 1 : G_{TX} directional gain of transmitting antennas.		
Note 2 : P_{out} is maximum conducted output power .		

Directional Gain Calculations for In-Band test method

	References Rule		Chapter	Description
☐	KDB 662911		F2)a)	Basic methodology
	☐	KDB 662911	F2)a) (i)	transmit signals are correlated
	☐	KDB 662911	F2)a) (ii)	transmit signals are uncorrelated
☐	KDB 662911		F2)b)	Sectorized antenna systems.
☐	KDB 662911		F2)c)	Cross-polarized antennas
	☐	ANSI C63.10	F2)c) (i)	Cross-polarized antennas
	☐	ANSI C63.10	F2)c) (ii)	Multiple antennas
☐	KDB 662911		F2)e)	Spatial stream
	☐	KDB 662911	F2)e) (i)	Antennas have the same gain

	☐	KDB 662911	F2)e) (ii)	Antenna have the different gain with one spatial stream
	☐	KDB 662911	F2)e) (iii)	Antenna have the different gain with more than one spatial stream
☒		KDB 662911	F2)f)	Cyclic Delay Diversity (CDD)
	☐	KDB 662911	F2)f) (i)	Antennas have the same gain
	☐	KDB 662911	F2)f) (ii)	Antenna have the different gain with one spatial stream
	☒	KDB 662911	F2)f) (iii)	Antenna have the different gain with more than one spatial stream

4.7.2 Test Setup

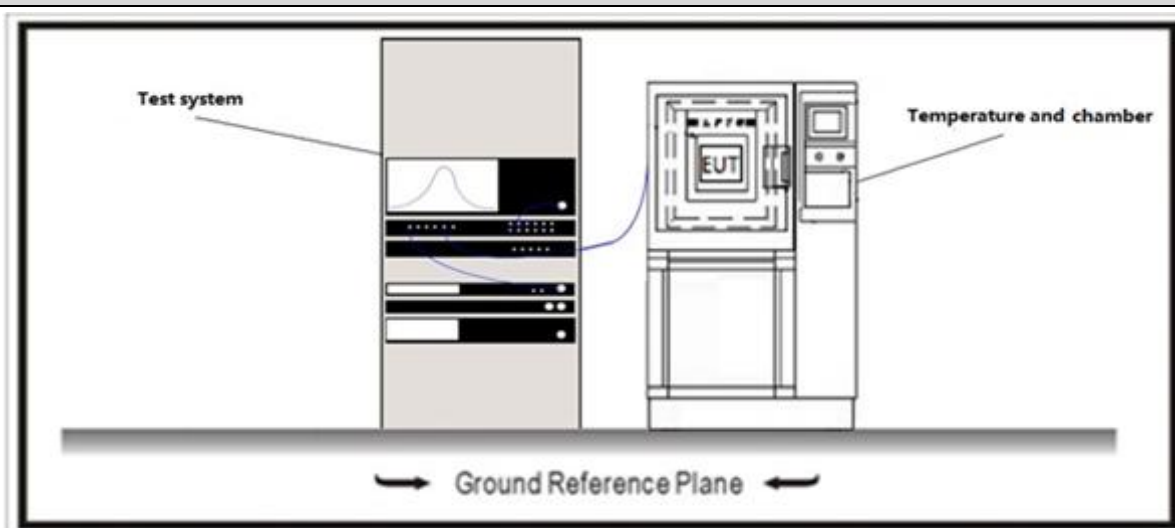

4.7.3 Test Procedure

	References Rule	Chapter	Description
☒	ANSI C63.10	12.5	Peak power spectral density
☒	FCC KDB 789033 D02v02r01	F	Maximum Power Spectral Density (PSD)

4.8 Radiated Emission Band Edge**VERDICT: PASS****4.8.1 Limit****Standard** FCC Part 15 Subpart C Paragraph 15.205

Restricted Bands of operation

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.²Above 38.6**FCC Part 15 Subpart C Paragraph 15.209 (Restricted Band Emissions Limit)**

Frequency (MHz)	Field strength (μV/m)	Field strength (dB μV/m)	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 - 13.8	300 _(Note 1)
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30 _(Note 1)
1.705 - 30	30	29.5	30 _(Note 1)
30 - 88	100	40	3 _(Note 2)
88 - 216	150	43.5	3 _(Note 2)
216 - 960	200	46	3 _(Note 2)
Above 960	500	54	3 _(Note 2)


Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified

distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment.


Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

FCC Part 15 Subpart C Paragraph 15.407(5)(b) (Unrestricted Band Emissions Limit)

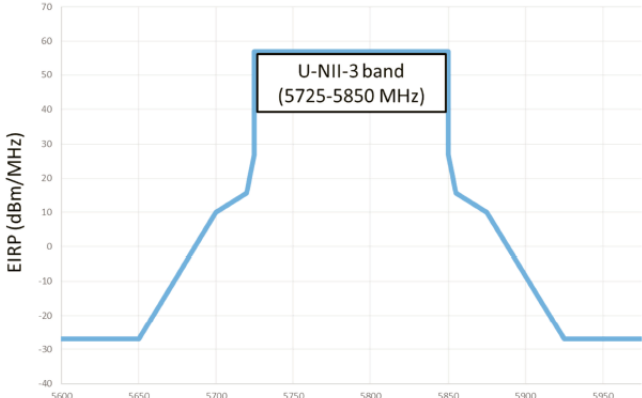Operating Frequency Band (MHz)	EIRP Limit (dBm/MHz)	Equivalent Field Strength at 3m (dBμV/m)
5150 - 5250	-27	68.3
5250 - 5350	-27	68.3
5470 - 5725	-27	68.3
Operating Frequency Band (MHz)	EIRP Limit (dBm/MHz)	
5725 - 5850		

4.8.2 Test Setup

Above 1GHz Test Setup:

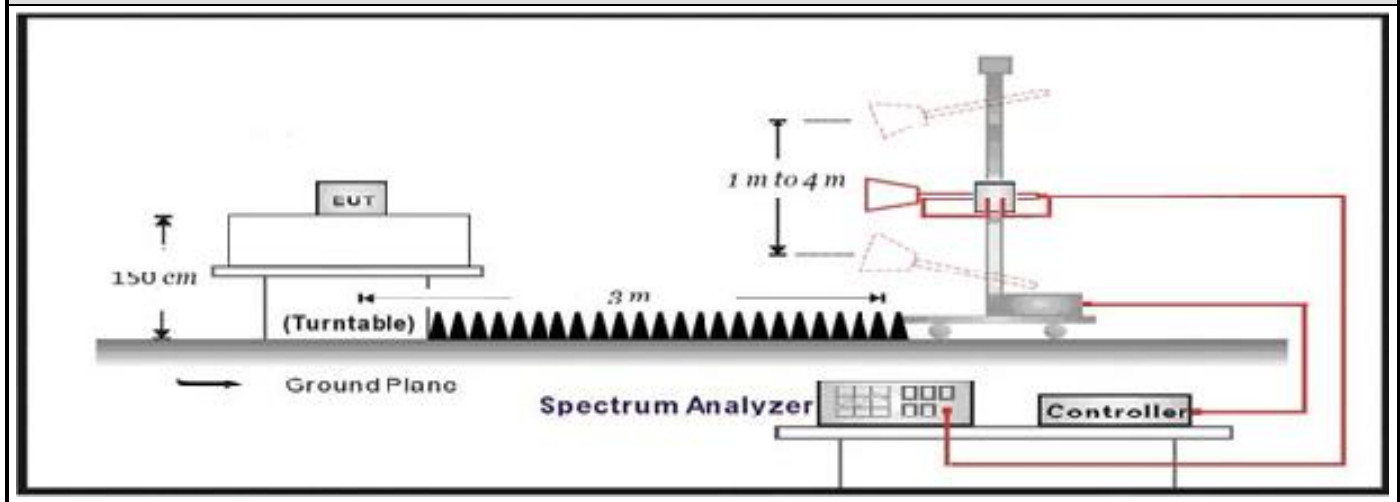

4.8.3 Test Procedure

	References Rule		Chapter	Description
☐	ANSI C63.10		12.7.3	Emissions in non-restricted frequency bands
☒	ANSI C63.10		12.7.2	Emissions in restricted frequency bands
	☐	ANSI C63.10	12.7.5	Radiated emission measurements
	☒	ANSI C63.10	12.7.6	Procedure for peak unwanted emissions measurements above 1000 MHz
	☒	ANSI C63.10	12.7.7	Procedures for average unwanted emissions measurements above 1000 MHz
	☐	ANSI C63.10	12.7.7.2	Method AD (average detection)—primary method
	☒	ANSI C63.10	12.7.7.3	Method VB-A (Alternative)
	☐	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
	☐	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
	☐	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz
☐	FCC KDB 789033 D02v02r01		G.2	Unwanted Emissions that fall Outside of the Restricted Bands
☐	FCC KDB 789033 D02v02r01		G.1	Unwanted Emissions in the Restricted Bands
	☐	FCC KDB 789033 D02v02r01	G.4	Procedure for Unwanted Emissions Measurements below 1000 MHz
	☐	FCC KDB 789033 D02v02r01	G.5	Procedure for Unwanted Maximum Emissions Measurements above 1000 MHz
	☐	FCC KDB 789033 D02v02r01	G.6	Procedures for Average Unwanted Emissions Measurements above 1000 MHz
	☐	FCC KDB 789033 D02v02r01	G.6.c	Method AD (Average detection)—primary method
	☐	FCC KDB 789033 D02v02r01	G.6.d	Method VB (Averaging using reduced video bandwidth): Alternative method.

4.9 Frequency Stability


VERDICT: PASS

4.9.1 Limit:

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band and ± 25 ppm maximum for the 2.4 GHz band.

4.9.2 Test Setup

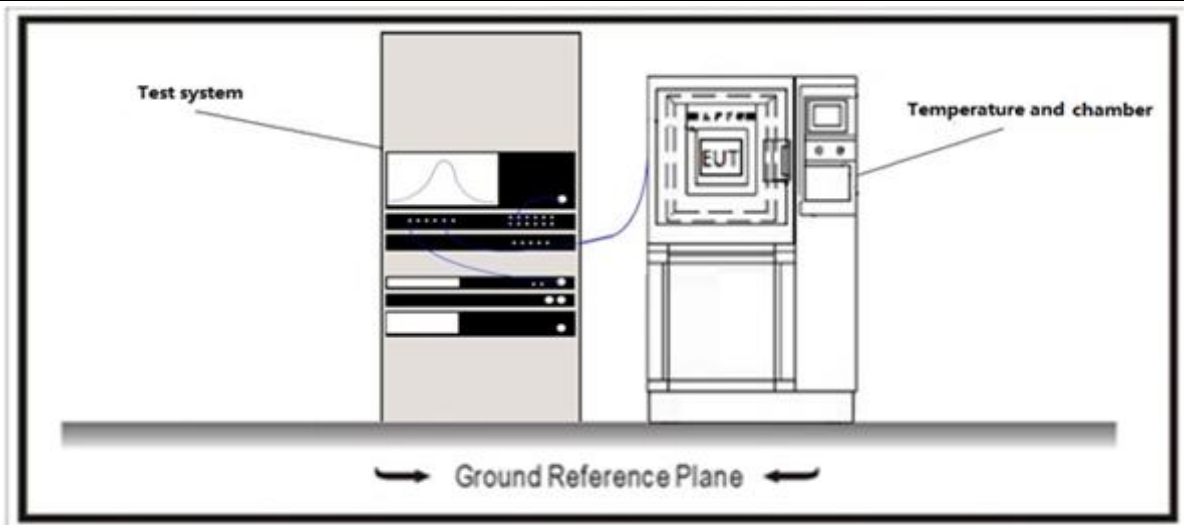

4.9.3 Test Procedure



	References Rule		Chapter	Description
☒	ANSI C63.10		6.8	Frequency stability tests
	☒	ANSI C63.10	6.8.1	Frequency stability with respect to ambient temperature
	☒	ANSI C63.10	6.8.2	Frequency stability when varying supply voltage

4.10 Dynamic Frequency Selection (DFS)**VERDICT: PASS****4.10.1 Limit**



Standard	FCC Part 15 Subpart E Paragraph 15.407(h)
Channel Availability Check (CAC)	
60 Seconds	
Radar Detection Threshold Level	
EIRP $\geq$ 200 milliwatt, level value: -64 dBm EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz, level value: -62 dBm EIRP < 200 milliwatt that do not meet the power spectral density requirement, level value: -62 dBm Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.	
U-NII Detection Bandwidth	
Minimum 100% of the UNII 99% transmission power bandwidth. See Note Note: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	
In-Service Monitoring	
the RLAN device shall be capable of detecting any of the radar test signals. Detection Probability (P_d): 60%	
Channel Shutdown - Channel Move Time.	
10 Seconds	
Channel Shutdown - Channel Closing Transmission Time	
200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period.(See Notes 1 and 2) Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	
Non-Occupancy Period	
Minimum 30 minutes	

4.10.2 Test Setup


Master with injection at the Master

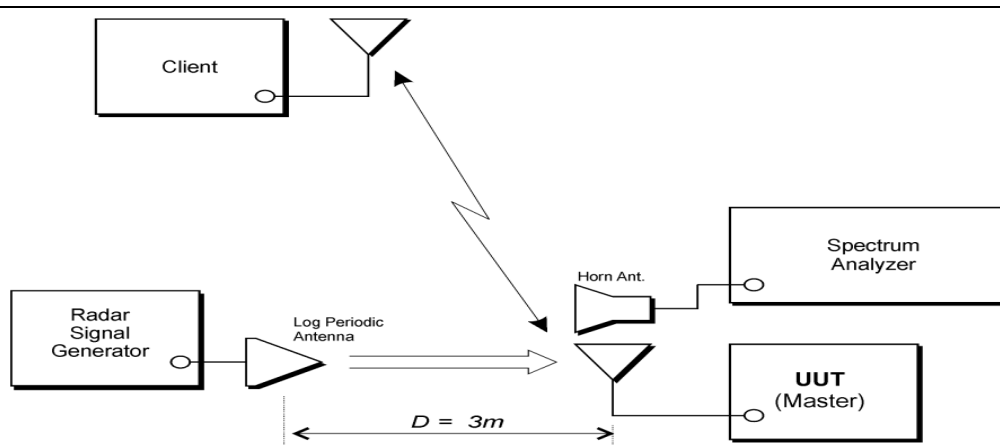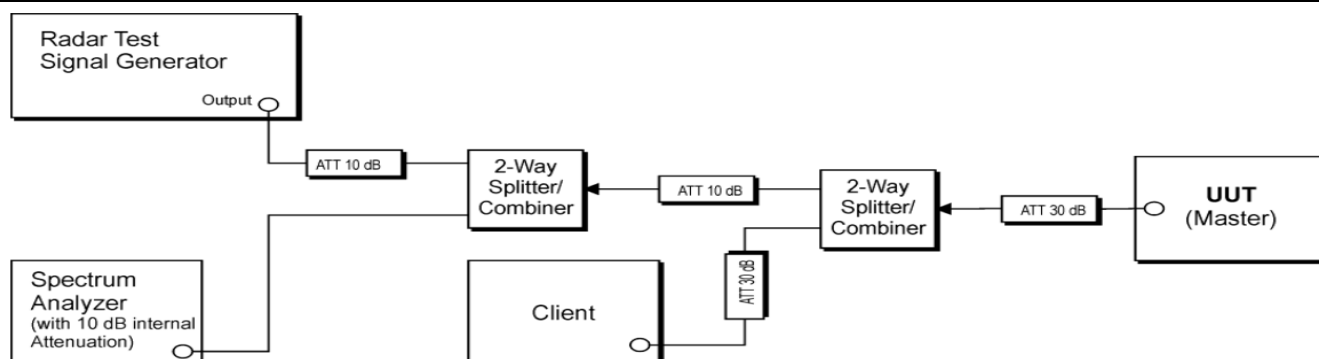

Client with injection at the Master

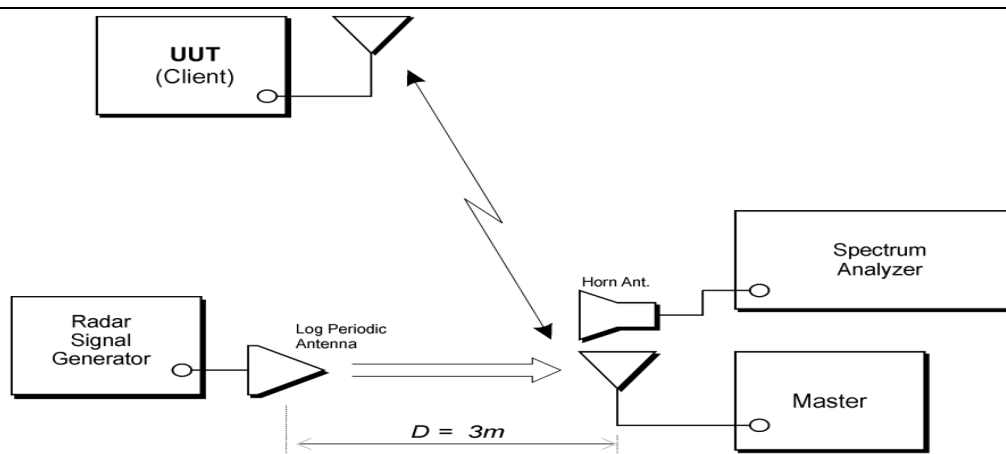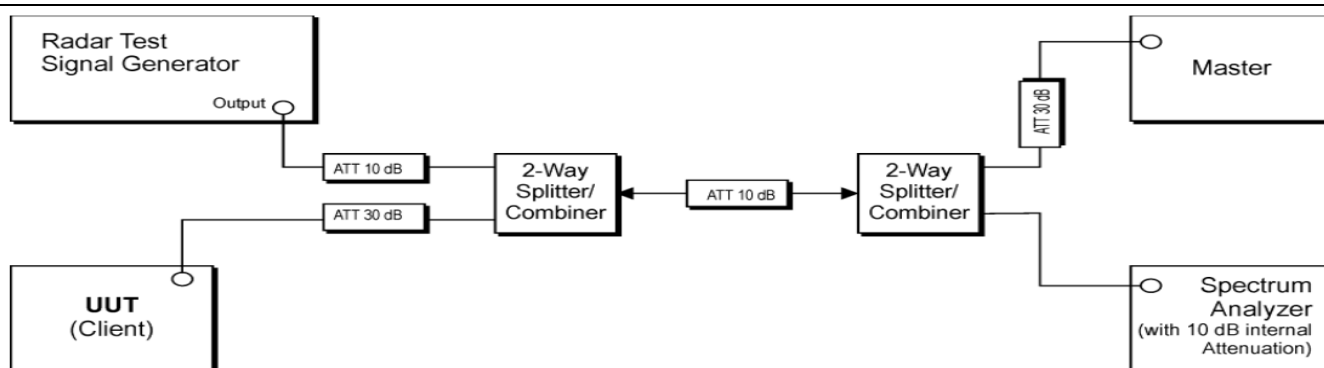

Client with injection at the Client

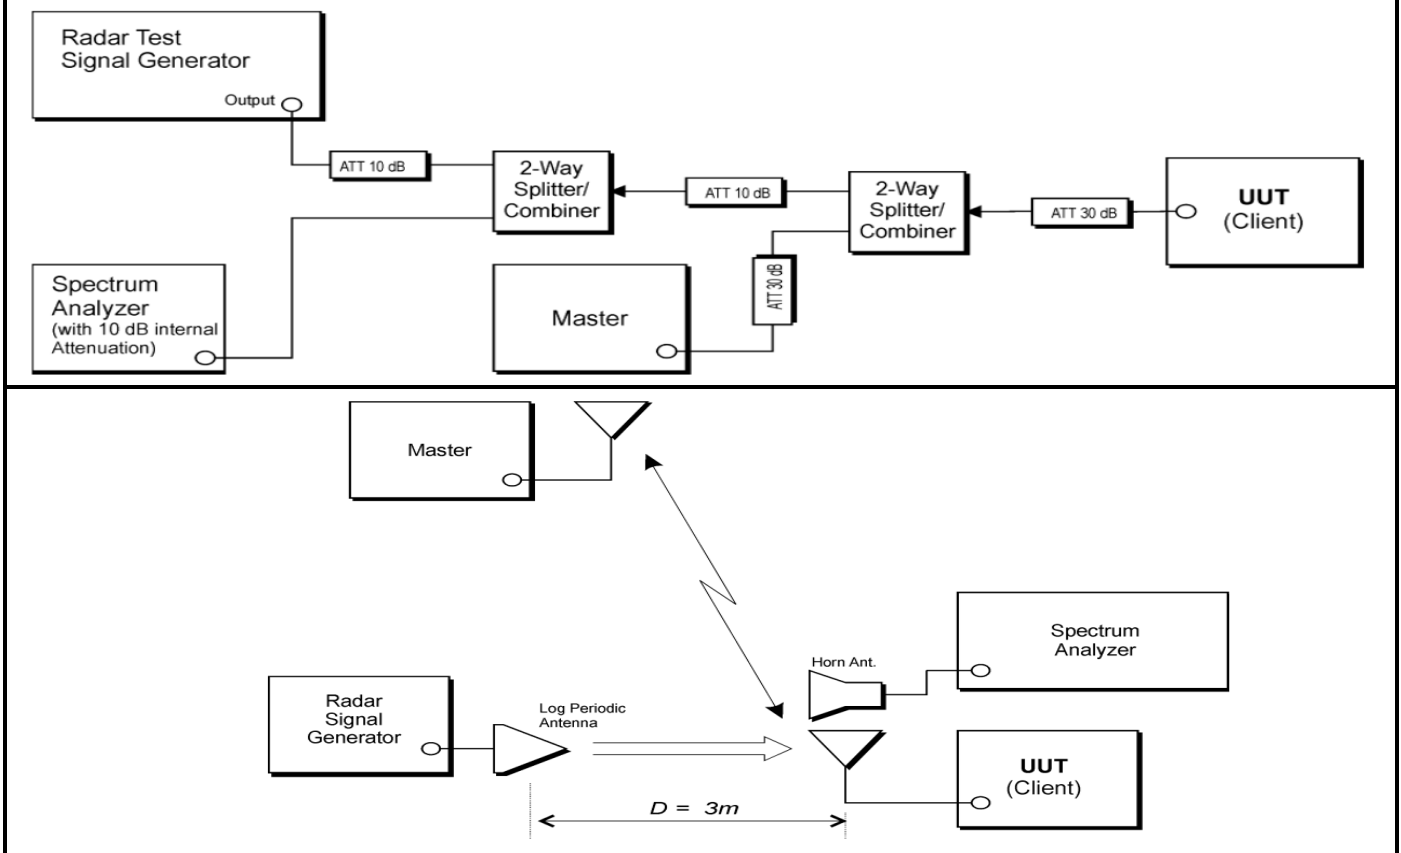

4.10.3 Test Procedure

References Rule	Description
☒ KDB 905462 D02	Dynamic Frequency Selection (DFS)

For a UUT with antenna connector(s) and using dedicated external antenna(s), or for a UUT with integral antenna(s) but with a temporary antenna connector(s) provided, conducted measurements shall be used.

When performing DFS testing on smart antenna systems, a power splitter/combiner shall be used to combine all the receive chains (antenna inputs) into a single test point. The insertion loss of the splitter/combiner shall be taken into account.

The UUT shall be configured to operate at the highest transmitter output power setting.

Beamforming gain Y of smart antenna systems, operating in a mode where beamforming is active, is ignored in order to test the worst case.

The centre frequencies of the radar test signals used in the test procedures below shall fall within the central 80 % of the Occupied Channel Bandwidth of the RLAN channel under test.

Tests with a radar burst at the beginning of the Channel Availability Check Time

a) The signal generator and UUT are connected using Set-up A as described in clause 5.4.8.1.3.1. The power of the UUT is switched off.

b) The UUT is powered on at T_0 . T_1 denotes the instant when the UUT has completed its power-up sequence ($T_{\text{power_up}}$) and is ready to start the radar detection. The *Channel Availability Check* is expected to commence on Chr at instant T_1 and is expected to end no sooner than $T_1 + T_{\text{ch_avail_check}}$ unless the radar test signal is detected sooner. Additional verification may be needed to define T_1 in case it is not exactly known or indicated by the UUT.

c) A single radar burst is generated on Chr using the reference test signal defined in table D.3 at a level of up to 10 dB above the level defined in clause 5.4.8.2.1.1. This single-burst radar test signal shall commence within 2 s after time T_1 .

d) It shall be recorded if the radar test signal was detected.

e) A timing trace or description of the observed timing and behaviour of the UUT shall be recorded.

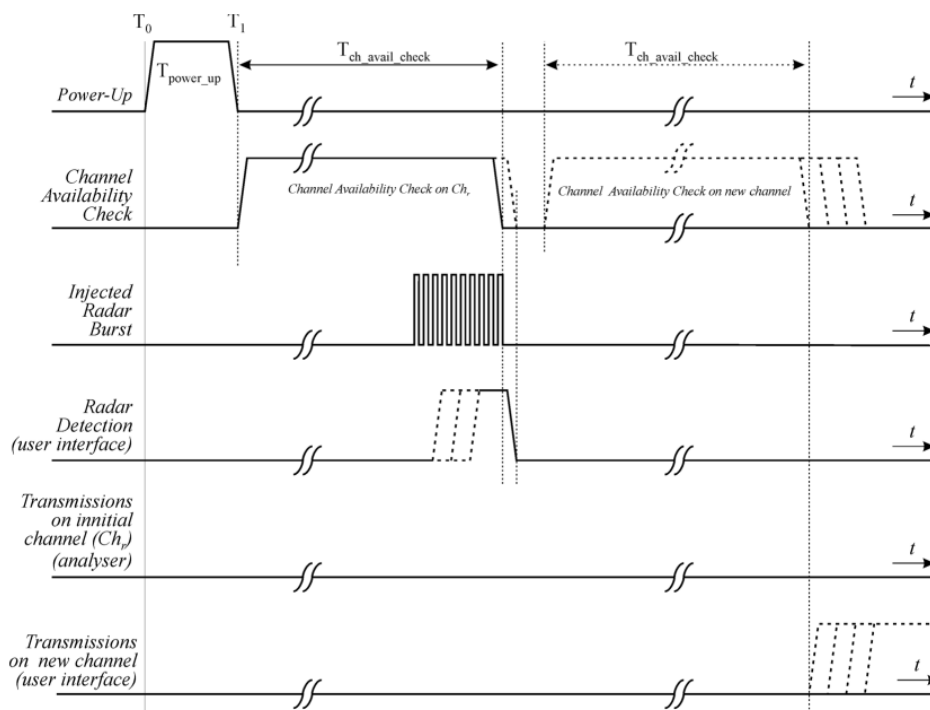


Figure 9: Example of timing for radar testing towards the end of the Channel Availability Check Time

In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period

These tests define how the following DFS parameters are verified during *In-Service Monitoring*:

- Channel Closing Transmission Time
- Channel Move Time
- Non-Occupancy Period

The steps below define the procedure to determine the above mentioned parameters when a radar Burst with a level equal to the DFS Detection Threshold + 1dB is generated on the Operating Channel of the UNII device (In- Service Monitoring).

- a) One frequency will be chosen from the Operating Channels of the UUT within the 5250-5350 MHz or 5470-5725 MHz bands. For 802.11 devices, the test frequency must contain control signals. This can be verified by disabling channel loading and monitoring the spectrum analyzer. If no control signals are detected, another frequency must be selected within the emission bandwidth where control signals are detected.
- b) In case the UUT is a U-NII device operating as a Client Device (with or without DFS), a U-NII device operating as a Master Device will be used to allow the UUT (Client device) to Associate with the Master Device. In case the UUT is a Master Device, a U-NII device operating as a Client Device will be used and it is assumed that the Client will Associate with the UUT (Master). In both cases for conducted tests, the Radar Waveform generator will be connected to the Master Device. For radiated tests, the emissions of the Radar Waveform generator will be directed towards the Master Device. If the Master Device has antenna gain, the main beam of the antenna will be directed toward the radar emitter. Vertical polarization is used for testing.
- c) Stream the channel loading test file from the Master Device to the Client Device on the test Channel for the entire period of the test.
- d) At time T_0 the Radar Waveform generator sends a Burst of pulses for one of the Radar Type 0 in **Table 5** at levels defined in **Table 3**, on the Operating Channel. An additional 1 dB is added to the radar test signal to ensure it is at or above the DFS Detection Threshold, accounting for equipment variations/errors.
- e) Observe the transmissions of the UUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). Measure and record the Channel Move Time and Channel Closing Transmission Time if radar detection occurs. **Figure 17** illustrates Channel Closing Transmission Time.
- f) When operating as a Master Device, monitor the UUT for more than 30 minutes following instant T_2 to verify that the UUT does not resume any transmissions on this Channel. Perform this test once and record the measurement result.
- g) In case the UUT is a U-NII device operating as a Client Device with In-Service Monitoring, perform steps a) to f).

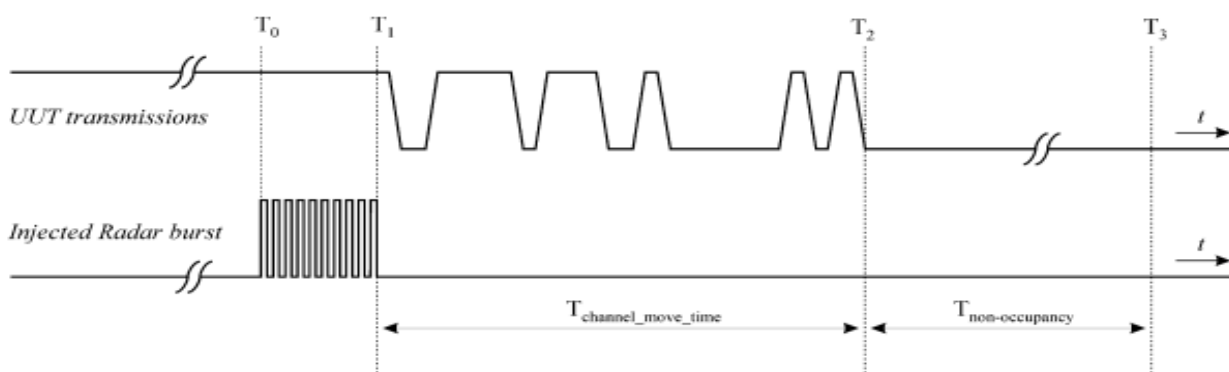


Figure 17: Example of Channel Closing Transmission Time & Channel Closing Time

Statistical Performance Check

The steps below define the procedure to determine the minimum percentage of successful detection requirements found in **Tables 5-7** when a radar burst with a level equal to the DFS Detection Threshold + 1dB is generated on the Operating Channel of the U-NII device (In- Service Monitoring).

- a) One frequency will be chosen from the Operating Channels of the UUT within the 5250-5350 MHz or 5470-5725 MHz bands.
- b) In case the UUT is a U-NII device operating as a Client Device (with or without Radar Detection), a U-NII device operating as a Master Device will be used to allow the UUT (Client device) to Associate with the Master Device. In case the UUT is a Master Device, a U-NII device operating as a Client Device will be used and it is assumed that the Client will Associate with the UUT (Master). In both cases for conducted tests, the Radar Waveform generator will be connected to the Master Device. For radiated tests, the emissions of the Radar Waveform generator will be directed towards the Master Device. If the Master Device has antenna gain, the main beam of the antenna will be directed toward the radar emitter. Vertical polarization is used for testing.
- c) Stream the channel loading test file from the Master Device to the Client Device on the test Channel for the entire period of the test.
- d) At time T₀ the Radar Waveform generator sends the individual waveform for each of the Radar Types 1- 6 in **Tables 5-7**, at levels defined in **Table 3**, on the Operating Channel. An additional 1 dB is added to the radar test signal to ensure it is at or above the DFS Detection Threshold, accounting for equipment variations/errors.
- e) Observe the transmissions of the UUT at the end of the Burst on the Operating Channel for duration greater than 10 seconds for Radar Type 0 to ensure detection occurs.
- f) Observe the transmissions of the UUT at the end of the Burst on the Operating Channel for duration greater than 22 seconds for Long Pulse Radar Type 5 to ensure detection occurs.
- g) In case the UUT is a U-NII device operating as a Client Device with In-Service Monitoring, perform steps a) to f).

Radar Detection Threshold Level (during Off-Channel CAC)

- a) The signal generator, the UUT (master device) and a slave device associated with the UUT, are connected using *Set-up A* described in clause 5.4.8.1.3.1.
- b) The UUT shall transmit a test transmission sequence in accordance with clause 5.3.1.2 on (all) the *Operating Channel(s)*.
- c) A multi burst radar test signal is generated on Chr using any of the radar test signals defined in table D.4 at a level defined in clause 5.4.8.2.1.1. The radar test signal used shall be recorded in the report. This multi burst radar test signal shall commence at T₃ and shall continue for the total duration of the *Off-Channel CAC Time* ($T_{\text{Off-Channel_CAC}}$) as declared by the manufacturer in accordance with table D.1. For channels within the 5 600 MHz to 5 650 MHz band test signals #3 and #4 shall not be used and the Burst Interval Time (BIT) during the test shall be varied between 8 min and 10 min. For channels outside this band, the Burst Interval Time (BIT) during the test shall be varied between 45 s and 60 s.
- d) The UUT shall detect the radar test signal before the end of the *Off-Channel CAC Time* and this shall be recorded. For the purpose of reducing test time, the test may be terminated immediately once the UUT has reported detection of the radar test signal.

Detection Probability (P_d)

This test may be facilitated by disabling the *Channel Shutdown* feature for the duration of the test. For channels outside the 5 600 MHz to 5 650 MHz band, the test in clause 5.4.8.2.1.4.2 is sufficient to demonstrate that the UUT meets the Detection Probability (P_d) defined in table D.5.

Where the declared channel plan includes channels whose nominal bandwidth falls completely or partly within the 5 600 MHz to 5 650 MHz band, the procedure in the steps below has to be performed on one of these channels. See clause 5.3.2.

a) A multi burst radar test signal is generated on Chr using any of the radar test signals defined in table D.4 (except signals #3 and #4) at a level of 10 dB above the level defined in clause 5.4.8.2.1.1. The radar test signal used shall be recorded in the report. This multi burst radar test signal shall commence at T₃ and shall continue for the total duration of the *Off-Channel CAC Time* ($T_{\text{Off-Channel_CAC}}$) as declared by the manufacturer in accordance with table D.1. The Burst Interval Time (BIT) during the test shall be varied between 8 minutes and 10 minutes.

b) It shall be recorded how many bursts have been detected by the UUT at the end of the *Off-Channel CAC Time*. The minimum number of bursts that the UUT shall detect in order to comply with the detection probability defined for this frequency range in table D.5 is given by table 12.

For the purpose of reducing test time, the test may be terminated immediately the UUT has reported the minimum number of burst detections required.

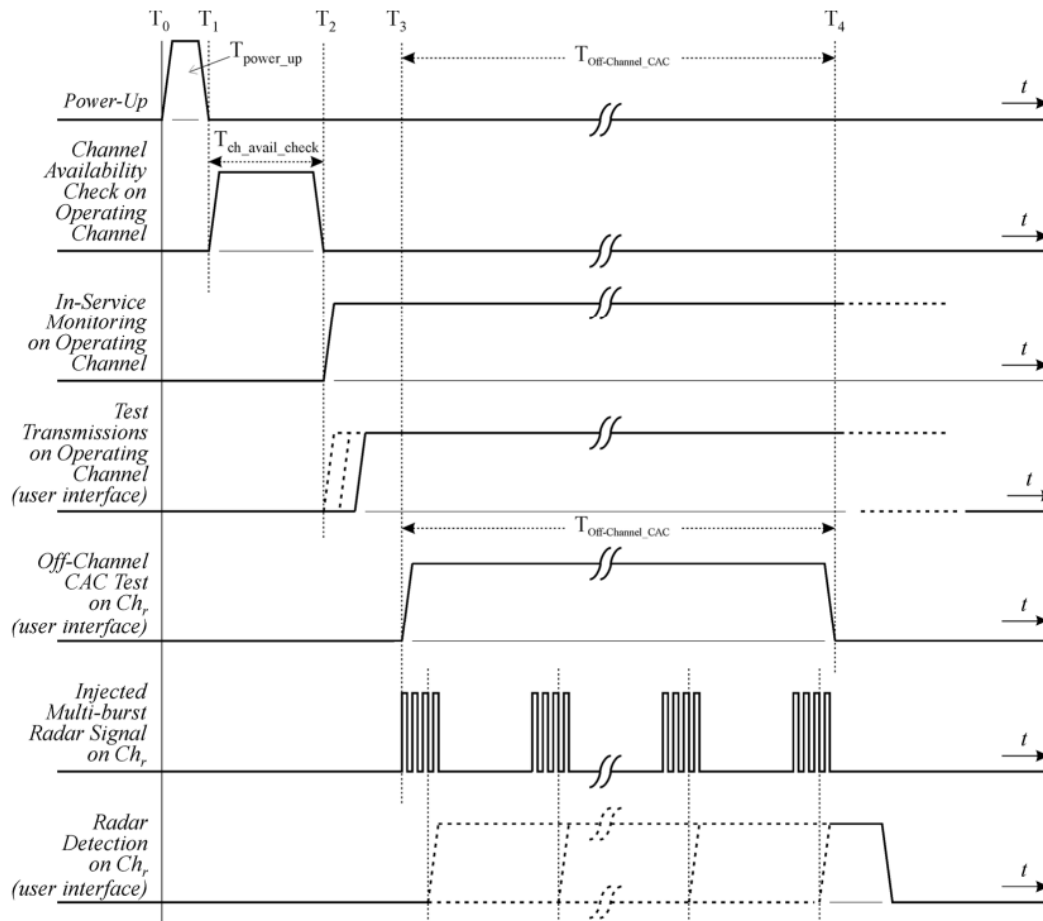


Figure 11: Example of timing for radar testing during the Off-Channel CAC

In-Service Monitoring

The steps below define the procedure to verify the *In-Service Monitoring* and the *Radar Detection Threshold Level* during the *In-Service Monitoring*.

The channel, on which the *In-Service Monitoring* test will be performed, shall be selected in accordance with clause 5.3.2. This channel, designated as Ch_r , is an *Operating Channel*.

a) When the UUT is a master device, a slave device will be used that associates with the UUT. The signal generator and the UUT are connected using *Set-up A* described in clause 5.4.8.1.3.1.

When the UUT is a slave device with a *Radar Interference Detection* function, the UUT shall associate with a master device. The signal generator and the UUT are connected using *Set-up C* described in clause 5.4.8.1.3.3.

b) The UUT shall transmit a test transmission sequence in accordance with clause 5.3.1.2 on the selected channel Ch_r . While the testing is performed on Ch_r , the equipment is allowed to have simultaneous transmissions on other adjacent or non-adjacent *Operating Channels*.

c) At a certain time T_0 , a single burst radar test signal is generated on Ch_r using radar test signal #1 defined in table D.4 and at a level defined in clause 5.4.8.2.1.1. T_1 denotes the end of the radar burst.

d) It shall be recorded if the radar test signal was detected.

e) Step b) to step d) shall be performed 20 times, each time a random value shall be chosen for pulse width and pulse repetition frequency from the corresponding ranges provided in table D.4. For radar test signal #5 and radar

test signal #6 provided in table D.4 the number of PRF values shall vary between 2 or 3. The radar test signal shall be detected at least 12 times out of the 20 trials in order to comply with the detection probability specified in table D.5.

f) Step b) to step e) shall be repeated for each of the radar test signals defined in table D.4 and as described in clause 5.4.8.1.2.

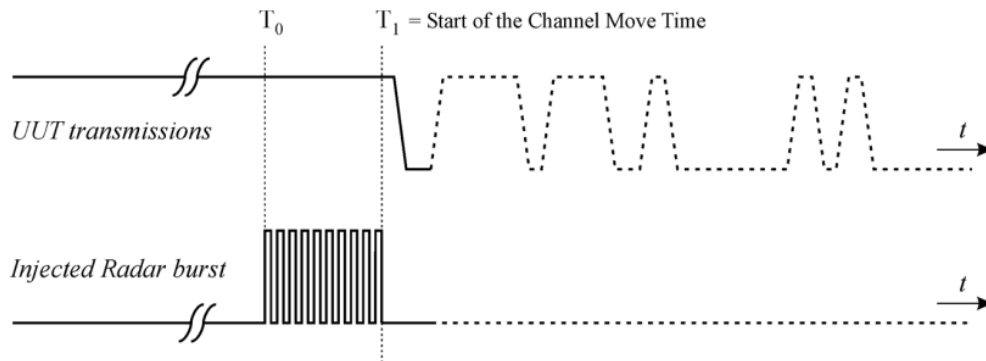


Figure 12: Example of timing for radar testing during In-Service Monitoring

Channel Shutdown and Non-Occupancy period

The steps below define the procedure to verify the *Channel Shutdown* process and to determine the *Channel Closing Transmission Time*, the *Channel Move Time* and the *Non-Occupancy Period*. This is illustrated in figure 13.

The channel, on which these tests will be performed, shall be selected in accordance with clause 5.3.2. This channel, designated as Chr, is an *Operating Channel*.

a) When the UUT is a master device, a slave device will be used that associates with the UUT. The signal generator and the UUT shall be connected using *Set-up A* described in clause 5.4.8.1.3.1.

When the UUT is a slave device (with or without a *Radar Interference Detection* function), the UUT shall associate with a master device. The signal generator and the UUT shall be connected using *Set-up B* described in clause 5.4.8.1.3.2.

In both cases, it is assumed that the channel selection mechanism for the *Uniform Spreading* requirement is disabled in the master.

b) The UUT shall transmit a test transmission sequence in accordance with clause 5.3.1.2 on the selected channel Chr. While the testing is performed on Chr, the equipment is allowed to have simultaneous transmissions on other adjacent or non-adjacent *Operating Channels*.

c) At a certain time T_0 , a single burst test signal is generated on Chr using the reference DFS test signal defined in table D.3 and at a level of up to 10 dB above the level defined in clause 5.4.8.2.1.1 on the selected channel. T_1 denotes the end of the radar burst.

d) The transmissions of the UUT following instant T_1 on the selected channel Chr shall be observed for a period greater than or equal to the *Channel Move Time* defined in table D.1. The aggregate duration (*Channel Closing Transmission Time*) of all transmissions from the UUT on Chr during the *Channel Move Time* shall be compared to the limit defined in table D.1. For equipment capable of having simultaneous transmissions on multiple (adjacent or non-adjacent) *Operating Channels*, the equipment is allowed to continue transmissions on other *Operating Channels* (different from Chr).

The aggregate duration of all transmissions of the UUT does not include quiet periods in between transmissions of the UUT.

e) T_2 denotes the instant when the UUT has ceased all transmissions on the channel Chr. The time difference between T_1 and T_2 shall be measured. This value (*Channel Move Time*) shall be noted and compared with the limit defined in table D.1.

f) Following instant T_2 , the selected channel Chr shall be observed for a period equal to the *Non-Occupancy Period* ($T_3 - T_2$) to verify that the UUT does not resume any transmissions on this channel.

g) When the UUT is a slave device with a *Radar Interference Detection* function step b) to step f) shall be repeated with the generator connected to the UUT using *Set-up C* as described in clause 5.4.8.1.3.3. See also note 2 in table D.2.

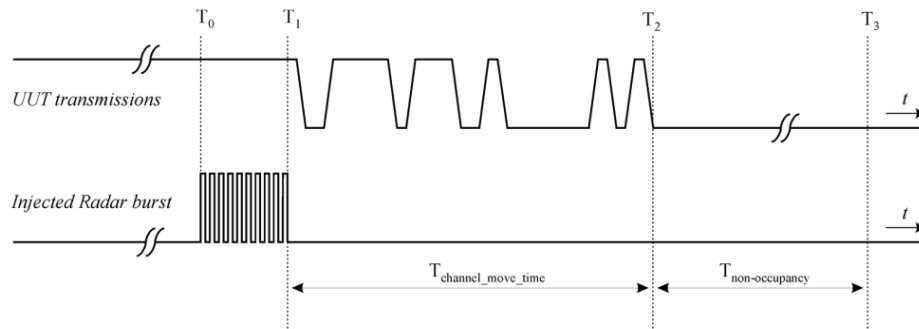


Figure 13: Channel Closing Transmission Time, Channel Move Time and Non-Occupancy Period

4.11 Antenna Requirement**VERDICT: PASS****4.11.1 Limit:**

Standard	FCC Part 15 Subpart C Paragraph 15.203;
An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.	

4.11.2 Antenna Connector Construction:

☒	The use of a permanently attached antenna
☐	The antenna use of a unique coupling to the intentional radiator
☐	The use of a nonstandard antenna jack or electrical connector
Please refer to the attached document "Internal Photograph" to show the antenna connector.	


5 TEST SETUP PHOTO AND EUT PHOTO

Remark: The test setup photo and EUT Photo please see appendix.

6 TEST RESULT


Appendix A: AC Power Line Conducted Emissions

Profile: 2520983R	Page No.: 7
Engineer: Yu Liu	
Site: TR1	Time: 2025/04/06 - 19:55
Limit: FCC_Part 15.207	Margin: 0
Probe: ENV216_101189(0.009-30MHz)	Polarity: Line
EUT: Smart Controller	Power: 120 Vac / 60 Hz
Note: Transmit by 802.11a	

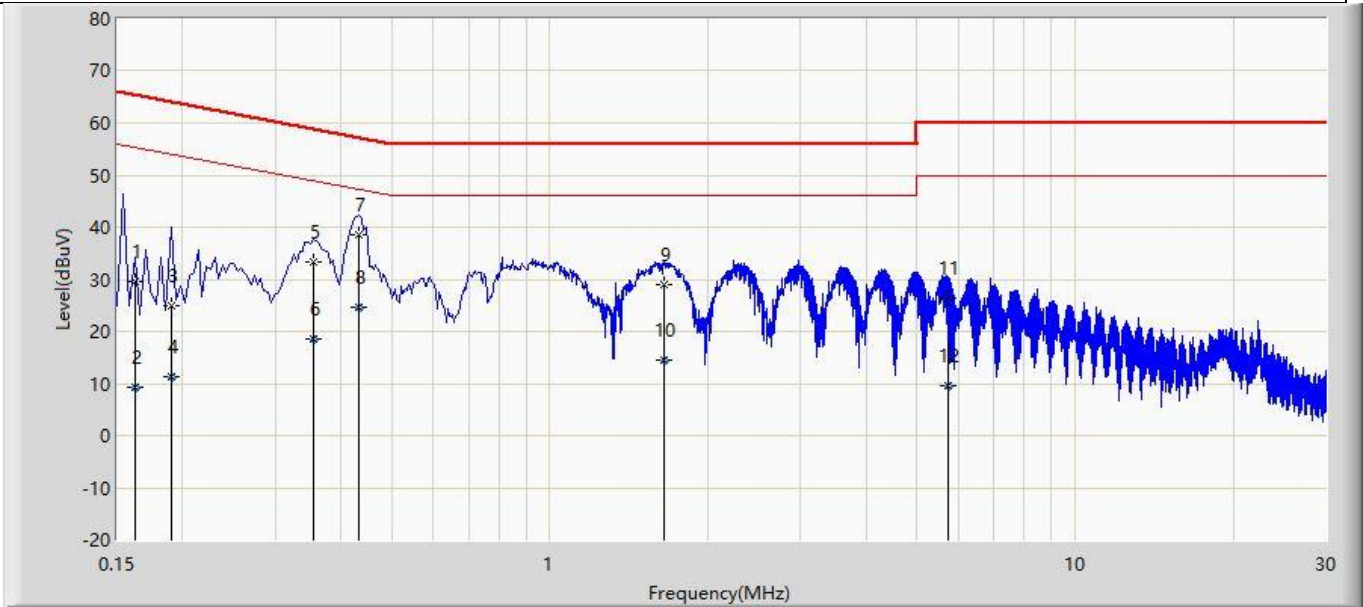

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		0.162	29.686	19.981	-35.694	65.380	9.705	QP
2		0.162	9.314	-0.391	-46.066	55.380	9.705	AV
3		0.190	24.948	15.252	-39.089	64.037	9.696	QP
4		0.190	11.409	1.713	-42.628	54.037	9.696	AV
5		0.354	33.296	23.576	-25.572	58.868	9.721	QP
6		0.354	18.542	8.821	-30.326	48.868	9.721	AV
7	*	0.434	38.658	28.922	-18.518	57.176	9.736	QP
8		0.434	24.679	14.944	-22.497	47.176	9.736	AV
9		1.654	28.882	19.096	-27.118	56.000	9.786	QP
10		1.654	14.404	4.618	-31.596	46.000	9.786	AV
11		5.710	26.252	16.382	-33.748	60.000	9.870	QP
12		5.710	9.505	-0.365	-40.495	50.000	9.870	AV

Profile: 2520983R	Page No.: 8
Engineer: Yu Liu	
Site: TR1	Time: 2025/04/06 - 19:58
Limit: FCC_Part 15.207	Margin: 0
Probe: ENV216_101189(0.009-30MHz)	Polarity: Neutral
EUT: Smart Controller	Power: 120 Vac / 60 Hz
Note: Transmit by 802.11a	

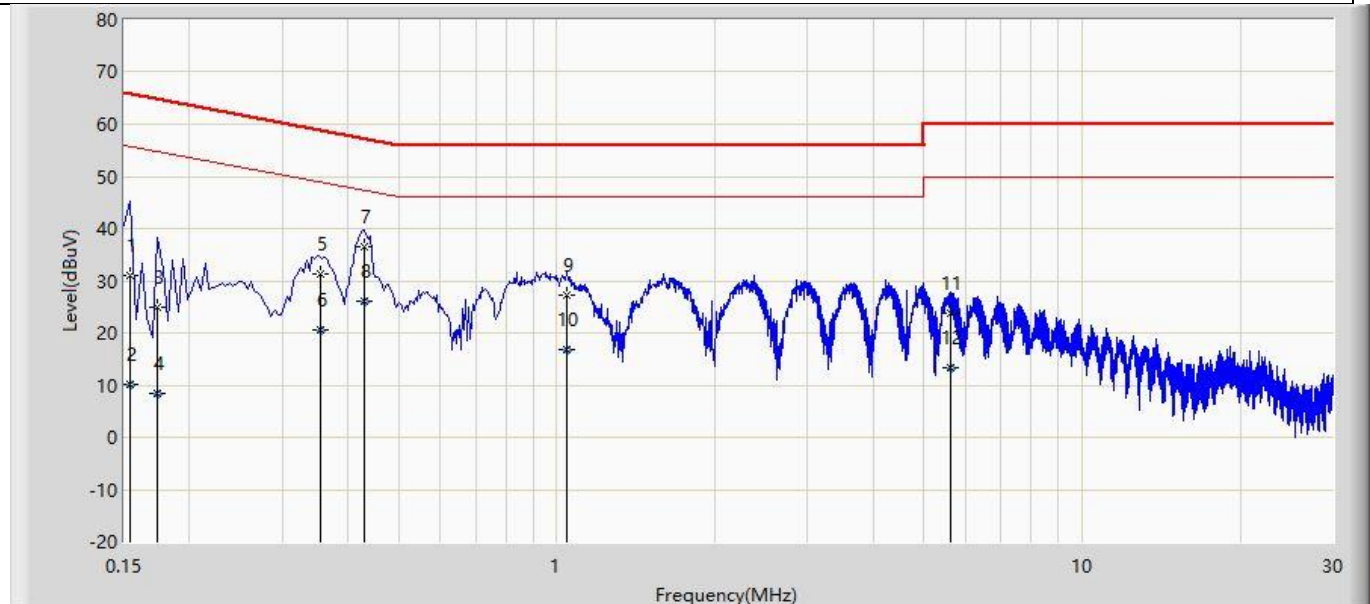

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		0.154	30.966	21.238	-34.815	65.781	9.727	QP
2		0.154	10.180	0.452	-45.602	55.781	9.727	AV
3		0.174	24.945	15.233	-39.823	64.767	9.712	QP
4		0.174	8.354	-1.358	-46.413	54.767	9.712	AV
5		0.354	31.240	21.582	-27.628	58.868	9.659	QP
6		0.354	20.612	10.953	-28.256	48.868	9.659	AV
7	*	0.430	36.613	26.966	-20.639	57.253	9.647	QP
8		0.430	26.128	16.481	-21.125	47.253	9.647	AV
9		1.046	27.317	17.587	-28.683	56.000	9.730	QP
10		1.046	16.946	7.216	-29.054	46.000	9.730	AV
11		5.618	23.665	13.792	-36.335	60.000	9.873	QP
12		5.618	13.239	3.366	-36.761	50.000	9.873	AV

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).


Appendix B: Radiated Emission

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode1:Transmit at 5180MHz by 802.11a	Volta	120 Vac / 60 Hz
Environment:	Temp: 25℃ ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

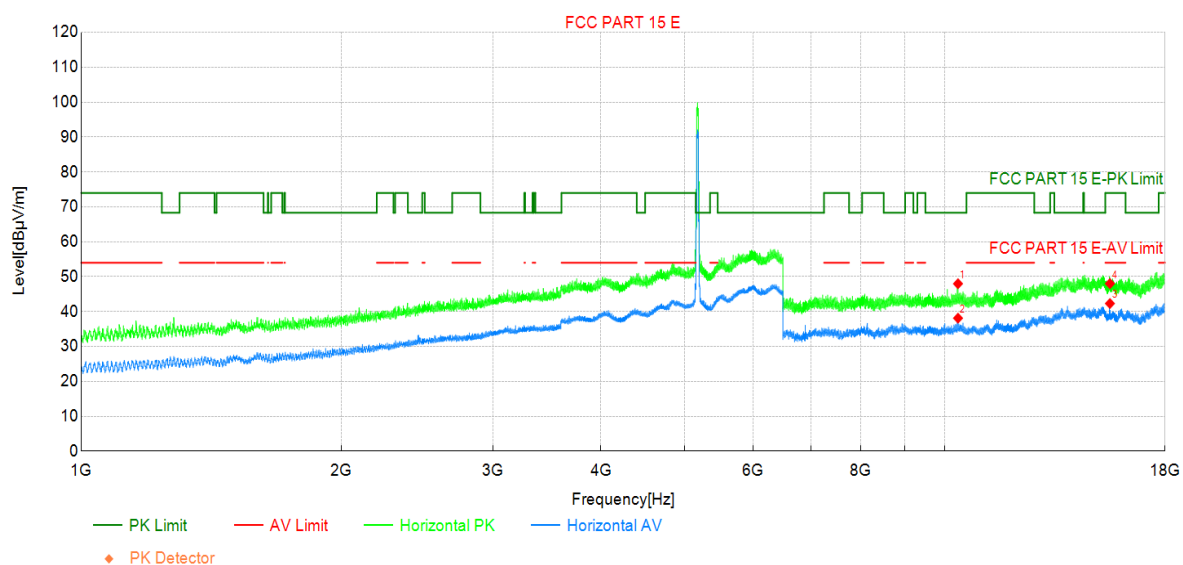

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10362.56	41.40	47.97	6.57	68.30	20.33	PK	Horizo	PASS
2	10363.52	31.54	38.11	6.57	-	-	AV	Horizo	NA
3	15539.96	28.40	42.31	13.91	54.00	11.69	AV	Horizo	PASS
4	15540.00	34.11	48.01	13.90	74.00	25.99	PK	Horizo	PASS

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode1:Transmit at 5180MHz by 802.11a	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

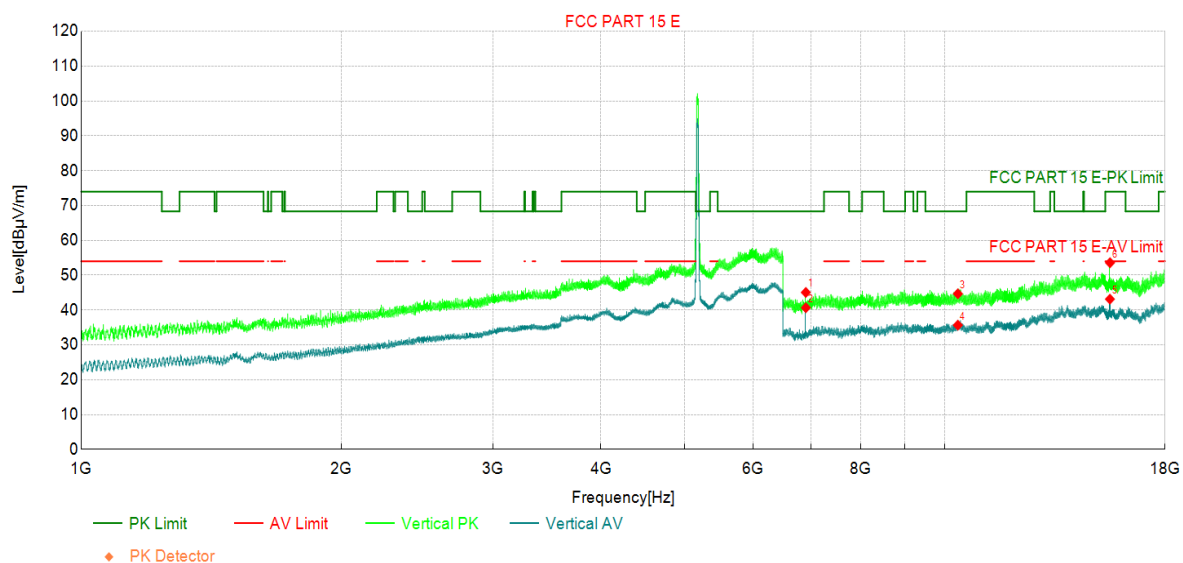

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	6906.33	43.12	45.05	1.93	68.30	23.25	PK	Vertic	PASS
2	6906.81	38.72	40.65	1.93	-	-	AV	Vertic	NA
3	10360.00	38.08	44.66	6.58	68.30	23.64	PK	Vertic	PASS
4	10360.00	29.08	35.66	6.58	-	-	AV	Vertic	NA
5	15540.00	29.23	43.13	13.90	54.00	10.87	AV	Vertic	PASS
6	15543.79	39.69	53.57	13.88	74.00	20.43	PK	Vertic	PASS

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode1:Transmit at 5220MHz by 802.11a	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

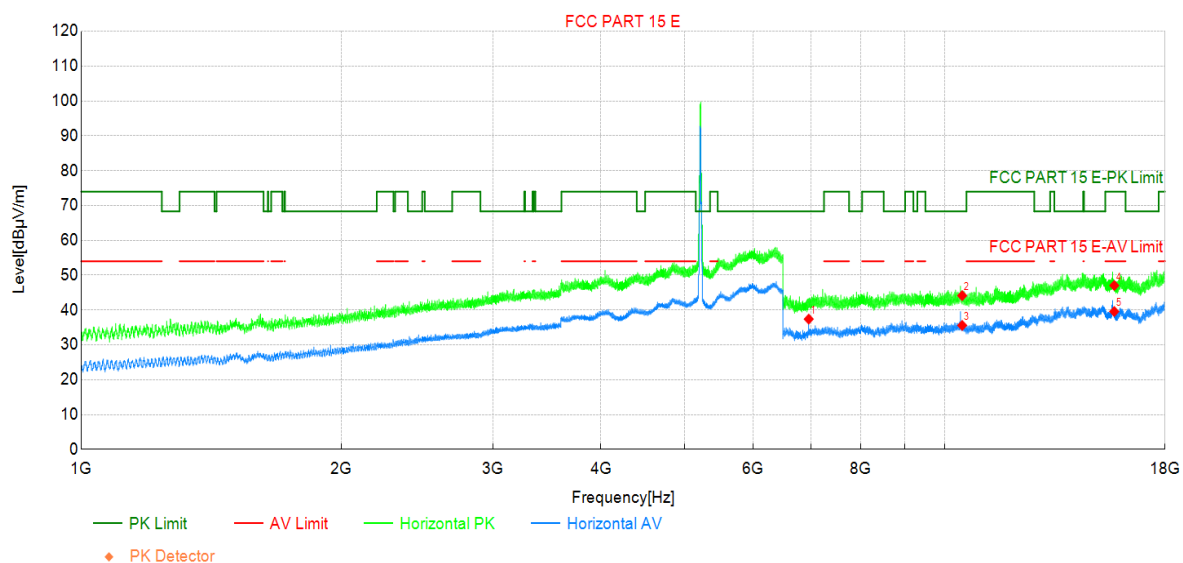

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	6960.48	35.25	37.40	2.15	-	-	AV	Horizo	NA
2	10480.00	37.42	44.13	6.71	68.30	24.17	PK	Horizo	PASS
3	10480.00	28.87	35.58	6.71	-	-	AV	Horizo	NA
4	15720.00	32.62	47.03	14.41	74.00	26.97	PK	Horizo	PASS
5	15720.00	25.16	39.57	14.41	54.00	14.43	AV	Horizo	PASS

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode1:Transmit at 5220MHz by 802.11a	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

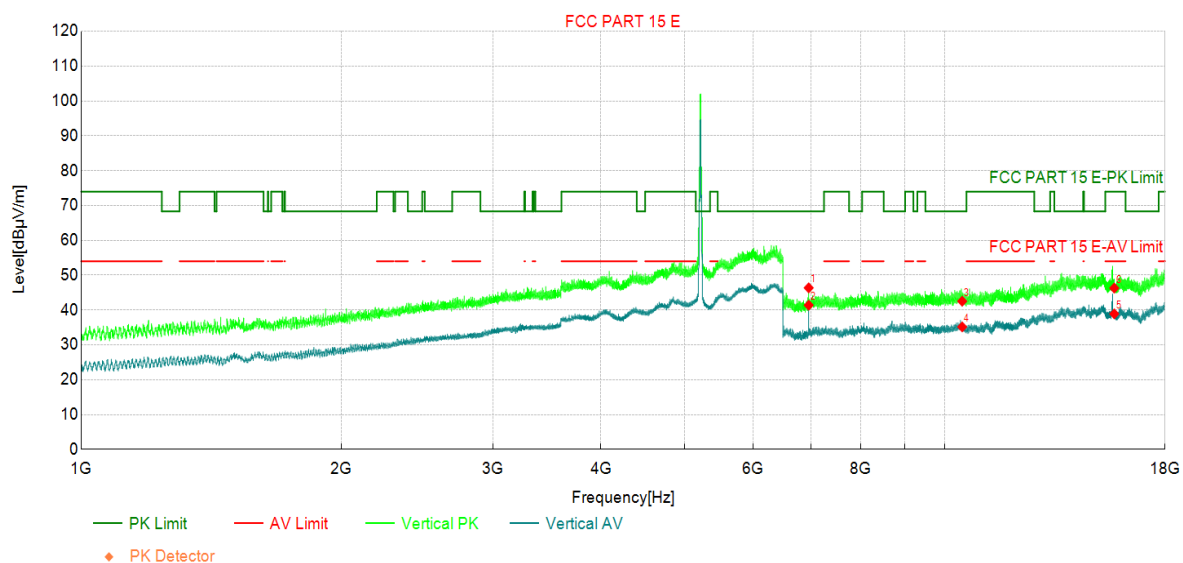

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	6959.52	44.21	46.36	2.15	68.30	21.94	PK	Vertic	PASS
2	6960.48	39.24	41.39	2.15	-	-	AV	Vertic	NA
3	10480.00	35.82	42.53	6.71	68.30	25.77	PK	Vertic	PASS
4	10480.00	28.44	35.15	6.71	-	-	AV	Vertic	NA
5	15720.00	24.49	38.90	14.41	54.00	15.10	AV	Vertic	PASS
6	15720.00	31.89	46.30	14.41	74.00	27.70	PK	Vertic	PASS

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode1:Transmit at 5240MHz by 802.11a	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

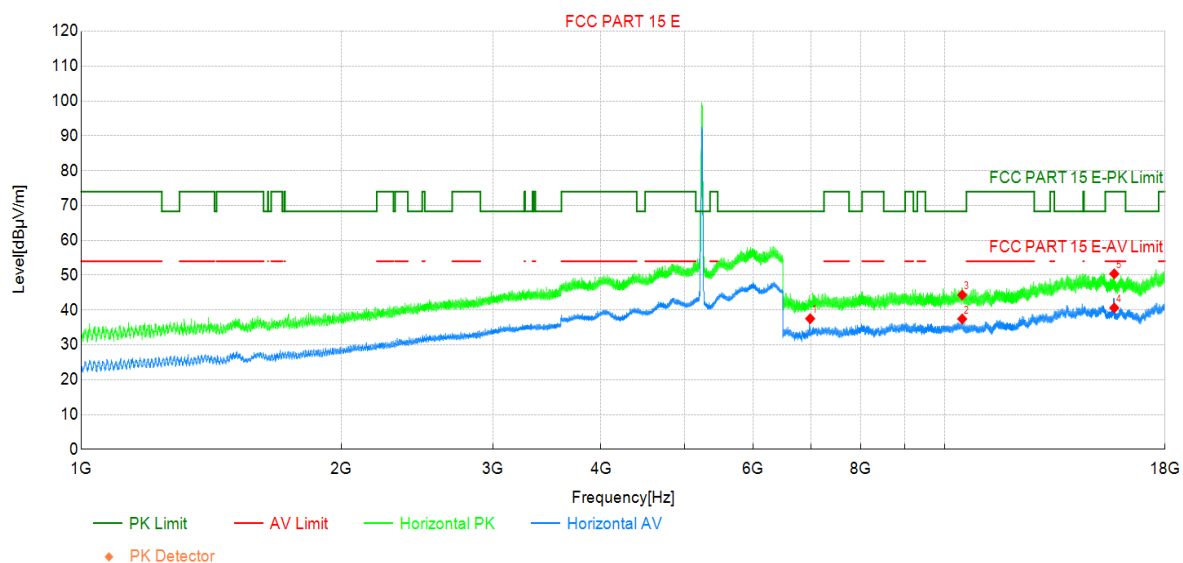

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	6986.83	35.25	37.51	2.26	-	-	AV	Horizo	NA
2	10480.00	30.73	37.44	6.71	-	-	AV	Horizo	NA
3	10480.00	37.63	44.34	6.71	68.30	23.96	PK	Horizo	PASS
4	15720.00	26.20	40.61	14.41	54.00	13.39	AV	Horizo	PASS
5	15720.00	35.98	50.39	14.41	74.00	23.61	PK	Horizo	PASS

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode1:Transmit at 5240MHz by 802.11a	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

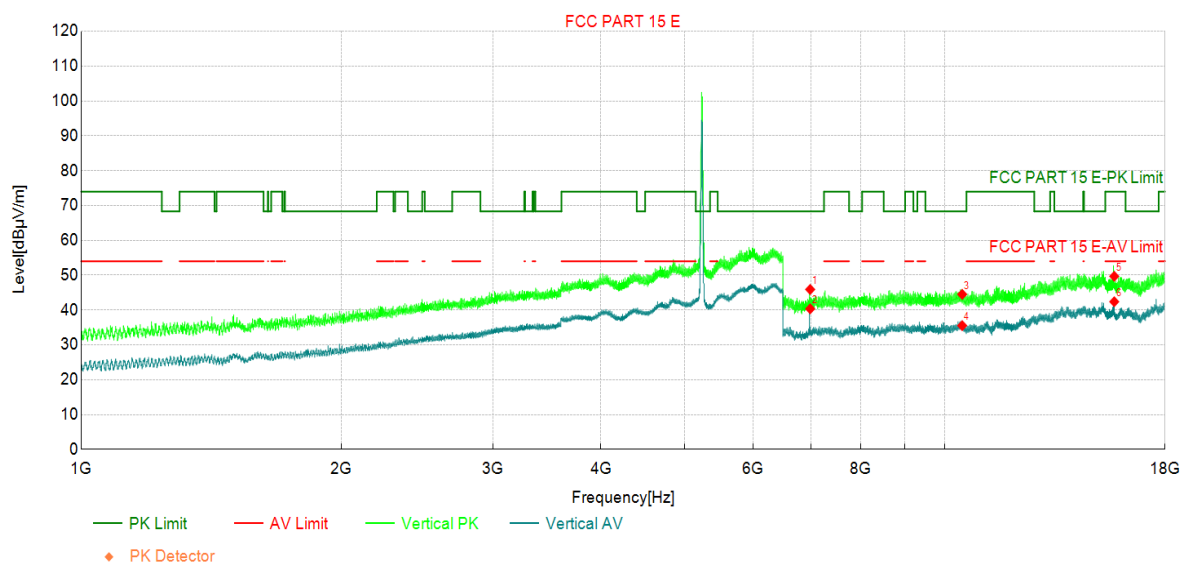

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	6986.83	43.65	45.91	2.26	68.30	22.39	PK	Vertic	PASS
2	6986.83	38.08	40.34	2.26	-	-	AV	Vertic	NA
3	10480.00	37.80	44.51	6.71	68.30	23.79	PK	Vertic	PASS
4	10480.00	28.80	35.51	6.71	-	-	AV	Vertic	NA
5	15720.00	35.27	49.68	14.41	74.00	24.32	PK	Vertic	PASS
6	15720.00	27.98	42.39	14.41	54.00	11.61	AV	Vertic	PASS

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode1:Transmit at 5260MHz by 802.11a	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

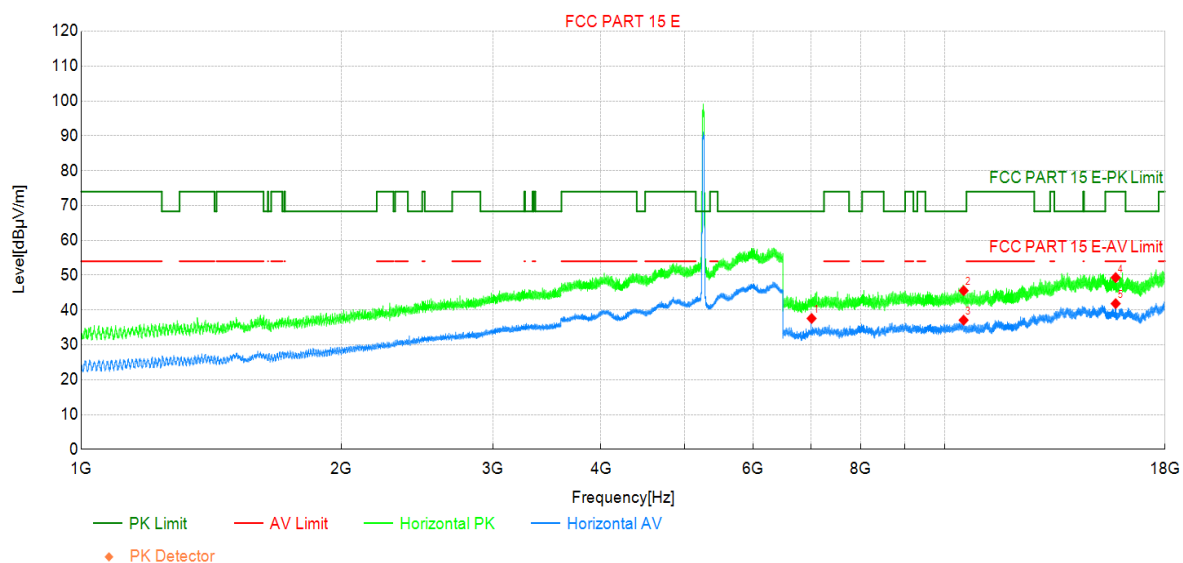

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	7013.67	35.17	37.57	2.40	-	-	AV	Horizo	NA
2	10520.00	38.80	45.56	6.76	68.30	22.74	PK	Horizo	PASS
3	10520.00	30.33	37.09	6.76	-	-	AV	Horizo	NA
4	15780.00	35.23	49.32	14.09	74.00	24.68	PK	Horizo	PASS
5	15780.00	27.74	41.83	14.09	54.00	12.17	AV	Horizo	PASS

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode1:Transmit at 5260MHz by 802.11a	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

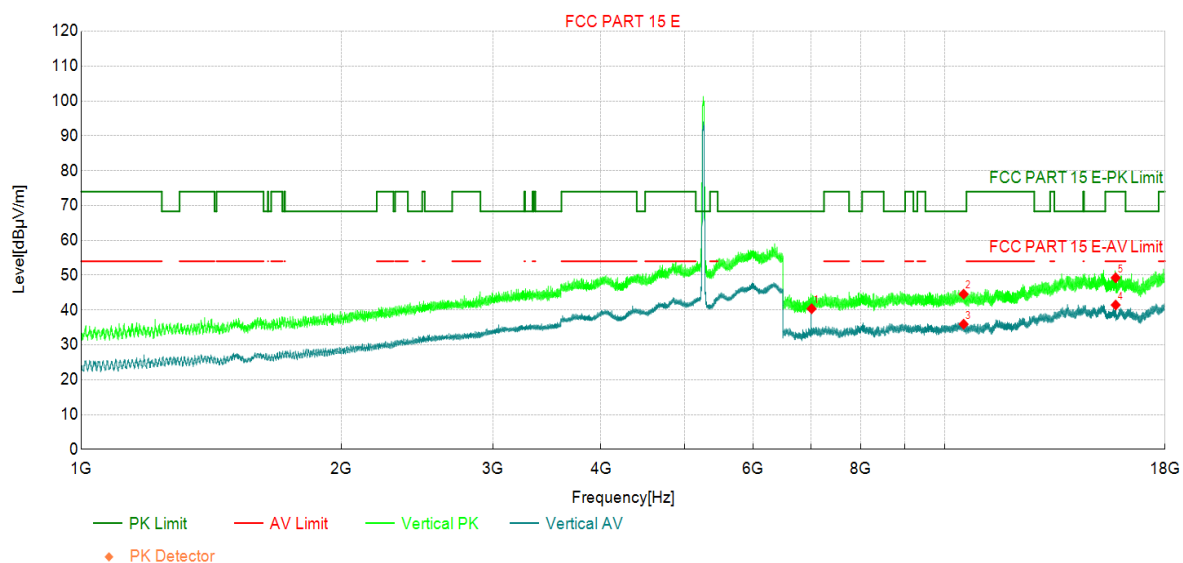

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	7013.67	37.98	40.38	2.40	-	-	AV	Vertic	NA
2	10520.00	37.79	44.55	6.76	68.30	23.75	PK	Vertic	PASS
3	10520.00	29.17	35.93	6.76	-	-	AV	Vertic	NA
4	15780.00	27.36	41.45	14.09	54.00	12.55	AV	Vertic	PASS
5	15780.00	35.17	49.26	14.09	74.00	24.74	PK	Vertic	PASS

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode1:Transmit at 5300MHz by 802.11a	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

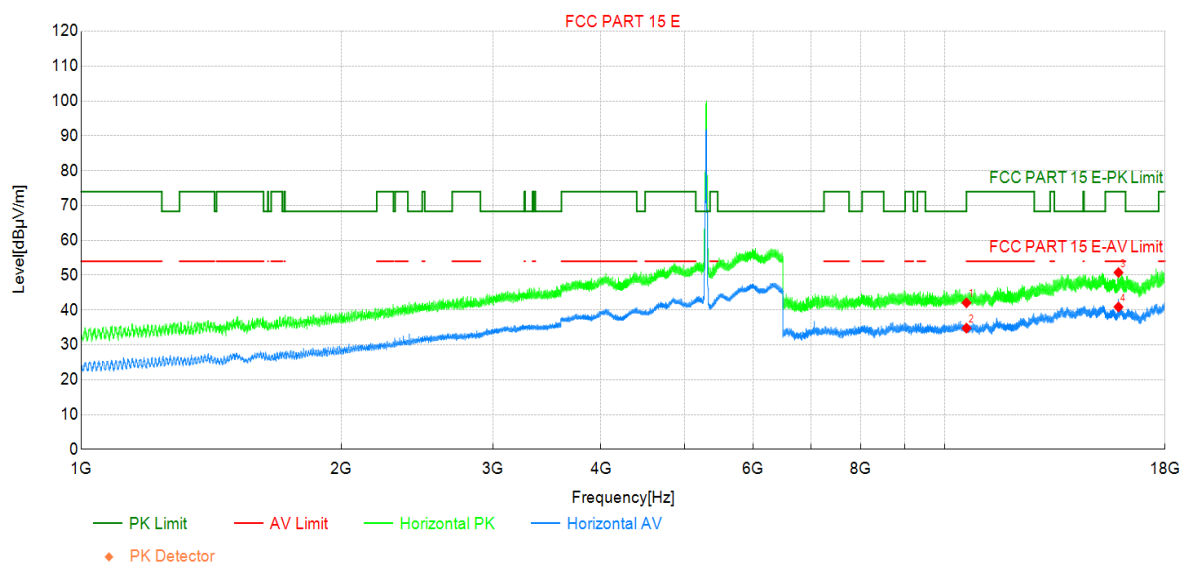

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10600.00	35.29	42.07	6.78	68.30	26.23	PK	Horizo	PASS
2	10600.00	28.02	34.80	6.78	54.00	19.20	AV	Horizo	PASS
3	15900.00	36.63	50.75	14.12	74.00	23.25	PK	Horizo	PASS
4	15900.00	26.76	40.88	14.12	54.00	13.12	AV	Horizo	PASS

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode1:Transmit at 5300MHz by 802.11a	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

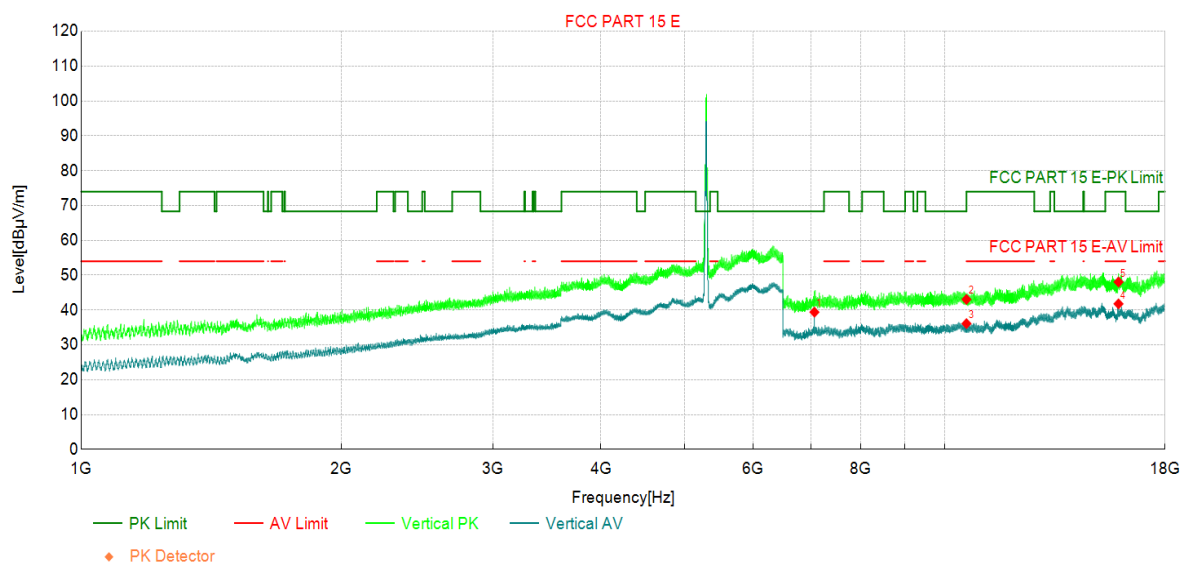

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	7066.85	36.67	39.39	2.72	-	-	AV	Vertic	NA
2	10600.00	36.26	43.04	6.78	68.30	25.26	PK	Vertic	PASS
3	10600.00	29.32	36.10	6.78	54.00	17.90	AV	Vertic	PASS
4	15900.00	27.64	41.76	14.12	54.00	12.24	AV	Vertic	PASS
5	15900.00	33.93	48.05	14.12	74.00	25.95	PK	Vertic	PASS

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode1:Transmit at 5320MHz by 802.11a	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

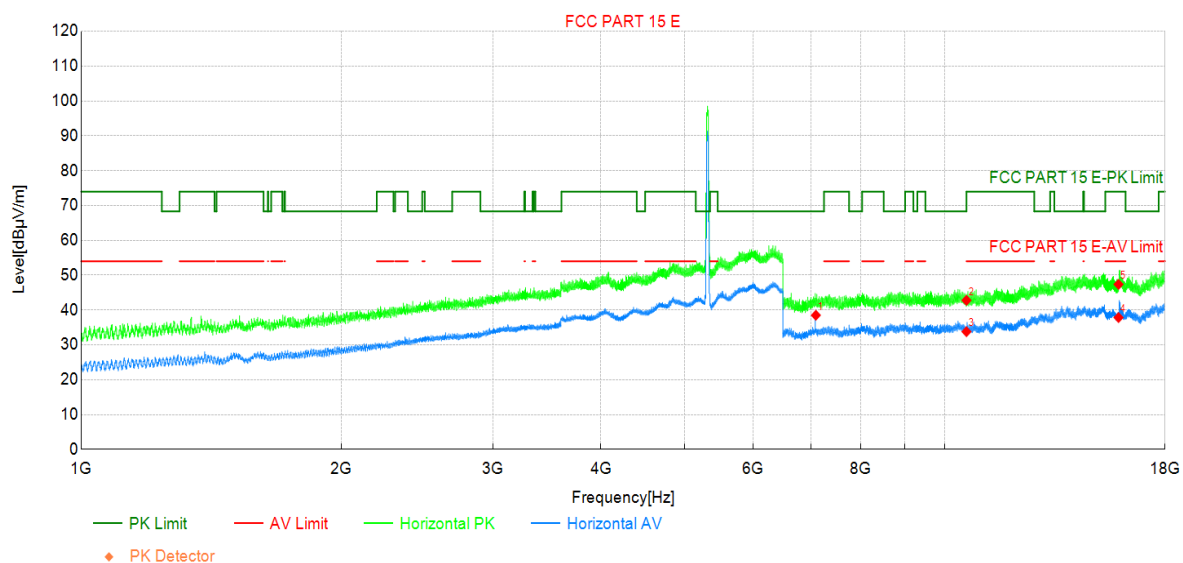

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	7093.69	35.61	38.50	2.89	-	-	AV	Horizo	NA
2	10600.00	36.00	42.78	6.78	68.30	25.52	PK	Horizo	PASS
3	10600.00	27.01	33.79	6.78	54.00	20.21	AV	Horizo	PASS
4	15900.00	23.73	37.85	14.12	54.00	16.15	AV	Horizo	PASS
5	15900.00	33.24	47.36	14.12	74.00	26.64	PK	Horizo	PASS

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode1:Transmit at 5320MHz by 802.11a	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

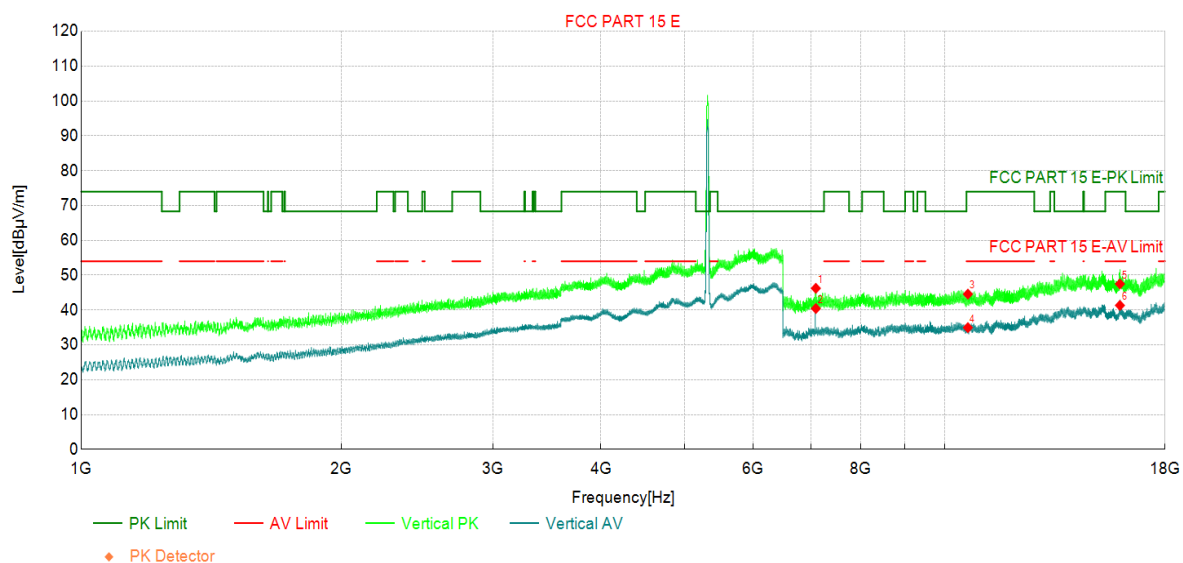

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	7093.21	43.34	46.23	2.89	68.30	22.07	PK	Vertic	PASS
2	7093.69	37.54	40.43	2.89	-	-	AV	Vertic	NA
3	10640.00	37.77	44.57	6.80	74.00	29.43	PK	Vertic	PASS
4	10640.00	28.15	34.95	6.80	54.00	19.05	AV	Vertic	PASS
5	15960.00	32.86	47.49	14.63	74.00	26.51	PK	Vertic	PASS
6	15960.00	26.69	41.32	14.63	54.00	12.68	AV	Vertic	PASS

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode1:Transmit at 5500MHz by 802.11a	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

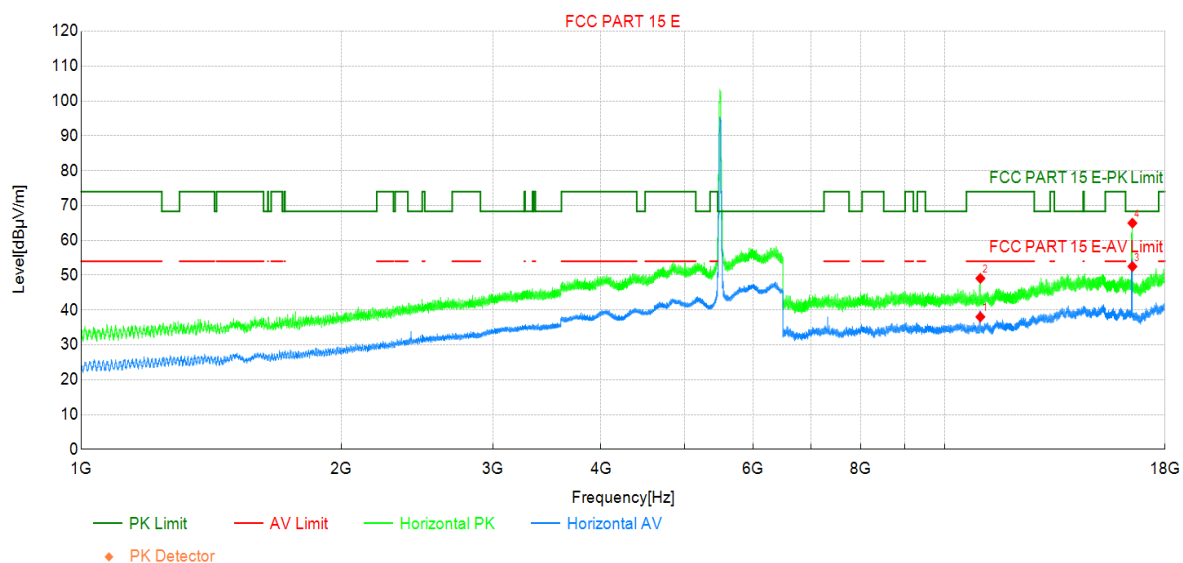

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11000.00	30.62	38.02	7.40	54.00	15.98	AV	Horizo	PASS
2	11001.29	41.69	49.08	7.39	74.00	24.92	PK	Horizo	PASS
3	16500.00	37.39	52.50	15.11	-	-	AV	Horizo	NA
4	16500.00	49.84	64.95	15.11	68.30	3.35	PK	Horizo	PASS

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode1:Transmit at 5500MHz by 802.11a	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

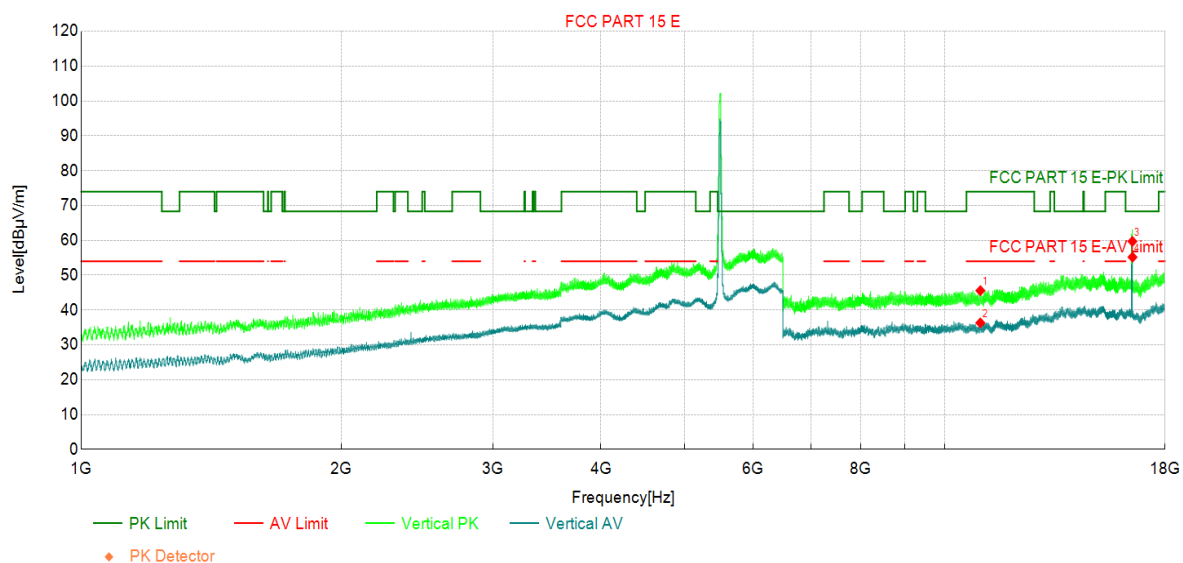

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11000.00	38.17	45.57	7.40	74.00	28.43	PK	Vertic	PASS
2	11000.00	28.91	36.31	7.40	54.00	17.69	AV	Vertic	PASS
3	16500.00	44.59	59.70	15.11	68.30	8.60	PK	Vertic	PASS
4	16504.52	40.07	55.17	15.10	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode1:Transmit at 5580MHz by 802.11a	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

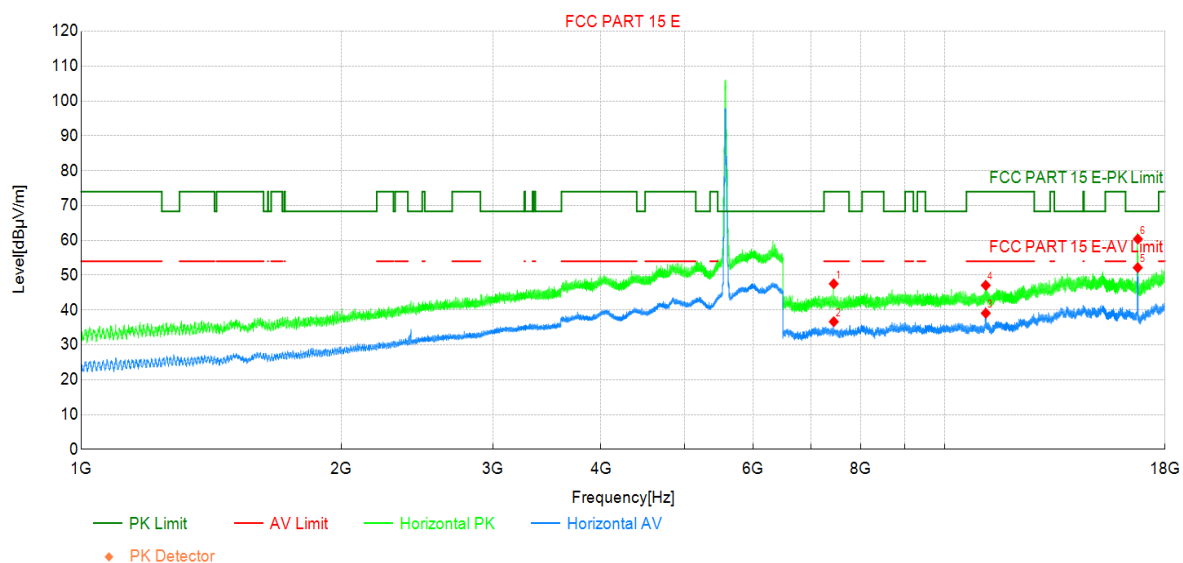

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	7440.13	44.45	47.52	3.07	74.00	26.48	PK	Horizo	PASS
2	7440.60	33.58	36.65	3.07	54.00	17.35	AV	Horizo	PASS
3	11160.00	31.79	39.08	7.29	54.00	14.92	AV	Horizo	PASS
4	11160.00	39.80	47.09	7.29	74.00	26.91	PK	Horizo	PASS
5	16736.44	37.55	52.16	14.61	-	-	AV	Horizo	NA
6	16740.00	45.74	60.36	14.62	68.30	7.94	PK	Horizo	PASS

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode1:Transmit at 5580MHz by 802.11a	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

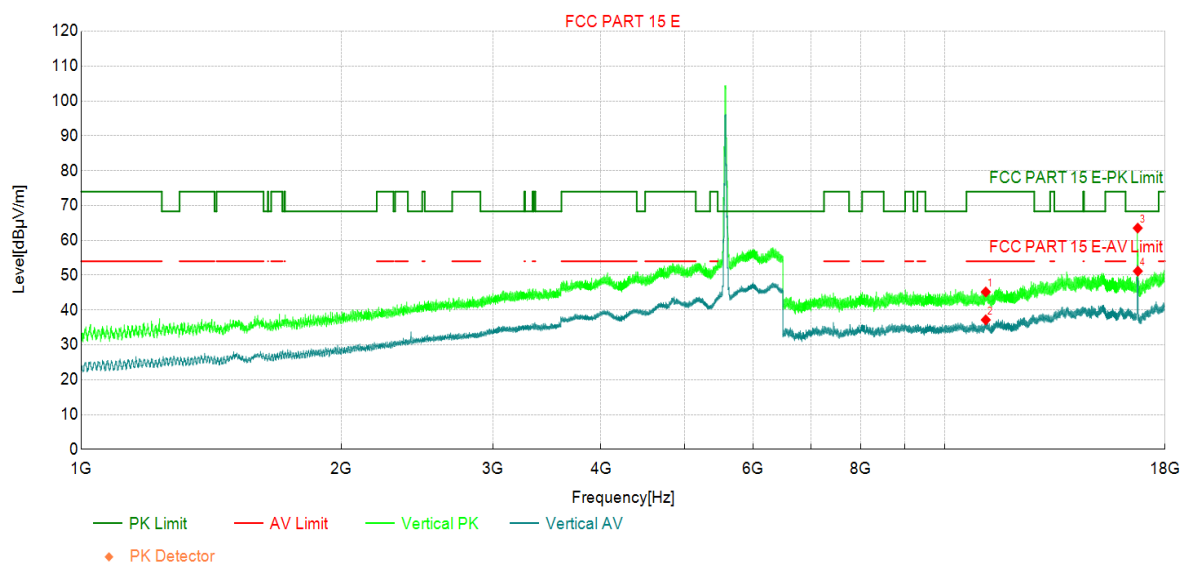

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11160.00	37.90	45.19	7.29	74.00	28.81	PK	Vertic	PASS
2	11160.00	29.87	37.16	7.29	54.00	16.84	AV	Vertic	PASS
3	16735.00	48.90	63.52	14.62	68.30	4.78	PK	Vertic	PASS
4	16740.00	36.53	51.15	14.62	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode1:Transmit at 5700MHz by 802.11a	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

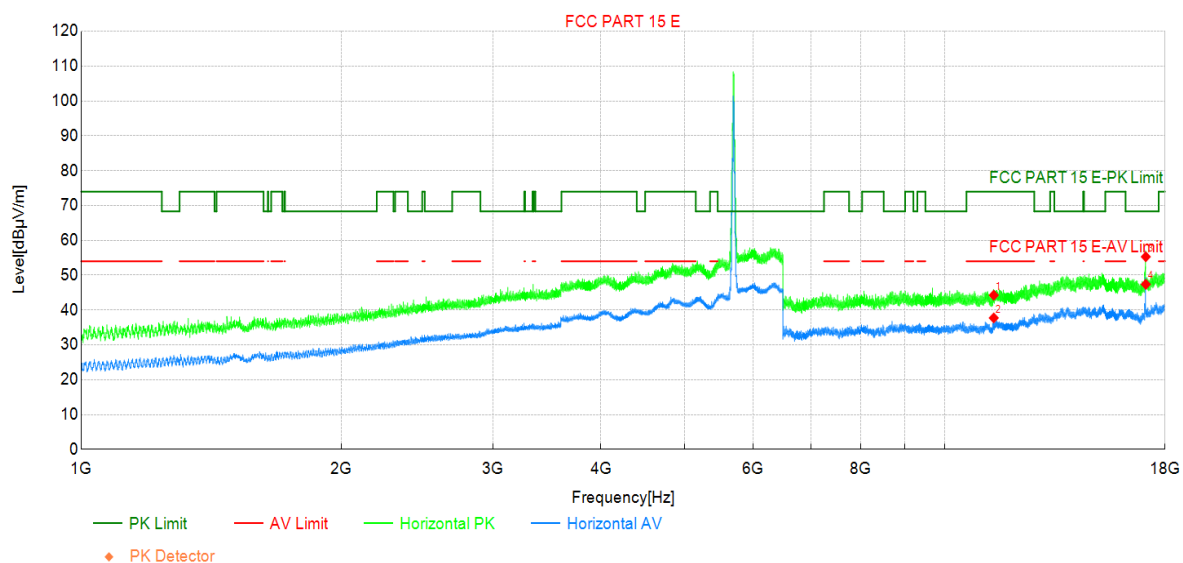

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11400.00	36.42	44.25	7.83	74.00	29.75	PK	Horizo	PASS
2	11400.00	29.89	37.72	7.83	54.00	16.28	AV	Horizo	PASS
3	17100.00	39.47	55.29	15.82	68.30	13.01	PK	Horizo	PASS
4	17100.00	31.56	47.38	15.82	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode1:Transmit at 5700MHz by 802.11a	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

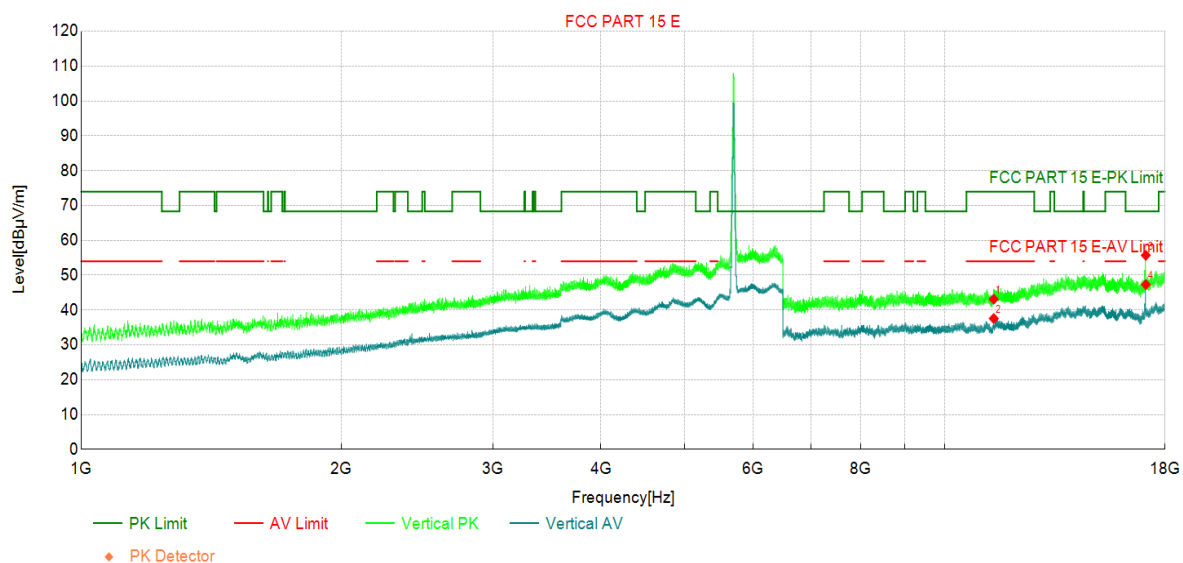

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11400.00	35.28	43.11	7.83	74.00	30.89	PK	Vertic	PASS
2	11400.00	29.73	37.56	7.83	54.00	16.44	AV	Vertic	PASS
3	17100.00	39.88	55.70	15.82	68.30	12.60	PK	Vertic	PASS
4	17100.00	31.49	47.31	15.82	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode1:Transmit at 5745MHz by 802.11a	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

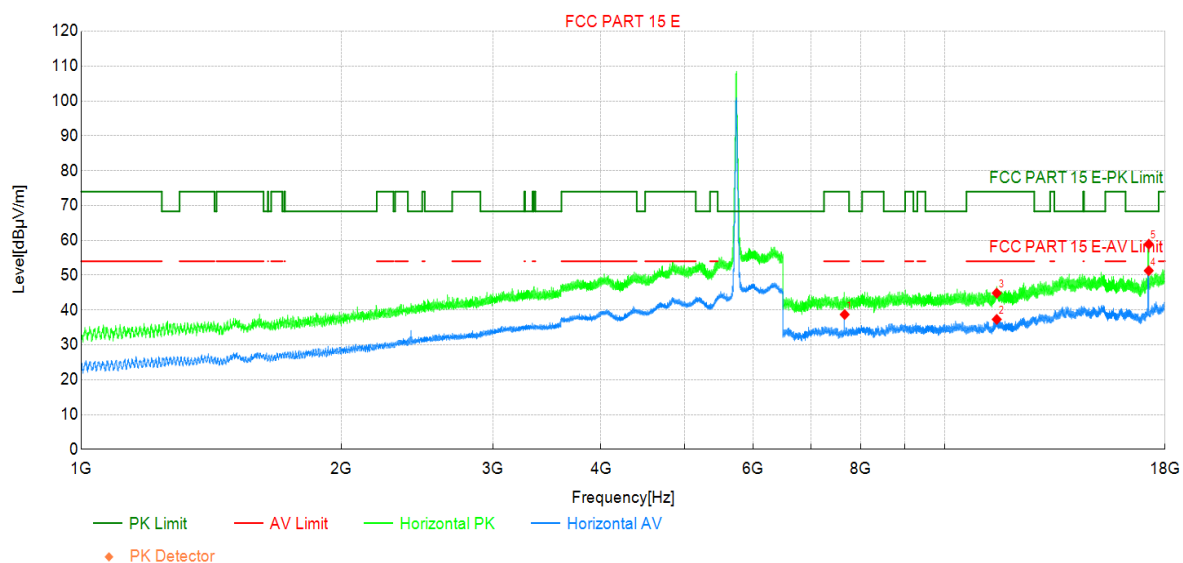

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	7660.54	35.59	38.71	3.12	54.00	15.29	AV	Horizo	PASS
2	11490.00	28.93	37.31	8.38	54.00	16.69	AV	Horizo	PASS
3	11490.00	36.46	44.84	8.38	74.00	29.16	PK	Horizo	PASS
4	17234.29	35.83	51.29	15.46	-	-	AV	Horizo	NA
5	17236.69	43.44	58.90	15.46	68.30	9.40	PK	Horizo	PASS

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode1:Transmit at 5745MHz by 802.11a	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

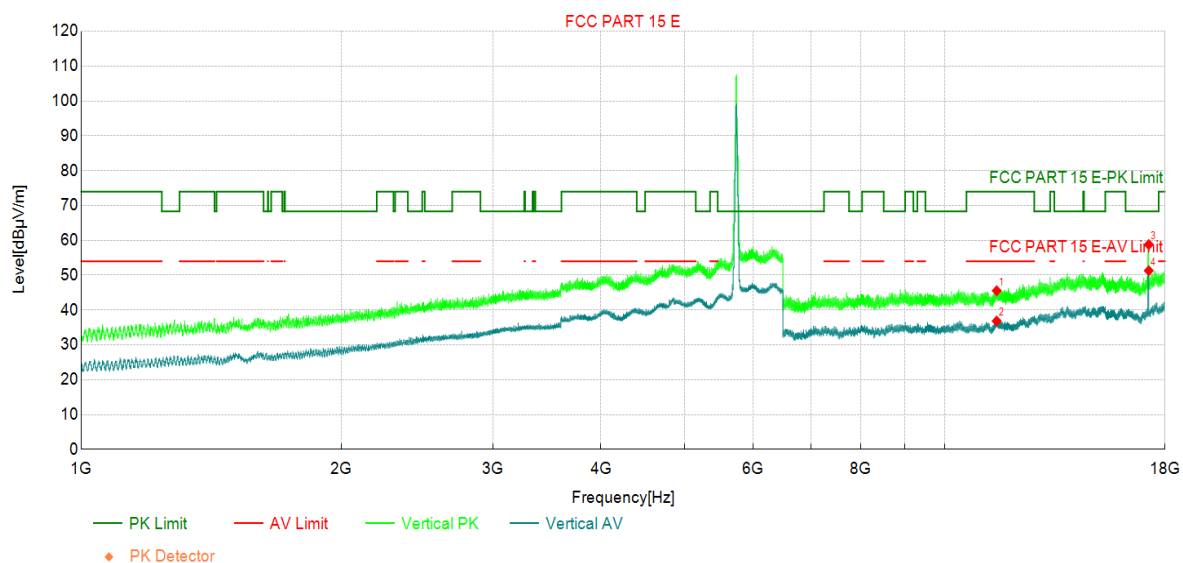

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11490.00	37.16	45.54	8.38	74.00	28.46	PK	Vertic	PASS
2	11490.00	28.44	36.82	8.38	54.00	17.18	AV	Vertic	PASS
3	17235.00	43.34	58.80	15.46	68.30	9.50	PK	Vertic	PASS
4	17235.00	35.84	51.30	15.46	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode1:Transmit at 5785MHz by 802.11a	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

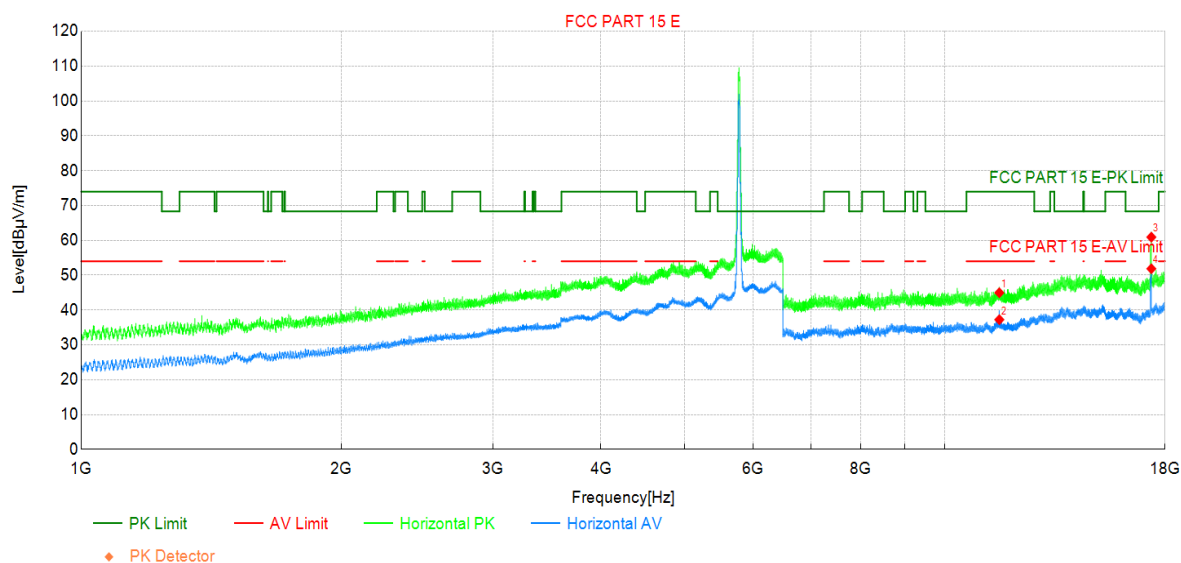

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11570.00	36.28	44.96	8.68	74.00	29.04	PK	Horizo	PASS
2	11570.00	28.55	37.23	8.68	54.00	16.77	AV	Horizo	PASS
3	17355.00	44.70	60.92	16.22	68.30	7.38	PK	Horizo	PASS
4	17355.00	35.62	51.84	16.22	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode1:Transmit at 5785MHz by 802.11a	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

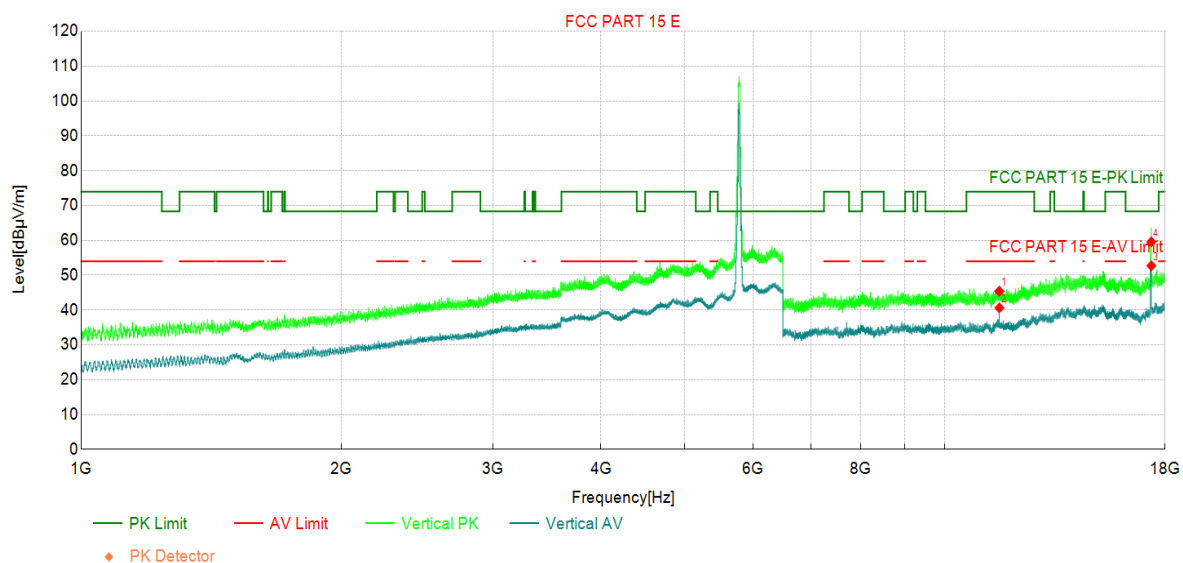

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11570.00	36.72	45.40	8.68	74.00	28.60	PK	Vertic	PASS
2	11572.46	31.95	40.63	8.68	54.00	13.37	AV	Vertic	PASS
3	17355.00	36.48	52.70	16.22	-	-	AV	Vertic	NA
4	17355.00	43.35	59.57	16.22	68.30	8.73	PK	Vertic	PASS

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode1:Transmit at 5825MHz by 802.11a	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

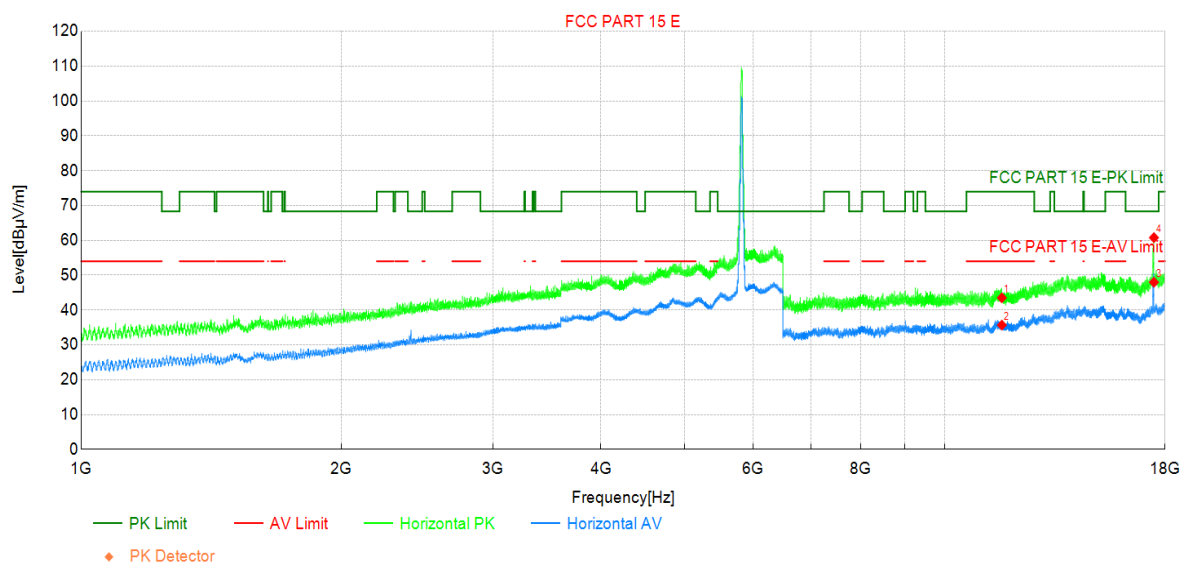

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11650.00	34.76	43.50	8.74	74.00	30.50	PK	Horizo	PASS
2	11650.00	26.93	35.67	8.74	54.00	18.33	AV	Horizo	PASS
3	17475.00	30.90	47.97	17.07	-	-	AV	Horizo	NA
4	17475.00	43.71	60.78	17.07	68.30	7.52	PK	Horizo	PASS

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode1:Transmit at 5825MHz by 802.11a	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

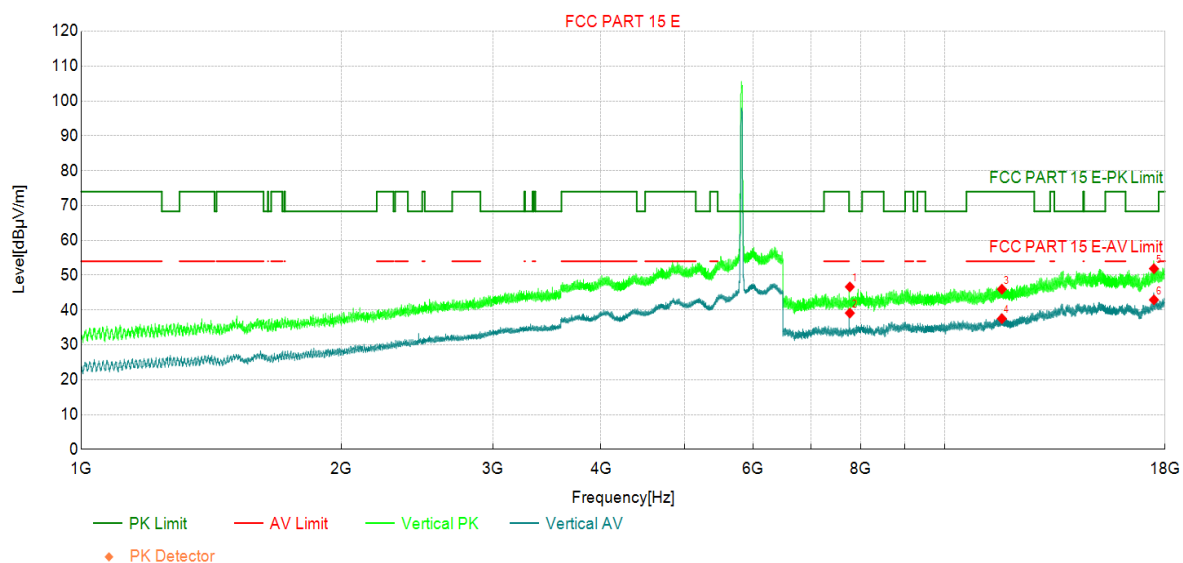

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	7766.44	43.30	46.65	3.35	68.30	21.65	PK	Vertic	PASS
2	7766.92	35.77	39.12	3.35	-	-	AV	Vertic	NA
3	11650.00	37.23	45.97	8.74	74.00	28.03	PK	Vertic	PASS
4	11650.00	28.78	37.52	8.74	54.00	16.48	AV	Vertic	PASS
5	17475.00	34.80	51.87	17.07	68.30	16.43	PK	Vertic	PASS
6	17475.00	25.85	42.92	17.07	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode2:Transmit at 5180MHz by 802.11ac(20Mhz)	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

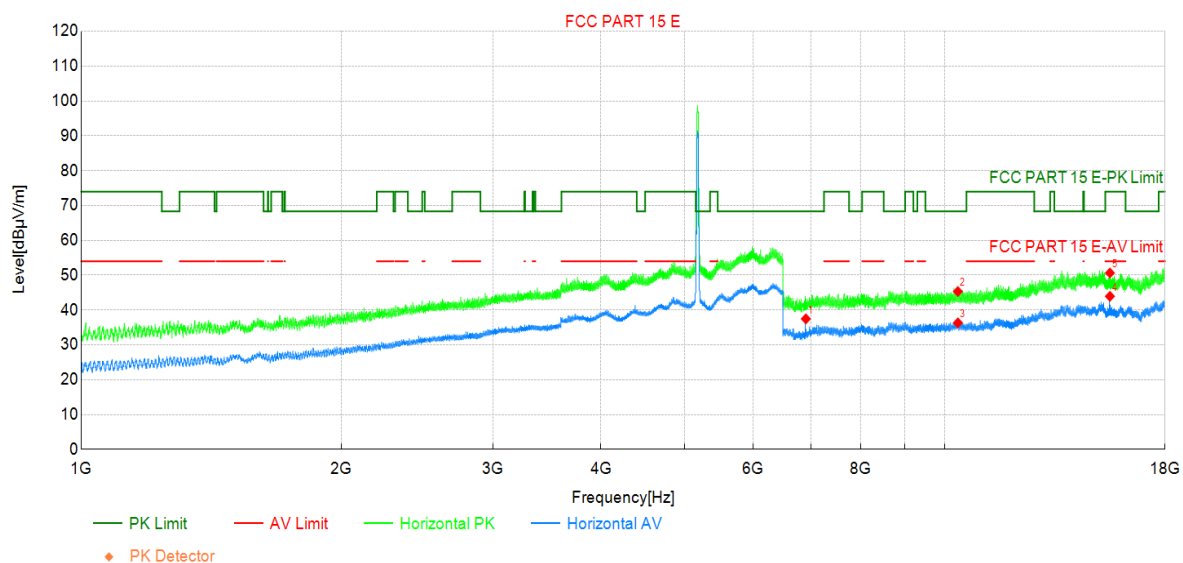

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	6906.81	35.53	37.46	1.93	-	-	AV	Horizo	NA
2	10360.00	38.74	45.32	6.58	68.30	22.98	PK	Horizo	PASS
3	10360.00	29.73	36.31	6.58	-	-	AV	Horizo	NA
4	15538.52	30.01	43.93	13.92	54.00	10.07	AV	Horizo	PASS
5	15540.00	36.74	50.64	13.90	74.00	23.36	PK	Horizo	PASS

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode2:Transmit at 5180MHz by 802.11ac(20Mhz)	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

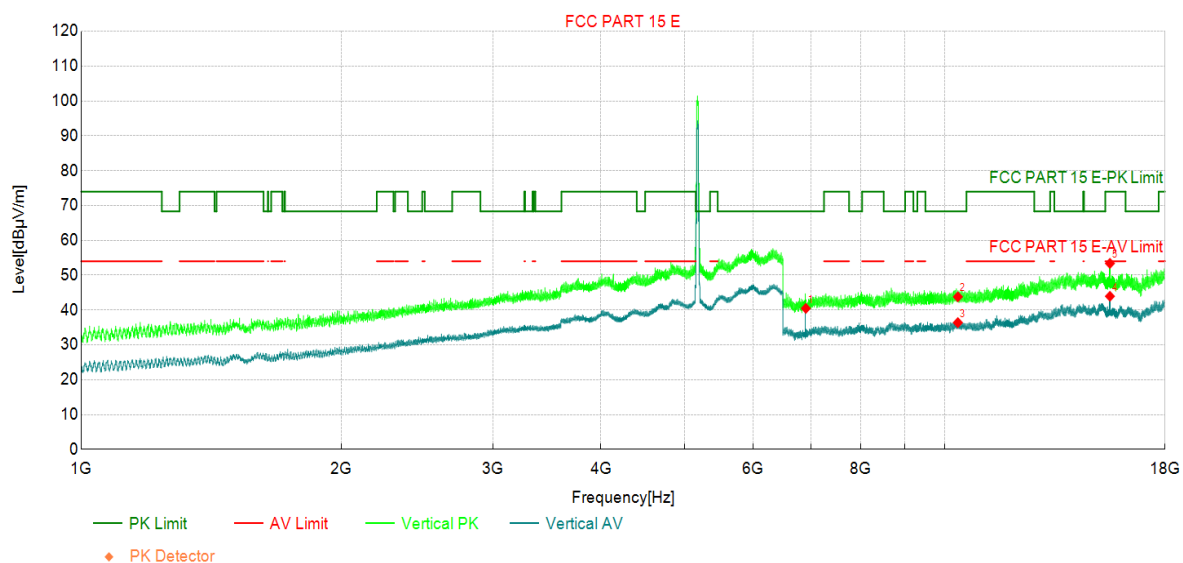

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	6906.81	38.54	40.47	1.93	-	-	AV	Vertic	NA
2	10360.00	37.21	43.79	6.58	68.30	24.51	PK	Vertic	PASS
3	10360.00	29.80	36.38	6.58	-	-	AV	Vertic	NA
4	15540.00	30.04	43.94	13.90	54.00	10.06	AV	Vertic	PASS
5	15540.00	39.48	53.38	13.90	74.00	20.62	PK	Vertic	PASS

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode2:Transmit at 5220MHz by 802.11ac(20Mhz)	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

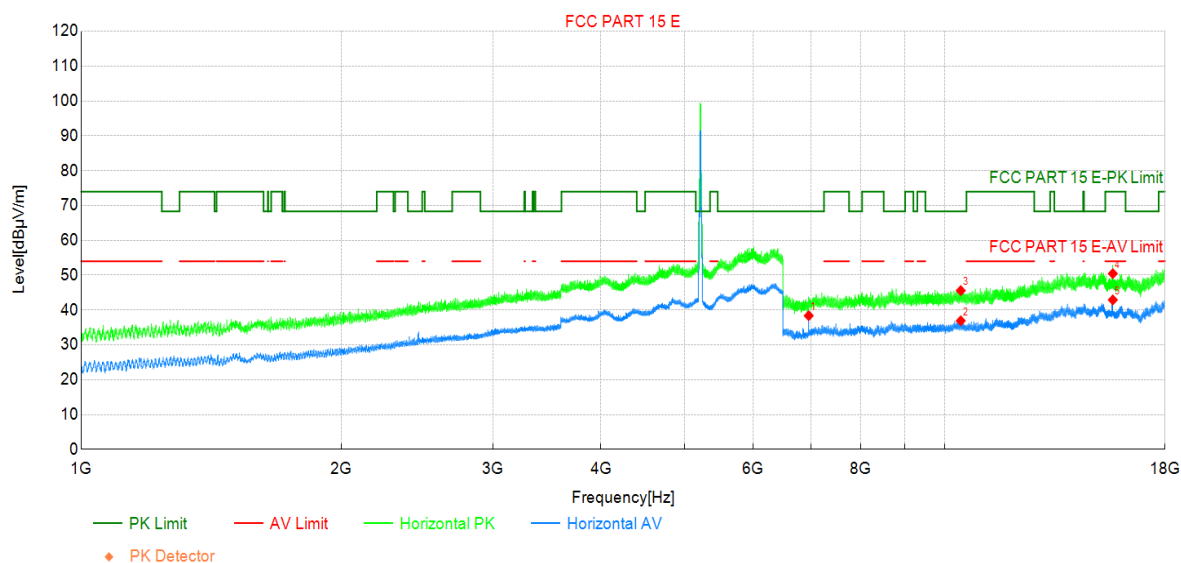

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	6960.48	36.22	38.37	2.15	-	-	AV	Horizo	NA
2	10440.00	30.28	36.92	6.64	-	-	AV	Horizo	NA
3	10440.00	38.93	45.57	6.64	68.30	22.73	PK	Horizo	PASS
4	15660.00	36.36	50.45	14.09	74.00	23.55	PK	Horizo	PASS
5	15660.00	28.82	42.91	14.09	54.00	11.09	AV	Horizo	PASS

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode2:Transmit at 5220MHz by 802.11ac(20Mhz)	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

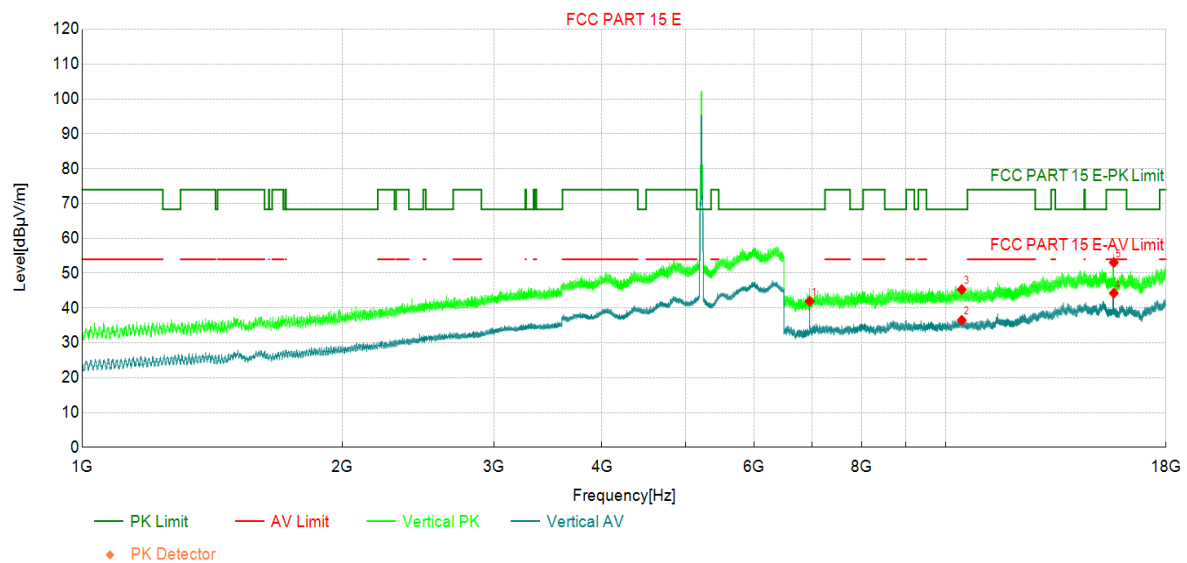

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	6960.48	39.77	41.92	2.15	-	-	AV	Vertic	NA
2	10440.00	29.87	36.51	6.64	-	-	AV	Vertic	NA
3	10440.00	38.68	45.32	6.64	68.30	22.98	PK	Vertic	PASS
4	15660.00	30.16	44.25	14.09	54.00	9.75	AV	Vertic	PASS
5	15660.00	38.96	53.05	14.09	74.00	20.95	PK	Vertic	PASS

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode2:Transmit at 5240MHz by 802.11ac(20Mhz)	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

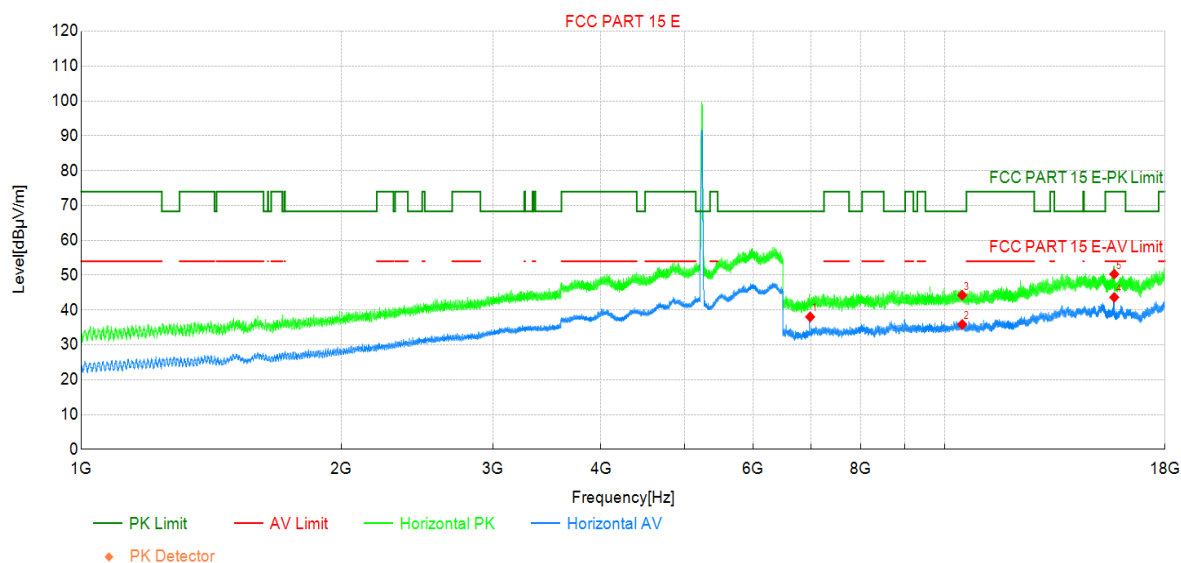

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	6986.83	35.77	38.03	2.26	-	-	AV	Horizo	NA
2	10480.00	29.15	35.86	6.71	-	-	AV	Horizo	NA
3	10480.00	37.54	44.25	6.71	68.30	24.05	PK	Horizo	PASS
4	15720.00	29.24	43.65	14.41	54.00	10.35	AV	Horizo	PASS
5	15720.00	35.89	50.30	14.41	74.00	23.70	PK	Horizo	PASS

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode2:Transmit at 5240MHz by 802.11ac(20Mhz)	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

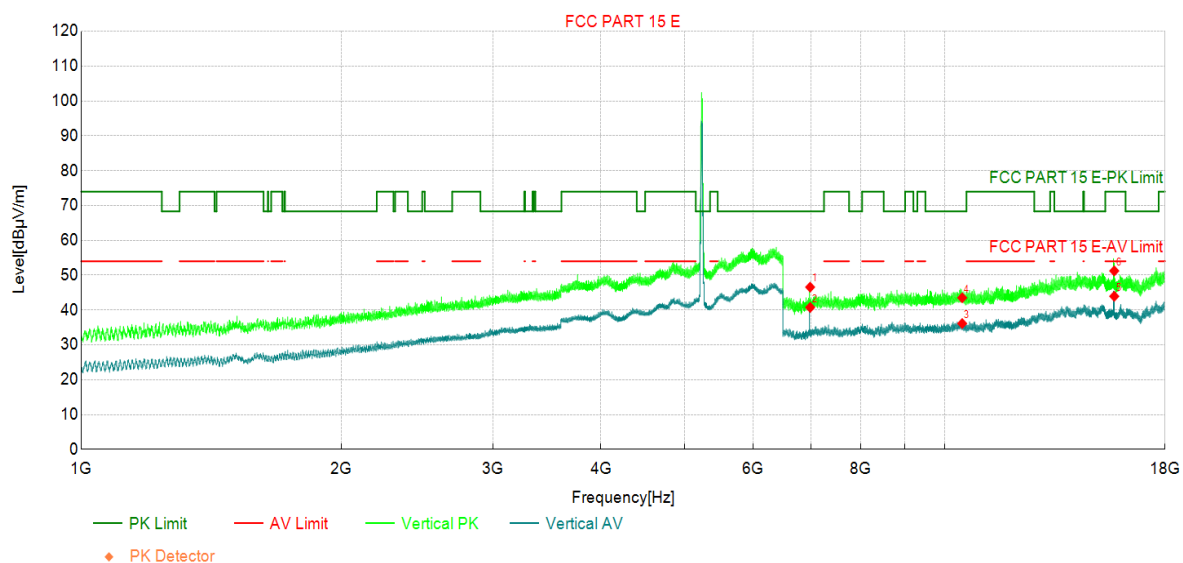

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	6986.35	44.30	46.56	2.26	68.30	21.74	PK	Vertic	PASS
2	6986.83	38.49	40.75	2.26	-	-	AV	Vertic	NA
3	10480.00	29.42	36.13	6.71	-	-	AV	Vertic	NA
4	10480.00	36.81	43.52	6.71	68.30	24.78	PK	Vertic	PASS
5	15720.00	29.53	43.94	14.41	54.00	10.06	AV	Vertic	PASS
6	15720.00	36.83	51.24	14.41	74.00	22.76	PK	Vertic	PASS

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode2:Transmit at 5260MHz by 802.11ac(20MHz)	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

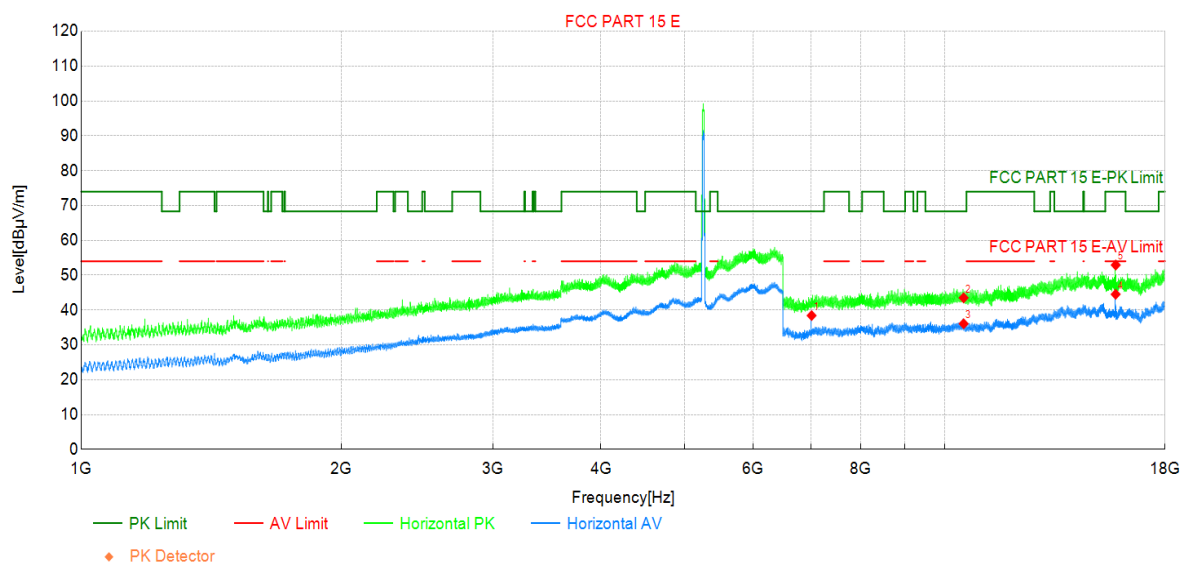

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	7013.67	36.01	38.41	2.40	-	-	AV	Horizo	NA
2	10520.00	36.74	43.50	6.76	68.30	24.80	PK	Horizo	PASS
3	10520.00	29.30	36.06	6.76	-	-	AV	Horizo	NA
4	15778.58	30.42	44.52	14.10	54.00	9.48	AV	Horizo	PASS
5	15782.42	38.84	52.92	14.08	74.00	21.08	PK	Horizo	PASS

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode2:Transmit at 5260MHz by 802.11ac(20MHz)	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

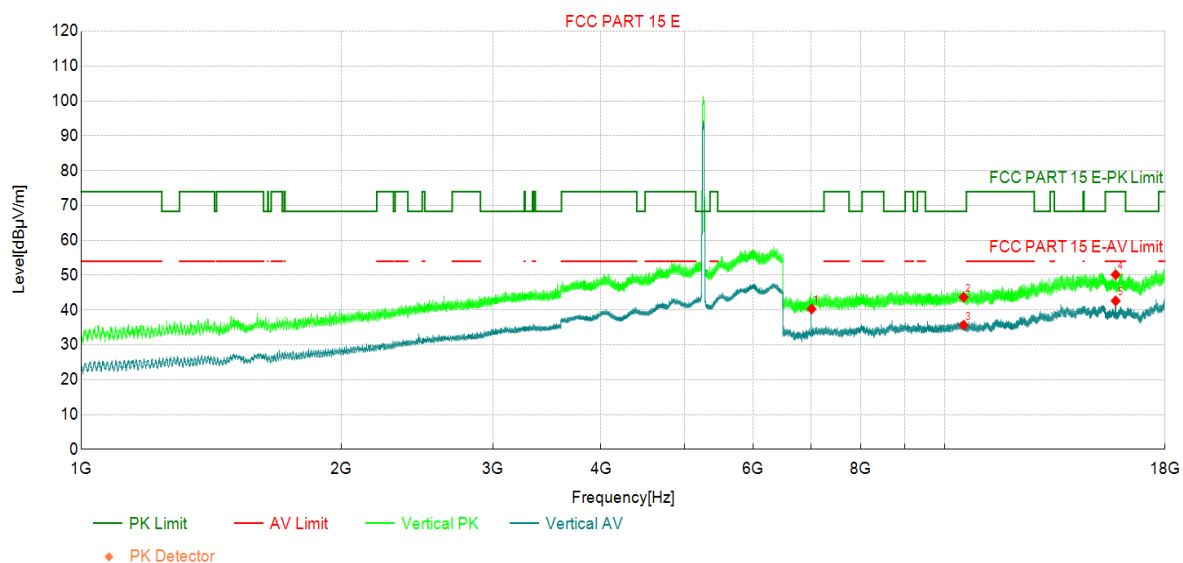

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	7013.67	37.90	40.30	2.40	-	-	AV	Vertic	NA
2	10520.00	36.91	43.67	6.76	68.30	24.63	PK	Vertic	PASS
3	10520.00	28.91	35.67	6.76	-	-	AV	Vertic	NA
4	15780.00	36.04	50.13	14.09	74.00	23.87	PK	Vertic	PASS
5	15780.00	28.53	42.62	14.09	54.00	11.38	AV	Vertic	PASS

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode2:Transmit at 5300MHz by 802.11ac(20MHz)	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

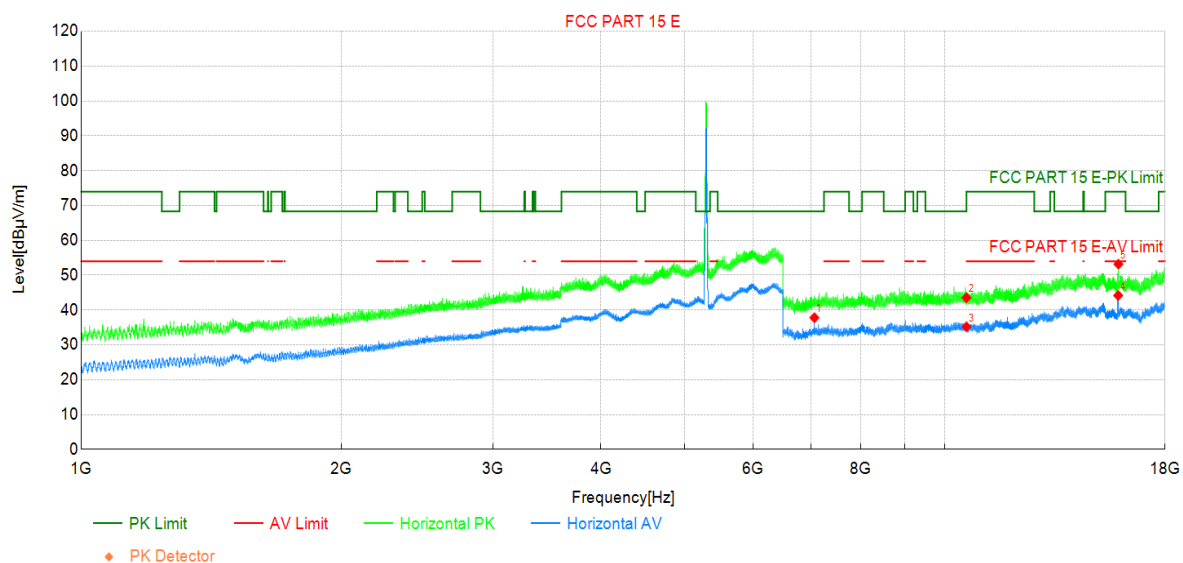

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	7066.85	35.06	37.78	2.72	-	-	AV	Horizo	NA
2	10600.00	36.76	43.54	6.78	68.30	24.76	PK	Horizo	PASS
3	10600.00	28.40	35.18	6.78	54.00	18.82	AV	Horizo	PASS
4	15886.88	30.06	44.17	14.11	54.00	9.83	AV	Horizo	PASS
5	15896.46	39.05	53.17	14.12	74.00	20.83	PK	Horizo	PASS

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode2:Transmit at 5300MHz by 802.11ac(20MHz)	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

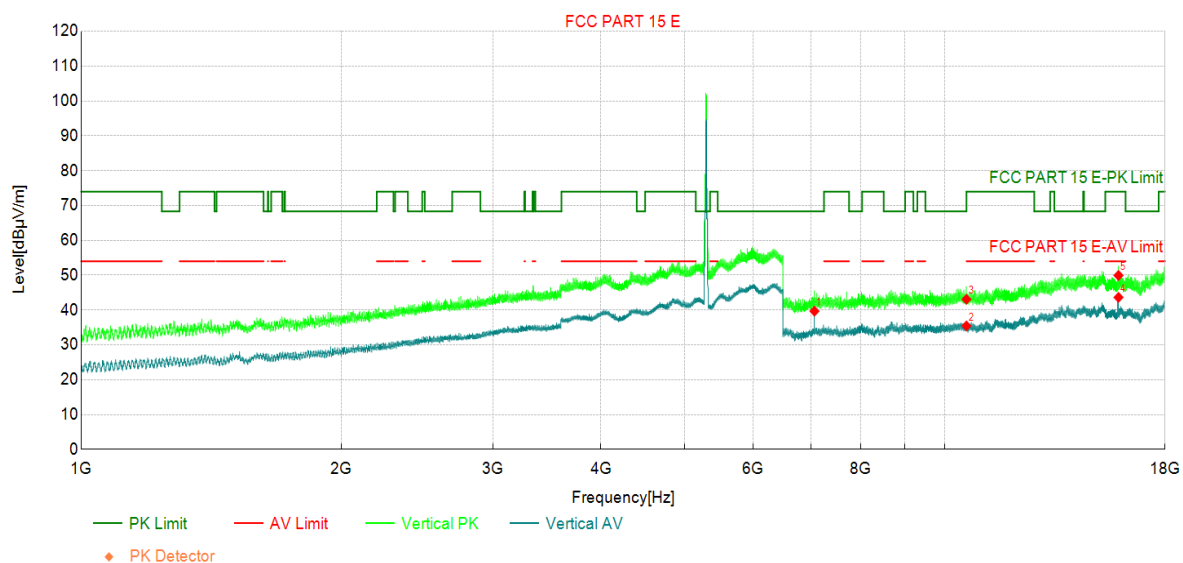

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	7066.85	36.95	39.67	2.72	-	-	AV	Vertic	NA
2	10600.00	28.66	35.44	6.78	54.00	18.56	AV	Vertic	PASS
3	10600.00	36.29	43.07	6.78	68.30	25.23	PK	Vertic	PASS
4	15900.00	29.52	43.64	14.12	54.00	10.36	AV	Vertic	PASS
5	15900.00	35.81	49.93	14.12	74.00	24.07	PK	Vertic	PASS

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode2:Transmit at 5320MHz by 802.11ac(20MHz)	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

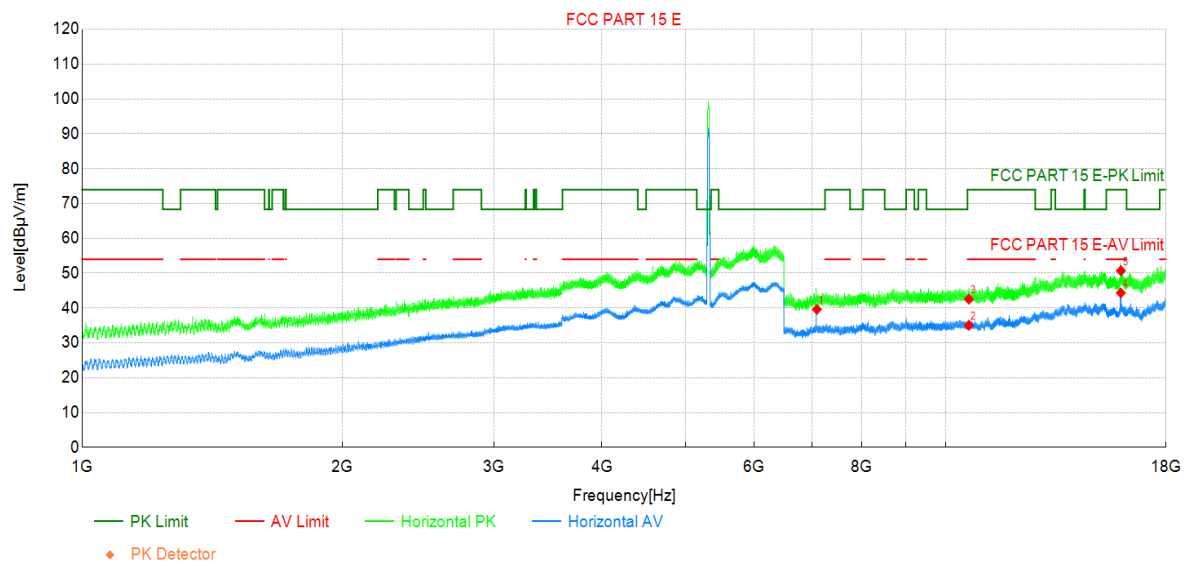

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	7093.69	36.70	39.59	2.89	-	-	AV	Horizo	NA
2	10640.00	28.23	35.03	6.80	54.00	18.97	AV	Horizo	PASS
3	10640.00	35.75	42.55	6.80	74.00	31.45	PK	Horizo	PASS
4	15956.35	29.75	44.34	14.59	54.00	9.66	AV	Horizo	PASS
5	15960.00	36.07	50.70	14.63	74.00	23.30	PK	Horizo	PASS

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode2:Transmit at 5320MHz by 802.11ac(20MHz)	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

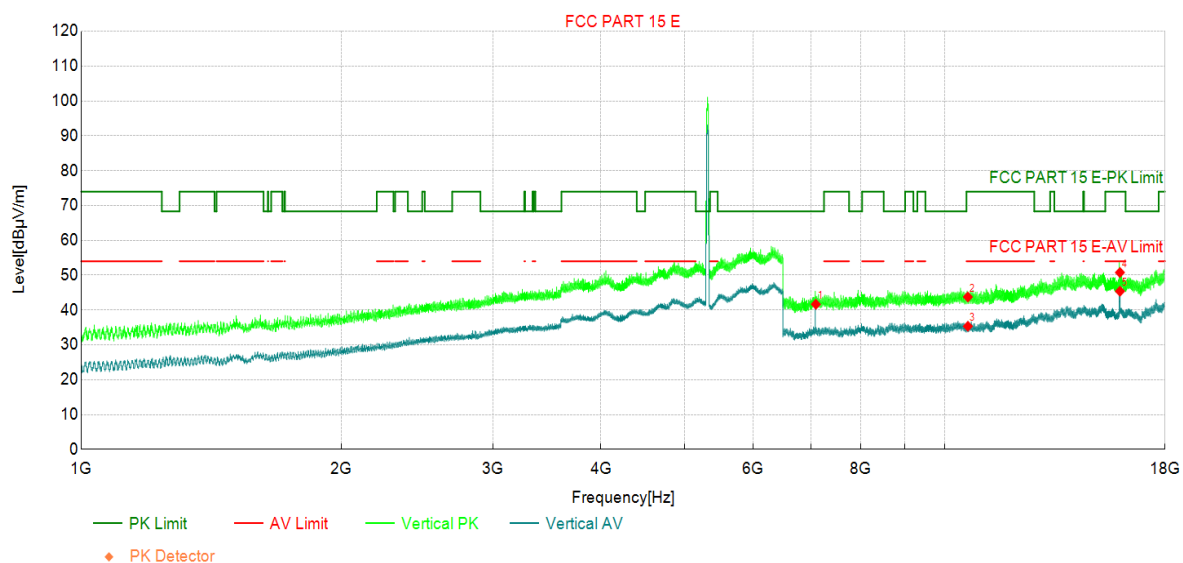

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	7093.69	38.76	41.65	2.89	-	-	AV	Vertic	NA
2	10640.00	36.94	43.74	6.80	74.00	30.26	PK	Vertic	PASS
3	10640.00	28.54	35.34	6.80	54.00	18.66	AV	Vertic	PASS
4	15960.00	36.14	50.77	14.63	74.00	23.23	PK	Vertic	PASS
5	15961.15	30.75	45.38	14.63	54.00	8.62	AV	Vertic	PASS

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode2:Transmit at 5500MHz by 802.11ac(20MHz)	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

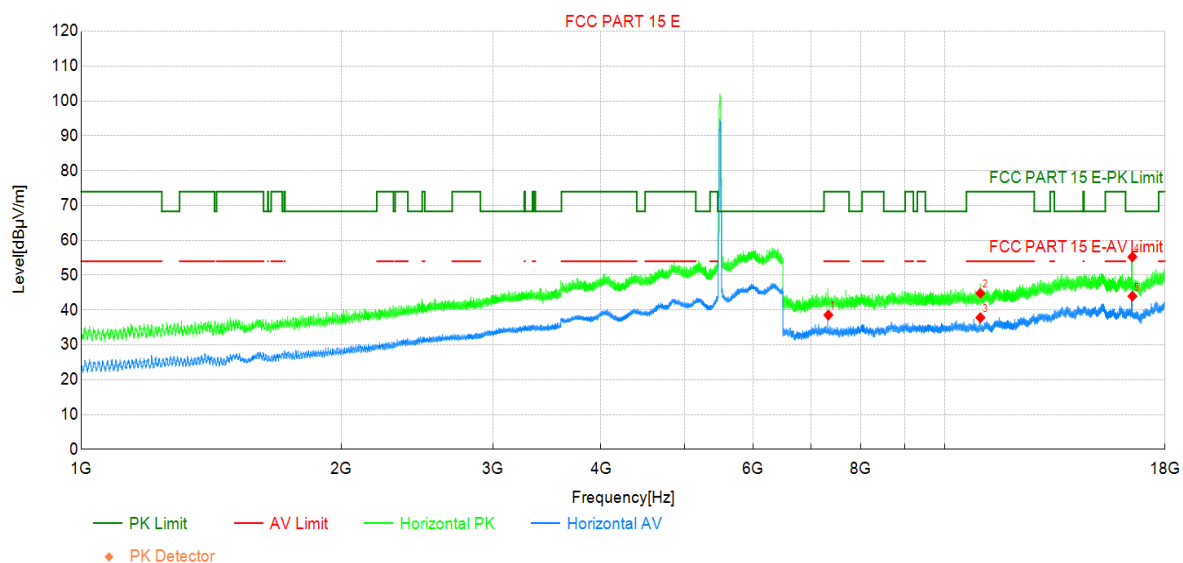

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	7333.75	35.39	38.55	3.16	54.00	15.45	AV	Horizo	PASS
2	11000.00	37.40	44.80	7.40	74.00	29.20	PK	Horizo	PASS
3	11000.00	30.42	37.82	7.40	54.00	16.18	AV	Horizo	PASS
4	16497.81	40.12	55.24	15.12	68.30	13.06	PK	Horizo	PASS
5	16500.00	28.85	43.96	15.11	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode2:Transmit at 5500MHz by 802.11ac(20MHz)	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

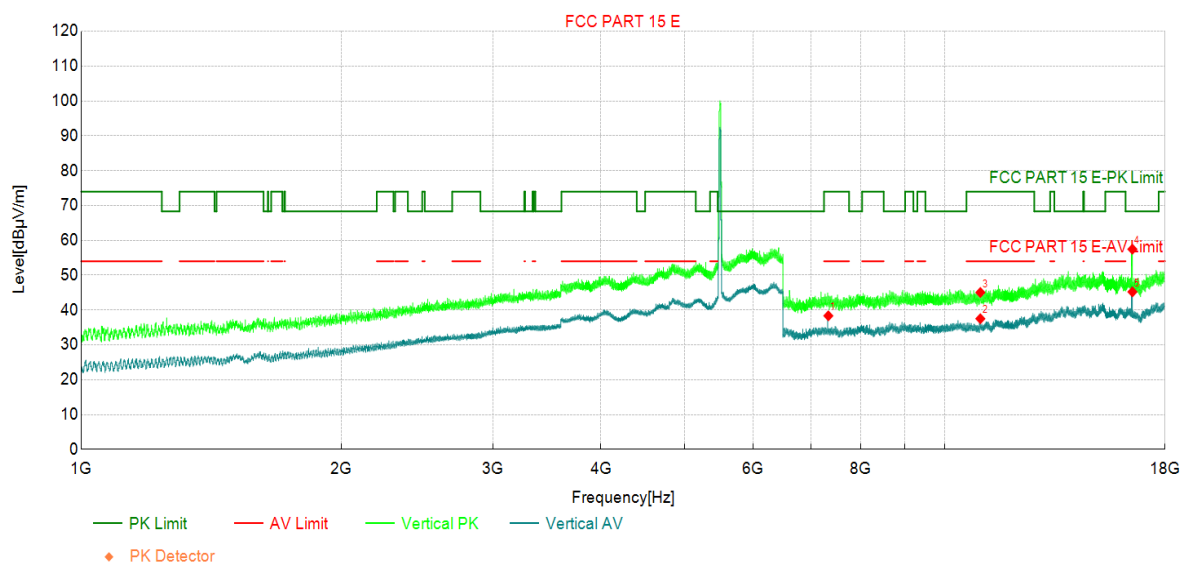

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	7333.75	35.18	38.34	3.16	54.00	15.66	AV	Vertic	PASS
2	11000.00	30.11	37.51	7.40	54.00	16.49	AV	Vertic	PASS
3	11000.00	37.63	45.03	7.40	74.00	28.97	PK	Vertic	PASS
4	16499.73	42.34	57.46	15.12	68.30	10.84	PK	Vertic	PASS
5	16500.00	30.10	45.21	15.11	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode2:Transmit at 5580MHz by 802.11ac(20MHz)	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

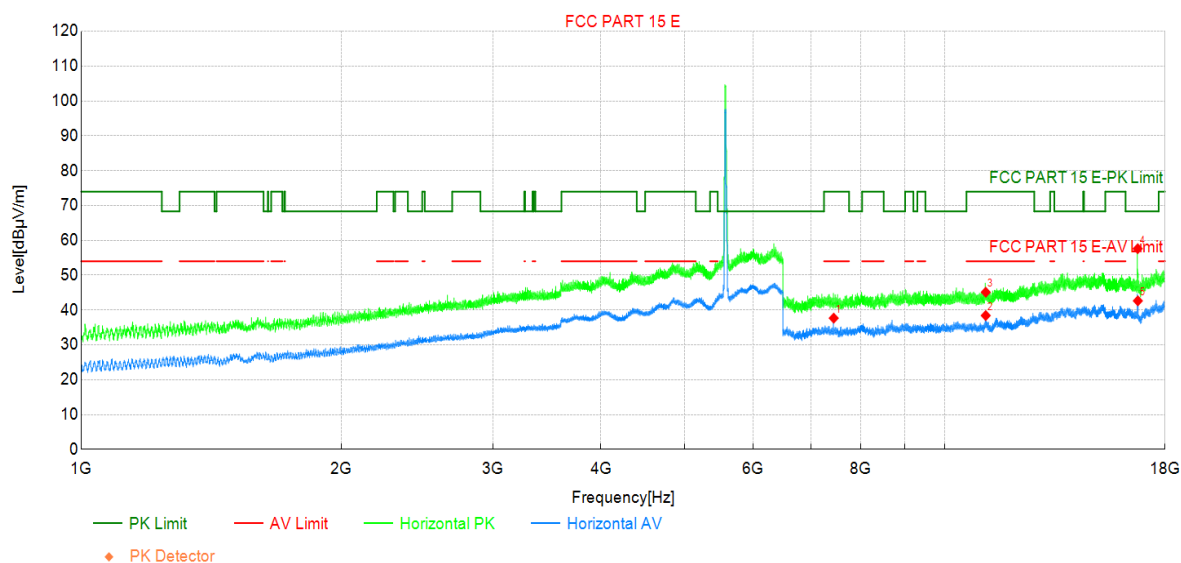

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	7440.13	34.60	37.67	3.07	54.00	16.33	AV	Horizo	PASS
2	11160.00	31.12	38.41	7.29	54.00	15.59	AV	Horizo	PASS
3	11160.00	37.82	45.11	7.29	74.00	28.89	PK	Horizo	PASS
4	16735.96	42.99	57.61	14.62	68.30	10.69	PK	Horizo	PASS
5	16740.00	28.01	42.63	14.62	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode2:Transmit at 5580MHz by 802.11ac(20MHz)	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

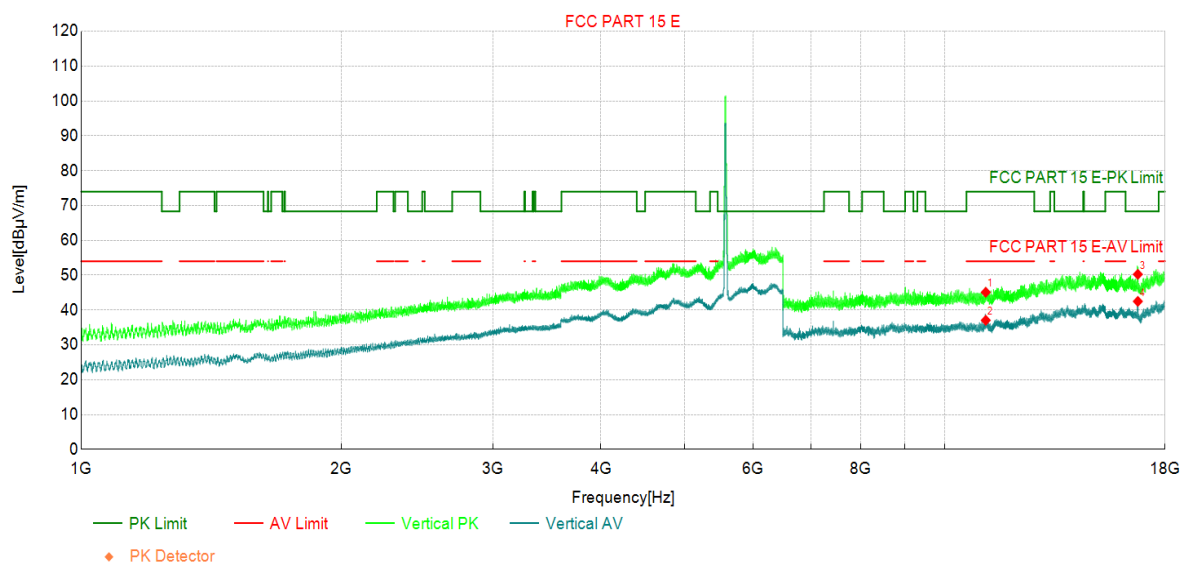

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11160.00	37.81	45.10	7.29	74.00	28.90	PK	Vertic	PASS
2	11160.00	29.76	37.05	7.29	54.00	16.95	AV	Vertic	PASS
3	16740.00	35.63	50.25	14.62	68.30	18.05	PK	Vertic	PASS
4	16740.00	27.86	42.48	14.62	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode2:Transmit at 5700MHz by 802.11ac(20MHz)	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

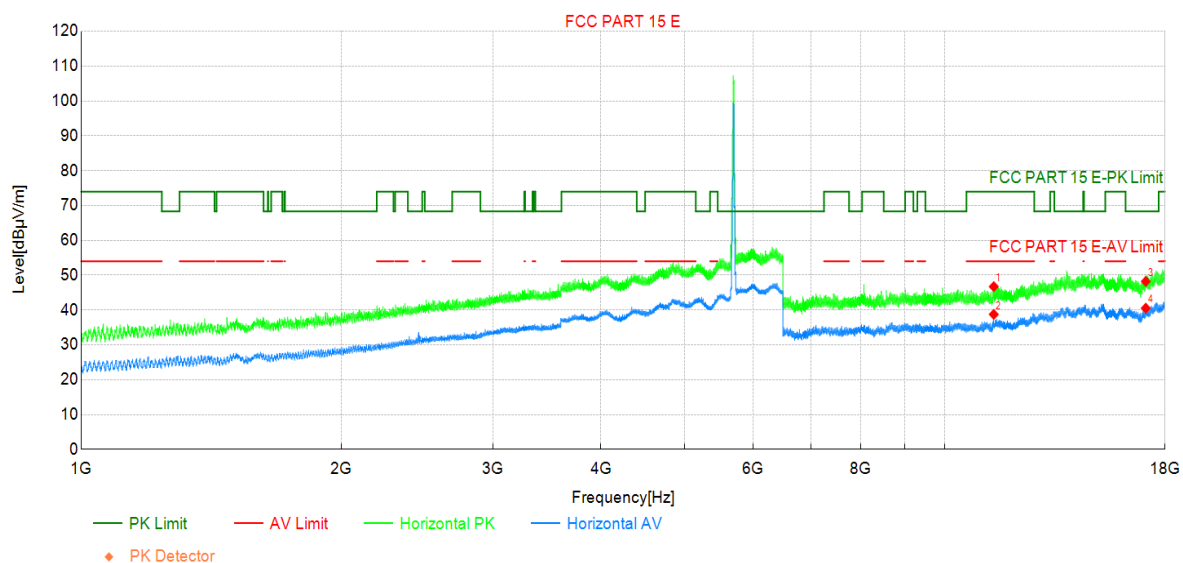

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11400.00	38.88	46.71	7.83	74.00	27.29	PK	Horizo	PASS
2	11400.00	30.92	38.75	7.83	54.00	15.25	AV	Horizo	PASS
3	17100.00	32.40	48.22	15.82	68.30	20.08	PK	Horizo	PASS
4	17100.00	24.71	40.53	15.82	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode2:Transmit at 5700MHz by 802.11ac(20MHz)	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

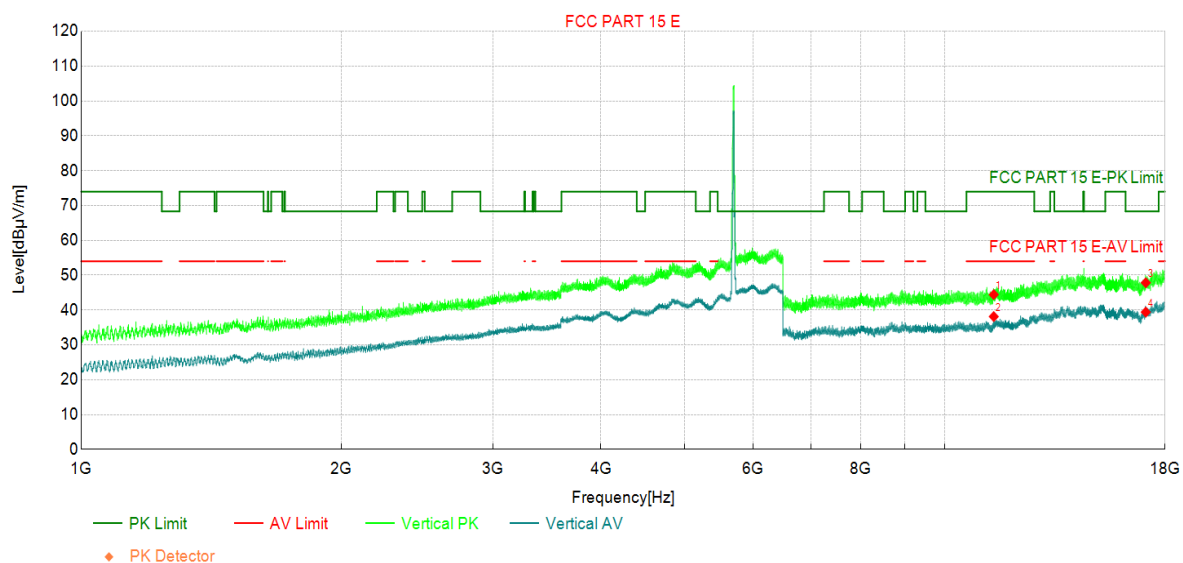

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11400.00	36.59	44.42	7.83	74.00	29.58	PK	Vertic	PASS
2	11400.00	30.29	38.12	7.83	54.00	15.88	AV	Vertic	PASS
3	17100.00	32.01	47.83	15.82	68.30	20.47	PK	Vertic	PASS
4	17100.00	23.58	39.40	15.82	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode2:Transmit at 5745MHz by 802.11ac(20MHz)	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

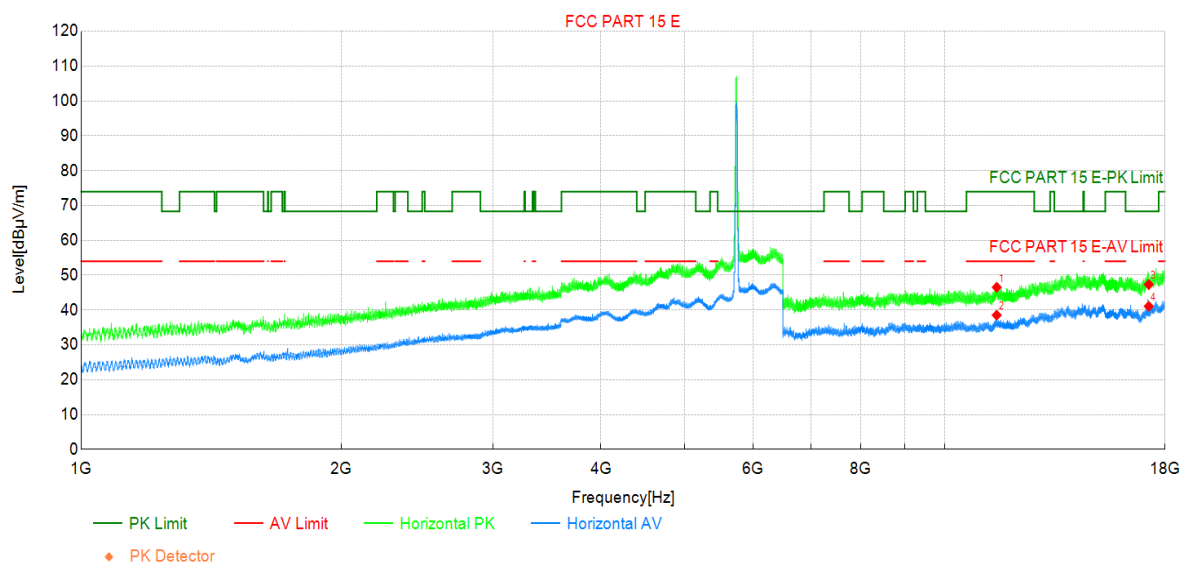

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11490.00	38.14	46.52	8.38	74.00	27.48	PK	Horizo	PASS
2	11490.00	30.14	38.52	8.38	54.00	15.48	AV	Horizo	PASS
3	17235.00	31.86	47.32	15.46	68.30	20.98	PK	Horizo	PASS
4	17235.00	25.61	41.07	15.46	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode2:Transmit at 5745MHz by 802.11ac(20MHz)	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

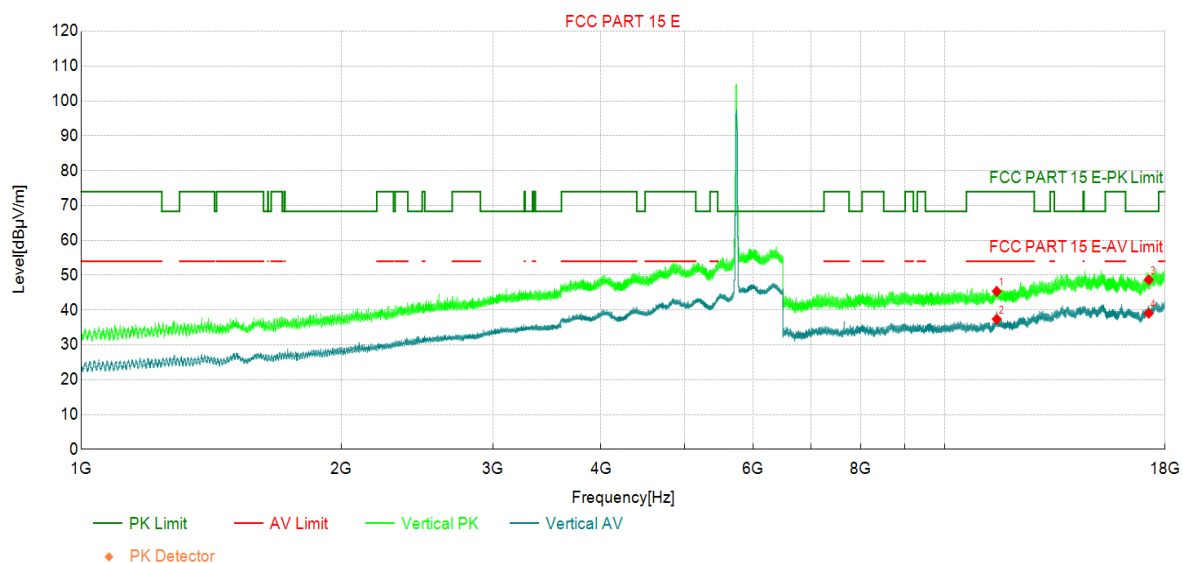

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11490.00	36.97	45.35	8.38	74.00	28.65	PK	Vertic	PASS
2	11490.00	28.99	37.37	8.38	54.00	16.63	AV	Vertic	PASS
3	17235.00	33.22	48.68	15.46	68.30	19.62	PK	Vertic	PASS
4	17235.00	23.59	39.05	15.46	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode2:Transmit at 5785MHz by 802.11ac(20MHz)	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

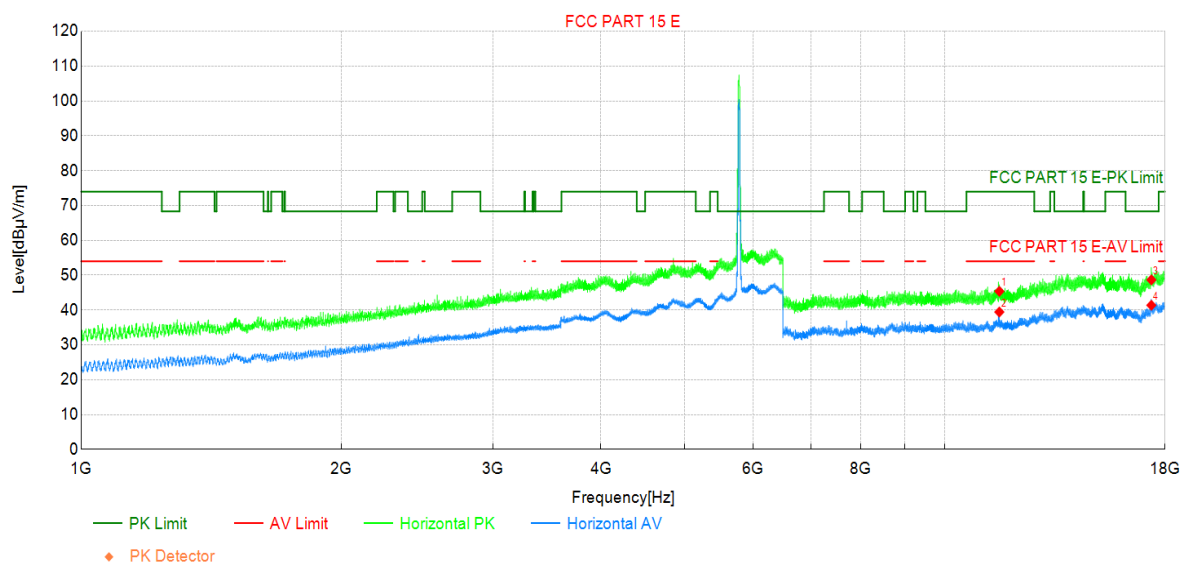

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11570.00	36.69	45.37	8.68	74.00	28.63	PK	Horizo	PASS
2	11570.00	30.75	39.43	8.68	54.00	14.57	AV	Horizo	PASS
3	17355.00	32.43	48.65	16.22	68.30	19.65	PK	Horizo	PASS
4	17355.00	25.14	41.36	16.22	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode2:Transmit at 5785MHz by 802.11ac(20MHz)	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

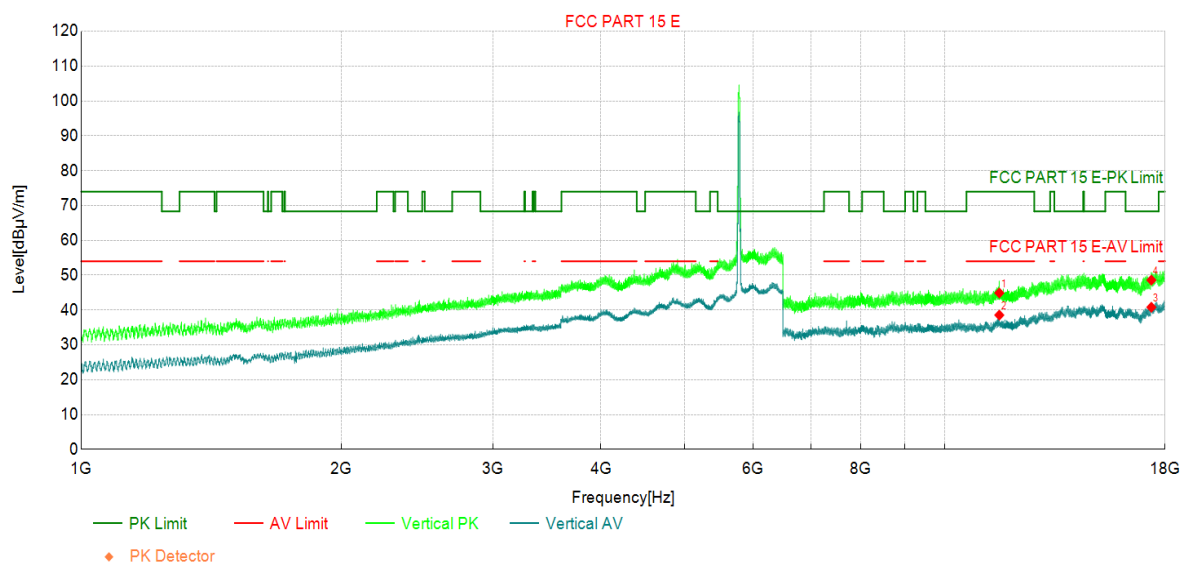

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11570.00	36.21	44.89	8.68	74.00	29.11	PK	Vertic	PASS
2	11570.00	29.86	38.54	8.68	54.00	15.46	AV	Vertic	PASS
3	17355.00	24.58	40.80	16.22	-	-	AV	Vertic	NA
4	17355.00	32.38	48.60	16.22	68.30	19.70	PK	Vertic	PASS

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode2:Transmit at 5825MHz by 802.11ac(20MHz)	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

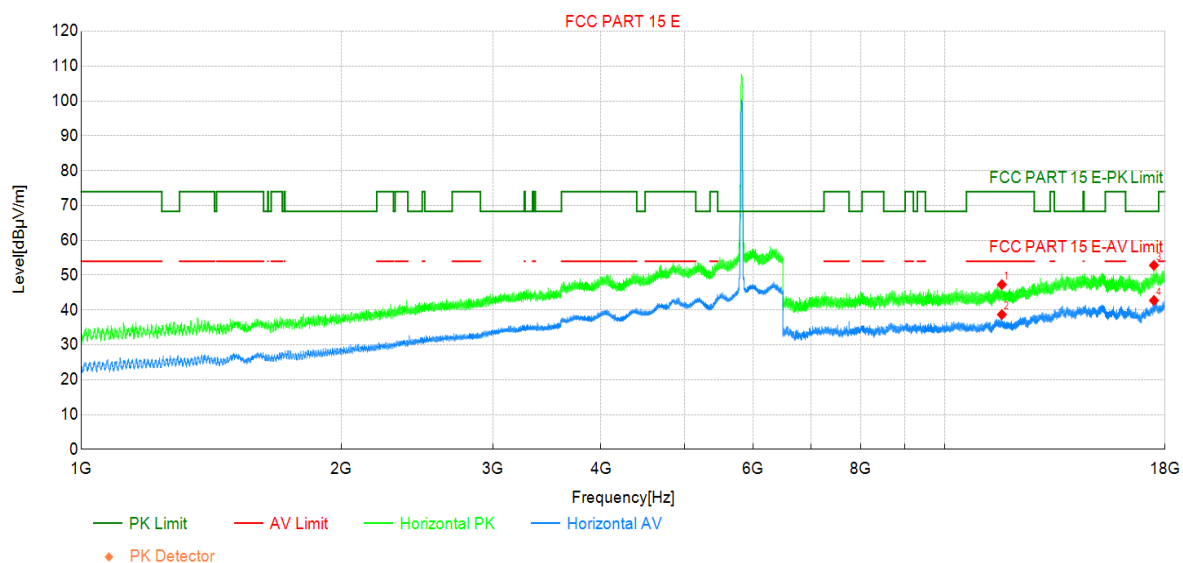

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11650.00	38.56	47.30	8.74	74.00	26.70	PK	Horizo	PASS
2	11650.00	29.95	38.69	8.74	54.00	15.31	AV	Horizo	PASS
3	17475.00	35.76	52.83	17.07	68.30	15.47	PK	Horizo	PASS
4	17475.00	25.66	42.73	17.07	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode2:Transmit at 5825MHz by 802.11ac(20MHz)	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

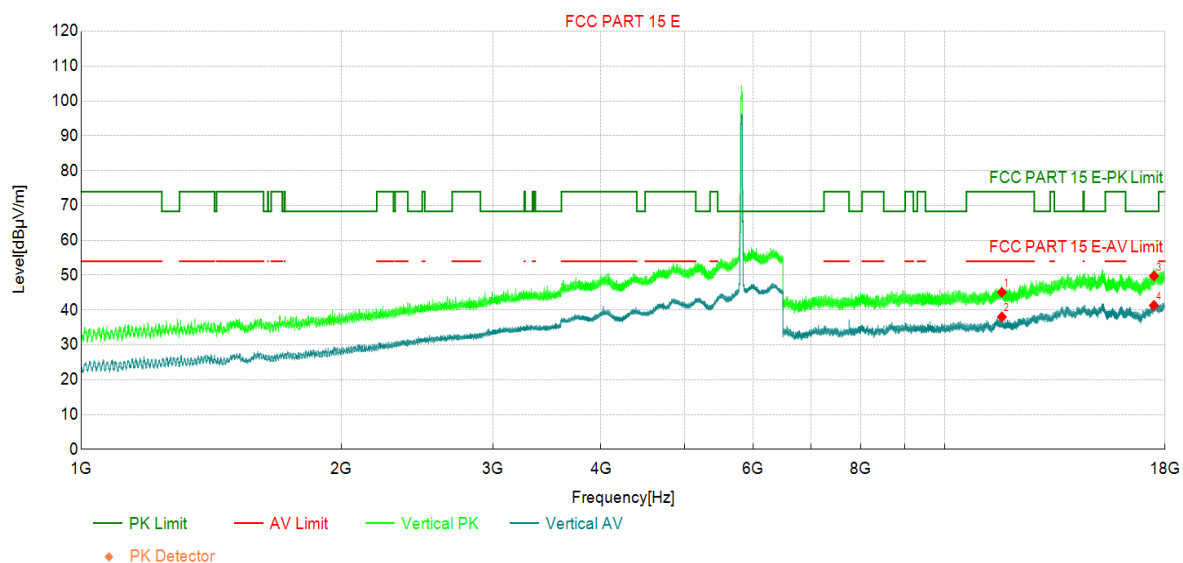

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11650.00	36.34	45.08	8.74	74.00	28.92	PK	Vertic	PASS
2	11650.00	29.28	38.02	8.74	54.00	15.98	AV	Vertic	PASS
3	17475.00	32.71	49.78	17.07	68.30	18.52	PK	Vertic	PASS
4	17475.00	24.23	41.30	17.07	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode3:Transmit at 5190MHz by 802.11ac(40MHz)	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

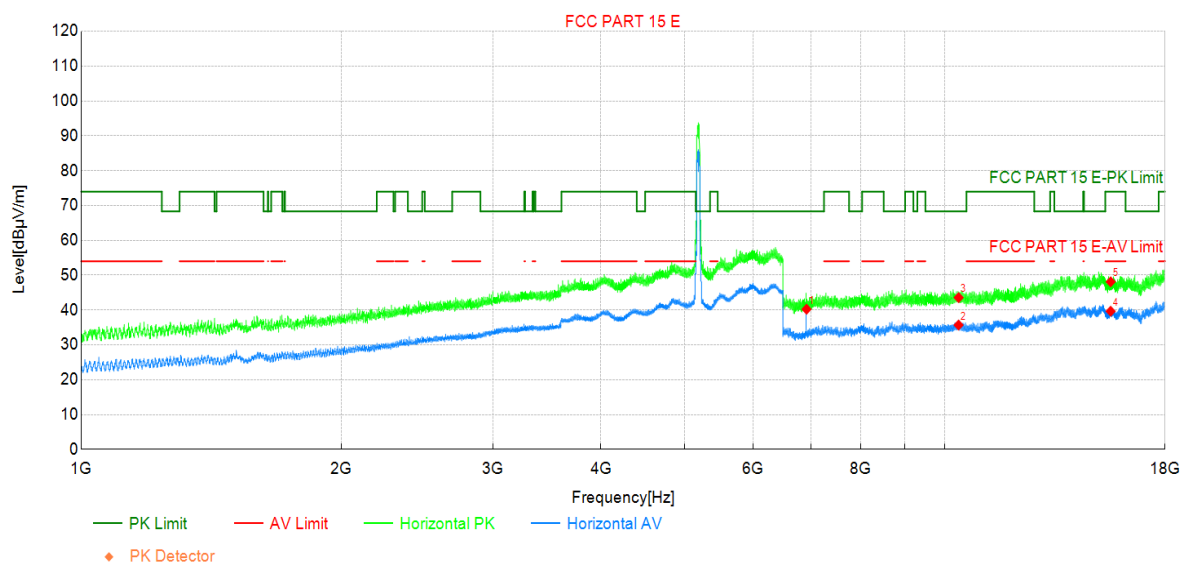

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	6920.23	38.26	40.24	1.98	-	-	AV	Horizo	NA
2	10380.00	29.12	35.69	6.57	-	-	AV	Horizo	NA
3	10380.00	36.99	43.56	6.57	68.30	24.74	PK	Horizo	PASS
4	15570.00	25.96	39.65	13.69	54.00	14.35	AV	Horizo	PASS
5	15570.00	34.41	48.10	13.69	74.00	25.90	PK	Horizo	PASS

Test Report

Project Information

Profile:	2520983R	EUT:	Smart Controller
Mode:	Mode3:Transmit at 5190MHz by 802.11ac(40MHz)	Volta	120 Vac / 60 Hz
Environment:	Temp: 25°C ; Humi:60%	Engi	Reyn Chen
Test Standard:	FCC PART 15 E		

Test Graph

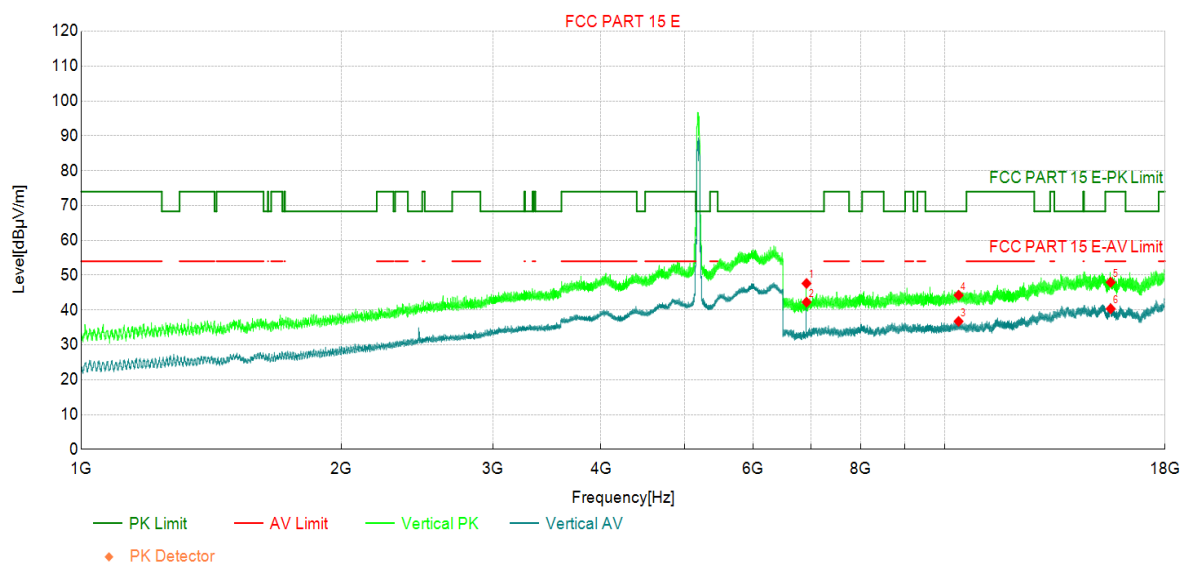

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	6919.75	45.65	47.63	1.98	68.30	20.67	PK	Vertic	PASS
2	6920.23	40.28	42.26	1.98	-	-	AV	Vertic	NA
3	10380.00	30.16	36.73	6.57	-	-	AV	Vertic	NA
4	10380.00	37.69	44.26	6.57	68.30	24.04	PK	Vertic	PASS
5	15570.00	34.26	47.95	13.69	74.00	26.05	PK	Vertic	PASS
6	15570.00	26.67	40.36	13.69	54.00	13.64	AV	Vertic	PASS