


LSC02 Radar

1、Size



2、Picture

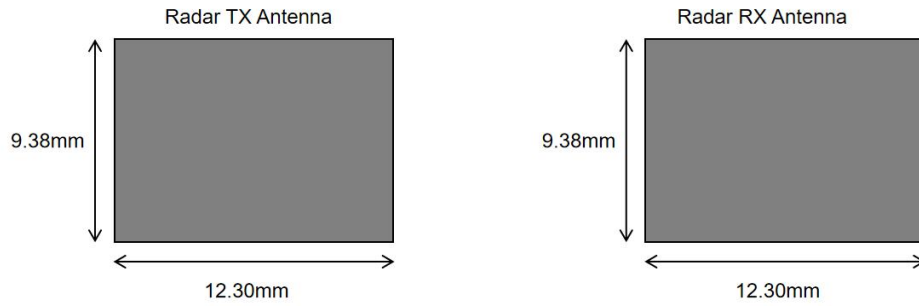

3、Test data

Passive Test ForRadar									
Freq (MHz)	Effi (%)	Gain (dBi)	Gain (dBd)	UHS (%)	DHS (%)	Max (dB)	Min (dB)	AttH (dB)	AttV (dB)
5700	29.19	1.79	-0.36	20.489	8.697	1.79	-18.41	52.76	52.75
5705	28.63	1.67	-0.48	20.231	8.399	1.67	-18.36	52.82	52.83
5710	30.26	1.81	-0.34	21.396	8.863	1.81	-17.85	52.99	52.74
5715	29.16	1.46	-0.69	20.691	8.471	1.46	-17.98	52.98	52.87
5720	27	0.96	-1.19	19.248	7.75	0.96	-18.49	52.88	53.15
5725	27.71	1	-1.15	19.642	8.071	1	-18.27	53.05	53.06

5730	29.57	1.14	-1.01	20.892	8.679	1.14	-18.34	53.49	52.96
5735	26.97	0.55	-1.6	19.048	7.923	0.55	-18.03	53.63	53.38
5740	25.38	-0.01	-2.16	17.823	7.558	-0.01	-18.91	53.48	53.77
5745	27.91	0.42	-1.73	19.335	8.57	0.42	-20.01	53.45	53.44
5750	29.2	0.49	-1.66	20.116	9.082	0.49	-20.02	53.58	53.05
5755	26.8	-0.07	-2.22	18.406	8.394	-0.07	-21.14	53.52	53.24
5760	27.21	0.08	-2.07	18.475	8.735	0.08	-21.48	53.27	53.34
5765	29.19	0.35	-1.8	19.587	9.603	0.35	-21.51	53.08	53.01
5770	29.9	0.57	-1.58	19.956	9.939	0.57	-21.27	53.12	52.88
5775	30.5	0.75	-1.4	20.216	10.28	0.75	-20.37	53.05	53
5780	30.06	0.77	-1.38	19.751	10.313	0.77	-19.38	52.83	52.86
5785	29.31	0.6	-1.55	19.214	10.094	0.6	-18.8	52.81	52.63
5790	30.36	0.88	-1.27	19.803	10.56	0.88	-20	52.91	52.6
5795	30.75	1.03	-1.12	20.006	10.745	1.03	-18.95	52.9	52.69
5800	29.54	0.84	-1.31	19.266	10.278	0.84	-18.48	52.84	52.87
5805	28.66	0.66	-1.49	18.767	9.895	0.66	-18.13	52.85	52.89
5810	29.79	0.9	-1.25	19.505	10.282	0.9	-17.94	53.03	52.69
5815	30.21	1	-1.15	19.768	10.444	1	-16.8	53.17	52.76
5820	28.16	0.67	-1.48	18.52	9.636	0.67	-16.09	53.18	53.18
5825	27.11	0.42	-1.73	17.887	9.226	0.42	-15.21	53.11	53.17
5830	28.37	0.72	-1.43	18.659	9.708	0.72	-14.54	53.02	52.75
5835	28.7	0.82	-1.33	18.954	9.748	0.82	-14.63	52.94	52.67
5840	27.16	0.53	-1.62	18.012	9.144	0.53	-14.85	52.86	52.77
5845	26.49	0.41	-1.74	17.607	8.878	0.41	-14.87	52.8	52.52
5850	26.9	0.53	-1.62	17.877	9.019	0.53	-15.53	52.84	52.44
5855	26.66	0.42	-1.73	17.712	8.944	0.42	-15.03	52.83	52.69
5860	26.06	0.34	-1.81	17.297	8.758	0.34	-15.5	52.74	52.63
5865	25.3	0.12	-2.03	16.798	8.499	0.12	-16	52.8	52.44
5870	24.04	-0.33	-2.48	15.887	8.151	-0.33	-16.39	52.89	52.58
5875	22.51	-0.75	-2.9	14.837	7.672	-0.75	-16.32	52.65	52.48
5880	22.5	-0.74	-2.89	14.66	7.843	-0.74	-17.15	52.45	52.26
5885	22	-0.99	-3.14	14.213	7.784	-0.99	-18.5	52.41	52.17
5890	20.17	-1.57	-3.72	12.934	7.235	-1.57	-19.78	52.3	52.07
5895	20.59	-1.41	-3.56	13.043	7.548	-1.41	-21.16	52.37	52.08
5900	22.25	-1.04	-3.19	13.854	8.4	-1.04	-23.01	52.55	52.18

Model No. : LSC02
 Manufacturer : Shenzhen Cmaeraking Technology Co.,LTD
 Address : RM602, Ogilvy Building, No. 1, Gaoxin South 7th Road, Nanshan, Shenzhen, China