



Solutions

# TEST REPORT

**Test Report No.: UL-RPT-RP-14620406-2216-FCC**

**Applicant \*** : UV Smart Technologies B.V.

**Model No. \*** : D45 V1

**FCC ID \*** : 2A8KOUVSMARTD45V1

**Technology** : RFID 13.56 MHz

**Test Standard(s)** : **FCC Parts 15.207, 15.209(a) & 15.225**

For details of applied tests refer to test result summary

1. This test report shall not be reproduced in full or partial, without the written approval of UL International Germany GmbH.
2. The results in this report apply only to the sample tested.
3. The test results in this report are traceable to the national or international standards.
4. **Test Report Version 1.1 supersede Version 1.0 with immediate effect**  
Test Report No. UL-RPT-RP-14620406-2216-FCC Version 1.1, Issue Date 06 FEBRUARY 2024 replaces  
Test Report No. UL-RPT-RP-14620406-2216-FCC Version 1.0, Issue Date 12 DECEMBER 2023, which is no longer valid.
5. Result of the tested sample: **PASS**
6. All information marked with a (\*) were provided by customer / applicant or authorized representative

Prepared by: Muhammad Faiq Khan  
Title: Project Engineer  
Date: 06 February 2024

Approved by: Rachid Acharkaoui  
Title: Operations Manager  
Date: 06 February 2024



Deutsche  
Akkreditierungsstelle  
D-PL-19381-02-00

This laboratory is accredited by DAkkS.  
The tests reported herein have been performed in  
accordance with its' terms of accreditation.

This page has been left intentionally blank.

**Table of Contents**

|                                                                          |           |
|--------------------------------------------------------------------------|-----------|
| <b>1. Customer Information *</b> .....                                   | <b>4</b>  |
| 1.1. Applicant Information                                               | 4         |
| 1.2. Manufacturer Information                                            | 4         |
| <b>2. Summary of Testing</b> .....                                       | <b>5</b>  |
| 2.1. General Information                                                 | 5         |
| Applied Standards                                                        | 5         |
| Location                                                                 | 5         |
| Date information                                                         | 5         |
| 2.2. Summary of Test Results                                             | 6         |
| 2.3. Methods and Procedures                                              | 6         |
| 2.4. Deviations from the Test Specification                              | 6         |
| <b>3. Equipment Under Test (EUT)</b> .....                               | <b>7</b>  |
| 3.1. Identification of Equipment Under Test (EUT) *                      | 7         |
| 3.2. Description of EUT *                                                | 7         |
| 3.3. Modifications Incorporated in the EUT                               | 7         |
| 3.4. Additional Information Related to Testing *                         | 8         |
| 3.5. Support Equipment                                                   | 8         |
| A. Support Equipment (In-house)                                          | 8         |
| B. . Support Equipment (Manufacturer supplied) *                         | 8         |
| <b>4. Operation and Monitoring of the EUT during Testing</b> .....       | <b>9</b>  |
| 4.1. Operating Modes                                                     | 9         |
| 4.2. Configuration and Peripherals                                       | 9         |
| <b>5. Measurements, Examinations and Derived Results</b> .....           | <b>10</b> |
| 5.1. General Comments                                                    | 10        |
| 5.2. Test Results                                                        | 11        |
| 5.2.1. Transmitter AC Conducted Spurious Emissions                       | 11        |
| 5.2.2. Transmitter 20 dB Bandwidth                                       | 21        |
| 5.2.3. Transmitter Fundamental Field Strength & Spectrum Mask            | 23        |
| 5.2.4. Transmitter Radiated Spurious Emissions                           | 27        |
| 5.2.5. Transmitter Frequency Stability (Temperature & Voltage Variation) | 32        |
| <b>6. Measurement Uncertainty</b> .....                                  | <b>36</b> |
| <b>7. Used equipment</b> .....                                           | <b>37</b> |
| <b>8. Open-Area-Test Site comparison</b> .....                           | <b>38</b> |
| <b>9. Report Revision History</b> .....                                  | <b>42</b> |

## **1. Customer Information \***

### **1.1.Applicant Information**

|                                |                                                   |
|--------------------------------|---------------------------------------------------|
| <b>Company Name:</b>           | UV Smart Technologies B.V.                        |
| <b>Company Address:</b>        | Patrijsweg 74, 2289 EX, Rijswijk, The Netherlands |
| <b>Company Phone No.:</b>      | 085 060 9800                                      |
| <b>Company E-Mail:</b>         | info@uvsmart.nl                                   |
| <b>Contact Person:</b>         | Michiel van Schelven                              |
| <b>Contact E-Mail Address:</b> | michiel.vanschelven@uvsmart.nl                    |
| <b>Contact Phone No.:</b>      | 085 060 9800                                      |

### **1.2.Manufacturer Information**

|                                |                                                   |
|--------------------------------|---------------------------------------------------|
| <b>Company Name:</b>           | AIM B.V.                                          |
| <b>Company Address:</b>        | Boschstraat 6, 6442 PB, Brunssum, The Netherlands |
| <b>Company Phone No.:</b>      | +31(0)45 2081 400                                 |
| <b>Company E-Mail:</b>         | info@aim-brunssum.nl                              |
| <b>Contact Person:</b>         | Emile Arnoldussen                                 |
| <b>Contact E-Mail Address:</b> | emile.arnoldussen@aim-brunssum.nl                 |
| <b>Contact Phone No.:</b>      | +31 (0)45 20 81 421                               |

## **2. Summary of Testing**

### **2.1. General Information**

#### **Applied Standards**

|                                 |                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| <b>Specification Reference:</b> | 47CFR15.225                                                                                                                           |
| <b>Specification Title:</b>     | Code of Federal Regulations Volume 47 (Telecommunications):<br>Part 15 Subpart C (Radio Frequency Devices) - Section 15.225           |
| <b>Specification Reference:</b> | 47CFR15.207 and 47CFR15.209                                                                                                           |
| <b>Specification Title:</b>     | Code of Federal Regulations Volume 47 (Telecommunications):<br>Part 15 Subpart C (Intentional Radiators) - Sections 15.207 and 15.209 |

#### **Location**

|                                |                                                                                    |
|--------------------------------|------------------------------------------------------------------------------------|
| <b>Location of Testing:</b>    | UL International Germany GmbH<br>Hedelfinger Str. 61<br>70327 Stuttgart<br>Germany |
| <b>Test Firm Registration:</b> | 399704                                                                             |

#### **Date information**

|                      |                                     |
|----------------------|-------------------------------------|
| <b>Order Date:</b>   | 15 December 2022                    |
| <b>EUT arrived:</b>  | 30 October 2023                     |
| <b>Test Dates:</b>   | 30 October 2023 to 17 November 2023 |
| <b>EUT returned:</b> | -/-                                 |

## 2.2. Summary of Test Results

| Clause                                                                                                                                                                                                                                                                                                                                                                                                               | Measurement                                                          | Complied                            | Did not comply           | Not performed            | Not applicable           |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|-------------------------------------|--------------------------|--------------------------|--------------------------|
| Part 15.207                                                                                                                                                                                                                                                                                                                                                                                                          | Transmitter AC Conducted Emissions                                   | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Part 15.215(c)                                                                                                                                                                                                                                                                                                                                                                                                       | Transmitter 20 dB Bandwidth                                          | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Part 15.225(a)(b)(c)(d)                                                                                                                                                                                                                                                                                                                                                                                              | Transmitter Fundamental Field Strength & Spectrum Mask (continued)   | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Part 15.209(a)/<br>15.225(d)                                                                                                                                                                                                                                                                                                                                                                                         | Transmitter Radiated Emissions                                       | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Part 15.225(e)                                                                                                                                                                                                                                                                                                                                                                                                       | Transmitter Frequency Stability<br>(Temperature & Voltage Variation) | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| <b>Decision rule:</b><br>Where not otherwise specified or communicated in writing, statements of conformity (e.g. Pass/Fail) are established according to the following decision rule: considering the ILAC G8:2019 chapter 4.2.1 (simple acceptance rule). This leads to a maximum 50% of false accept or false reject when the measured value equals the tolerance limit. See ILAC-G8:09/2019 for further details. |                                                                      |                                     |                          |                          |                          |

## 2.3. Methods and Procedures

|                   |                                                                                                                                                                      |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Reference:</b> | ANSI C63.4-2014                                                                                                                                                      |
| <b>Title:</b>     | American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz. |
| <b>Reference:</b> | ANSI C63.10-2013                                                                                                                                                     |
| <b>Title:</b>     | American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices                                                                       |
| <b>Reference:</b> | KDB 414788 D01 Radiated Test Site v01r01                                                                                                                             |
| <b>Title:</b>     | TEST SITES FOR RADIATED EMISSION MEASUREMENTS                                                                                                                        |
| <b>Reference:</b> | FCC KDB 174176 D01 Line Conducted FAQ v01r01 June 3, 2015                                                                                                            |
| <b>Title:</b>     | AC Power-Line Conducted Emissions Frequently Asked Questions                                                                                                         |

## 2.4. Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

### **3. Equipment Under Test (EUT)**

#### **3.1. Identification of Equipment Under Test (EUT) \***

|                          |                                     |
|--------------------------|-------------------------------------|
| Brand Name:              | UV Smart D45                        |
| Model Name or Number:    | D45 V1                              |
| Serial Number:           | D45V1PROTO11 (Radiated Test Sample) |
| Hardware Version Number: | N/A                                 |
| Firmware Version Number: | 1.0                                 |
| FCC ID:                  | 2A8KOUVSMARTD45V1                   |

#### **3.2. Description of EUT \***

The equipment under test was a Disinfection device, UV disinfectors which supporting RFID 13.56MHz technology

#### **3.3. Modifications Incorporated in the EUT**

No modifications were applied to the EUT during testing.

**3.4. Additional Information Related to Testing \***

|                              |                       |        |
|------------------------------|-----------------------|--------|
| Tested Technology:           | RFID 13.56 MHz        |        |
| Category of Equipment:       | Transceiver           |        |
| Channel Spacing:             | Single channel device |        |
| Transmit Frequency Range:    | 13.56 MHz             |        |
| Power supply Requirement(s): | 120 V AC 60 Hz        |        |
| Tested Temperature Range:    | Minimum               | -20 °C |
|                              | Maximum               | +50 °C |

**3.5. Support Equipment**

The following support equipment was used to exercise the EUT during testing:

**A. Support Equipment (In-house)**

| Item | Description | Brand Name | Model Name or Number | Serial Number |
|------|-------------|------------|----------------------|---------------|
| 1    | RFID Card   | N/A        | N/A                  | N/A           |

**B. . Support Equipment (Manufacturer supplied) \***

| Item | Description               | Brand Name | Model Name or Number | Serial Number |
|------|---------------------------|------------|----------------------|---------------|
| 1    | Power Cable               | N/A        | N/A                  | N/A           |
| 2    | Antenna 50 Ohm Terminator | N/A        | N/A                  | N/A           |



## **4. Operation and Monitoring of the EUT during Testing**

### **4.1. Operating Modes**

The EUT was tested in the following operating mode(s):

- ☒ Continuous transmitting modulated carrier at maximum power in RFID-13.56 MHz test mode.

### **4.2. Configuration and Peripherals**

The EUT was tested in the following configuration(s):

- The EUT was configured to transmit a continuous modulated carrier with maximum power at 13.56 MHz by default.

#### **EUT Power supply:**

- The EUT was powered via 120V 60 Hz.
- Voltage variations tests done with a laboratory power supply with varying the input voltage.

#### **Test Mode Activations:**

- The RFID 13.56 MHz test mode was activated by default as soon as the device is powered up.

#### **AC Conducted Measurements:**

- For AC conducted line emissions measurement the EUT was powered with 120VAC / 60 Hz and also 240 VAC / 60 Hz as it is in the range.
- In accordance with FCC KDB 174176 Q5, AC conducted emissions was also performed with the EUT's RFID 13.56 MHz Antenna removed and terminated with a 50Ω termination (dummy load).
- The Toyo EMI Software EP5/CE Ver 4.0.1. was used for these measurements.

#### **Radiated Measurements:**

- Before starting final radiated spurious emission measurements "worst case verification" with the EUT in Standing-position & Laying-position was performed by Lab.
- The EUT in Standing-position was found to be the worst case therefore this report includes relevant results.
- Radiated measurements below 30 MHz were performed with the EUT positioned on the turn table and rotating 360 degrees while the loop antenna height was set to 100 cm.
- Radiated measurements above 30 MHz were performed with the EUT positioned on the turn table and rotating 360 degrees while the antenna height varies from 1 to 4 m over the measurement frequency range.
- R&S®EMC32 Measurement Software V11.30.00 was used for the radiated spurious emission measurements.

## **5. Measurements, Examinations and Derived Results**

### **5.1. General Comments**

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to Section 6 *Measurement Uncertainty* for details.

In accordance with DAkkS requirements all the measurement equipment is on a calibration schedule. All equipment was within the calibration period on the date of testing.

## 5.2. Test Results

### 5.2.1. Transmitter AC Conducted Spurious Emissions

#### Test Summary:

|                            |                                     |            |                  |
|----------------------------|-------------------------------------|------------|------------------|
| Test Engineer:             | Abbas Al-Hussainy                   | Test Date: | 13 November 2023 |
| Test Sample Serial Number: | D45V1PROTO11 (Radiated Test Sample) |            |                  |
| Test Site Identification   | SR 7/8                              |            |                  |

|                   |                                                          |
|-------------------|----------------------------------------------------------|
| FCC Reference:    | Part 15.207                                              |
| Test Method Used: | ANSI C63.10 Section 6.2 / FCC KDB 174176 and notes below |

#### Environmental Conditions:


|                        |      |
|------------------------|------|
| Temperature (°C):      | 21.0 |
| Relative Humidity (%): | 58.9 |

#### Settings of the Instrument

|          |                          |
|----------|--------------------------|
| Detector | Quasi Peak/ Average Peak |
|----------|--------------------------|

#### Note(s):

1. The EUT was powered with 120VAC / 60 Hz and also 240 VAC / 60 Hz as it is in the range of the used power supply.
2. As mentioned in FCC KDB 174176 Q5 a suitable dummy load for radio frequency termination used in place of the antenna, which has the same electrical properties as the intended antenna without radiated emissions.
3. The EUT was configured on RFID 13.56 MHz: Single Channel.
4. Pre-scans were performed, and markers placed on the highest live and neutral measured levels. Final measurements were performed on the marker frequencies and the results entered into the tables below.
5. The final measured value, for the given emission, in the table below incorporates the cable loss.
6. All other emissions shown on the pre-scan plot were investigated. Only the highest 6 emissions have been reported in the tables below in accordance with ANSI C63.10 section 6.2.5.
7. Measurements were performed in shielded room (SR7/ 8 Asset Number 1603671). The EUT was placed at a height of 80 cm above the reference ground plane and in a distance of 40 cm from the vertical ground plane at the edge of the table.
8. Measurement software used: Toyo EMI Software; CE measurement software EP5/CE Ver 4.0.1.

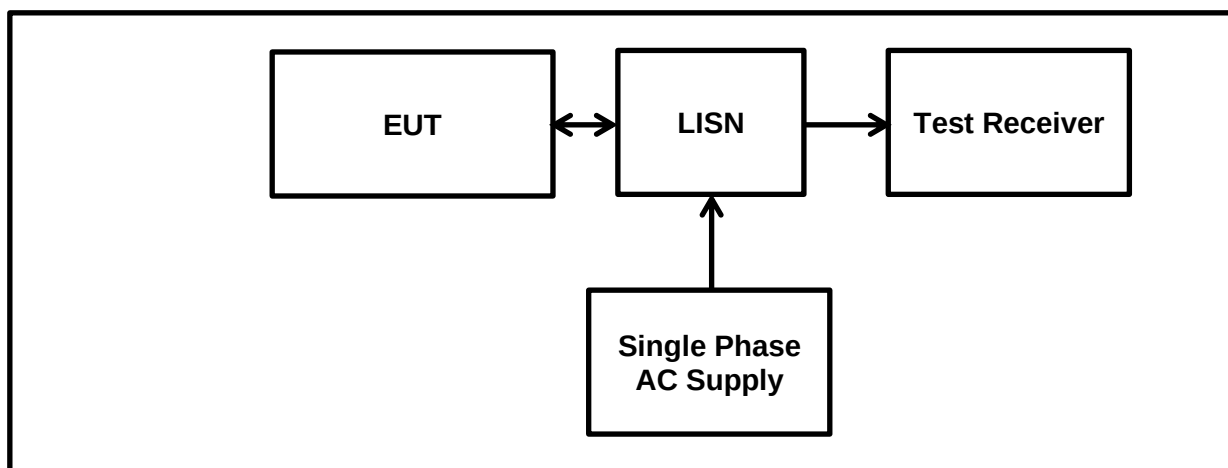**Transmitter AC Conducted Spurious Emissions (continued)****Test setup:**

**Transmitter AC Conducted Spurious Emissions (continued)****Results: Live / Quasi Peak / 120 VAC 60 Hz / RFID Active**

| Frequency (MHz) | Line | Level (dB $\mu$ V) | Limit (dB $\mu$ V) | Margin (dB) | Result   |
|-----------------|------|--------------------|--------------------|-------------|----------|
| 0.15601         | Live | 43.9               | 65.7               | 21.8        | Complied |
| 0.18056         | Live | 43.5               | 64.5               | 21.0        | Complied |
| 0.51723         | Live | 43.6               | 56.0               | 12.4        | Complied |
| 0.88798         | Live | 21.1               | 56.0               | 34.9        | Complied |
| 0.97495         | Live | 24.8               | 56.0               | 31.2        | Complied |
| 13.56313        | Live | 47.4               | 60.0               | 12.6        | Complied |
| 27.12425        | Live | 27.1               | 60.0               | 32.9        | Complied |

**Results: Live / Average / 120 VAC 60 Hz / RFID Active**



| Frequency (MHz) | Line | Level (dB $\mu$ V) | Limit (dB $\mu$ V) | Margin (dB) | Result   |
|-----------------|------|--------------------|--------------------|-------------|----------|
| 0.15601         | Live | 37.3               | 55.7               | 18.4        | Complied |
| 0.18056         | Live | 36.7               | 54.5               | 17.8        | Complied |
| 0.51723         | Live | 35.6               | 46.0               | 10.4        | Complied |
| 0.88798         | Live | 11.2               | 46.0               | 34.8        | Complied |
| 0.97495         | Live | 16.9               | 46.0               | 29.1        | Complied |
| 13.56313        | Live | 34.9               | 50.0               | 15.1        | Complied |
| 27.12425        | Live | 16.7               | 50.0               | 33.3        | Complied |

**Results: Neutral / Quasi Peak / 120 VAC 60 Hz / RFID Active**

| Frequency (MHz) | Line    | Level (dB $\mu$ V) | Limit (dB $\mu$ V) | Margin (dB) | Result   |
|-----------------|---------|--------------------|--------------------|-------------|----------|
| 0.15401         | Neutral | 48.3               | 65.8               | 17.5        | Complied |
| 0.17906         | Neutral | 41.9               | 64.5               | 22.6        | Complied |
| 0.51723         | Neutral | 43.7               | 56.0               | 12.3        | Complied |
| 0.88998         | Neutral | 21.5               | 56.0               | 34.5        | Complied |
| 13.34269        | Neutral | 12.0               | 60.0               | 48.0        | Complied |
| 13.56313        | Neutral | 46.7               | 60.0               | 13.3        | Complied |
| 27.12425        | Neutral | 28.2               | 60.0               | 31.8        | Complied |

**Transmitter AC Conducted Spurious Emissions (continued)****Results: Neutral / Average / 120 VAC 60 Hz / RFID Active**

| Frequency (MHz) | Line    | Level (dB $\mu$ V) | Limit (dB $\mu$ V) | Margin (dB) | Result   |
|-----------------|---------|--------------------|--------------------|-------------|----------|
| 0.15401         | Neutral | 41.7               | 55.8               | 14.1        | Complied |
| 0.17906         | Neutral | 35.5               | 54.5               | 19.0        | Complied |
| 0.51723         | Neutral | 35.7               | 46.0               | 10.3        | Complied |
| 0.88998         | Neutral | 11.9               | 46.0               | 34.1        | Complied |
| 13.34269        | Neutral | 6.3                | 50.0               | 43.7        | Complied |
| 13.56313        | Neutral | 34.2               | 50.0               | 15.8        | Complied |
| 27.12425        | Neutral | 16.4               | 50.0               | 33.6        | Complied |

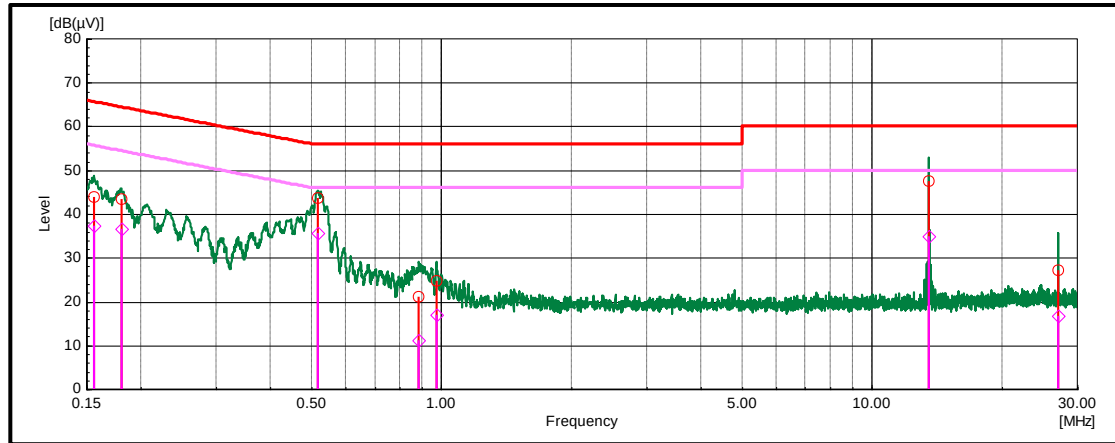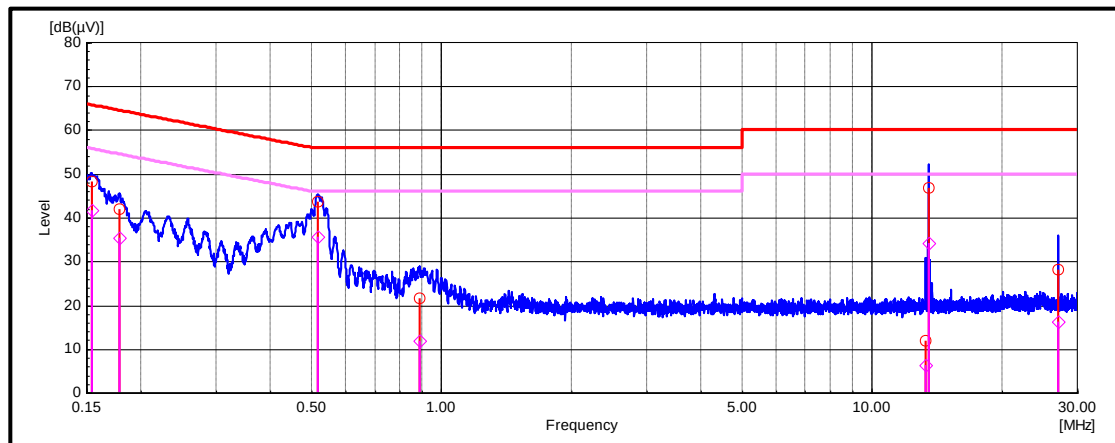**Result: Pass****Plot: Live Line / 120 VAC 60 Hz / RFID Active****Plot: Neutral Line / 120 VAC 60 Hz / RFID Active**

*Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.*

**Transmitter AC Conducted Spurious Emissions (continued)****Results: Live / Quasi Peak / 240 VAC 60 Hz / RFID Active**

| Frequency (MHz) | Line | Level (dB $\mu$ V) | Limit (dB $\mu$ V) | Margin (dB) | Result   |
|-----------------|------|--------------------|--------------------|-------------|----------|
| 0.23689         | Live | 33.3               | 62.2               | 28.9        | Complied |
| 0.52217         | Live | 41.5               | 56.0               | 14.5        | Complied |
| 1.38439         | Live | 19.2               | 56.0               | 36.8        | Complied |
| 5.14620         | Live | 9.2                | 60.0               | 50.8        | Complied |
| 13.55997        | Live | 51.3               | 60.0               | 8.7         | Complied |
| 27.12081        | Live | 33.2               | 60.0               | 26.8        | Complied |

**Results: Live / Average / 240 VAC 60 Hz / RFID Active**

| Frequency (MHz) | Line | Level (dB $\mu$ V) | Limit (dB $\mu$ V) | Margin (dB) | Result   |
|-----------------|------|--------------------|--------------------|-------------|----------|
| 0.23689         | Live | 24.5               | 52.2               | 27.7        | Complied |
| 0.52217         | Live | 29.4               | 46.0               | 16.6        | Complied |
| 1.38439         | Live | 12.0               | 46.0               | 34.0        | Complied |
| 5.14620         | Live | 6.2                | 50.0               | 43.8        | Complied |
| 13.55997        | Live | 38.7               | 50.0               | 11.3        | Complied |
| 27.12081        | Live | 21.2               | 50.0               | 28.8        | Complied |

**Results: Neutral / Quasi Peak / 240 VAC 60 Hz / RFID Active**

| Frequency (MHz) | Line    | Level (dB $\mu$ V) | Limit (dB $\mu$ V) | Margin (dB) | Result   |
|-----------------|---------|--------------------|--------------------|-------------|----------|
| 0.15441         | Neutral | 48.0               | 65.8               | 17.8        | Complied |
| 0.52407         | Neutral | 40.4               | 56.0               | 15.6        | Complied |
| 1.36263         | Neutral | 15.6               | 56.0               | 40.4        | Complied |
| 4.44500         | Neutral | 8.6                | 56.0               | 47.4        | Complied |
| 13.56318        | Neutral | 46.7               | 60.0               | 13.3        | Complied |
| 27.12011        | Neutral | 33.8               | 60.0               | 26.2        | Complied |


**Results: Neutral / Average / 240 VAC 60 Hz / RFID Active**

| Frequency (MHz) | Line    | Level (dB $\mu$ V) | Limit (dB $\mu$ V) | Margin (dB) | Result   |
|-----------------|---------|--------------------|--------------------|-------------|----------|
| 0.15441         | Neutral | 40.1               | 55.8               | 15.7        | Complied |
| 0.52407         | Neutral | 28.4               | 46.0               | 17.6        | Complied |
| 1.36263         | Neutral | 9.0                | 46.0               | 37.0        | Complied |
| 4.44500         | Neutral | 6.1                | 46.0               | 39.9        | Complied |
| 13.56318        | Neutral | 34.1               | 50.0               | 15.9        | Complied |
| 27.12011        | Neutral | 21.8               | 50.0               | 28.2        | Complied |


**Result: Pass**

**Transmitter AC Conducted Spurious Emissions (continued)**

**Plot: Live Line / 240 VAC 60 Hz / RFID Active**

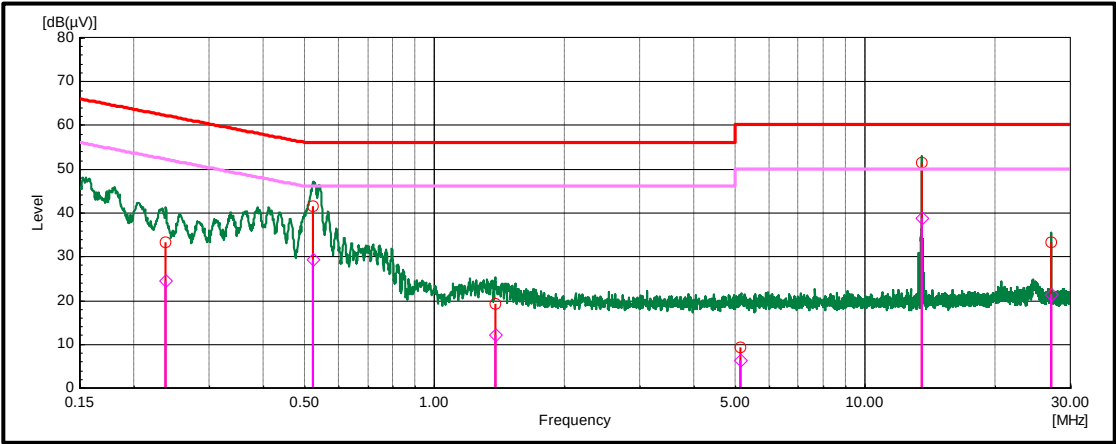

**Plot: Neutral Line / 240 VAC 60 Hz / RFID Active**

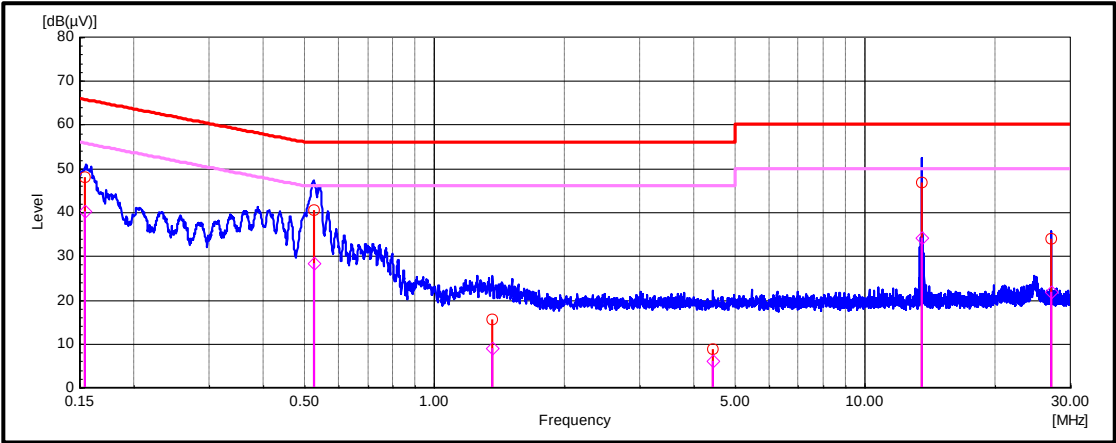

*Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.*



**Transmitter AC Conducted Spurious Emissions (continued)****Results: Live / Quasi Peak / 120 VAC 60 Hz / Antenna disconnected / Dummy Load fitted**

| Frequency (MHz) | Line | Level (dB $\mu$ V) | Limit (dB $\mu$ V) | Margin (dB) | Result   |
|-----------------|------|--------------------|--------------------|-------------|----------|
| 0.20556         | Live | 40.5               | 63.4               | 22.9        | Complied |
| 0.51477         | Live | 44.9               | 56.0               | 11.1        | Complied |
| 0.91147         | Live | 19.4               | 56.0               | 36.6        | Complied |
| 3.74547         | Live | 8.1                | 56.0               | 47.9        | Complied |
| 6.55076         | Live | 9.7                | 60.0               | 50.3        | Complied |
| 23.55095        | Live | 11.4               | 60.0               | 48.6        | Complied |

**Results: Live / Average / 120 VAC 60 Hz / Antenna disconnected / Dummy Load fitted**

| Frequency (MHz) | Line | Level (dB $\mu$ V) | Limit (dB $\mu$ V) | Margin (dB) | Result   |
|-----------------|------|--------------------|--------------------|-------------|----------|
| 0.20556         | Live | 34.9               | 53.4               | 18.5        | Complied |
| 0.51477         | Live | 38.3               | 46.0               | 7.7         | Complied |
| 0.91147         | Live | 10.5               | 46.0               | 35.5        | Complied |
| 3.74547         | Live | 4.5                | 46.0               | 41.5        | Complied |
| 6.55076         | Live | 5.5                | 50.0               | 44.5        | Complied |
| 23.55095        | Live | 6.9                | 50.0               | 43.1        | Complied |

**Results: Neutral / Quasi Peak / 120 VAC 60 Hz / Antenna disconnected / Dummy Load fitted**

| Frequency (MHz) | Line    | Level (dB $\mu$ V) | Limit (dB $\mu$ V) | Margin (dB) | Result   |
|-----------------|---------|--------------------|--------------------|-------------|----------|
| 0.23201         | Neutral | 38.1               | 62.4               | 24.3        | Complied |
| 0.51699         | Neutral | 43.7               | 56.0               | 12.3        | Complied |
| 0.88068         | Neutral | 20.9               | 56.0               | 35.1        | Complied |
| 2.11156         | Neutral | 8.0                | 56.0               | 48.0        | Complied |
| 8.21680         | Neutral | 8.7                | 60.0               | 51.3        | Complied |
| 23.96057        | Neutral | 11.2               | 60.0               | 48.8        | Complied |


**Results: Neutral / Average / 120 VAC 60 Hz / Antenna disconnected / Dummy Load fitted**

| Frequency (MHz) | Line    | Level (dB $\mu$ V) | Limit (dB $\mu$ V) | Margin (dB) | Result   |
|-----------------|---------|--------------------|--------------------|-------------|----------|
| 0.23201         | Neutral | 33.6               | 52.4               | 18.8        | Complied |
| 0.51699         | Neutral | 37.0               | 46.0               | 9.0         | Complied |
| 0.88068         | Neutral | 11.6               | 46.0               | 34.4        | Complied |
| 2.11156         | Neutral | 4.4                | 46.0               | 41.6        | Complied |
| 8.21680         | Neutral | 4.6                | 50.0               | 45.4        | Complied |
| 23.96057        | Neutral | 6.7                | 50.0               | 43.3        | Complied |


**Result: Pass**

**Transmitter AC Conducted Spurious Emissions (continued)**

**Plot: Live Line / 120 VAC 60 Hz / Antenna disconnected / Dummy Load fitted**

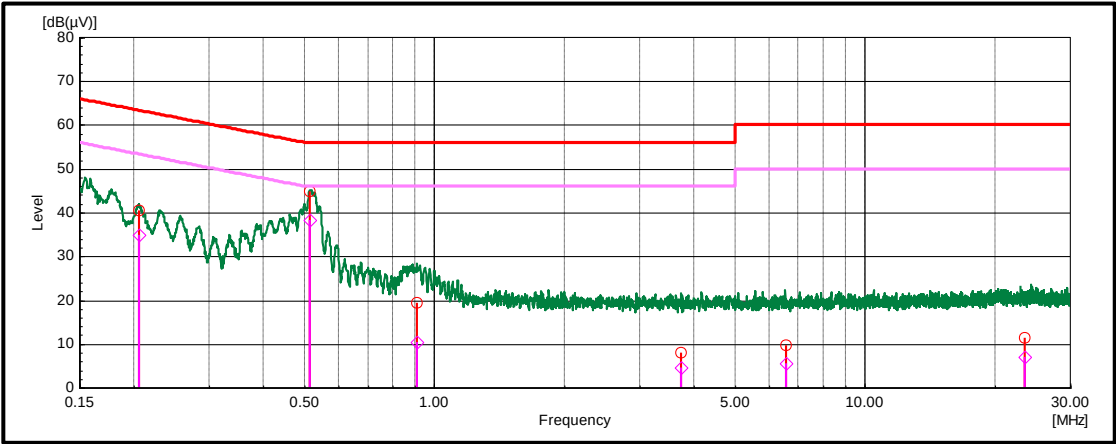

**Plot: Neutral Line / 120 VAC 60 Hz / Antenna disconnected / Dummy Load fitted**

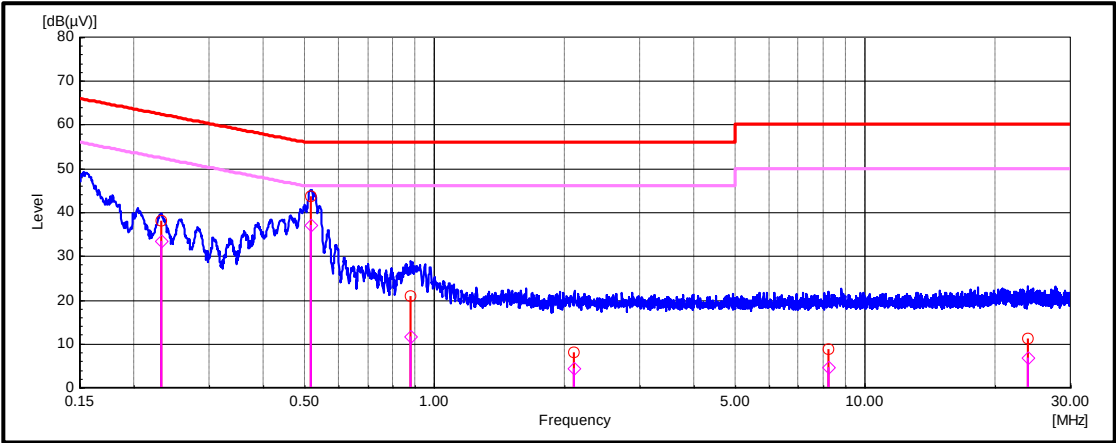

*Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.*

**Transmitter AC Conducted Spurious Emissions (continued)****Results: Live / Quasi Peak / 240 VAC 60 Hz / Antenna disconnected / Dummy Load fitted**

| Frequency (MHz) | Line | Level (dB $\mu$ V) | Limit (dB $\mu$ V) | Margin (dB) | Result   |
|-----------------|------|--------------------|--------------------|-------------|----------|
| 0.17918         | Live | 43.4               | 64.5               | 21.1        | Complied |
| 0.25947         | Live | 36.3               | 61.4               | 25.1        | Complied |
| 0.52315         | Live | 40.8               | 56.0               | 15.2        | Complied |
| 0.97564         | Live | 18.0               | 56.0               | 38.0        | Complied |
| 3.33269         | Live | 8.6                | 56.0               | 47.4        | Complied |
| 11.59134        | Live | 8.8                | 60                 | 51.2        | Complied |
| 20.98579        | Live | 13.1               | 60                 | 46.9        | Complied |

**Results: Live / Average / 240 VAC 60 Hz / Antenna disconnected / Dummy Load fitted**



| Frequency (MHz) | Line | Level (dB $\mu$ V) | Limit (dB $\mu$ V) | Margin (dB) | Result   |
|-----------------|------|--------------------|--------------------|-------------|----------|
| 0.17918         | Live | 34.5               | 54.5               | 20.0        | Complied |
| 0.25947         | Live | 28.2               | 51.4               | 23.2        | Complied |
| 0.52315         | Live | 28.9               | 46.0               | 17.1        | Complied |
| 0.97564         | Live | 10.8               | 46.0               | 35.2        | Complied |
| 3.33269         | Live | 4.5                | 46.0               | 41.5        | Complied |
| 11.59134        | Live | 4.7                | 50                 | 45.3        | Complied |
| 20.98579        | Live | 8.1                | 50                 | 41.9        | Complied |

**Results: Neutral / Quasi Peak / 240 VAC 60 Hz / Antenna disconnected / Dummy Load fitted**

| Frequency (MHz) | Line    | Level (dB $\mu$ V) | Limit (dB $\mu$ V) | Margin (dB) | Result   |
|-----------------|---------|--------------------|--------------------|-------------|----------|
| 0.18342         | Neutral | 37.8               | 64.3               | 26.5        | Complied |
| 0.52240         | Neutral | 41.1               | 56.0               | 14.9        | Complied |
| 0.96566         | Neutral | 13.7               | 56.0               | 42.3        | Complied |
| 1.33344         | Neutral | 19.4               | 56.0               | 36.6        | Complied |
| 2.94539         | Neutral | 8.1                | 56.0               | 47.9        | Complied |
| 11.96677        | Neutral | 8.8                | 60.0               | 51.2        | Complied |
| 24.68035        | Neutral | 16.0               | 60.0               | 44.0        | Complied |

**Transmitter AC Conducted Spurious Emissions (continued)****Results: Neutral / Average / 240 VAC 60 Hz / Antenna disconnected / Dummy Load fitted**

| Frequency (MHz) | Line    | Level (dB $\mu$ V) | Limit (dB $\mu$ V) | Margin (dB) | Result   |
|-----------------|---------|--------------------|--------------------|-------------|----------|
| 0.18342         | Neutral | 29.9               | 54.3               | 24.4        | Complied |
| 0.52240         | Neutral | 29.3               | 46.0               | 16.7        | Complied |
| 0.96566         | Neutral | 7.4                | 46.0               | 38.6        | Complied |
| 1.33344         | Neutral | 11.3               | 46.0               | 34.7        | Complied |
| 2.94539         | Neutral | 4.5                | 46.0               | 41.5        | Complied |
| 11.96677        | Neutral | 4.7                | 50.0               | 45.3        | Complied |
| 24.68035        | Neutral | 9.2                | 50.0               | 40.8        | Complied |

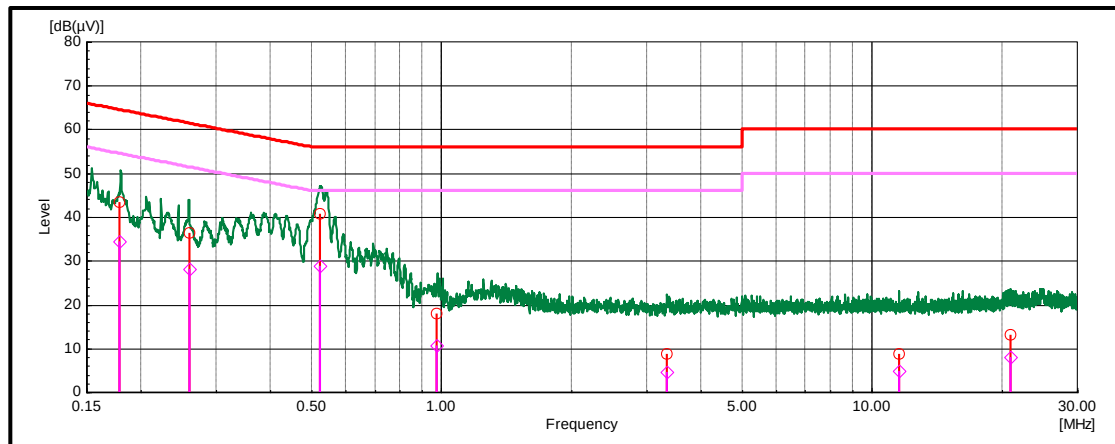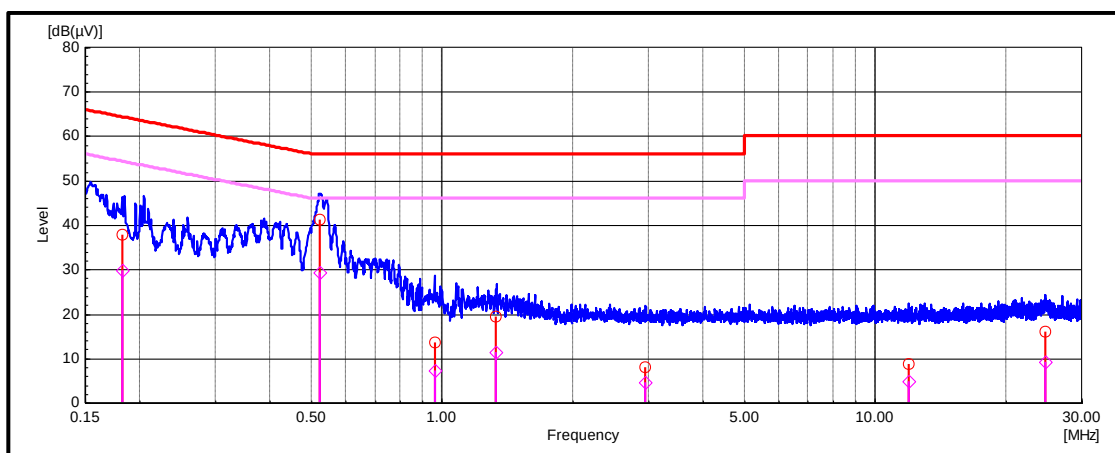**Result: Pass****Plot: Live Line / 240 VAC 60 Hz / Antenna disconnected / Dummy Load fitted****Plot: Neutral Line / 240 VAC 60 Hz / Antenna disconnected / Dummy Load fitted**

*Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.*

**5.2.2. Transmitter 20 dB Bandwidth****Test Summary:**

|                            |                                     |             |                  |
|----------------------------|-------------------------------------|-------------|------------------|
| Test Engineer:             | Muhammad Faiq Khan                  | Test Dates: | 13 November 2023 |
| Test Sample Serial Number: | D45V1PROTO11 (Radiated Test Sample) |             |                  |
| Test Site Identification   | SR 9                                |             |                  |

|                   |                           |
|-------------------|---------------------------|
| FCC Reference:    | Part 15.215(c)            |
| Test Method Used: | ANSI C63.10 Section 6.9.2 |

**Environmental Conditions:**


|                        |      |
|------------------------|------|
| Temperature (°C):      | 21.5 |
| Relative Humidity (%): | 46.5 |

**Settings of the Instrument:**

|            |                  |
|------------|------------------|
| RBW/VBW    | 30 kHz / 100 kHz |
| Span       | 3 MHz            |
| Sweep time | Auto             |
| Detector   | MaxPeak          |

**Notes:**


1. The n dB down function of the spectrum analyzer was set to 20 dB.

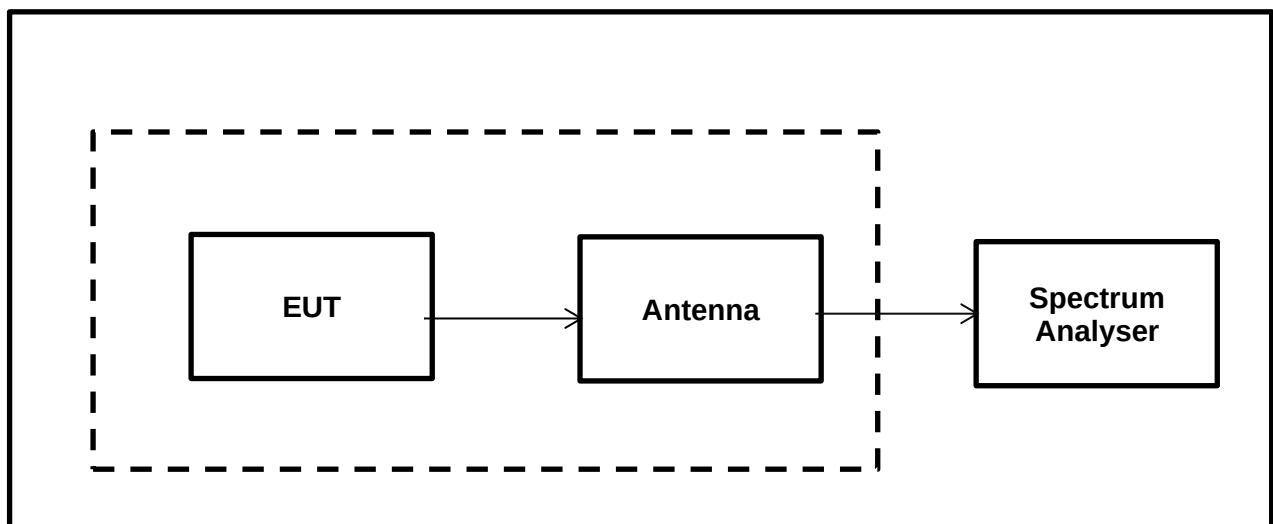**Test Setup:**

Transmitter 20 dB Bandwidth (continued)

Results: RFID 13.56 MHz

| RFID Channel | 20 dB Bandwidth (kHz) |
|--------------|-----------------------|
| 13.56 MHz    | 502.1                 |

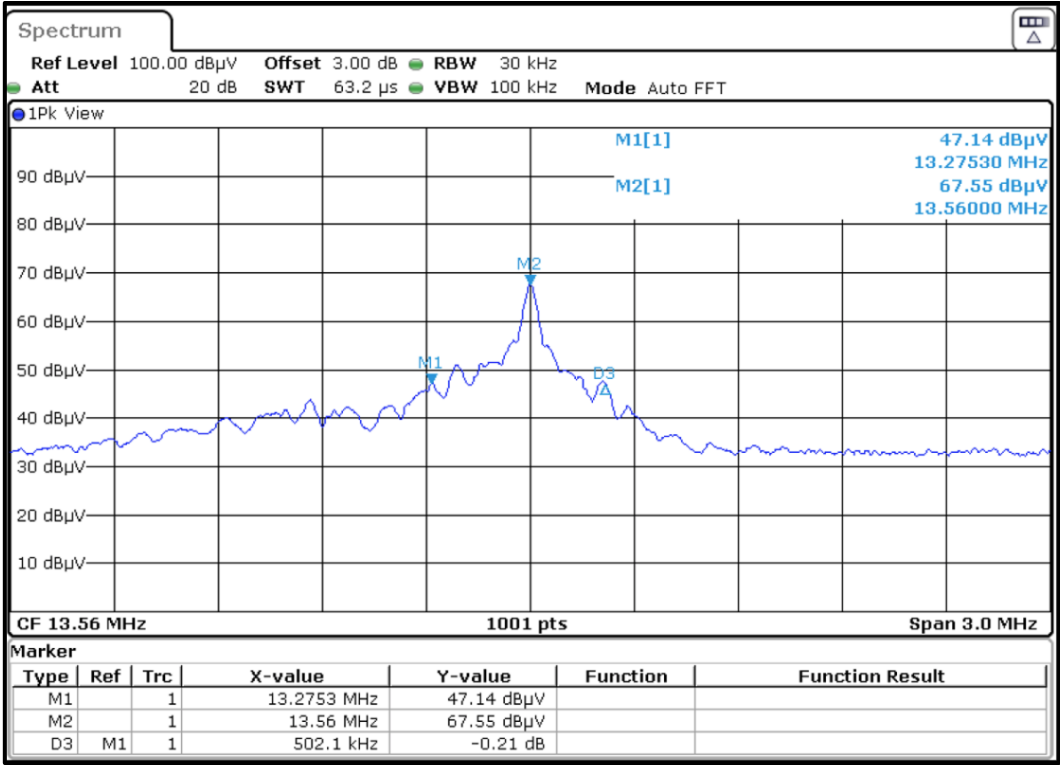

RFID 13.56 MHz

Result: Pass

**5.2.3. Transmitter Fundamental Field Strength & Spectrum Mask****Test Summary:**

|                                   |                                     |                   |                 |
|-----------------------------------|-------------------------------------|-------------------|-----------------|
| <b>Test Engineer:</b>             | Muhammad Faiq Khan                  | <b>Test Date:</b> | 30 October 2023 |
| <b>Test Sample Serial Number:</b> | D45V1PROTO11 (Radiated Test Sample) |                   |                 |
| <b>Test Site Identification</b>   | SR 1/2                              |                   |                 |

|                          |                         |
|--------------------------|-------------------------|
| <b>FCC Reference:</b>    | Part 15.225(a)(b)(c)(d) |
| <b>Test Method Used:</b> | ANSI C63.10 Section 6.4 |

**Environmental Conditions:**


|                               |      |
|-------------------------------|------|
| <b>Temperature (°C):</b>      | 23.0 |
| <b>Relative Humidity (%):</b> | 46.5 |

**Note(s):**

1. The limit is specified at a test distance of 30 metres. However, as specified by FCC Section 15.31 (f)(2), measurements may be performed at a closer distance and the measured level corrected to the specified measurement distance by using the square of an inverse linear distance extrapolation factor (40 dB/decade).
2. In accordance with FCC KDB 414788 D01 Radiated Test Site v01 an alternative Test Site was used. Instead of an OATS a Semi Anechoic Chamber was used where evidence was shown that the behaviour is the same. A maximum deviation of 1.38 dB for 13.56 MHz could be determined. This deviation is also taken into account to the result.
3. Therefore, applicable limits were extrapolated from 30 m to 3 m using a distance extrapolation factor of 40 dB/decade. The transducer factor on the measuring instrument was used to extrapolate the measured values from 30 m to 3 m using a distance extrapolation factor of 40 dB/decade.
4. Pre-scan measurements were performed using a spectrum analyser with a peak detector and measurement bandwidth of 10 kHz. The fundamental field strength was maximized by rotating the measurement antenna and EUT. The spectrum analyser was then switched to test receiver mode and the final measurement on the maximized level was performed.
5. Compliance with the spectrum mask is shown by final measurements performed in a semi-anechoic chamber. For the field strength measurements in a semi-anechoic chamber, a transducer factor on the measuring instrument was used to extrapolate the results at 3 m to a distance of 30 m. A distance extrapolation factor of 40 dB was used.
6. A transducer factor was used on the spectrum analyser during measurement. This factor includes correction between the fixed gain of the magnetic loop antenna and the calibration values. It also includes the value of the RF cable used to connect the antenna to the spectrum analyser which was incorporated into the annual calibration of the magnetic loop antenna.
7. For the emissions appearing within the 13.110-14.010 MHz band, compliance with the spectrum mask is shown in accordance with FCC Part 15.225(a)(b)(c)(d) limits.
8. The emissions shown at frequencies approximately at 13.56 MHz on the plot represent EUT's fundamental field strength for RFID 13.56 MHz.
9. For the emissions appearing outside of the 13.110-14.010 MHz band, compliance with the spectrum mask is shown in accordance with FCC Part 15.225(d) referencing FCC Part 15.209 general radiated emission limits.

**Transmitter Fundamental Field Strength & Spectrum Mask(continued)**

**Semi Anechoic Chamber**

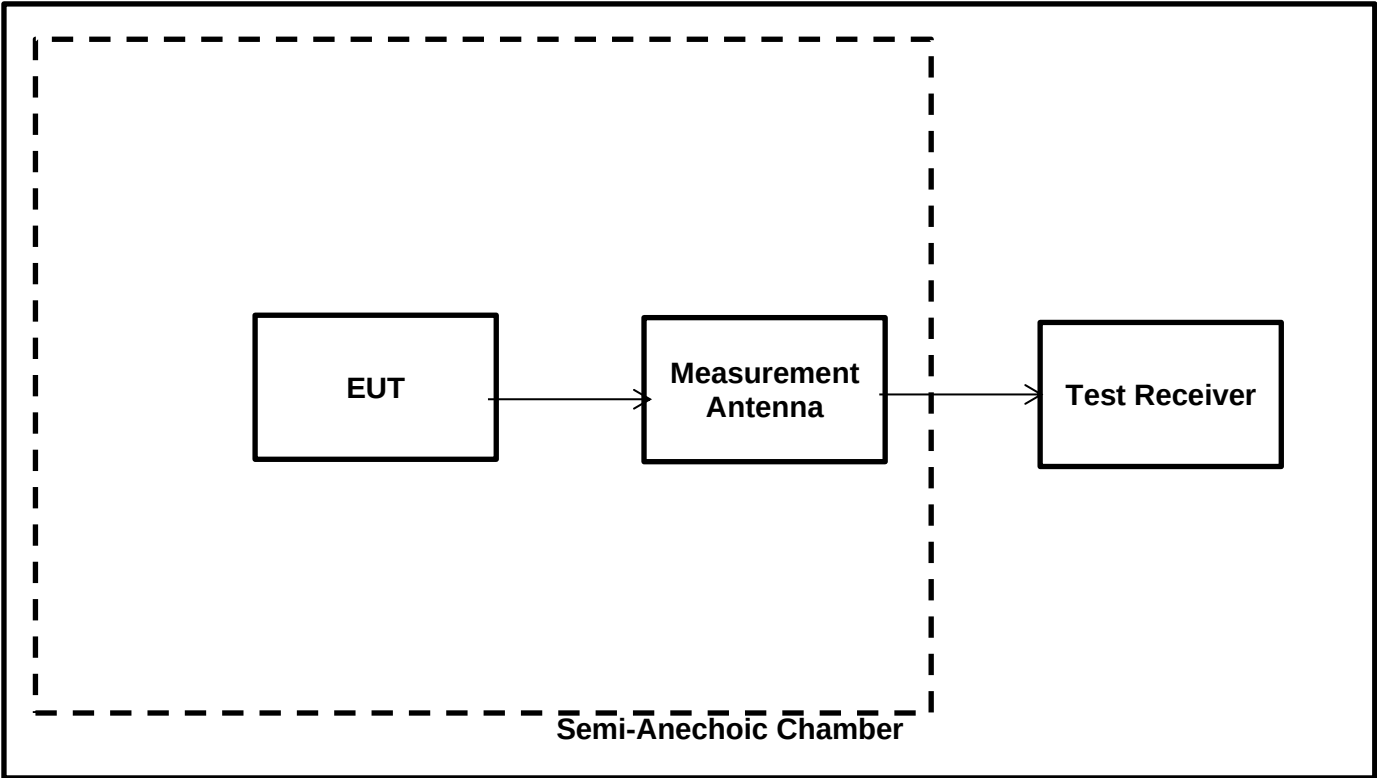




**Transmitter Fundamental Field Strength & Spectrum Mask (continued)****Results: AC Power supply / RFID 13.56 MHz**

| Frequency Band (MHz) | Emission Frequency (MHz) | Loop Antenna Orientation | MaxPeak Emission Level at 3 m (dBμV/m)<br><small>Note 3</small> | Deviation from OATS to SAC (dB) | Deviation Corrected Level at 3 m (dBμV/m) | Limit at 3 m (dBμV/m)<br><small>Note 3</small> | Margin (dB) | Result   |
|----------------------|--------------------------|--------------------------|-----------------------------------------------------------------|---------------------------------|-------------------------------------------|------------------------------------------------|-------------|----------|
| 12.000 to 13.110     | 12.47                    | 0° to EUT                | 32.30                                                           | 0.48                            | 32.78                                     | 69.50                                          | 36.72       | Complied |
| 13.110 to 13.410     | 13.30                    | 90° to EUT               | 32.30                                                           | 1.38                            | 33.68                                     | 80.50                                          | 46.82       | Complied |
| 13.410 to 13.553     | 13.53                    | 90° to EUT               | 46.47                                                           | 1.38                            | 47.85                                     | 90.50                                          | 42.65       | Complied |
| 13.553 to 13.567     | 13.559                   | 90° to EUT               | 67.87                                                           | 1.38                            | 69.25                                     | 124.00                                         | 54.75       | Complied |
| 13.567 to 13.710     | 13.59                    | 90° to EUT               | 47.40                                                           | 1.38                            | 48.78                                     | 90.50                                          | 41.72       | Complied |
| 13.710 to 14.010     | 13.73                    | 90° to EUT               | 35.28                                                           | 1.07                            | 36.35                                     | 80.50                                          | 44.15       | Complied |
| 14.010 to 15.000     | 14.05                    | 90° to EUT               | 30.54                                                           | 1.07                            | 31.61                                     | 69.50                                          | 37.89       | Complied |
|                      | 14.61                    | 0° to EUT                | 31.82                                                           | 0.7                             | 32.52                                     | 69.50                                          | 36.98       | Complied |

**Transmitter Fundamental Field Strength & Spectrum Mask (continued)**  
**Plot: AC Power supply / RFID 13.56 MHz**

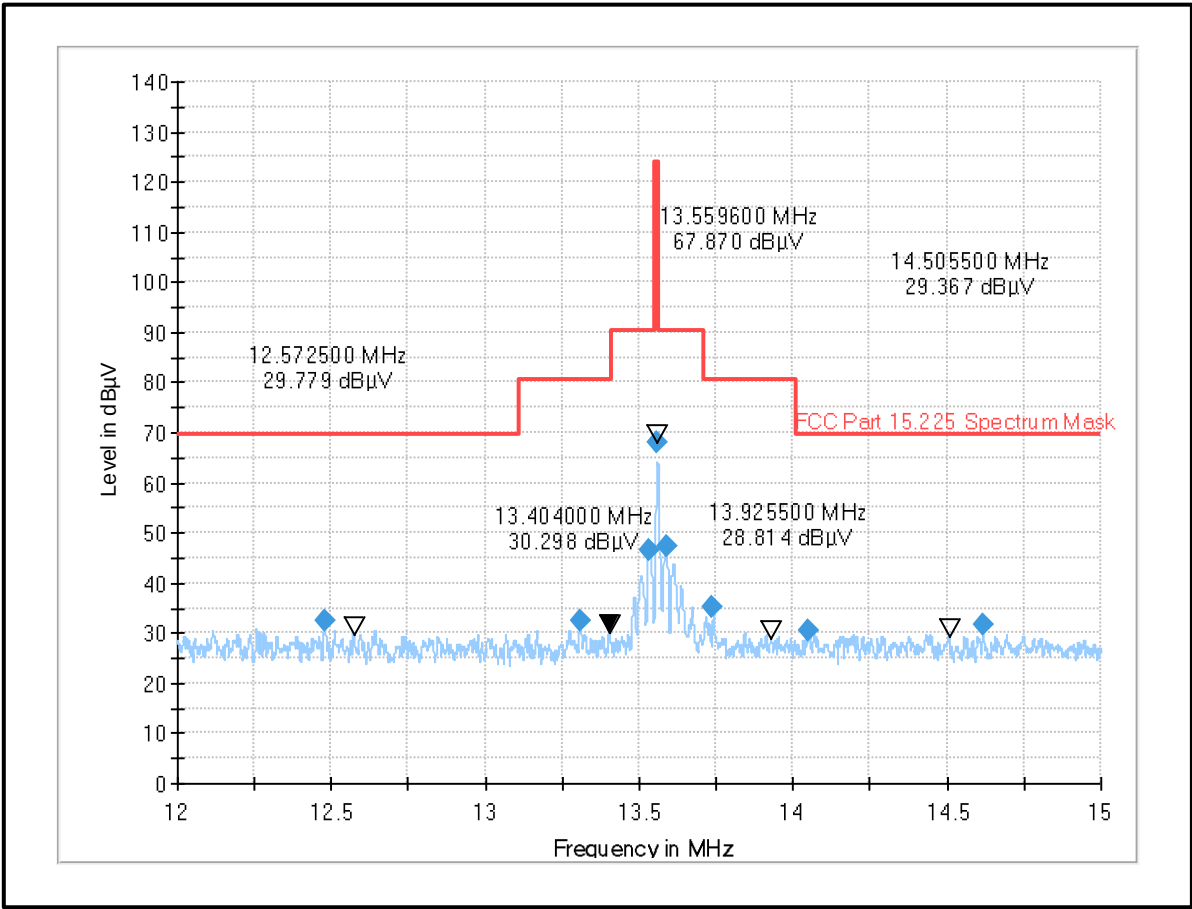

Fundamental field strength and spectrum mask / measured at 3 metres/ measured in a semi-anechoic chamber

**Result: Pass**

**5.2.4. Transmitter Radiated Spurious Emissions****Test Summary:**

|                                   |                                     |                   |                 |
|-----------------------------------|-------------------------------------|-------------------|-----------------|
| <b>Test Engineer:</b>             | Muhammad Faiq Khan                  | <b>Test Date:</b> | 30 October 2023 |
| <b>Test Sample Serial Number:</b> | D45V1PROTO11 (Radiated Test Sample) |                   |                 |
| <b>Test Site Identification</b>   | SR 1/2                              |                   |                 |

|                          |                                       |
|--------------------------|---------------------------------------|
| <b>FCC Reference:</b>    | Parts 15.225(d) & 15.209(a)           |
| <b>Test Method Used:</b> | ANSI C63.10:2013 Sections 6.3 and 6.4 |
| <b>Frequency Range:</b>  | 9 kHz to 30 MHz                       |


**Environmental Conditions:**

|                               |      |
|-------------------------------|------|
| <b>Temperature (°C):</b>      | 23.0 |
| <b>Relative Humidity (%):</b> | 46.5 |

**Note(s):**


- In accordance with FCC KDB 414788, an alternative test site may be used for the measurement below 30 MHz (The OATS / SAC comparison data is available upon request). Therefore the result from the semi-anechoic chamber tests is shown in this section of the test report.
- The limits are specified at a test distance of 30 m & 300 m. However, as specified by FCC Section 15.31 (f)(2), measurements may be performed at a closer distance and the measured level corrected to the specified measurement distance by using the square of an inverse linear distance extrapolation factor.
- Therefore the limit values are extrapolated to a measurement distance of 3 m where field strength of X dBμV/m was measured.
  - 9 kHz- 490 kHz: limits extrapolated from 300 m to 3 m adding 80 dB at 40 dB /decade.
  - 490 kHz-1705 kHz: limits extrapolated from 30 m to 3 m by adding 40 dB at 40 dB /decade.
- The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
- Measurements below 30 MHz were performed in a semi-anechoic chamber SR1/ 2 (Asset Number 1603665) at a distance of 3 m. The EUT placed on table 80 cm from ground plane in the centre of the chamber turntable. The measurement loop antenna height was at 1 m.
- Pre-scans were performed and markers placed on the highest measured levels. The test receiver was set to:
  - Frequency range: 9 kHz-150 kHz : RBW: 300 Hz /VBW: 1 kHz
  - Frequency range: 150 kHz – 30 MHz: RBW: 10 kHz /VBW: 30 kHz
  - Detector: Max-Peak detector
  - Trace Mode: Max Hold
- The emissions shown at frequencies approximately 13.56 MHz on the 9 kHz to 30 MHz plots are the EUT RFID 13.56 MHz fundamental for the tested channel.

**Transmitter Radiated Spurious Emission test setup**  
**Test Setup:**

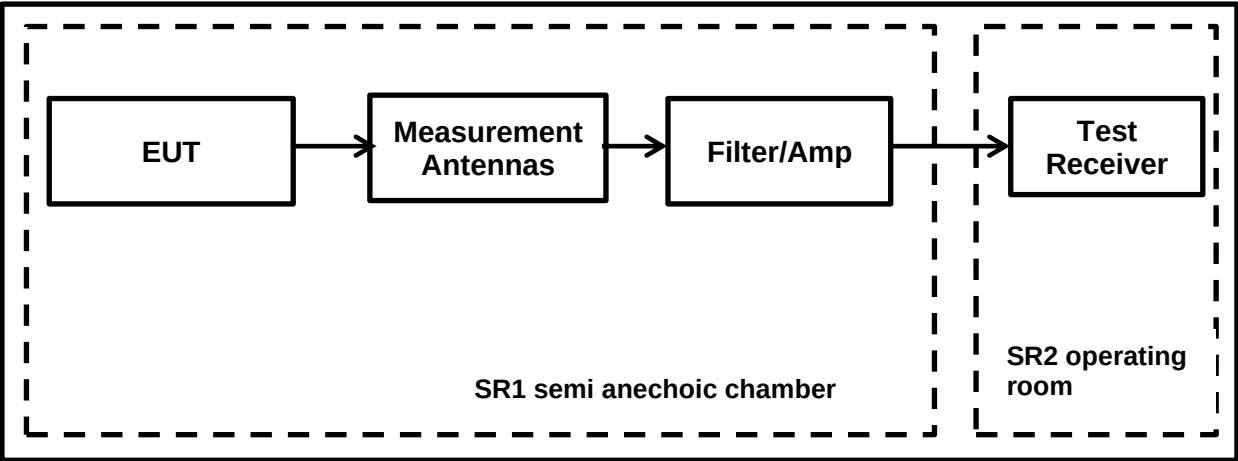

**Transmitter Radiated Emissions (continued)****Results: AC Power supply / RFID 13.56 MHz**

| Frequency (MHz) | Loop Antenna Orientation | Level (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Result   |
|-----------------|--------------------------|----------------------|----------------------|-------------|----------|
| 0.011820        | 90° to EUT               | 79.38                | 125.77               | 46.39       | Complied |
| 0.288915        | 0° to EUT                | 38.85                | 97.78                | 58.93       | Complied |
| 1.509383        | 0° to EUT                | 36.77                | 63.95                | 27.18       | Complied |
| 10.478518       | 0° to EUT                | 33.83                | 70.00                | 36.17       | Complied |

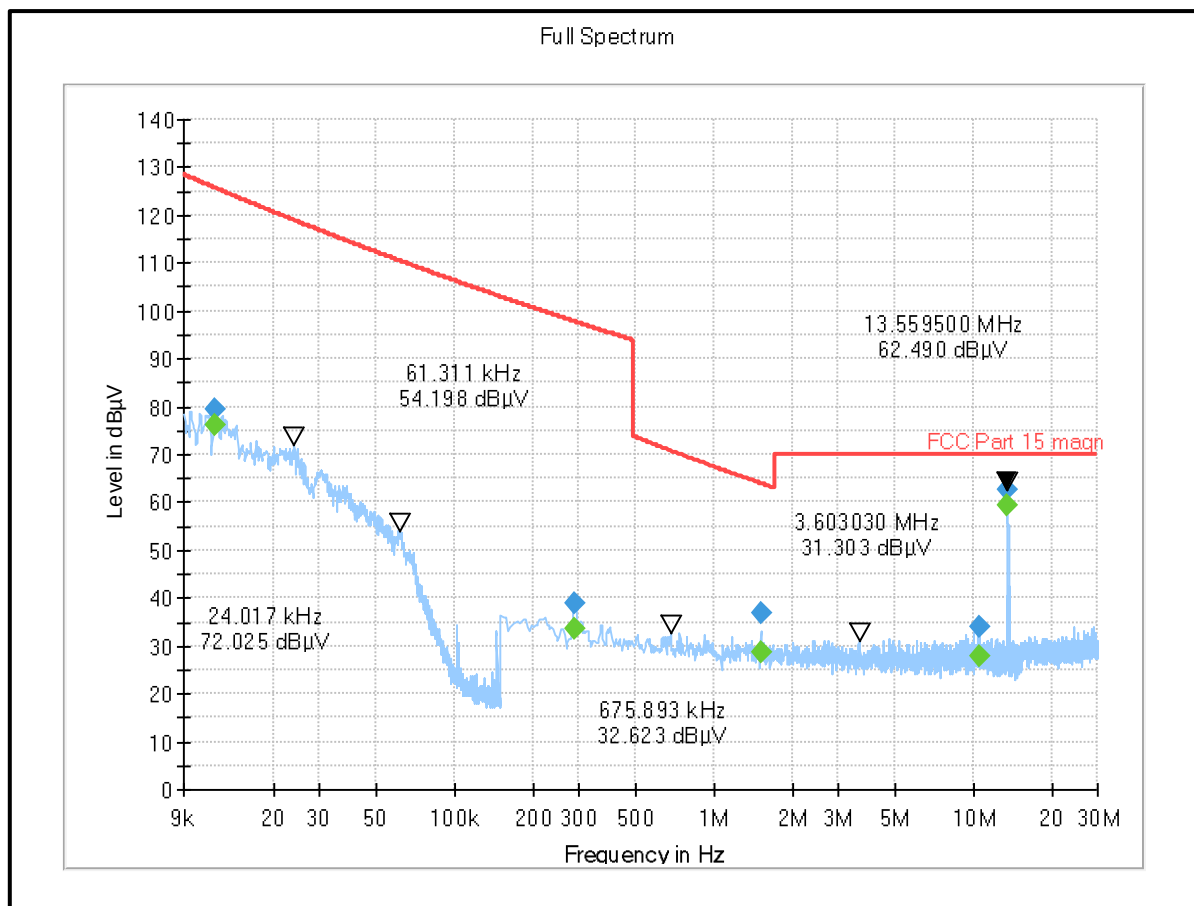**Plot: 9kHz – 30MHz – Active RFID****Result: Pass**

**Transmitter Radiated Emissions (continued)****Test Summary:**

|                                   |                                     |                   |                 |
|-----------------------------------|-------------------------------------|-------------------|-----------------|
| <b>Test Engineer:</b>             | Muhammad Faiq Khan                  | <b>Test Date:</b> | 30 October 2023 |
| <b>Test Sample Serial Number:</b> | D45V1PROTO11 (Radiated Test Sample) |                   |                 |
| <b>Test Site Identification</b>   | SR 1/2                              |                   |                 |


|                          |                                       |
|--------------------------|---------------------------------------|
| <b>FCC Reference:</b>    | Parts 15.225(d) & 15.209(a)           |
| <b>Test Method Used:</b> | ANSI C63.10:2013 Sections 6.3 and 6.5 |
| <b>Frequency Range:</b>  | 30 MHz to 1000 MHz                    |

**Environmental Conditions:**

|                               |      |
|-------------------------------|------|
| <b>Temperature (°C):</b>      | 23.1 |
| <b>Relative Humidity (%):</b> | 46.0 |


**Note(s):**

1. Measurements below 1 GHz were performed in a semi-anechoic chamber SR1/ 2 (Asset Number 1603665) at a distance of 3 m. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 m to 4 m.
2. Pre-scans were performed, and markers placed on the highest measured levels. The test receiver resolution bandwidth was set to 100 kHz and video bandwidth 300 kHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold.
3. Final measurements were performed on the marker frequencies and the results entered into the table below. The test receiver resolution bandwidth was set to 120 kHz, using a CISPR quasi-peak detector and span big enough to see the whole emission.

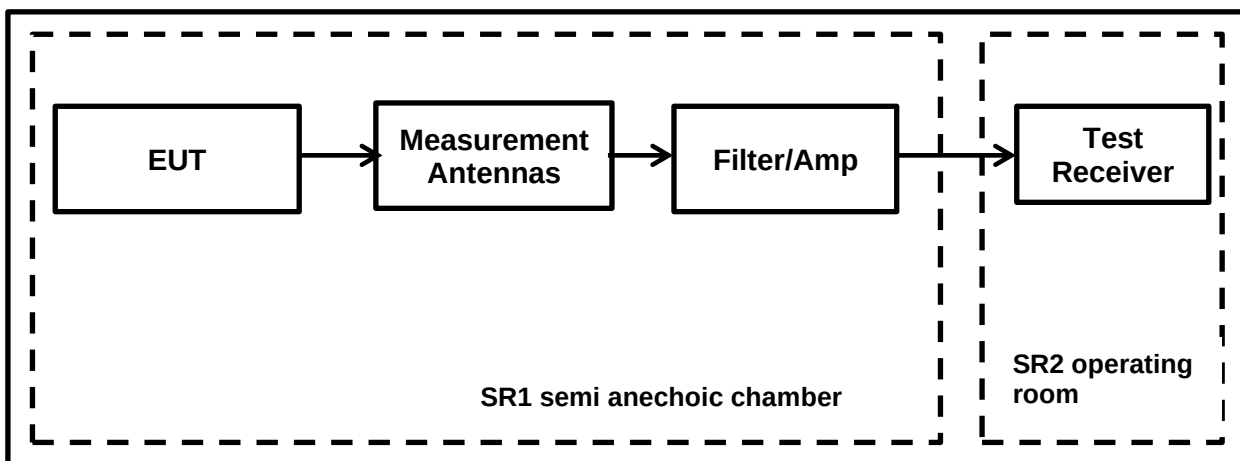**Test Setup:**

**Transmitter Radiated Emissions (continued)****Results: AC Power supply / RFID 13.56 MHz**

| Frequency (MHz) | Antenna Polarization | Level (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Result   |
|-----------------|----------------------|----------------------|----------------------|-------------|----------|
| 42.510000       | Vertical             | 18.91                | 40.00                | 21.09       | Complied |
| 81.345000       | Horizontal           | 35.75                | 40.00                | 4.25        | Complied |
| 169.545000      | Vertical             | 19.46                | 43.50                | 24.04       | Complied |
| 303.300000      | Vertical             | 36.03                | 46.00                | 9.97        | Complied |
| 360.000000      | Horizontal           | 42.40                | 46.00                | 3.60        | Complied |
| 480.000000      | Horizontal           | 40.96                | 46.00                | 5.04        | Complied |
| 600.000000      | Vertical             | 42.09                | 46.00                | 3.91        | Complied |
| 840.000000      | Horizontal           | 41.92                | 46.00                | 4.08        | Complied |

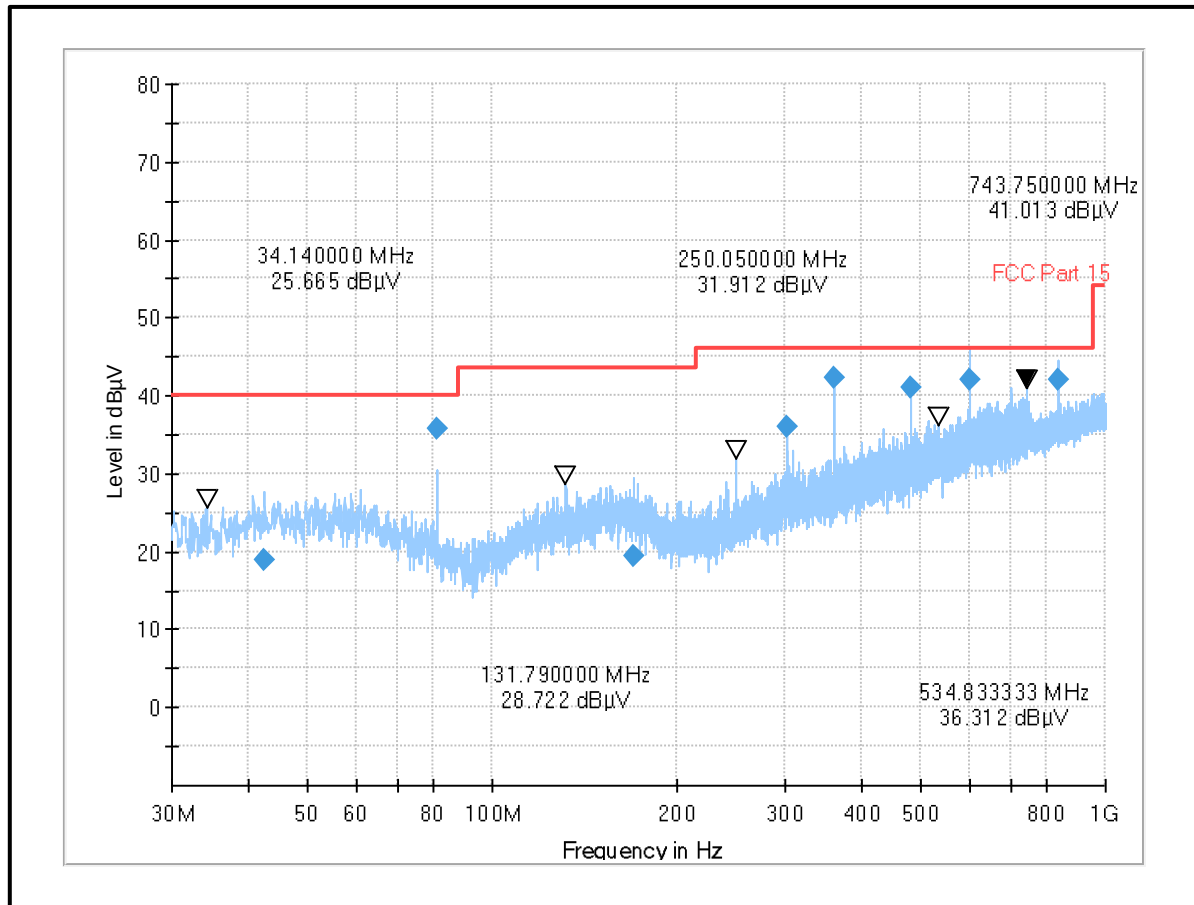**Plot: 30Mz – 1000MHz – Active RFID****Result: Pass**

**5.2.5. Transmitter Frequency Stability (Temperature & Voltage Variation)****Test Summary:**

|                                   |                                     |                    |                                        |
|-----------------------------------|-------------------------------------|--------------------|----------------------------------------|
| <b>Test Engineer:</b>             | Abbas Al-Hussainy                   | <b>Test Dates:</b> | 14 November 2023 &<br>15 November 2023 |
| <b>Test Sample Serial Number:</b> | D45V1PROTO11 (Radiated Test Sample) |                    |                                        |
| <b>Test Site Identification</b>   | SR 9                                |                    |                                        |

|                          |                                      |
|--------------------------|--------------------------------------|
| <b>FCC Reference:</b>    | Part 15.225(e)                       |
| <b>Test Method Used:</b> | ANSI C63.10 Sections 6.8.1 and 6.8.2 |

**Environmental Conditions:**

|                                       |             |
|---------------------------------------|-------------|
| <b>Ambient Temperature (°C):</b>      | 21.1 & 22.3 |
| <b>Ambient Relative Humidity (%):</b> | 45.0 & 47.7 |

**Settings of the Instrument**

|                        |              |
|------------------------|--------------|
| <b>RBW/VBW</b>         | 30 Hz/30 kHz |
| <b>Span</b>            | 4 kHz        |
| <b>Sweep Time</b>      | Auto         |
| <b>Sweep Mode</b>      | Single Sweep |
| <b>Detector</b>        | Peak         |
| <b>Marker Function</b> | Signal Count |


**Note(s):**

1. The EUT was kept inside the environmental/climatic test chamber. The tests were performed with extreme temperature & extreme voltage variations.
2. The temperature variations were monitored throughout the tests using a calibrated digital thermometer. The voltage variations were monitored throughout the tests using a calibrated digital multimeter.
3. For accurate measurement of frequency deviations, Signal Count / frequency counter function was activated on the spectrum analyser.
4. The applicant's declared operating frequency 13.560 MHz was used as reference frequency.
5. The difference between operating /reference frequency & measured frequency was reported as a frequency error.
6. The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  or 100 ppm of the operating frequency



**Transmitter Frequency Stability (Temperature & Voltage Variation) (continued)**

**Test Setup:**

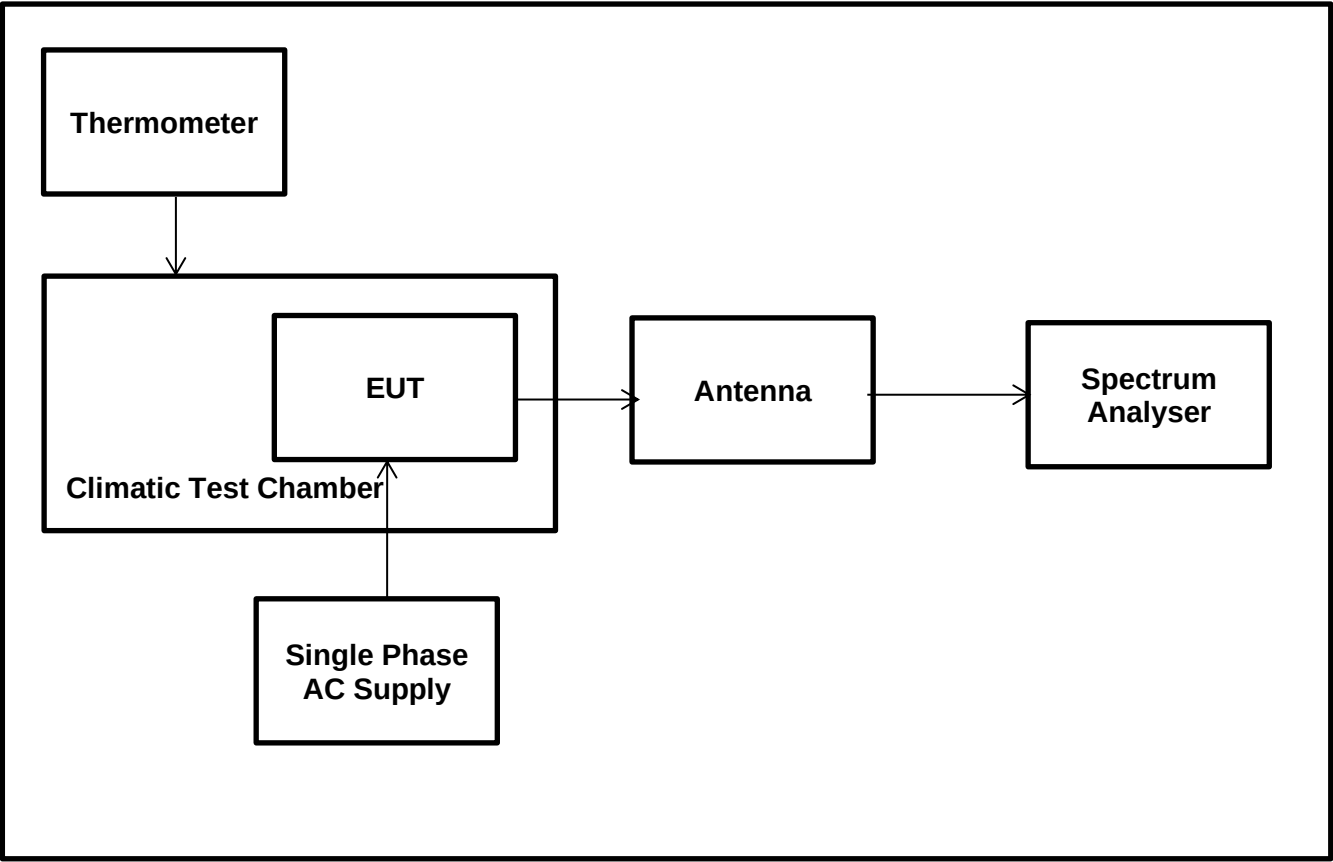

**Transmitter Frequency Stability (Temperature & Voltage Variation) (continued)****Results: AC Power supply / RFID 13.56 MHz / Temperature Variations**

| Extreme Temperature (°C) | Time after EUT Power-up | Measured Frequency (MHz) | Frequency Error |        | Frequency Error Limits |       | Result   |
|--------------------------|-------------------------|--------------------------|-----------------|--------|------------------------|-------|----------|
|                          |                         |                          | %               | ppm    | %                      | ppm   |          |
| -20                      | at 0 minutes            | 13.559774145             | -0.001665597    | -16.66 | ± 0.01                 | ± 100 | Complied |
|                          | at 2 minutes            | 13.559803280             | -0.001450737    | -14.51 | ± 0.01                 | ± 100 | Complied |
|                          | at 5 minutes            | 13.559810293             | -0.001399019    | -13.99 | ± 0.01                 | ± 100 | Complied |
|                          | at 10 minutes           | 13.559815712             | -0.001359056    | -13.59 | ± 0.01                 | ± 100 | Complied |
| -10                      | at 0 minutes            | 13.559826542             | -0.001279189    | -12.79 | ± 0.01                 | ± 100 | Complied |
|                          | at 2 minutes            | 13.559831444             | -0.001243038    | -12.43 | ± 0.01                 | ± 100 | Complied |
|                          | at 5 minutes            | 13.559832906             | -0.001232257    | -12.32 | ± 0.01                 | ± 100 | Complied |
|                          | at 10 minutes           | 13.559833277             | -0.001229521    | -12.30 | ± 0.01                 | ± 100 | Complied |
| 0                        | at 0 minutes            | 13.559831819             | -0.001240273    | -12.40 | ± 0.01                 | ± 100 | Complied |
|                          | at 2 minutes            | 13.559831354             | -0.001243702    | -12.44 | ± 0.01                 | ± 100 | Complied |
|                          | at 5 minutes            | 13.559825908             | -0.001283864    | -12.84 | ± 0.01                 | ± 100 | Complied |
|                          | at 10 minutes           | 13.559827076             | -0.001275251    | -12.75 | ± 0.01                 | ± 100 | Complied |
| +10                      | at 0 minutes            | 13.559826175             | -0.001281895    | -12.82 | ± 0.01                 | ± 100 | Complied |
|                          | at 2 minutes            | 13.559814732             | -0.001366283    | -13.66 | ± 0.01                 | ± 100 | Complied |
|                          | at 5 minutes            | 13.559808339             | -0.001413429    | -14.13 | ± 0.01                 | ± 100 | Complied |
|                          | at 10 minutes           | 13.559803135             | -0.001451807    | -14.52 | ± 0.01                 | ± 100 | Complied |
| +20                      | at 0 minutes            | 13.559791567             | -0.001537117    | -15.37 | ± 0.01                 | ± 100 | Complied |
|                          | at 2 minutes            | 13.559781070             | -0.001614528    | -16.15 | ± 0.01                 | ± 100 | Complied |
|                          | at 5 minutes            | 13.559772837             | -0.001675243    | -16.75 | ± 0.01                 | ± 100 | Complied |
|                          | at 10 minutes           | 13.559775127             | -0.001658355    | -16.58 | ± 0.01                 | ± 100 | Complied |
| +30                      | at 0 minutes            | 13.559756536             | -0.001795457    | -17.95 | ± 0.01                 | ± 100 | Complied |
|                          | at 2 minutes            | 13.559744569             | -0.001883709    | -18.84 | ± 0.01                 | ± 100 | Complied |
|                          | at 5 minutes            | 13.559741094             | -0.001909336    | -19.09 | ± 0.01                 | ± 100 | Complied |
|                          | at 10 minutes           | 13.559738812             | -0.001926165    | -19.26 | ± 0.01                 | ± 100 | Complied |
| +40                      | at 0 minutes            | 13.559722945             | -0.002043178    | -20.43 | ± 0.01                 | ± 100 | Complied |
|                          | at 2 minutes            | 13.559716652             | -0.002089587    | -20.90 | ± 0.01                 | ± 100 | Complied |
|                          | at 5 minutes            | 13.559714845             | -0.002102913    | -21.03 | ± 0.01                 | ± 100 | Complied |
|                          | at 10 minutes           | 13.559716208             | -0.002092861    | -20.93 | ± 0.01                 | ± 100 | Complied |
| +50                      | at 0 minutes            | 13.559705803             | -0.002169594    | -21.70 | ± 0.01                 | ± 100 | Complied |
|                          | at 2 minutes            | 13.559705686             | -0.002170457    | -21.70 | ± 0.01                 | ± 100 | Complied |
|                          | at 5 minutes            | 13.559704045             | -0.002182559    | -21.83 | ± 0.01                 | ± 100 | Complied |
|                          | at 10 minutes           | 13.559704837             | -0.002176718    | -21.77 | ± 0.01                 | ± 100 | Complied |

**Result: Pass**

**Transmitter Frequency Stability (Temperature & Voltage Variation) (continued)****Results: AC Power supply / RFID 13.56 MHz / Voltage Variations**

| Extreme Voltage Conditions           | Extreme DC Voltage (V) | Measured Frequency (MHz) | Frequency Error |        | Frequency Error Limits |       | Result   |
|--------------------------------------|------------------------|--------------------------|-----------------|--------|------------------------|-------|----------|
|                                      |                        |                          | %               | ppm    | %                      | ppm   |          |
| 85% of Rated Primary Supply Voltage  | 102                    | 13.559785837             | -0.001579       | -15.79 | ± 0.01                 | ± 100 | Complied |
| Rated Primary Supply Voltage         | 120                    | 13.559773818             | -0.001668       | -16.68 | ± 0.01                 | ± 100 | Complied |
| 115% of Rated Primary Supply Voltage | 138                    | 13.559785664             | -0.001581       | -15.81 | ± 0.01                 | ± 100 | Complied |

**Result: Pass**

## 6. Measurement Uncertainty

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document “approximately” is interpreted as meaning “effectively” or “for most practical purposes”.

| Measurement Type                | Confidence Level (%) | Calculated Uncertainty |
|---------------------------------|----------------------|------------------------|
| AC Conducted Spurious Emissions | 95%                  | ±2.49 dB               |
| 20 dB Bandwidth                 | 95%                  | ±0.87 %                |
| Fundamental Field Strength      | 95%                  | ±3.10 dB               |
| Radiated Spurious Emissions     | 95%                  | ±3.10 dB               |
| Frequency Stability             | 95%                  | ±92 Hz                 |

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

## 7. Used equipment

### Test site: SR 1/2

| ID      | Manufacturer                  | Type                            | Model        | Serial            | Calibration Date | Cal. Cycle (months) |
|---------|-------------------------------|---------------------------------|--------------|-------------------|------------------|---------------------|
| 1       | Rohde & Schwarz               | Antenna, Loop                   | HFH2-Z2      | 831247/012        | 18/07/2023       | 36                  |
| 377     | BONN Elektronik               | Amplifier, Low Noise Pre        | BLMA 0118-1A | 025294B           | 18/07/2023       | 12                  |
| 460     | Deisel                        | Turntable                       | DT 4250 S    | n/a               | n/a              | n/a                 |
| 465     | Schwarzbeck                   | Antenna, Trilog Broadband       | VULB 9168    | 9168-240          | 02/09/2020       | 42                  |
| 496     | Rohde & Schwarz               | Antenna, log. - periodical      | HL050        | 100297            | 22/08/2022       | 24                  |
| 588     | Maturo                        | Controller                      | NCD          | 029/7180311       | n/a              | n/a                 |
| 591     | Rohde & Schwarz               | Receiver                        | ESU 40       | 100244/040        | 13/07/2023       | 12                  |
| 669     | Rohde & Schwarz               | EMI Test Receiver               | ESW 44       | 103087            | 13/07/2023       | 18                  |
| 694     | Rohde & Schwarz               | Signal Analyzer                 | FSW 50       | 101847            | 09/05/2023       | 12                  |
| 608     | Rohde & Schwarz               | Switch Matrix                   | OSP 120      | 101227            | lab verification | n/a                 |
| 628     | Maturo                        | Antenna mast                    | CAM 4.0-P    | 224/19590716      | n/a              | n/a                 |
| 629     | Maturo                        | Kippeinrichtung                 | KE 2.5-R-M   | MAT002            | n/a              | n/a                 |
| -/-     | Testo                         | Thermo-Hygrometer               | 608-H1       | 01                | lab verification | n/a                 |
| 328     | SPS                           | AC/DC power distribution system | PAS 5000     | A2464 00/2 0200   | lab verification | n/a                 |
| 1603665 | Siemens Matsushita Components | semi-anechoic chamber SR1/ 2    | -/-          | B83117-A1421-T161 | n/a              | n/a                 |
| 681     | Maturo                        | Antenna mast, tilting           | BAM4.5-P     | 402/0718.1        | n/a              | n/a                 |

### Test site: SR 7/8

| ID  | Manufacturer    | Type                      | Model   | Serial No. | Calibration Date | Cal. Cycle |
|-----|-----------------|---------------------------|---------|------------|------------------|------------|
| 22  | Rohde & Schwarz | Artificial Mains          | ESH3-Z5 | 831767/014 | 18.07.2023       | 12         |
| 23  | Rohde & Schwarz | Artificial Mains          | ESH3-Z5 | 831767/013 | 18.07.2023       | 12         |
| 28  | Rohde & Schwarz | Passive Probe             | ESH2-Z3 | none       | 13.07.2022       | 36         |
| 215 | Rohde & Schwarz | Artificial Mains Network  | ESH2-Z5 | 879675/002 | 18.07.2023       | 24         |
| 349 | Rohde & Schwarz | Receiver, EMI Test        | ESIB7   | 836697/009 | 18.07.2023       | 12         |
| 351 | Rohde & Schwarz | network, Artificial Mains | ESH3-Z5 | 862770/018 | 18.07.2023       | 12         |
| 505 | Rohde & Schwarz | Absorbing Clamp           | MDS21   | 100005     | 21.07.2023       | 48         |

### Test site: SR 9

| ID  | Manufacturer        | Type                            | Model               | Serial          | Calibration Date                            | Cal. Cycle (months) |
|-----|---------------------|---------------------------------|---------------------|-----------------|---------------------------------------------|---------------------|
| 625 | Schwarzbeck         | Antenna, H-field                | HFSL 7101           | 109             | lab verification only relative measurements | n/a                 |
| 637 | Rohde & Schwarz     | Spectrum Analyser               | FSV40               | 101587          | 12/07/2023                                  | 12                  |
| -/- | Testo               | Thermo-Hygrometer               | 608-H1              | 07              | lab verification                            | n/a                 |
| 645 | Weiss Umwelttechnik | Climatic Chamber                | LabEvent T/110/70/3 | 5822619794 0010 | lab verification                            | n/a                 |
| 327 | SPS                 | AC/DC power distribution system | PAS 5000            | A2464 00/1 0200 | lab verification                            | n/a                 |

## 8. Open-Area-Test Site comparison

GPS coordinates

Latitude: 48.765746, Longitude: 9.250684



**Open-Area-Test Site comparison (continued)**

The following listed equipment was used for the measurement:

| Manufacturer    | Type               | Model   | Frequency Range |
|-----------------|--------------------|---------|-----------------|
| Rohde & Schwarz | Signal generator   | SML03   | 9 kHz – 30 MHz  |
| Rohde & Schwarz | Receiver, EMI Test | ESIB7   | 20 Hz – 7 GHz   |
| Rohde & Schwarz | Antenna, Loop      | HFH2-Z2 | 1 kHz – 30 MHz  |
| ETS LINDGREN    | Antenna, Loop      | 6512    | 1 kHz – 30 MHz  |
| HUBER+SUHNER    | RF Cable           | -/-     | -/-             |
| Elspec          | BNC Cable          | -/-     | -/-             |


The transmit signal to the ETS Lindgren loop antenna is supplied by the SML signal generator.

The distance of the transmit and receive antenna was 3 m. No other distances can be achieved in SR1 so 10 m and 30 m distances are not possible. Due to this no comparison is possible.

The Results are valid for equipment which is not larger as the loop antenna which represents in the comparison the EUT.

If an EUT is bigger measurements on an OATS are needed.

The measurement was performed on the lowest frequency 9 kHz and was increased by 10 kHz Steps up to 100 kHz. Then the step size was 100 kHz up to 1000 kHz. From 1 MHz up to the last frequency of 30 MHz the step size was 1 MHz. The HFH2-Z2 loop antenna placed at 80 cm height was used as the receive antenna. The intercepted RF signal from this antenna was measured with the ESIB7 Test Receiver and the values were recorded accordingly.

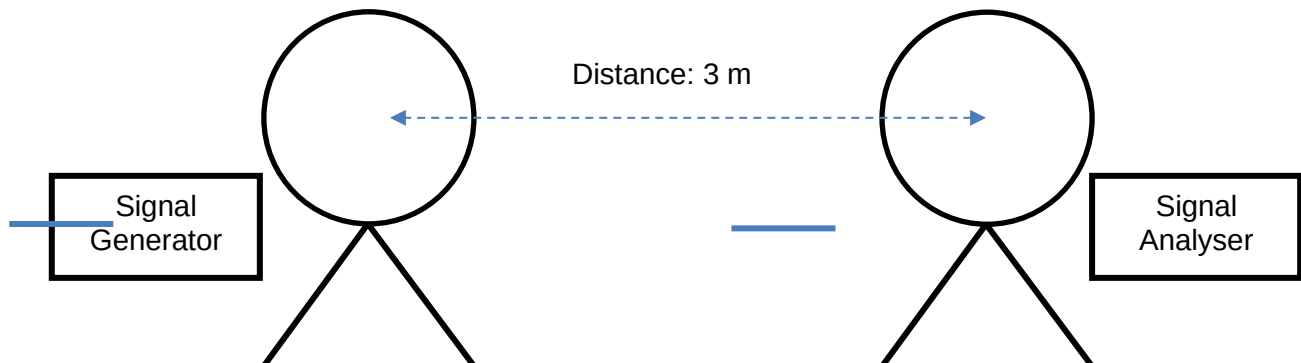



**Open-Area-Test Site comparison (continued)**Numeric values:

| Frequency (MHz)            | 0.01  | 0.02  | 0.03  | 0.04  | 0.05  | 0.06  | 0.07  | 0.08  | 0.09  | 0.10  | 0.125 | 0.20  |
|----------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| SR1 Measured power (dBμV)  | 87.91 | 87.22 | 87.01 | 86.98 | 86.40 | 86.32 | 85.98 | 85.20 | 84.30 | 83.80 | 82.96 | 82.55 |
| OATS Measured power (dBμV) | 86.22 | 87.42 | 87.50 | 86.49 | 86.01 | 85.39 | 84.32 | 84.29 | 84.20 | 83.10 | 83.60 | 82.32 |
| Delta (dB)                 | -1.69 | 0.20  | 0.49  | -0.49 | -0.39 | -0.93 | -1.66 | -0.91 | -0.10 | -0.70 | 0.64  | -0.23 |

| Frequency (MHz)            | 0.30  | 0.40  | 0.50  | 0.60  | 0.70  | 0.80  | 0.90  | 1.00  | 2.00  | 3.00  | 4.00  | 5.00  |
|----------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| SR1 Measured power (dBμV)  | 81.98 | 81.23 | 80.39 | 80.00 | 79.53 | 79.10 | 78.87 | 78.20 | 77.60 | 77.01 | 76.32 | 76.04 |
| OATS Measured power (dBμV) | 80.84 | 80.49 | 79.58 | 79.58 | 78.85 | 78.59 | 77.69 | 77.50 | 77.91 | 76.90 | 75.45 | 74.90 |
| Delta (dB)                 | -1.14 | -0.74 | -0.81 | -0.42 | -0.68 | -0.51 | -1.18 | -0.70 | 0.31  | -0.11 | -0.87 | -1.14 |


| Frequency (MHz)            | 6.00  | 7.00  | 8.00  | 9.00  | 10.00 | 11.00 | 12.00 | 13.00 | 13.56 | 14.00 | 15.00 | 16.00 |
|----------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| SR1 Measured power (dBμV)  | 75.98 | 75.43 | 75.20 | 74.97 | 74.59 | 74.32 | 74.05 | 73.83 | 73.50 | 73.22 | 73.20 | 73.05 |
| OATS Measured power (dBμV) | 74.94 | 74.09 | 74.11 | 73.58 | 73.87 | 74.38 | 74.84 | 74.31 | 74.88 | 74.29 | 73.90 | 73.93 |
| Delta (dB)                 | -1.04 | -1.34 | -1.09 | -1.39 | -0.72 | 0.06  | 0.79  | 0.48  | 1.38  | 1.07  | 0.70  | 0.88  |

| Frequency (MHz)            | 17.00 | 18.00 | 19.00 | 20.00 | 21.00 | 22.00 | 23.00 | 24.00 | 25.00 | 26.00 | 27.00 | 28.00 | 29.00 | 30.00 |
|----------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| SR1 Measured power (dBμV)  | 73.00 | 72.86 | 72.74 | 72.64 | 72.50 | 72.52 | 72.39 | 72.20 | 72.04 | 71.97 | 71.86 | 71.64 | 71.41 | 71.27 |
| OATS Measured power (dBμV) | 73.70 | 73.98 | 72.90 | 72.60 | 72.45 | 72.34 | 72.59 | 72.59 | 71.97 | 71.59 | 71.58 | 71.88 | 71.98 | 72.49 |
| Delta (dB)                 | 0.70  | 1.12  | 0.16  | -0.04 | -0.05 | -0.18 | 0.20  | 0.39  | -0.07 | -0.38 | -0.28 | 0.24  | 0.57  | 1.22  |



Open-Area-Test Site comparison (continued)

Graph

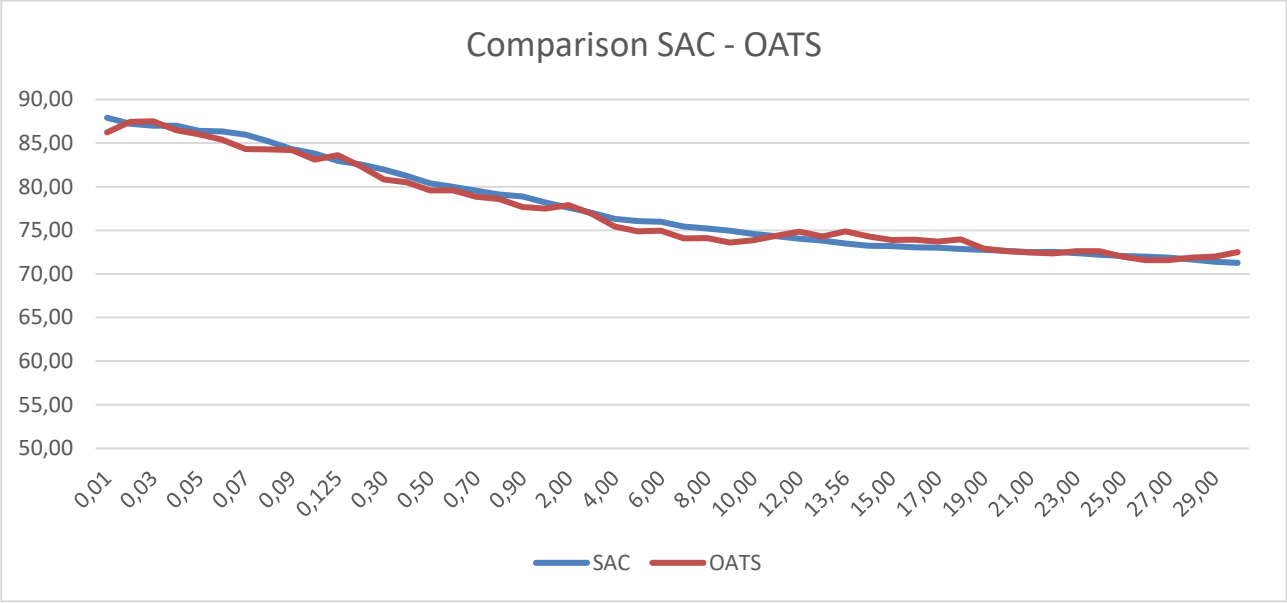

Conclusion: Maximum difference is 1.69 dB @ 9 kHz

9. Report Revision History

| Version Number                                                                                                                                                                                                                                                                                 | Revision Details |           |                                     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|-----------|-------------------------------------|
|                                                                                                                                                                                                                                                                                                | Page No(s)       | Clause    | Details                             |
| 1.0                                                                                                                                                                                                                                                                                            | 42               | -         | Initial Version                     |
| <b>Test Report Version 1.1 supersede Version 1.0 with immediate effect</b><br>Test Report No. UL-RPT-RP-14620406-2216-FCC Version 1.1, Issue Date 06 FEBRUARY 2024 replaces<br>Test Report No. UL-RPT-RP-14620406-2216-FCC Version 1.0, Issue Date 12 DECEMBER 2023, which is no longer valid. |                  |           |                                     |
| 1.1                                                                                                                                                                                                                                                                                            | as below         | as below  | Current Version                     |
|                                                                                                                                                                                                                                                                                                | 1                | Font page | Used standards information updated. |
|                                                                                                                                                                                                                                                                                                | 5                | 2.1       | Used standards information updated. |
|                                                                                                                                                                                                                                                                                                | 6                | 2.2       | Decision rule updated               |
|                                                                                                                                                                                                                                                                                                | 8                | 3.5       | Support equipment table updated     |
|                                                                                                                                                                                                                                                                                                | 11               | 5.2.1     | Notes updated                       |
|                                                                                                                                                                                                                                                                                                | 17-20            | 5.2.1     | Table headers updated               |
|                                                                                                                                                                                                                                                                                                | 19               | 5.2.1     | Result tables updated               |
|                                                                                                                                                                                                                                                                                                | 24               | 5.2.3     | Test setup diagram updated          |
|                                                                                                                                                                                                                                                                                                | 27 & 30          | 5.2.4     | Notes updated                       |
|                                                                                                                                                                                                                                                                                                | 37               | 7         | Used equipment table updated        |

END of Test Report