




FCC PART 15.225
TEST REPORT

For

SC Autosports,LLC

8050 Forest Lane Dallas, Texas, United States

FCC ID: 2A8M8-PS

Report Type: Original Report	Product Name: PS-Agility
Report Number: <u>RKSA240705001-00B</u>	
Report Date: <u>2024-08-08</u>	
Reviewed By:	<u>Jenny Yang</u> 
Approved By:	<u>Kyle Xu</u> 
Prepared By:	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu Province, China Tel: +86-512-86175000 Fax: +86-512-88934268 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Kunshan). This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, or any agency of the U.S.Government.

TABLE OF CONTENTS

REPORT REVISION HISTORY.....	3
GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
JUSTIFICATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
TEST EQUIPMENT LIST	8
FCC§15.203 - ANTENNA REQUIREMENT.....	9
APPLICABLE STANDARD	9
ANTENNA CONNECTED CONSTRUCTION	9
FCC§15.225, §15.205 & §15.209 - RADIATED EMISSIONS TEST	10
APPLICABLE STANDARD	10
TEST SYSTEM SETUP.....	10
EMI TEST RECEIVER SETUP.....	11
TEST RESULTS SUMMARY	12
FCC§15.225(E) - FREQUENCY STABILITY.....	13
APPLICABLE STANDARD	13
TEST PROCEDURE	13
§15.215(C) - 20DB EMISSION BANDWIDTH TESTING	15
REQUIREMENT	15
TEST PROCEDURE	15
APPENDIX - TEST DATA.....	16
ENVIRONMENTAL CONDITIONS & TEST INFORMATION.....	16
RADIATED EMISSIONS TEST	17
FREQUENCY STABILITY	27
20dB EMISSION BANDWIDTH TESTING.....	28
RF EXPOSURE EVALUATION	29
EUT PHOTOGRAPHS.....	30
TEST SETUP PHOTOGRAPHS	31

REPORT REVISION HISTORY

Number of Revisions	Report No.	Version	Issue Date	Description
0	RKSA240705001-00B	R1V1	2024-08-08	Initial Release

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant:	SC Autosports,LLC
Tested Model:	M1124M-3704010
Product Name:	PS-Agility
Power Supply:	DC 12V
RF Function:	NFC
Modulation type:	ASK
Operating Band/Frequency:	13.56 MHz
Antenna Type:	PCB Antenna

All measurement and test data in this report was gathered from production sample serial number: RKSA240705001-1 (Assigned by the BACL (Kunshan). The EUT supplied by the applicant was received on 2024-07-05.)

Objective

This Type approval report is prepared for *SC Autosports,LLC* in accordance with Part 2- Subpart J, and Part 15-Subparts A and C of the Federal Communication Commission's rules.

The objective is to determine the Compliance of the EUT with FCC rules, sec 15.203, 15.205, 15.209 and 15.225.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19 dB
RF conducted test with spectrum		0.9dB
Radiated emission	9 kHz~150 kHz	3.8 dB
	150 kHz~30 MHz	3.4 dB
	30MHz~1GHz	6.11dB
Occupied Bandwidth		0.5kHz
RF Frequency		$\pm 0.08 \times 10^{-6}$
Temperature		1.0°C
Humidity		6%
Supply voltages		$\pm 0.4\%$

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu Province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) is accredited in accordance with ISO/IEC 17025:2017 by NVLAP (Lab code: 600338-0), and the lab has been recognized as the FCC accredited lab under the KDB 974614 D01, the FCC Designation No. : CN5055.

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

EUT Exercise Software

The EUT is tested in the engineering mode.

Equipment Modifications

No modification on the EUT.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Shenzhen Zhaoxin Electronic Instrument Equipment Co., Ltd.	DC Source	PS-6005D	18P6005D10724

External I/O Cable

Cable Description	Length (m)	From Port	To
USB Cable	1.0	EUT	DC Source
Power Cable	1.0	DC Source	AC Source

Block Diagram of Test Setup

For Radiated Emissions (Below 1GHz):

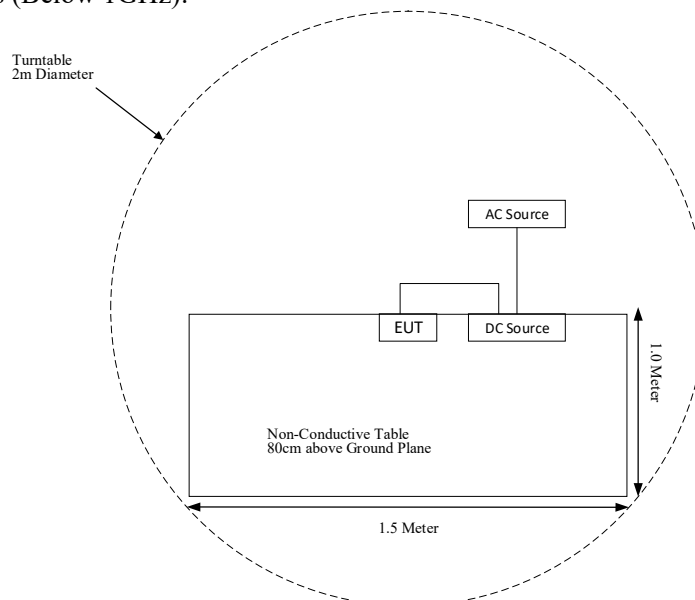

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Not Applicable (See Note)
§15.225 §15.209 §15.205	Radiated Emission Test	Compliant
§15.225(e)	Frequency Stability	Compliant
§15.215(c)	20dB Emission Bandwidth	Compliant
§1.1310 §2.1093	RF Exposure	Compliant

Note:

1. The EUT is a vehicular equipment.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2024-04-23	2025-04-22
Sunol Sciences	Broadband Antenna	JB3	A090314-1	2023-11-11	2024-11-10
ETS-LINDGREN	Loop Antenna	6512	108100	2023-11-09	2024-11-08
Narda	6dB Attenuator	773-6	10690812-2-1	2023-11-11	2024-11-10
Sonoma Instrument	Pre-amplifier	310N	171205	2024-04-23	2025-04-22
Rohde & Schwarz	Auto Test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-8	008	2024-04-23	2025-04-22
MICRO-COAX	Coaxial Cable	Cable-9	009	2024-04-23	2025-04-22
MICRO-COAX	Coaxial Cable	Cable-10	010	2024-04-23	2025-04-22
20dB Emission Bandwidth					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2024-04-23	2025-04-22
ETS-LINDGREN	Loop Antenna	6512	108100	2023-11-09	2024-11-08
Sonoma Instrument	Pre-amplifier	310N	171205	2024-04-23	2025-04-22
MICRO-COAX	Coaxial Cable	Cable-8	008	2024-04-23	2025-04-22
MICRO-COAX	Coaxial Cable	Cable-9	009	2024-04-23	2025-04-22
MICRO-COAX	Coaxial Cable	Cable-10	010	2024-04-23	2025-04-22
Frequency Stability					
BACL	Temperature & Humidity Chamber	BTH-150	30023	2024-04-25	2025-04-24
EAST	Regulated DC Power Supply	MCH-303D-II	14070562	2023-10-10	2024-10-09
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2024-04-23	2025-04-22
ETS-LINDGREN	Loop Antenna	6512	108100	2023-11-09	2024-11-08
MICRO-COAX	Coaxial Cable	Cable-10	010	2024-04-23	2025-04-22

Statement of Traceability: Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.203 - ANTENNA REQUIREMENT

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Antenna Connected Construction

The EUT has an PCB antenna for 13.56 MHz, the antenna was permanently attached, fulfill the requirement of this section, please refer to the EUT photos.

Result: Compliant.

FCC§15.225, §15.205 & §15.209 - RADIATED EMISSIONS TEST


Applicable Standard


As per FCC Part 15.225

- (a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- (b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- (c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

Test System Setup

9 kHz-30MHz:

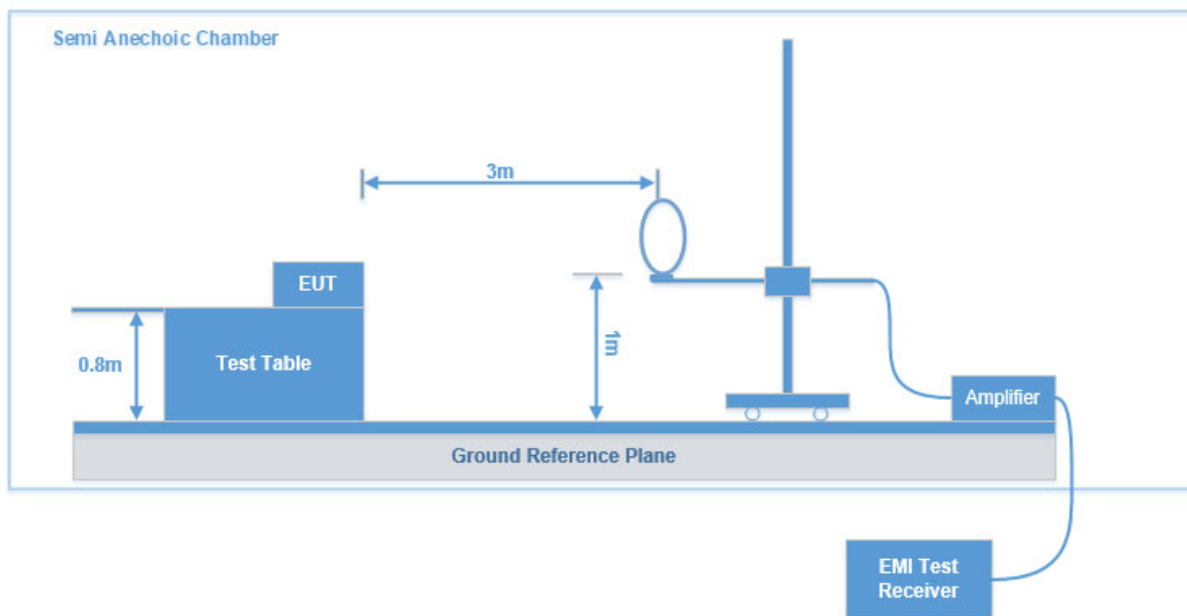

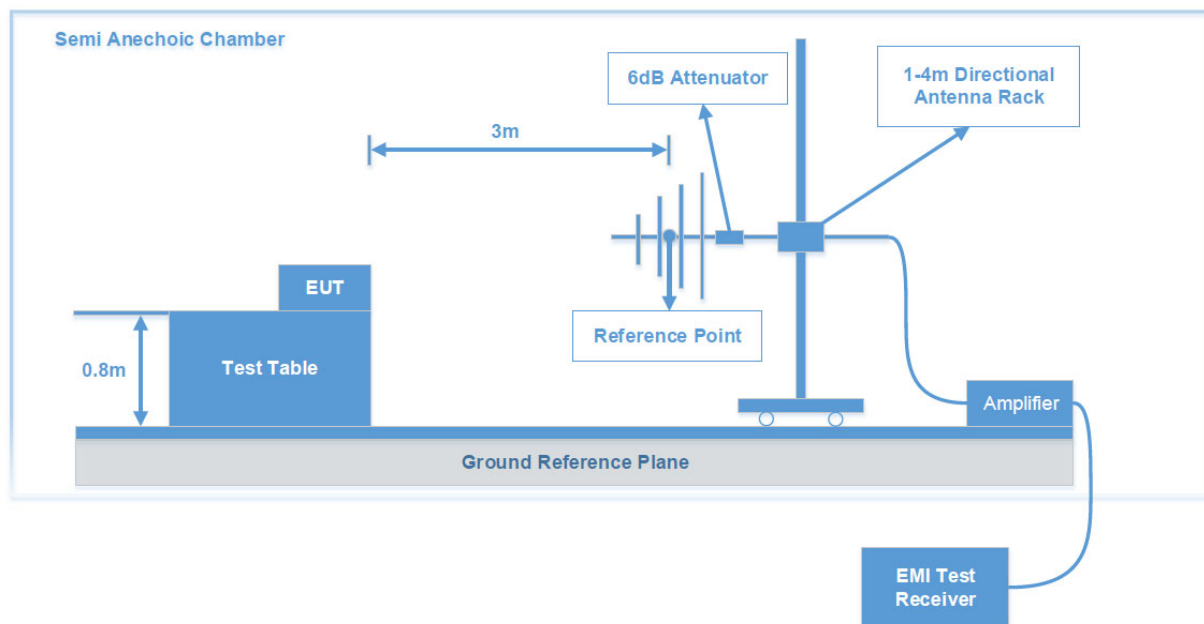30MHz-1GHz:

The radiated emission tests were performed in the 3-meter chamber a test site, using the setup accordance with the ANSI C63.10. The specification used was the FCC Part Subpart C limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

According to FCC Rules, 47 CFR 15.33, the EUT emissions were investigated up to 1000 MHz.

During the radiated emission test, the EMI test Receiver was set with the following configurations:

Frequency Range	RBW	VBW	IF B/W	Measurement
9 kHz - 150 kHz	200 Hz	1 kHz	200 Hz	QP/Average
150 kHz - 30 MHz	9 kHz	30 kHz	9 kHz	QP/ Average
30 MHz - 1000 MHz	100 kHz	300 kHz	/	Peak
	/	/	120 kHz	QP

For 9 kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz.

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform QP/Average measurement.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude (dB μ V/m) = Meter Reading (dB μ V) + Antenna Factor (dB/m) + Cable Loss (dB) - Amplifier Gain (dB)

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V/m)

Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.209, 15.205, 15.225.

Test Data: See Appendix

FCC§15.225(e) - FREQUENCY STABILITY

Applicable Standard

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Test Procedure

a) Supply the EUT with a nominal ac voltage or install a new or fully charged battery in the EUT. If possible, a dummy load shall be connected to the EUT because an antenna near the metallic walls of an environmental test chamber could affect the output frequency of the EUT. If the EUT is equipped with a permanently attached, adjustable-length antenna, then the EUT shall be placed in the center of the chamber with the antenna adjusted to the shortest length possible.

Turn ON the EUT and tune it to one of the number of frequencies shown in 5.6.

b) Couple the unlicensed wireless device output to the measuring instrument by connecting an antenna to the measuring instrument with a suitable length of coaxial cable and placing the measuring antenna near the EUT (e.g., 15 cm away), or by connecting a dummy load to the measuring instrument, through an attenuator if necessary.

NOTE—An instrument that has an adequate level of accuracy as specified by the procuring or regulatory agency is the recommended measuring instrument.

c) Adjust the location of the measurement antenna and the controls on the measurement instrument to obtain a suitable signal level (i.e., a level that will not overload the measurement instrument but is strong enough to allow measurement of the operating or fundamental frequency of the EUT).

d) Turn the EUT OFF and place it inside the environmental temperature chamber. For devices that have oscillator heaters, energize only the heater circuit.

e) Set the temperature control on the chamber to the highest specified in the regulatory requirements for the type of device and allow the oscillator heater and the chamber temperature to stabilize.


f) While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.

g) Measure the frequency at each of frequencies specified in 5.6.

h) Switch OFF the EUT but do not switch OFF the oscillator heater.

i) Lower the chamber temperature by not more than 10°C , and allow the temperature inside the chamber to stabilize.

j) Repeat step f) through step i) down to the lowest specified temperature.

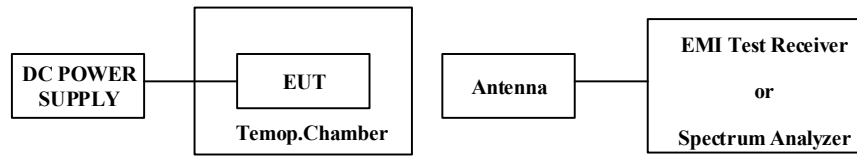

Test Data: See Appendix


§15.215(c) - 20dB EMISSION BANDWIDTH TESTING

Requirement

Per 15.215 (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

Test Procedure

1. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.

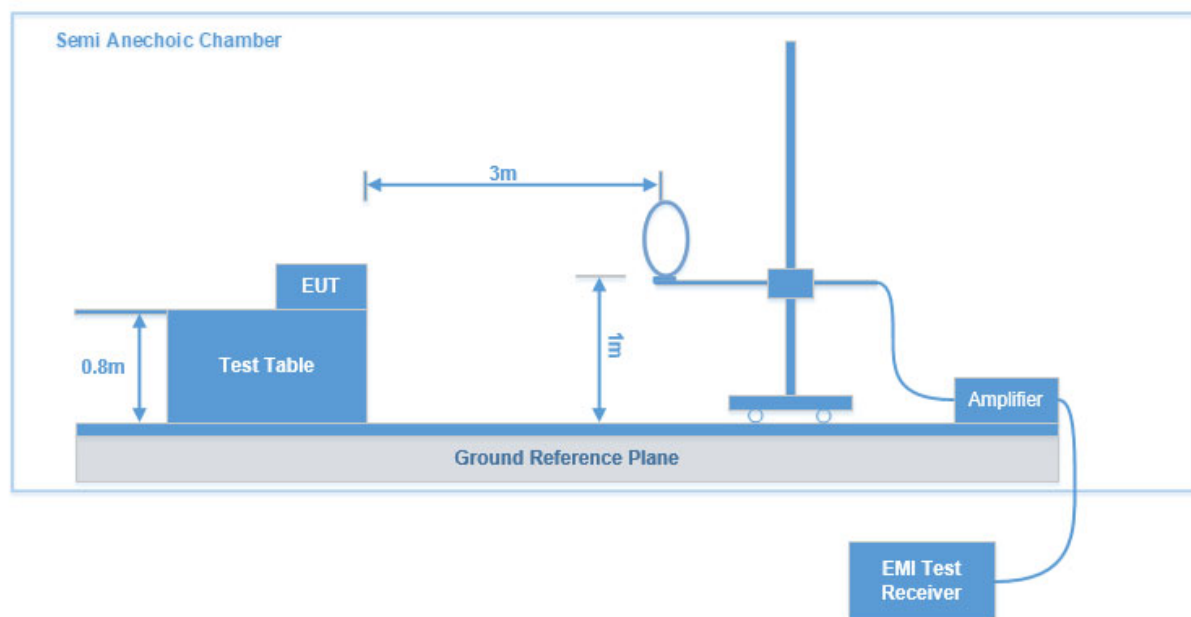

Test Data: See Appendix

APPENDIX - TEST DATA

Environmental Conditions & Test Information


Test Item:	RADIATED EMISSIONS
	9kHz - 1GHz
Test Date:	2024-07-22~2024-07-25
Temperature:	25.4 °C~28.9 °C
Relative Humidity:	41%~58 %
ATM Pressure:	100.7kPa~102.8kPa
Test Result:	Pass
Test Engineer:	Grace Luo

Test Item:	FREQUENCY STABILITY	20DB BANDWIDTH
Test Date:	2024-07-22	2024-07-25
Temperature:	28.7 °C	28.9 °C
Relative Humidity:	56 %	58 %
ATM Pressure:	100.7kPa	102.8 kPa
Test Result:	Pass	Pass
Test Engineer:	Leah Li	Leah Li

RADIATED EMISSIONS TEST

Test mode: Transmitting


For Ground-parallel
1) 9 kHz~150 kHz:

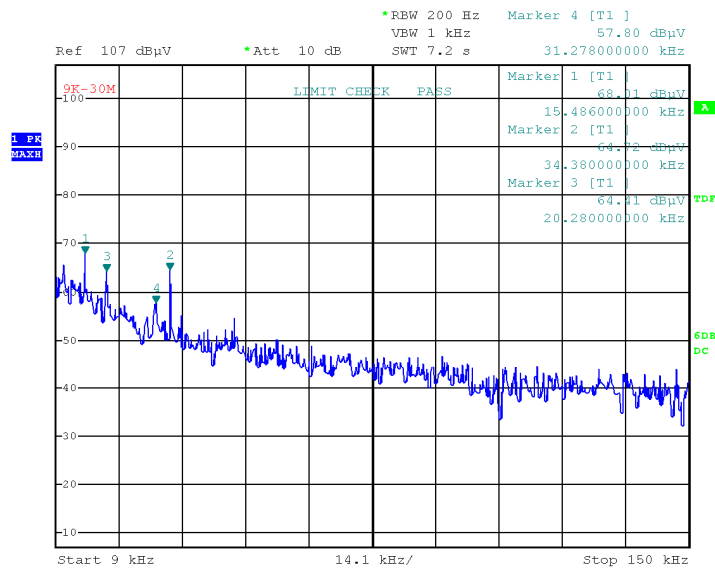

Project No.RKSA240705001 Tester:Grace Luo
Date: 25.JUL.2024 14:17:04

Frequency (MHz)	Corrected Amplitude (dBμV/m) @3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	Limit (dBμV/m) @3m	Margin (dB)
0.015486	68.01	PK	54	123.81	55.8
0.02028	64.41	PK	50.72	121.46	57.05
0.031278	57.8	PK	47.99	117.7	59.9
0.03438	64.72	PK	43.47	116.88	52.16

2) 150 kHz~30 MHz:

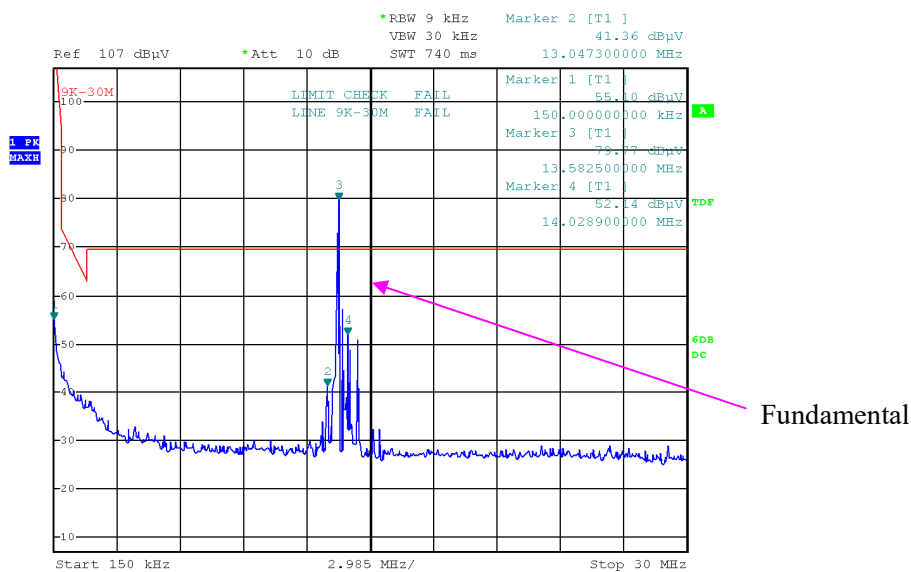


Project No.RKSA240705001

Tester:Grace Luo

Date: 25.JUL.2024 14:07:16

Frequency (MHz)	Corrected Amplitude (dBμV/m) @3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	Limit (dBμV/m) @3m	Margin (dB)
0.15	55.1	PK	31.73	104.08	48.98
13.0473	41.36	PK	3.67	69.54	28.18
14.0289	52.14	PK	3.55	69.54	17.4

3) 13.11 MHz~14.01 MHz:

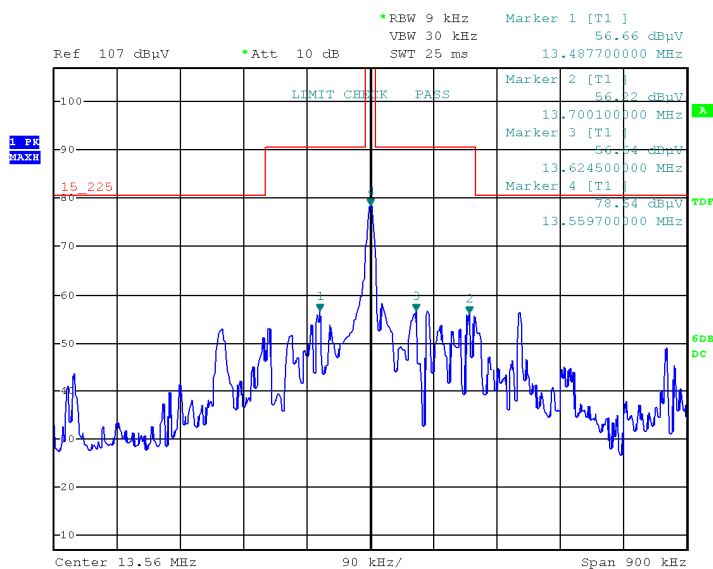


Project No.RKSA240705001

Tester:Grace Luo

Date: 25.JUL.2024 14:46:26

Frequency (MHz)	Corrected Amplitude (dBμV/m) @3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	Limit (dBμV/m) @3m	Margin (dB)
13.4877	56.66	PK	3.66	90.47	33.81
13.5597	78.54	PK	3.65	124	45.46
13.6245	56.64	PK	3.63	90.47	33.83
13.7	56.22	PK	3.61	90.47	34.25


For Parallel
1) 9 kHz~150 kHz:

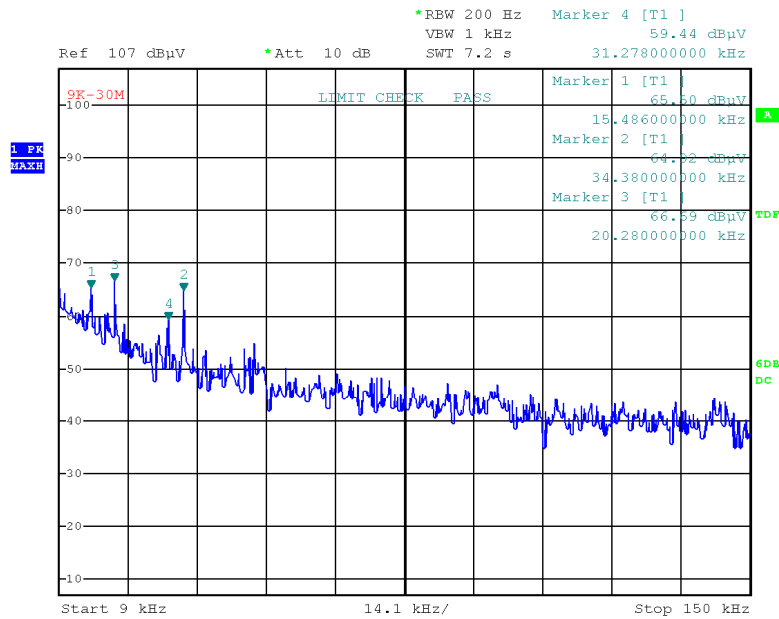

Project No.RKSA240705001 Tester:Grace Luo
Date: 25.JUL.2024 14:13:57

Frequency (MHz)	Corrected Amplitude (dBμV/m) @3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	Limit (dBμV/m) @3m	Margin (dB)
0.015486	65.5	PK	50.72	123.81	58.31
0.02028	66.69	PK	49.73	121.46	54.77
0.031278	59.44	PK	47.99	117.7	58.26
0.03438	64.92	PK	43.47	116.88	51.96

2) 150 kHz~30 MHz:

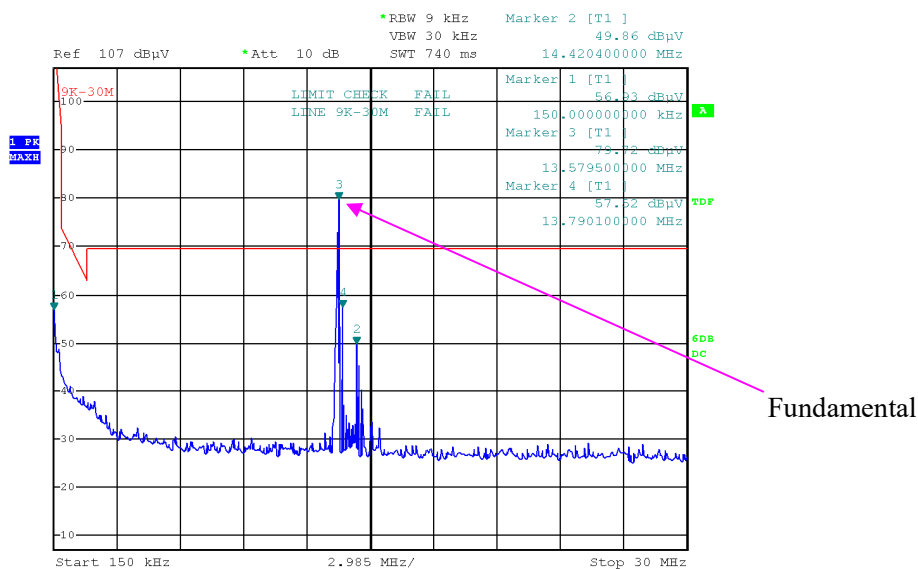


Project No.RKSA240705001

Tester:Grace Luo

Date: 25.JUL.2024 13:57:57

Frequency (MHz)	Corrected Amplitude (dBμV/m) @3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	Limit (dBμV/m) @3m	Margin (dB)
0.15	56.93	PK	31.73	104.08	47.15
13.7901	57.52	PK	3.7	69.54	12.02
14.4204	49.86	PK	3.58	69.54	19.68

3) 13.11 MHz~14.01 MHz:

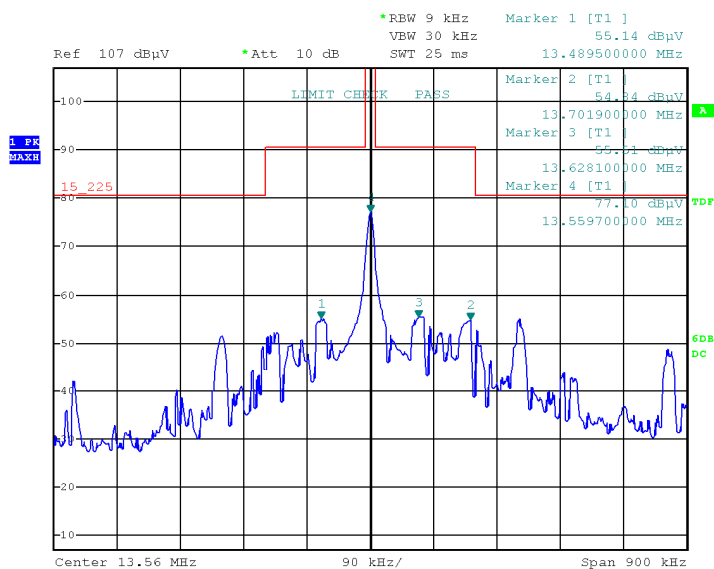


Project No.RKSA240705001

Tester:Grace Luo

Date: 25.JUL.2024 14:51:39

Frequency (MHz)	Corrected Amplitude (dBμV/m) @3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	Limit (dBμV/m) @3m	Margin (dB)
13.4895	55.14	PK	3.65	90.47	35.33
13.5597	77.1	PK	3.64	124	46.9
13.6281	55.51	PK	3.64	90.47	34.96
13.7019	54.84	PK	3.63	90.47	35.63


For Perpendicular
1) 9 kHz~150 kHz:

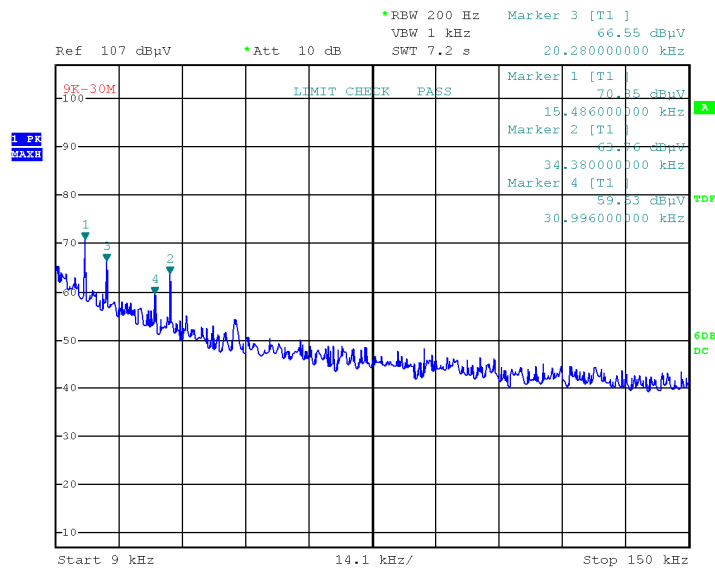

Project No.RKSA240705001 Tester:Grace Luo
Date: 25.JUL.2024 14:09:05

Frequency (MHz)	Corrected Amplitude (dBμV/m) @3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	Limit (dBμV/m) @3m	Margin (dB)
0.015486	70.85	PK	53.34	123.81	52.96
0.02028	66.55	PK	50.72	121.46	54.91
0.030996	59.53	PK	47.99	117.78	58.25
0.03438	63.76	PK	43.47	116.88	53.12

2) 150 kHz~30 MHz:

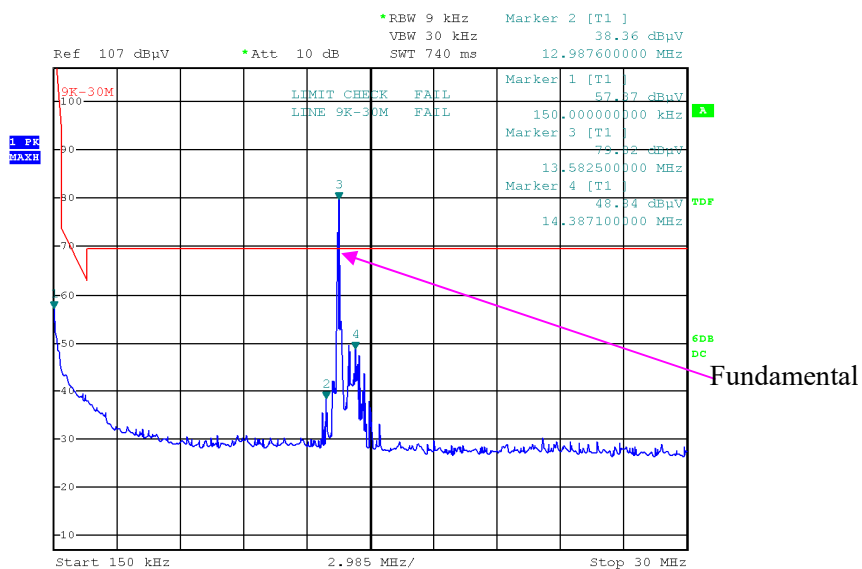


Project No.RKSA240705001
Date: 25.JUL.2024 14:03:01

Tester:Grace Luo

Frequency (MHz)	Corrected Amplitude (dBμV/m) @3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	Limit (dBμV/m) @3m	Margin (dB)
0.15	57.37	PK	31.73	104.08	46.71
12.9876	38.36	PK	3.58	69.54	31.18
14.3871	48.84	PK	3.53	69.54	20.7

3) 13.11 MHz~14.01 MHz:

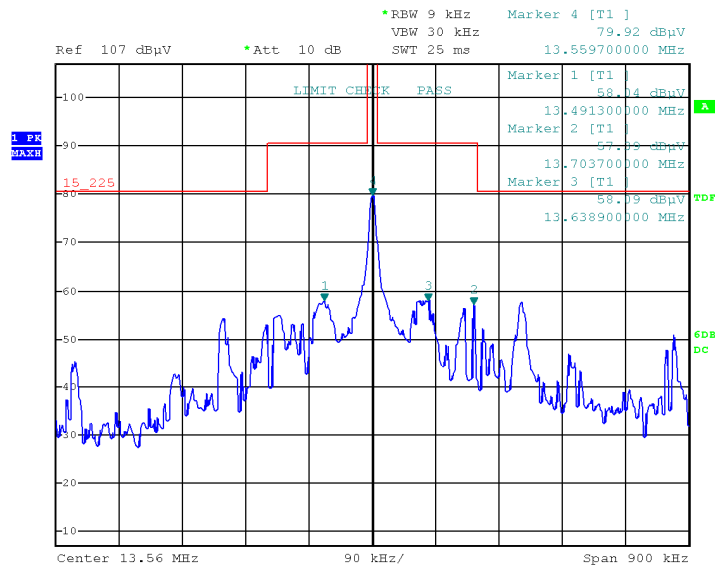

Project No. RKSA240705001


Tester:Grace Luo

Date: 25.JUL.2024 14:34:33

Frequency (MHz)	Corrected Amplitude (dBμV/m) @3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	Limit (dBμV/m) @3m	Margin (dB)
13.4913	58.04	PK	3.64	90.47	32.43
13.5597	79.92	PK	3.63	124	44.08
13.6389	58.09	PK	3.63	90.47	32.38
13.7037	57.39	PK	3.62	90.47	33.08

30 MHz ~1 GHz:**Common Information**

Project No: RKSA240705001
EUT Model: M1124M-3704010
Test Mode: NFC
Standard: FCC Part 15.225
Test Equipment: ESCI, JB3, 310N
Temperature: 25.4°C
Humidity: 41%
Barometric Pressure: 100.7kPa
Test Engineer: Grace Luo
Test Date: 2024/7/22

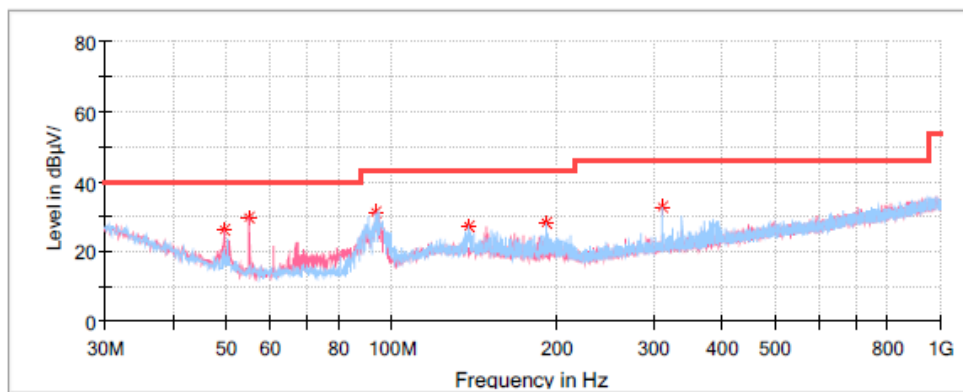**Critical Freqs**

Frequency (MHz)	MaxPeak (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Pol	Corr. (dB/m)
49.642500	26.06	40.00	13.94	V	-16.6
55.098750	29.61	40.00	10.39	V	-17.2
93.413750	31.14	43.50	12.36	V	-16.1
138.397500	27.37	43.50	16.13	H	-11.4
191.383750	28.27	43.50	15.23	H	-12.6
311.906250	32.71	46.00	13.29	H	-10.2

FREQUENCY STABILITY*Test Mode: Transmitting.**Test Result: Compliant*

F₀ =13.56MHz				
Power Supply(V_{DC})	Temperature (°C)	Measured Frequency (MHz)	Frequency Error (%)	Part 15.225 Limit
12	-20	13.5602133	0.00157	±0.01%
	-10	13.5605734	0.00423	±0.01%
	0	13.5607879	0.00581	±0.01%
	10	13.5606533	0.00482	±0.01%
	20	13.5602600	0.00192	±0.01%
	30	13.5601057	0.00078	±0.01%
	40	13.5601184	0.00087	±0.01%
	50	13.5602876	0.00212	±0.01%
10.2	20	13.5604367	0.00322	±0.01%
13.8	20	13.5602814	0.00208	±0.01%

Test Result: Compliant

Frequency (MHz)	20dB Bandwidth (kHz)
13.56	0.70

Ref 107 dBuV *Att 10 dB *REW 200 Hz Delta 1 [T1] VBW 1 kHz 0.02 dB SWT 260 ms 700.000000000 Hz

Marker 1 [T1 59.83 dBuV 13.559910000 MHz

P1 79.83 dBmV P2 59.83 dBmV

Center 13.56 MHz 500 Hz/ Span 5 kHz

Date: 25.JUL.2024 13:43:59

RF EXPOSURE EVALUATION

Applicable Standard

According to KDB447498 D01 General RF Exposure Guidance v06: 4.3. General SAR test exclusion guidance

c) For frequencies below 100 MHz, the following may be considered for SAR test exclusion (also illustrated in Appendix C):

1) For test separation distances > 50 mm and < 200 mm, the power threshold at the corresponding test separation distance at 100 MHz in step b) is multiplied by $[1 + \log(100/f_{\text{MHz}})]$

2) For test separation distances ≤ 50 mm, the power threshold determined by the equation in c) 1) for 50 mm and 100 MHz is multiplied by $\frac{1}{2}$

3) SAR measurement procedures are not established below 100 MHz

Measurement Result:

For NFC, the power of EUT: E Field @3m is 79.92dBuV/m = -15.28 dBm(0.03mW)

Note: $E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2$ for $d = 3$ m.

SAR test exclusion threshold for NFC(13.56MHz) separation distance < 50 mm

$$= [474 * (1 + \log(100/f_{\text{MHz}}))] / 2$$

$$= 443\text{mW}$$

$$> 0.03\text{mW}$$

Result: Compliant

EUT PHOTOGRAPHS

Please refer to the attachment EXHIBIT A - EUT EXTERNAL PHOTOGRAPHS and EXHIBIT B - EUT INTERNAL PHOTOGRAPHS.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment EXHIBIT C - TEST SETUP PHOTOGRAPHS.

Declarations

1. The laboratory is not responsible for the authenticity of any information provided by the applicant. Information from the applicant that may affect test results is marked with “★”.
2. The test data was only valid for the test sample(s).
3. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.
4. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
5. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor $k=2$ with the 95.45% confidence interval.

******* END OF REPORT *******