

TEST REPORT

Product Name: Hasee T8
FCC ID: 2A8MN-T8
Trademark: Hasee
Model Number: T8
Prepared For: SHENZHEN HASEE INNOVATION CO., LTD
West Zone, Floor 1, Hasee Building, Xintianxia Industrial Park,
Address: Banxuegang Industrial Aresa Bantian Street, Longgang District,
Shenzhen City
Manufacturer: SHENZHEN HASEE INNOVATION CO., LTD
West Zone, Floor 1, Hasee Building, Xintianxia Industrial Park,
Address: Banxuegang Industrial Aresa Bantian Street, Longgang District,
Shenzhen City
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: Floor 1&2, Building A, No. 26 of Xinghe Road, Xinqiao Community,
Xinqiao Street, Baoan District, Shenzhen, Guangdong, China.
Sample Received Date: Aug. 26, 2022
Sample tested Date: Aug. 26, 2022 to Sep. 06, 2022
Issue Date: Sep. 06, 2022
Report No.: CTB220906004RF
Test Standards 47 CFR Part 15 Subpart E
Test Results PASS
Remark: This is WIFI-5GHz band radio test report.

Compiled by:

Chen Zheng

Reviewed by:

Arron Liu

Approved by:

Bin Mei Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	8
4.3 Support Equipment	8
4.5 Test Mode	9
4.6 Test Environment	10
5. TEST FACILITY AND TEST INSTRUMENT USED	11
5.1 Test Facility	11
5.2 Test Instrument Used	11
6. AC POWER LINE CONDUCTED EMISSION	13
6.1 Block Diagram Of Test Setup	13
6.2 Limit	13
6.3 Test procedure	13
6.4 Test Result	15
7. RADIATED SPURIOUS EMISSIONS	17
7.1 Block Diagram Of Test Setup	17
7.2 Limit	17
7.3 Test procedure	18
7.4 Test Result	19
8. BAND EDGE	24
8.1 Block Diagram Of Test Setup	24
8.2 Limit	24
8.3 Test procedure	24
9. CONDUCTED PEAK OUTPUT POWER	33
9.1 Block Diagram Of Test Setup	33
9.2 Limit	33
9.3 Test procedure	34
10. EMISSION BANDWIDTH& OCCUPIED BANDWIDTH	46
10.1 Block Diagram Of Test Setup	46
10.2 Limits	46
10.3 Test Procedure	46
10.4 Test Results	48
11. POWER SPECTRAL DENSITY	60
11.1 Block Diagram Of Test Setup	60
11.2 Limit	60
11.3 Test procedure	60
11.4 Test Result	62
12. FREQUENCY STABILITY	73
12.1 Block Diagram Of Test Setup	73

12.2	Limit	73
12.3	Test procedure	73
12.4	Test Result	73
13.	OPERATION IN THE ABSENCE OF INFORMATION TO THE TRANSMIT ...	79
13.1	Requirement	79
13.2	Test Results	79
14.	ANTENNA REQUIREMENT	80
15.	EUT PHOTOGRAPHS	81
16.	EUT TEST SETUP PHOTOGRAPHS	82

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB220906004RF	Sep. 06, 2022	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart E Section 15.407 (b)(6)	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart E Section 15.205/15.407(b)	KDB789033	PASS
Band edge	47 CFR Part 15 Subpart E Section 15.205/15.407(b)	KDB789033	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart E Section 15.407 (a)	KDB789033	PASS
Emission Bandwidth & Occupied Bandwidth	47 CFR Part 15 Subpart E Section 15.407 (a)(e)	KDB789033	PASS
Power Spectral Density	47 CFR Part 15 Subpart E Section 15.407 (a)	KDB789033	PASS
Frequency stability	47 CFR Part 15 Subpart E Section 15.407 (g)	KDB789033	PASS
Operation in the absence of information to the transmit	47 CFR Part 15 Subpart E Section 15.407 (b)	47 CFR Part 15 Subpart E	PASS
Antenna Requirement	47 CFR Part 15 Subpart E Section 15.203	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	U=±54.3Hz
Adjacent channel power	U=±1.3dB
Conducted Adjacent channel power	U=±1.38dB
Conducted output power Above 1G	U=±1.0dB
Conducted output power below 1G	U=±0.9dB
Power Spectral Density , Conduction	U=±1.0dB
Conduction spurious emissions	U=±2.8dB
Out of band emission	U=±54Hz
3m camber Radiated spurious emission(9KHz-30MHz)	U=±4.8dB
3m camber Radiated spurious emission(30MHz-1GHz)	U=±4.3dB
3m chamber Radiated spurious emission(1GHz-18GHz)	U=±4.5dB
3m chamber Radiated spurious emission(18GHz-40GHz)	U=±3.4dB
humidity uncertainty	U=±5.3%
Temperature uncertainty	U=±0.59℃
Supply voltages	U=±3%
Time	U=±5%
Conducted emission(150K-30MHz)	3.2dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	T8
Model Description:	N/A
Wi-Fi Specification:	IEEE 802.11a/b/g/n/ac
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	IEEE 802.11a/n/ac(20M): 5150MHz ~5250MHz/ 4 channel IEEE 802.11n/ac(40M): 5150MHz ~5250MHz/ 2 channel IEEE 802.11ac(80M): 5150MHz ~5250MHz/ 1 channel IEEE 802.11a/n/ac(20M): 5725MHz ~5850MHz/ 5 channel IEEE 802.11n/ac(40M): 5725MHz ~5850MHz/ 2 channel IEEE 802.11ac(80M): 5725MHz ~5850MHz/ 1 channel
Max. RF output power:	WiFi (5G): 13.641dBm
Type of Modulation:	WiFi: DSSS, CCK and OFDM
Antenna installation:	Internal Antenna
Antenna Gain:	Ant1: 5.2G 1.88dBi, 5.8G 2.31dBi Ant2: 5.2G 1.88dBi, 5.8G 2.31dBi
Ratings:	Adapter Input: AC100-250V, 2.5A Output: DC20V/9A Battery:DC15.4V, 3410mAh

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Keyboard	DELL	KB216t	N/A	AE
2	Mouse	DELL	MS116c	N/A	AE
3	Monitor	DELL	SE2218HV	N/A	AE
4	Router	Huawei	AX2 Pro	N/A	AE

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

For 802.11a/n/ac(20M) Operation in the 5150MHz ~5250 MHz band			
Channel	Frequency	Channel	Frequency
36	5180MHz	44	5220MHz
40	5200MHz	48	5240MHz
For 802.11a/n/ac(20M) Operation in the 5725MHz ~5850 MHz band			
Channel	Frequency	Channel	Frequency
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz	NA	NA
For 802.11n/ac(40M) Operation in the 5150MHz ~5250 MHz band			
Channel	Frequency	Channel	Frequency
38	5190MHz	46	5230MHz
Channel	Frequency	Channel	Frequency
151	5755MHz	159	5795MHz
For 802.11n/ac(40M) Operation in the 5725MHz ~5850 MHz band			
Channel	Frequency	Channel	Frequency
151	5755MHz	159	5795MHz
For 802.11ac(80M) Operation in the 5150MHz ~5250 MHz band			
Channel	Frequency	Channel	Frequency
42	5210MHz	NA	NA
For 802.11ac(80M) Operation in the 5725MHz ~5850 MHz band			
Channel	Frequency	Channel	Frequency
155	5775MHz	NA	NA

NOTE: Dutycycle>98%.

Test mode	rate
802.11a	54M
802.11n	500M
802.11/ac	500M

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
802.11a/n/ac(20M)	5150MHz ~5250 MHz	Channel 36	Channel 40	Channel 48
		5180MHz	5200MHz	5240MHz
802.11n/ac(40M)		Channel 38	N/A	Channel 46
		5190MHz	N/A	5230MHz
802.11ac(80M)	5725MHz ~5850 MHz	N/A	Channel 42	N/A
		N/A	5210MHz	N/A
802.11a/n/ac(20M)		Channel 149	Channel 157	Channel 165
		5745MHz	5785MHz	5825MHz
802.11n/ac(40M)		Channel 151	N/A	Channel 159
		5755MHz	N/A	5795MHz
802.11ac(80M)		N/A	Channel 155	N/A
		N/A	5775MHz	N/A

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):NV	15.4V
Normal Temperature(°C):NT	23
Low Temperature(°C):LT	0
High Temperature(°C):HT	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinxhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.


5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2023.07.19
2	Power Sensor	Agilent	U2021XA	MY56120032	2023.07.19
3	Power Sensor	Agilent	U2021XA	MY56120034	2023.07.19
4	Communication test set	R&S	CMW500	108058	2023.07.19
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	2023.07.19
6	Signal Generator	Agilent	N5181A	MY50140365	2023.07.19
7	Vector signal generator	Agilent	N5182A	MY47420195	2023.07.19
8	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2023.07.19
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2023.07.19
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	2023.07.19
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2022.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2023.07.19
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/
16	966 chamber	C.R.T.	966	/	2024.08.11
17	Receiver	R&S	ESPI	100362	2023.07.19
18	Amplifier	HP	8447E	2945A02747	2023.07.19
19	Amplifier	Agilent	8449B	3008A01838	2023.07.19
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2023.07.22
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	2023.07.22

22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	2023.07.23
24	loop antenna	ZHINAN	ZN30900A	GTS534	/
25	40G Horn antenna	A/H/System	SAS-574	588	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	2024.10.30

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

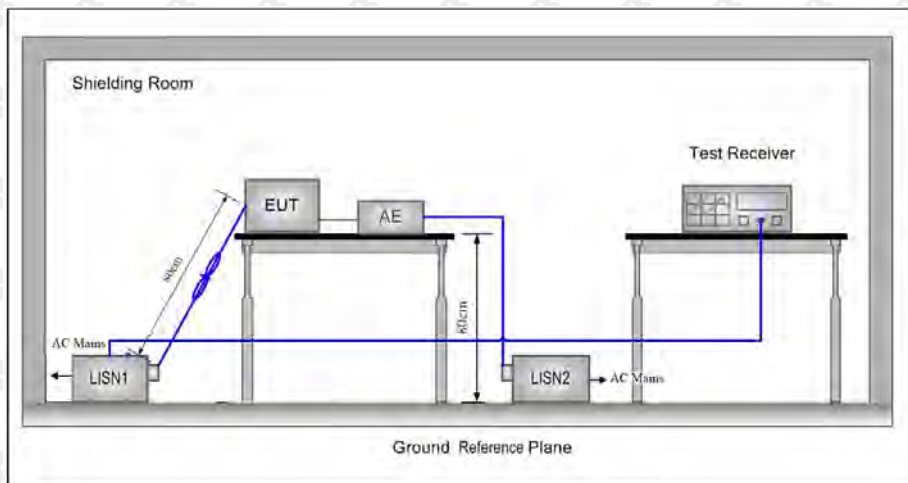

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result

L:

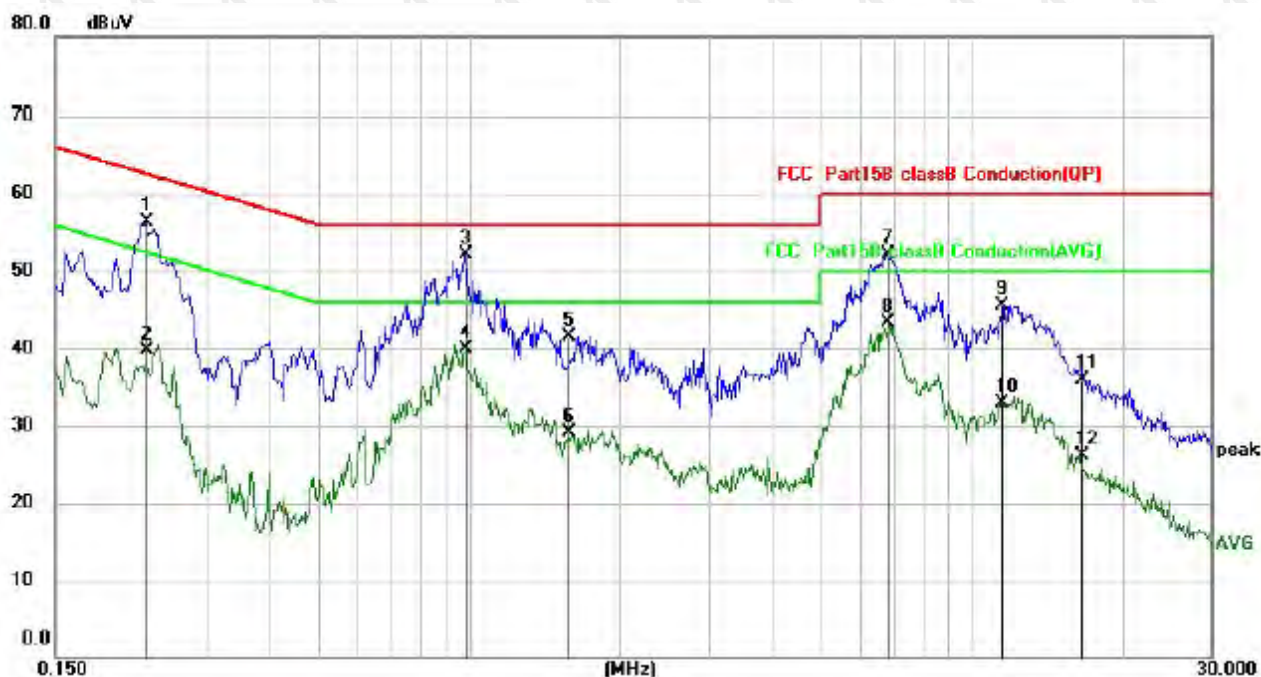


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.2268	46.28	10.00	56.28	62.57	-6.29	QP
2		0.2268	29.67	10.00	39.67	52.57	-12.90	AVG
3	*	0.9819	42.05	9.98	52.03	56.00	-3.97	QP
4		0.9819	29.99	9.98	39.97	46.00	-6.03	AVG
5		1.5820	31.52	10.01	41.53	56.00	-14.47	QP
6		1.5820	19.04	10.01	29.05	46.00	-16.95	AVG
7		6.8018	41.86	10.23	52.09	60.00	-7.91	QP
8		6.8018	33.08	10.23	43.31	50.00	-6.69	AVG
9		11.4618	35.11	10.38	45.49	60.00	-14.51	QP
10		11.4618	22.57	10.38	32.95	50.00	-17.05	AVG
11		16.4939	25.39	10.49	35.88	60.00	-24.12	QP
12		16.4939	15.53	10.49	26.02	50.00	-23.98	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N:

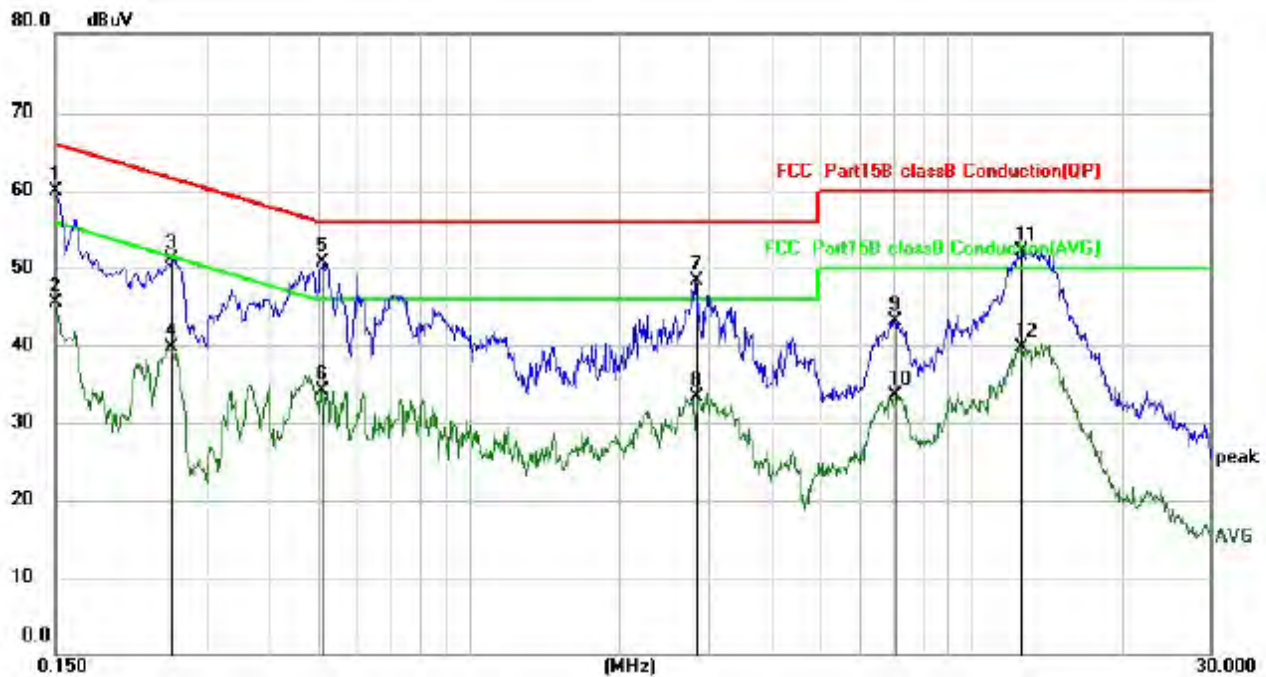

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1		0.1500	49.98	10.01	59.99	66.00	-6.01	QP
2		0.1500	35.50	10.01	45.51	56.00	-10.49	AVG
3		0.2548	41.09	10.00	51.09	61.60	-10.51	QP
4		0.2548	29.79	10.00	39.79	51.60	-11.81	AVG
5	*	0.5100	40.72	9.97	50.69	56.00	-5.31	QP
6		0.5100	24.22	9.97	34.19	46.00	-11.81	AVG
7		2.8380	38.22	10.07	48.29	56.00	-7.71	QP
8		2.8380	23.32	10.07	33.39	46.00	-12.61	AVG
9		7.0378	32.93	10.24	43.17	60.00	-16.83	QP
10		7.0378	23.21	10.24	33.45	50.00	-16.55	AVG
11		12.6178	41.74	10.41	52.15	60.00	-7.85	QP
12		12.6178	29.36	10.41	39.77	50.00	-10.23	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Remark:

1. Factor = Cable loss + LISN factor, Margin = Limit – Level
2. All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
3. All the test modes completed for test. Only the worst result of was reported.

7. RADIATED SPURIOUS EMISSIONS

7.1 Block Diagram Of Test Setup

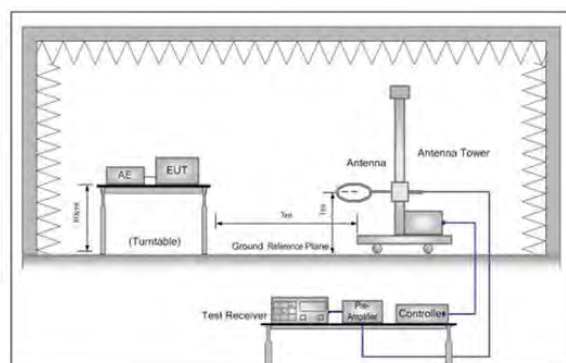


Figure 1. Below 30MHz

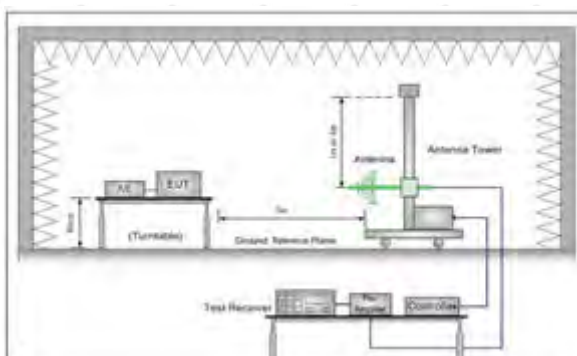


Figure 2. 30MHz to 1GHz

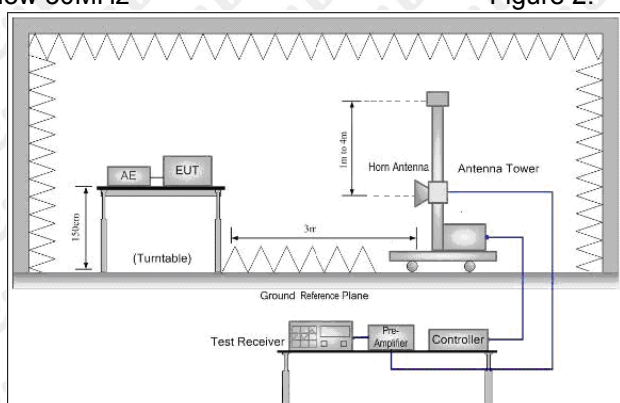


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	$20\log 2400/F \text{ (kHz)} + 80$	Quasi-peak	3
0.490MHz-1.705MHz	$20\log 24000/F \text{ (kHz)} + 40$	Quasi-peak	3
1.705MHz-30MHz	$20\log 30 + 40$	Quasi-peak	3
30MHz-88MHz	40.0	Quasi-peak	3
88MHz-216MHz	43.5	Quasi-peak	3
216MHz-960MHz	46.0	Quasi-peak	3
960MHz-1GHz	54.0	Quasi-peak	3
Above 1GHz	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

If radiated measurements are performed, field strength is then converted to EIRP as follows:

(i) $EIRP = ((E \cdot d)^2) / 30$

where:

- E is the field strength in V/m;
- d is the measurement distance in meters;
- EIRP is the equivalent isotropically radiated power in watts.

(ii) Working in dB units, the above equation is equivalent to:

$$EIRP[dBm] = E[dB\mu V/m] + 20 \log(d[meters]) - 104.77$$

(iii) Or, if d is 3 meters:

$$EIRP[dBm] = E[dB\mu V/m] - 95.2$$

7.3 Test procedure

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j. Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result

30MHz-1GHz Test Results:

Modulation : 802.11a (the worst data)

Test Channel : 5780MHz

Antenna polarity: H



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		48.5865	36.64	-5.59	31.05	40.00	-8.95	QP
2		69.6003	36.65	-7.86	28.79	40.00	-11.21	QP
3	*	136.6990	42.11	-5.67	36.44	43.50	-7.06	QP
4		282.9849	41.13	-5.38	35.75	46.00	-10.25	QP
5		495.9343	33.81	0.61	34.42	46.00	-11.58	QP
6		948.7608	25.70	5.91	31.61	46.00	-14.39	QP

Antenna polarity: V



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		38.6837	39.17	-5.59	33.58	40.00	-6.42	QP
2		59.9637	39.15	-6.17	32.98	40.00	-7.02	QP
3		140.3420	39.43	-5.44	33.99	43.50	-9.51	QP
4	*	355.4272	44.10	-3.26	40.84	46.00	-5.16	QP
5		495.9343	35.13	0.61	35.74	46.00	-10.26	QP
6		854.0247	28.18	6.13	34.31	46.00	-11.69	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Radiated Spurious Emission (Above 1GHz):

Modulation : 802.11(a) (the worst data)

Freq (MHz)	Rd_level (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	detector	Height	Degree	Antenna polarization
Channel:5180MHz									
10360	44.05	16.39	60.44	74	-13.56	PK	1.36	148	H
10360	29.65	16.39	46.04	54	-7.96	AV	1.76	120	H
10360	43.79	16.39	60.18	74	-13.82	PK	1.79	165	V
10360	30.84	16.39	47.23	54	-6.77	AV	1.55	282	V
Channel:5240MHz									
10480	44.95	16.11	61.06	74	-12.94	PK	1.05	175	H
10480	28.22	16.11	44.33	54	-9.67	AV	1.39	139	H
10480	44.59	16.11	60.70	74	-13.30	PK	1.32	165	V
10480	29.46	16.11	45.57	54	-8.43	AV	1.04	197	V
Channel:5745MHz									
11490	42.11	17.46	59.57	74	-14.43	PK	1.64	332	H
11490	26.99	17.46	44.45	54	-9.55	AV	1.06	187	H
11490	41.33	17.46	58.79	74	-15.21	PK	1.24	153	V
11490	29.98	17.46	47.44	54	-6.56	AV	1.09	351	V
Channel:5825MHz									
11650	41.59	17.57	59.16	74	-14.84	PK	1.56	128	H
11650	29.26	17.57	46.83	54	-7.17	AV	1.14	316	H
11650	43.61	17.57	61.18	74	-12.82	PK	1.45	183	V
11650	28.41	17.57	45.98	54	-8.02	AV	1.56	134	V

Modulation : 802.11(n40) (the worst data)

Freq (MHz)	Rd_level (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	detector	Height	Degree	Antenna polarization
Channel:5190MHz									
10380	38.35	16.34	54.69	74	-19.31	PK	1.51	6	H
10380	22.70	16.34	39.04	54	-14.96	AV	1.33	155	H
10380	38.12	16.34	54.46	74	-19.54	PK	1.44	217	V
10380	24.84	16.34	41.18	54	-12.82	AV	1.74	216	V
Channel:5230MHz									
10460	43.85	16.15	60.00	74	-14.00	PK	1.05	30	H
10460	25.41	16.15	41.56	54	-12.44	AV	1.36	76	H
10460	40.64	16.15	56.79	74	-17.21	PK	1.16	95	V
10460	27.12	16.15	43.27	54	-10.73	AV	1.05	147	V
Channel:5755MHz									
11510	40.35	17.49	57.84	74	-16.16	PK	1.01	311	H
11510	25.35	17.49	42.84	54	-11.16	AV	1.29	160	H
11510	43.39	17.49	60.88	74	-13.12	PK	1.22	102	V
11510	25.20	17.49	42.69	54	-11.31	AV	1.48	184	V
Channel:5795MHz									
11590	41.15	17.52	58.67	74	-15.33	PK	1.13	74	H
11590	27.58	17.52	45.10	54	-8.90	AV	1.07	155	H
11590	39.95	17.52	57.47	74	-16.53	PK	1.58	261	V
11590	25.07	17.52	42.59	54	-11.41	AV	1.27	32	V

Modulation : 802.11(VH80) (the worst data)

Freq (MHz)	Rd_level (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	detector	Height	Degree	Antenna polarization
Channel:5210MHz									
10420	40.19	16.25	56.44	74	-17.56	PK	1.85	213	H
10420	29.94	16.25	46.19	54	-7.81	AV	1.77	114	H
10420	43.82	16.25	60.07	74	-13.93	PK	1.55	154	V
10420	25.57	16.25	41.82	54	-12.18	AV	1.42	135	V


Channel:5775MHz									
11550	40.17	17.5	57.67	74	-16.33	PK	1.77	178	H
11550	27.04	17.5	44.54	54	-9.46	AV	1.50	156	H
11550	41.17	17.5	58.67	74	-15.33	PK	1.87	255	V
11550	29.55	17.5	47.05	54	-6.95	AV	1.25	324	V

Remark:

- 1.Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits
- 2.The EUT was tested in the low, high channel and the worst case position data was reported.
- 3.Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

8. BAND EDGE

8.1 Block Diagram Of Test Setup

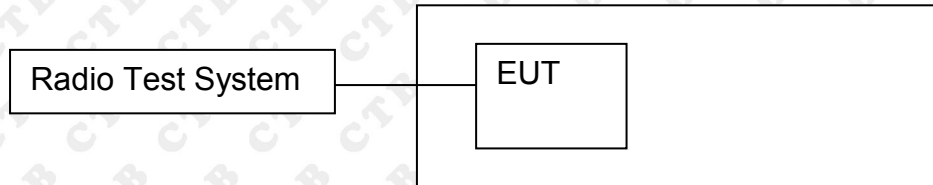

8.2 Limit


- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.


8.3 Test procedure


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

8.4 Test Result


Test Graph ANT 1

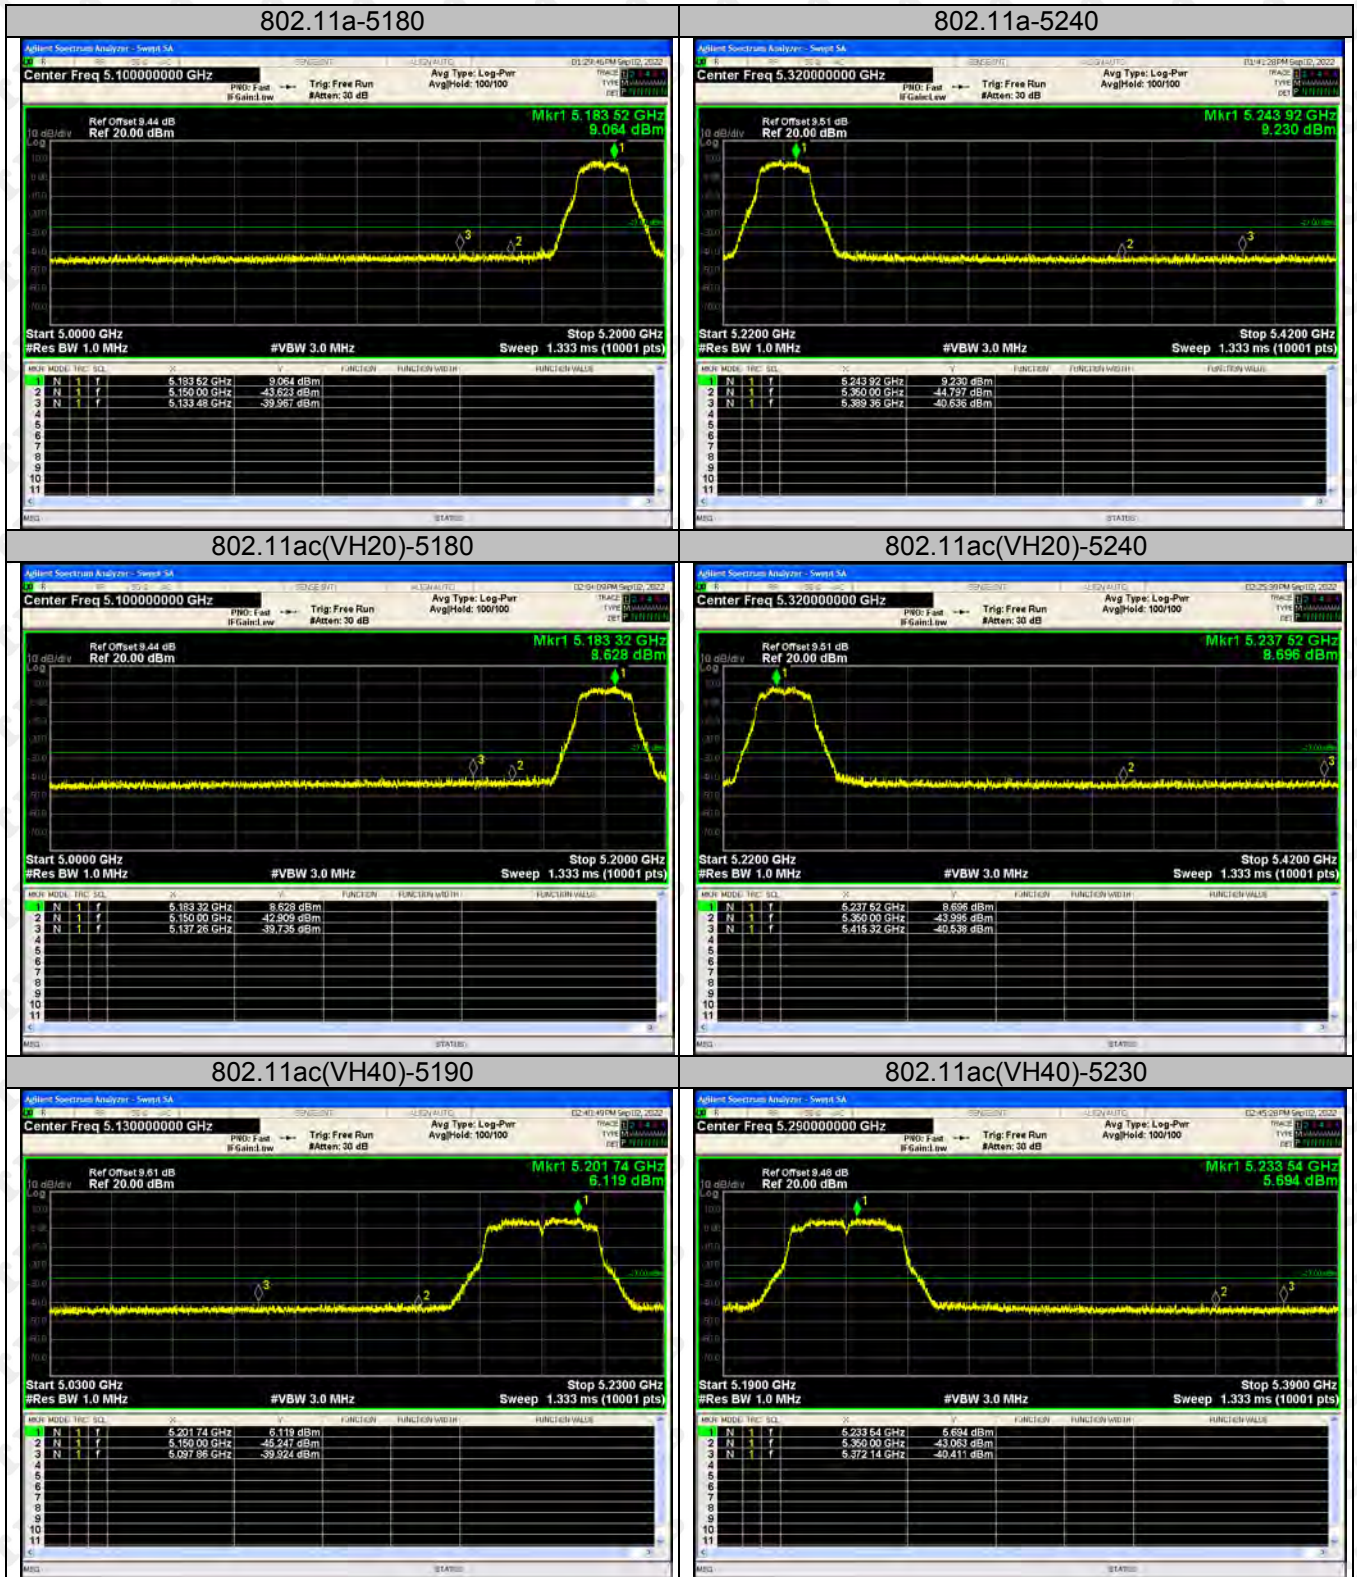

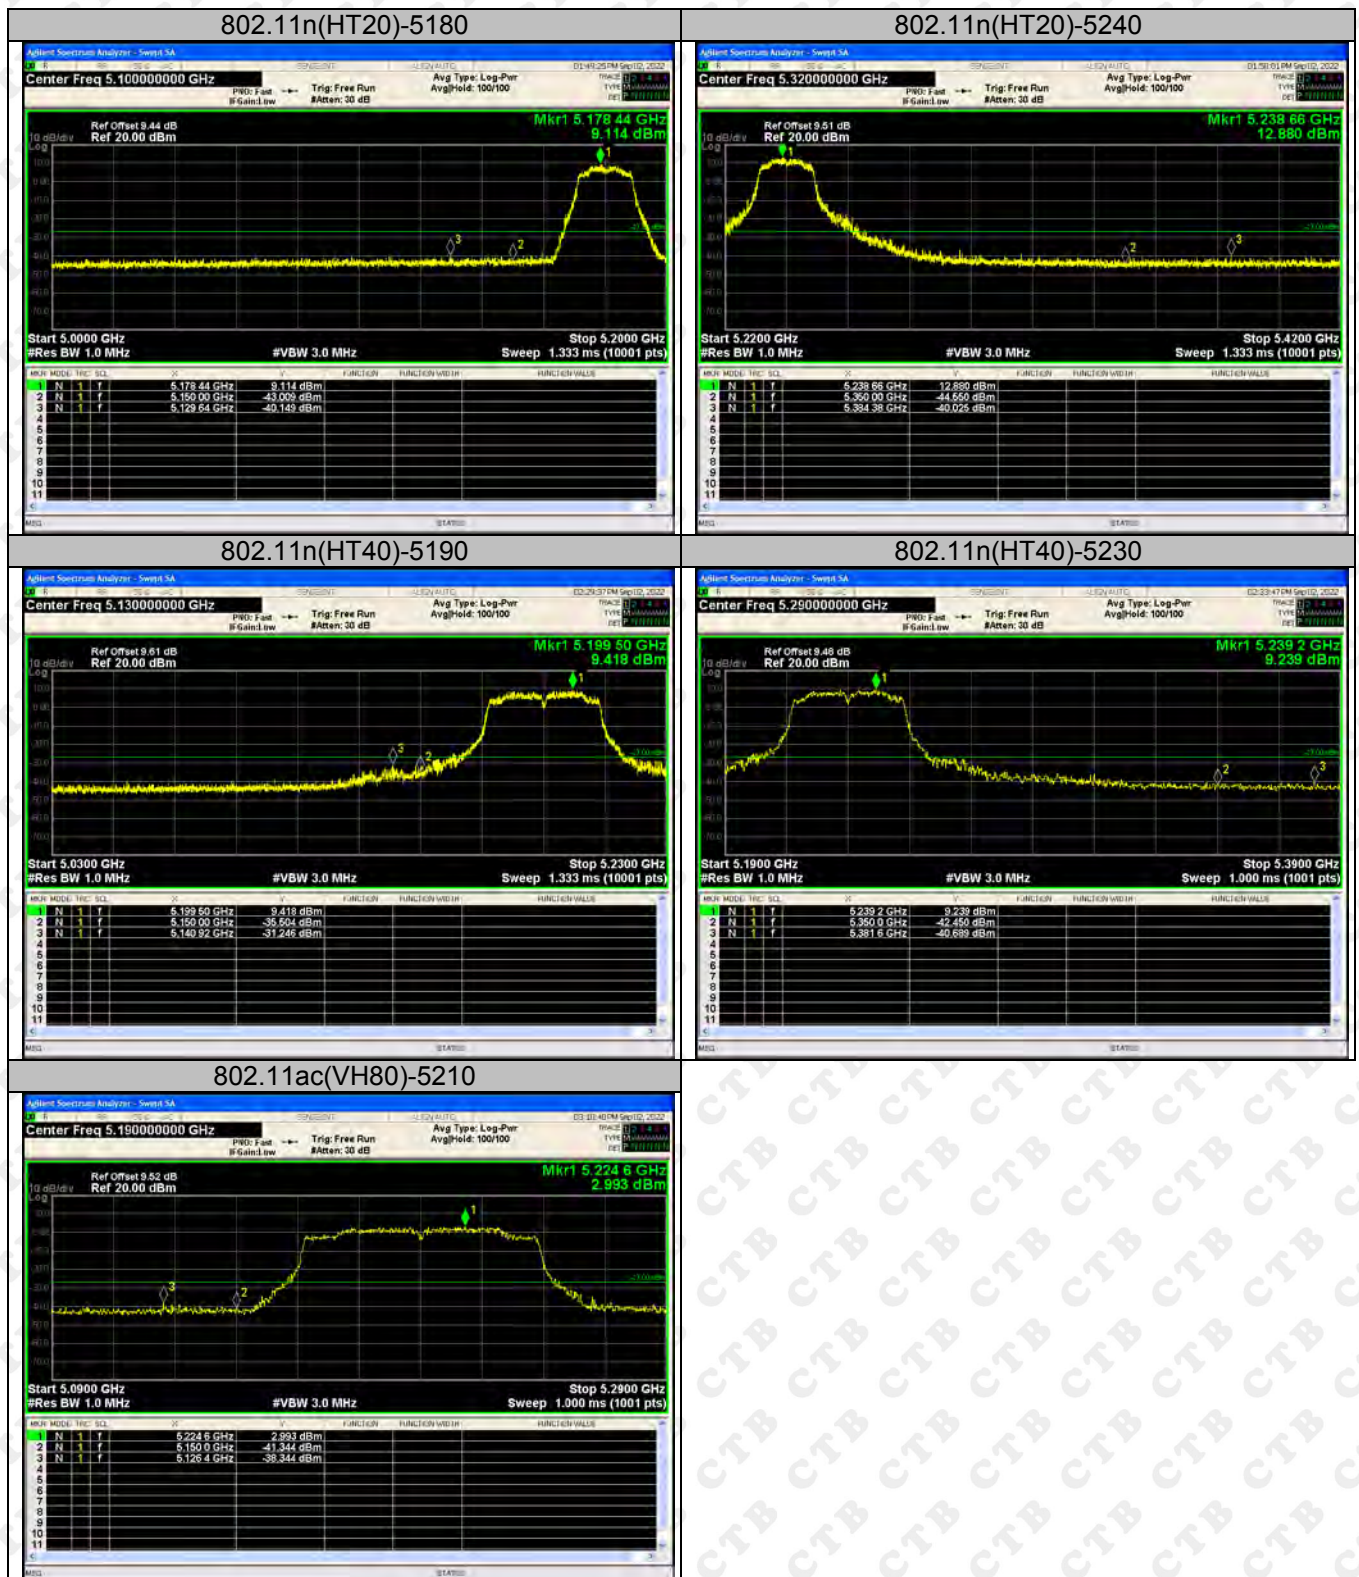


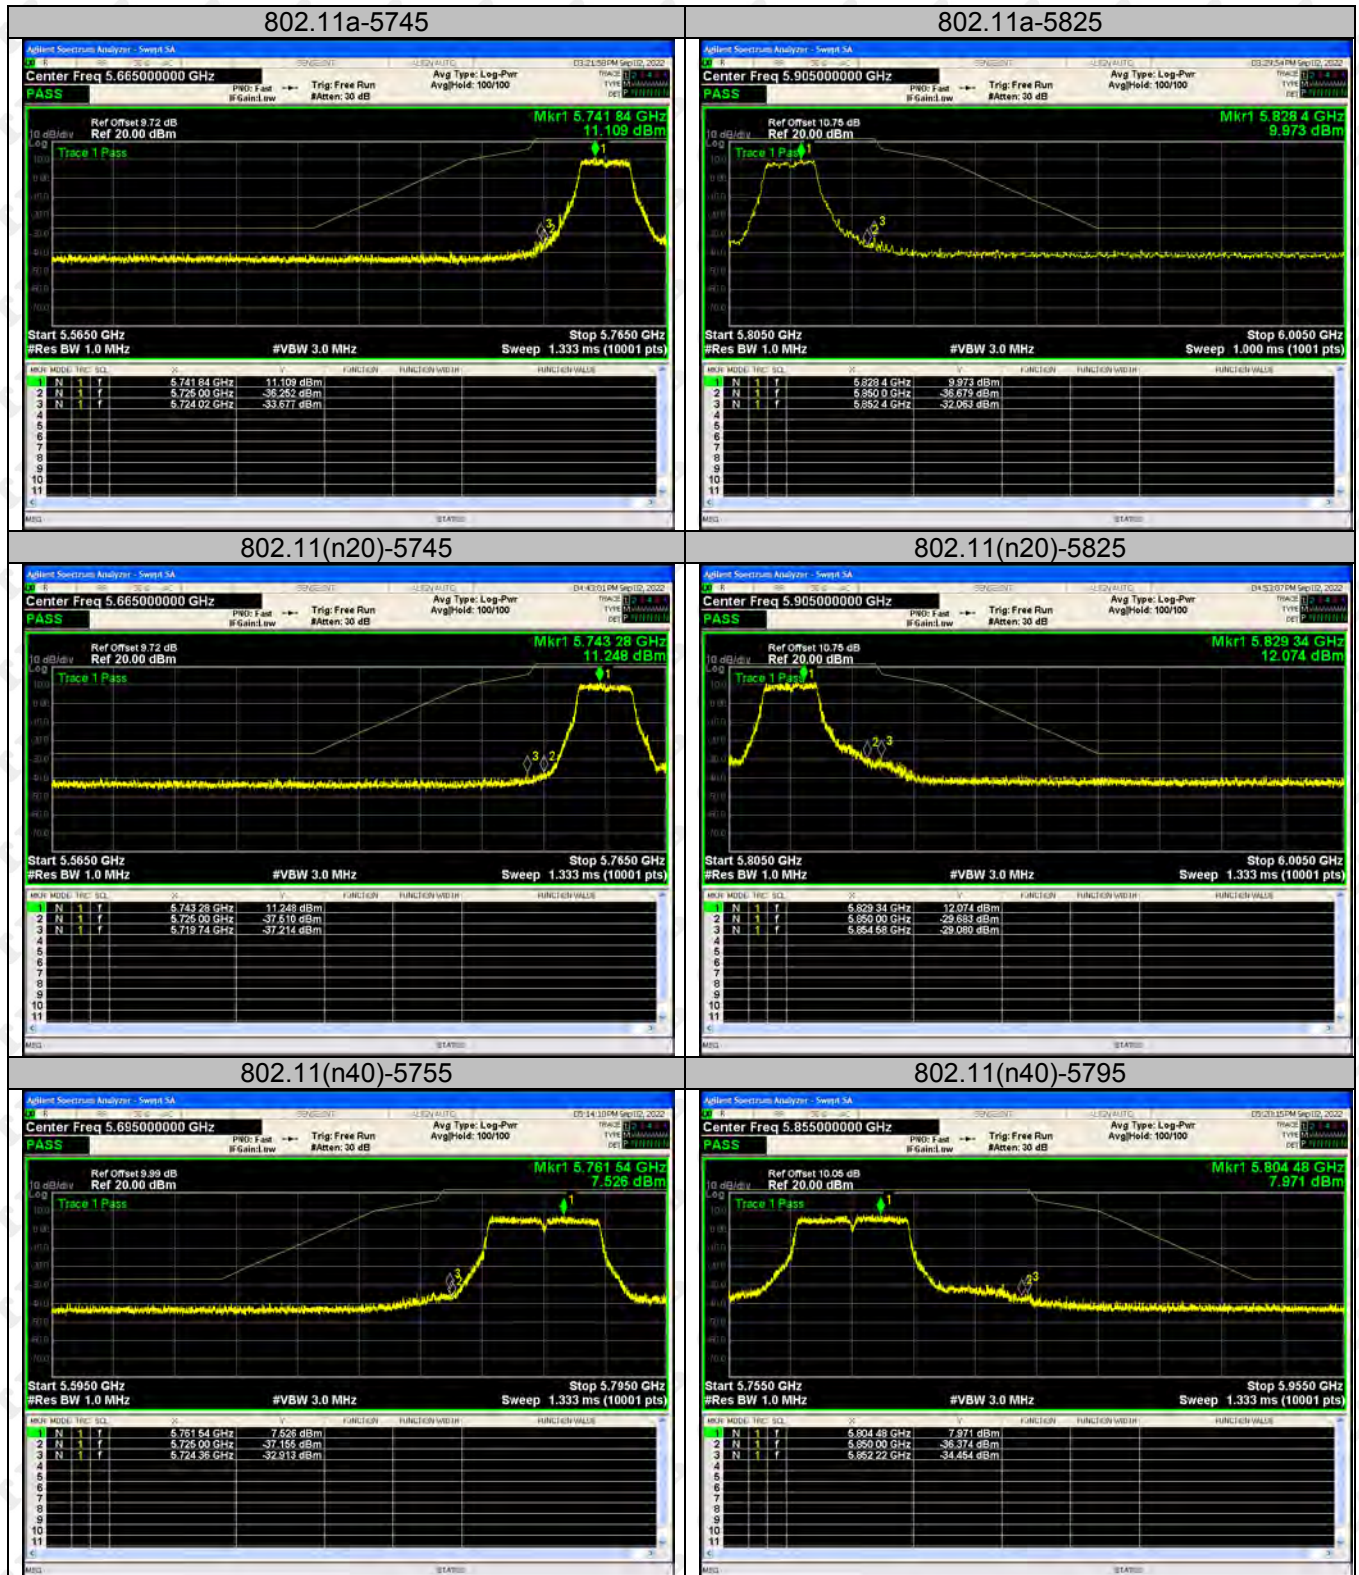


802.11ac(VH20)-5745

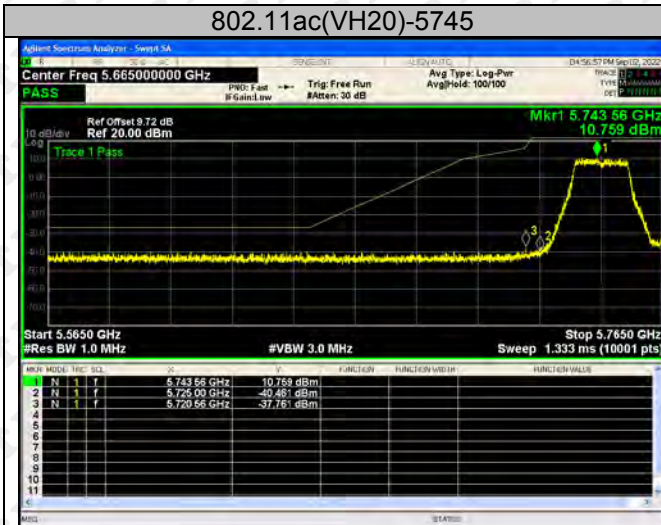


802.11ac(VH20)-5825

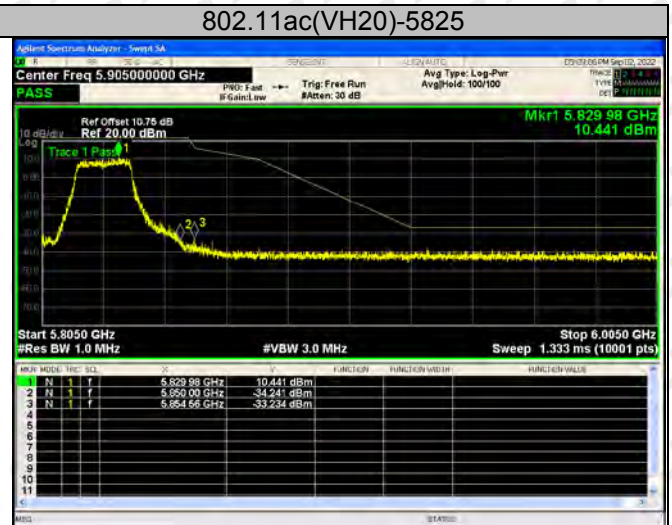


802.11ac(VH40)-5755

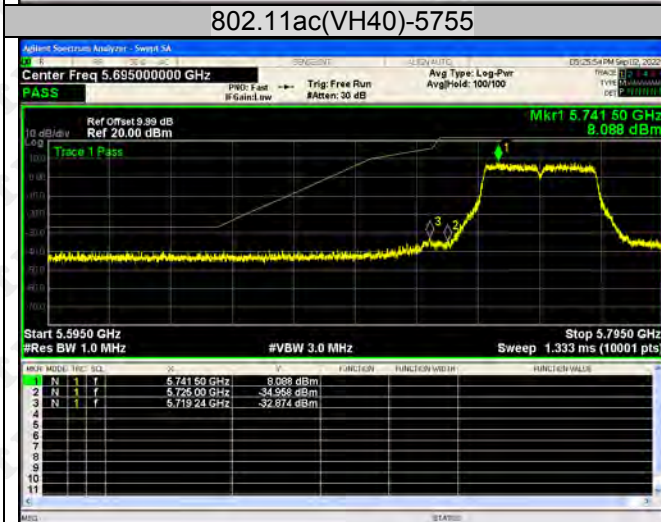

802.11ac(VH40)-5795

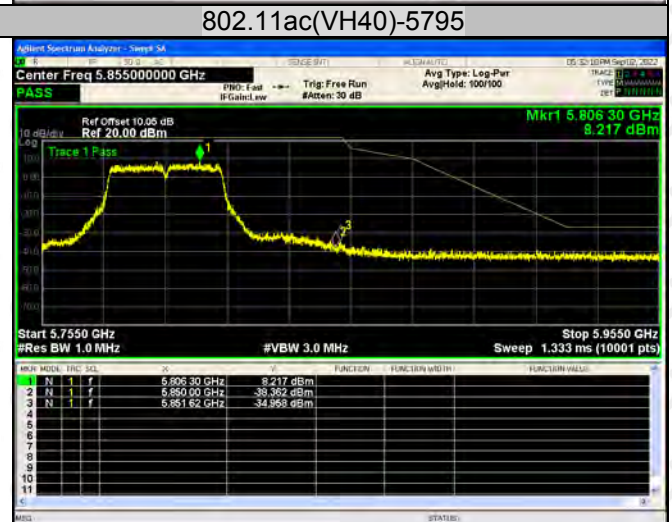


802.11ac(VH80)-5775

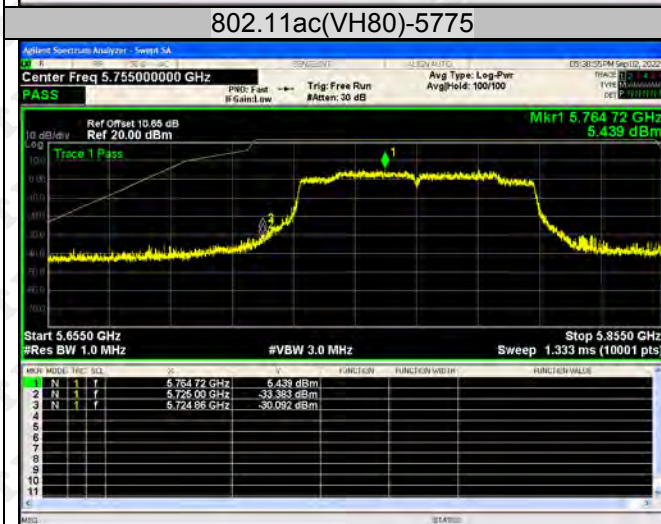


ANT 2


802.11a-5180

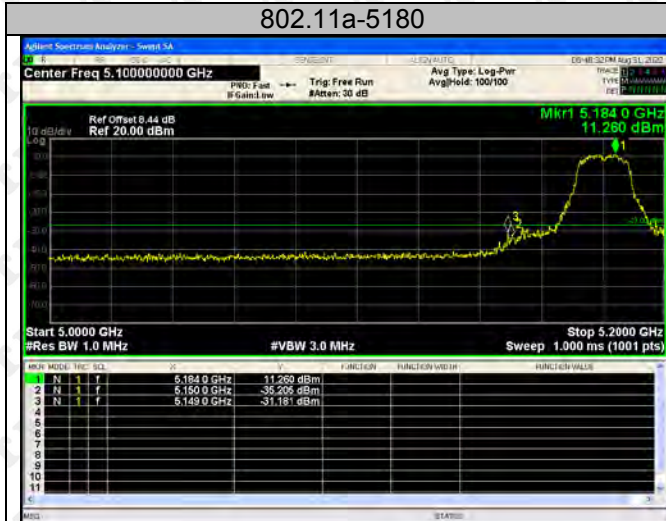

802.11a-5240

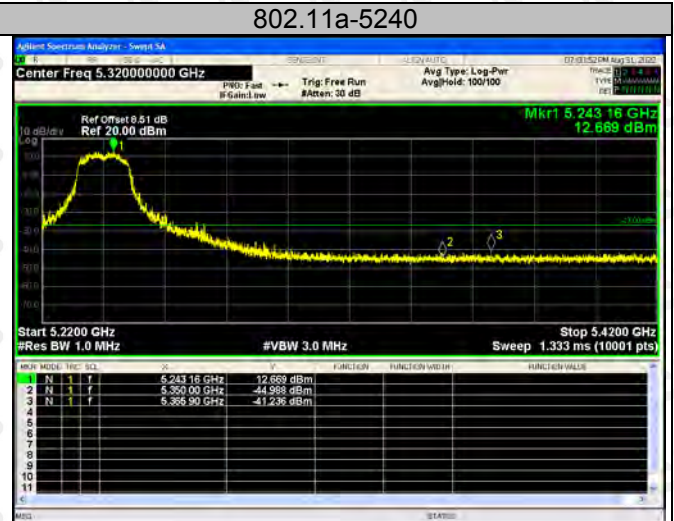


802.11ac(VH20)-5180

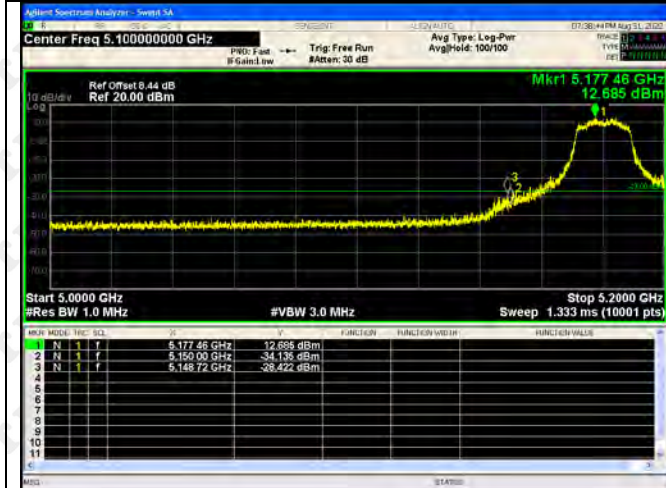

802.11ac(VH20)-5240



802.11ac(VH40)-5190

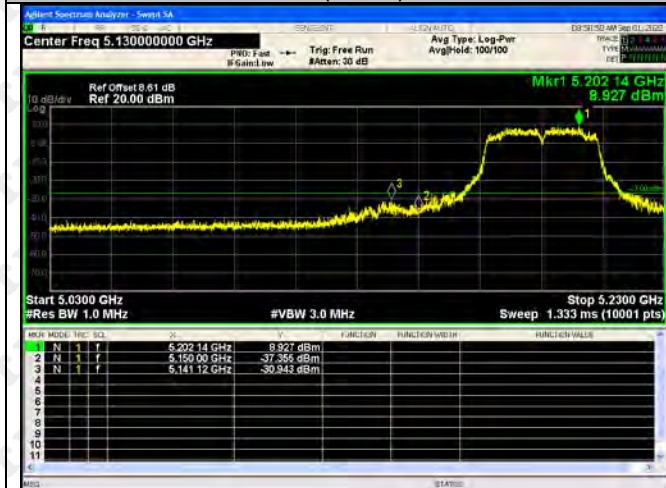


802.11ac(VH40)-5230






802.11a-5745

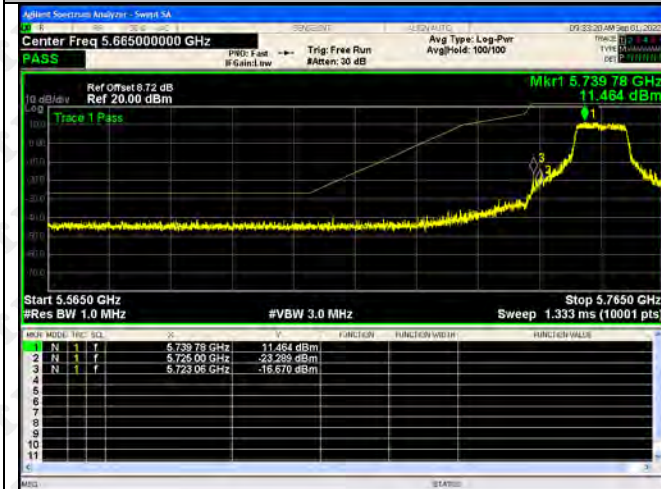

802.11a-5825



802.11(n20)-5745

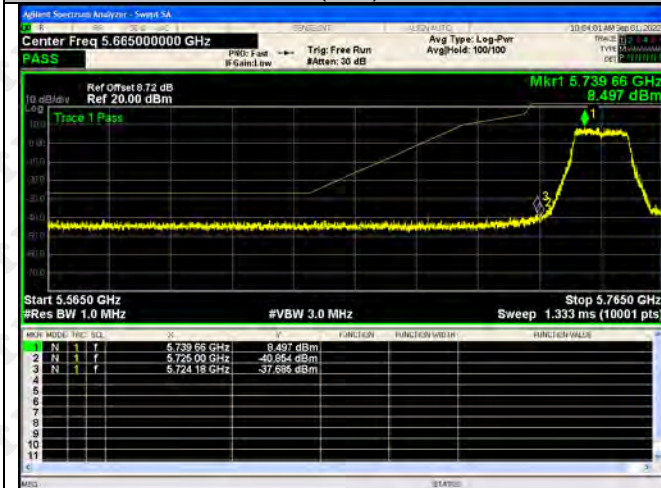

802.11(n20)-5825




802.11(n40)-5755




802.11(n40)-5795



802.11ac(VH20)-5745

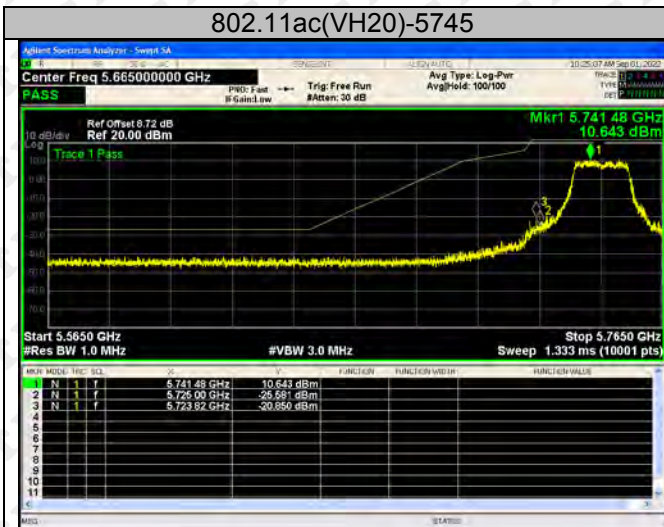

802.11ac(VH20)-5825

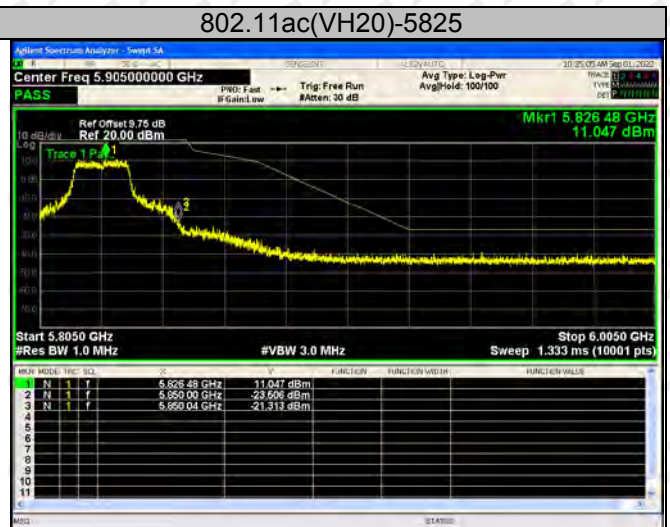

802.11ac(VH40)-5755



802.11ac(VH40)-5795




802.11ac(VH80)-5775



9. CONDUCTED PEAK OUTPUT POWER

9.1 Block Diagram Of Test Setup

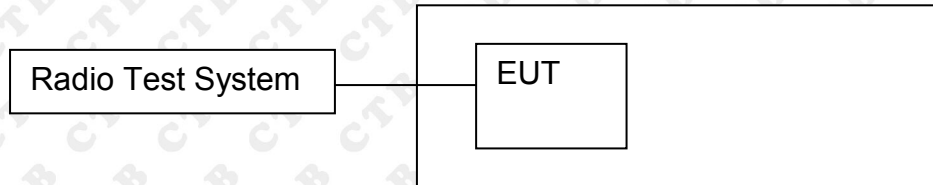

9.2 Limit

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p.

at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(4) The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

(5) The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

(h) Transmit Power Control (TPC) and Dynamic Frequency Selection (DFS).

(1) Transmit power control (TPC). U-NII devices operating in the 5.25-5.35 GHz band and the 5.47-5.725 GHz band shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm. A TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW.

9.3 Test procedure

According to KDB789033 D02v02r01 sectionE, the following is the measurement procedure.

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1 MHz.
- (iii) Set VBW $\geq$ 3 MHz.
- (iv) Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This ensures that bin-to-bin spacing is $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)
- (v) Sweep time = auto.
- (vi) Detector = power averaging (rms), if available. Otherwise, use sample detector mode.
- (vii) If transmit duty cycle $< 98\%$, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run."
- (viii) Trace average at least 100 traces in power averaging (rms) mode.
- (ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

9.4 Test Result


ANT 1+ANT 2


Test mode1	Test Channel (MHz)	Output Power dBm ANT1	Output Power dBm ANT2	Output Power dBm Total	Limit dBm
802.11a	5180	10.511	10.112	/	30
	5200	10.661	10.211	/	30
	5240	10.597	10.37	/	30
802.11ac20	5180	10.145	10.238	13.202	30
	5200	9.994	10.777	13.413	30
	5240	10.533	10.612	13.583	30
802.11ac40	5190	9.025	9.352	12.202	30
	5230	9.136	9.517	12.341	30
802.11ac80	5210	8.69	8.057	11.395	30
802.11n(HT20)	5180	10.52	10.075	13.313	30
	5200	10.079	10.104	13.102	30
	5240	10.79	10.35	13.586	30
802.11n(HT40)	5190	9.473	9.524	12.509	30
	5230	9.132	9.645	12.406	30




ANT 1+ANT 2

Test mode1	Test Channel (MHz)	Output Power dBm ANT1	Output Power dBm ANT2	Output Power dBm Total	Limit dBm
802.11a	5745	10.743	10.249	/	30
	5785	10.345	10.402	/	30
	5825	10.574	10.331	/	30
802.11ac20	5745	10.484	10.401	13.453	30
	5785	10.311	10.593	13.465	30
	5825	10.515	10.743	13.641	30
802.11ac40	5755	9.398	9.103	12.263	30
	5795	9.458	9.153	12.318	30
802.11ac80	5775	8.639	8.216	11.443	30
802.11n(HT20)	5745	10.353	10.505	13.440	30
	5785	10.265	10.439	13.363	30
	5825	10.126	10.829	13.502	30
802.11n(HT40)	5755	9.215	9.284	12.260	30
	5795	9.502	9.492	12.507	30


ANT 1

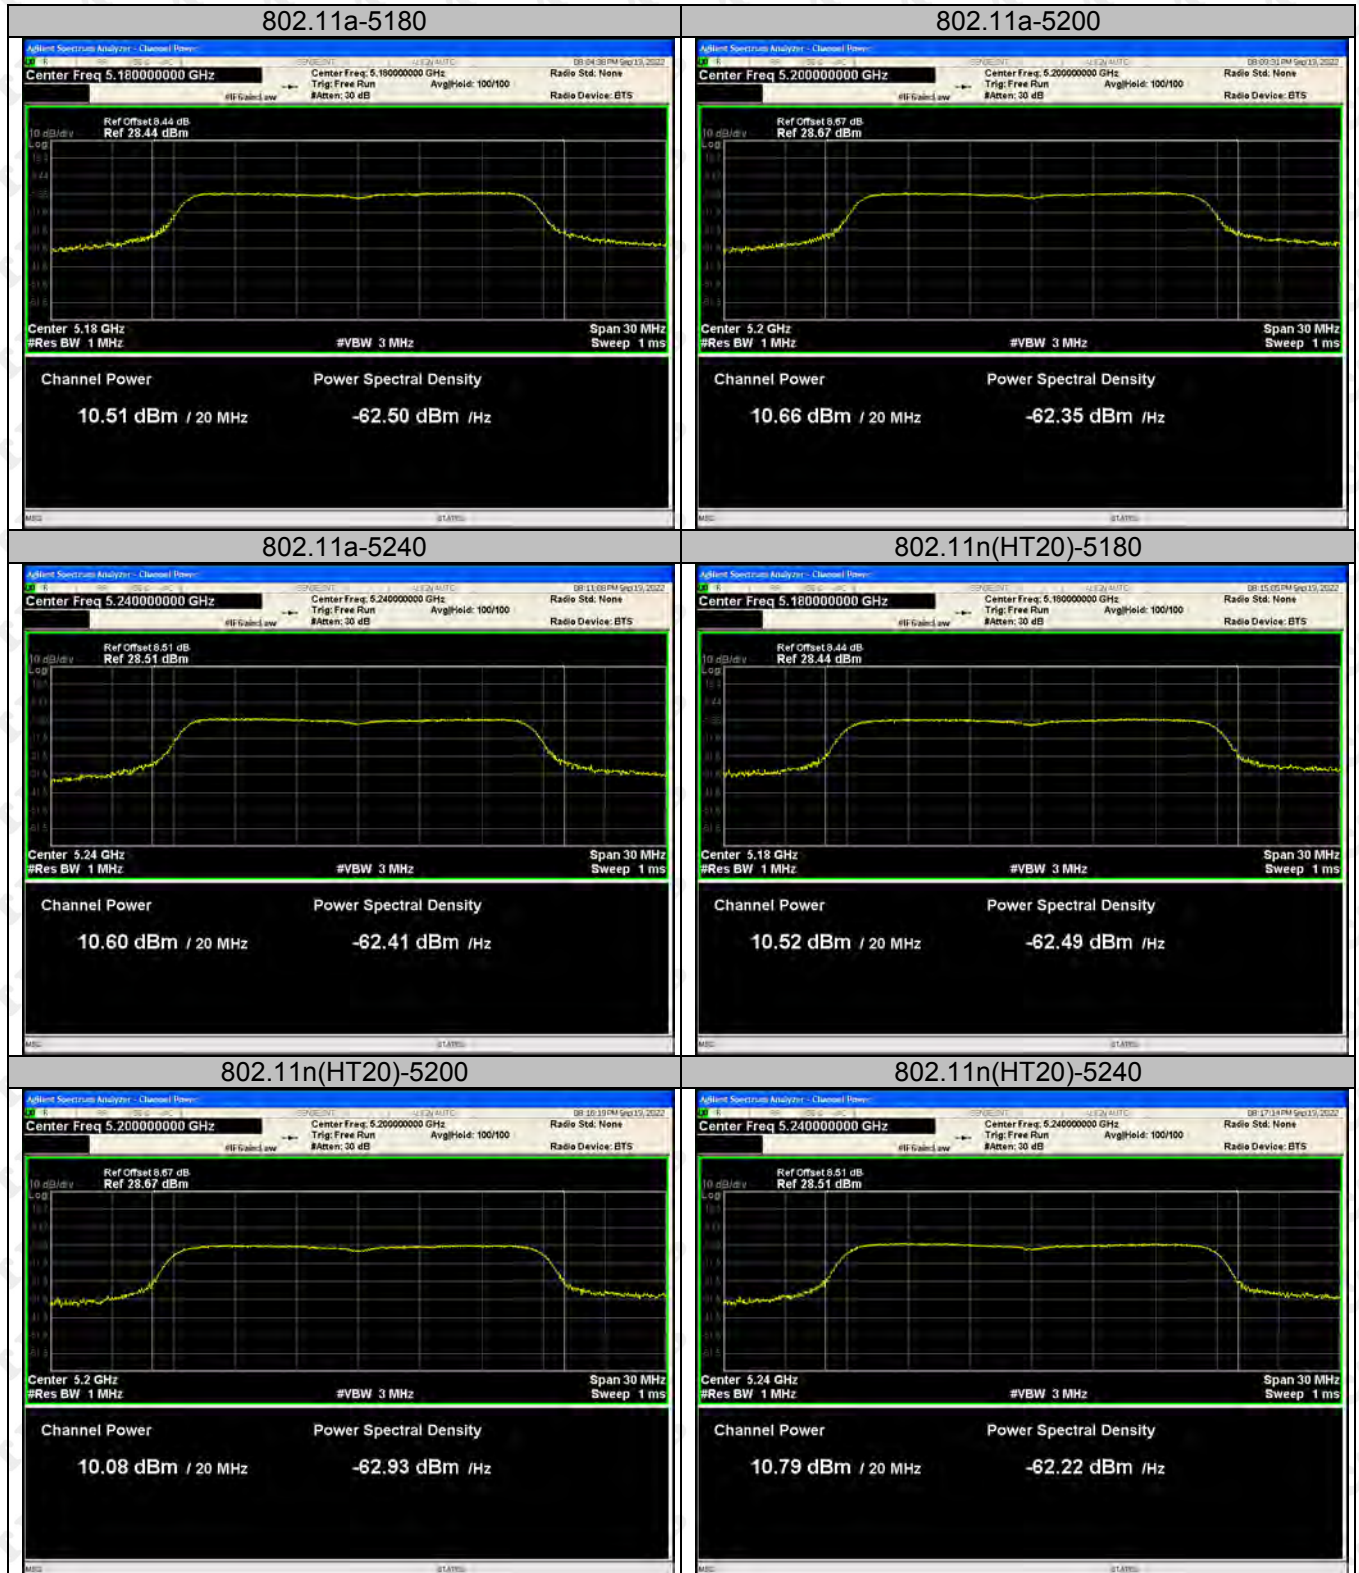

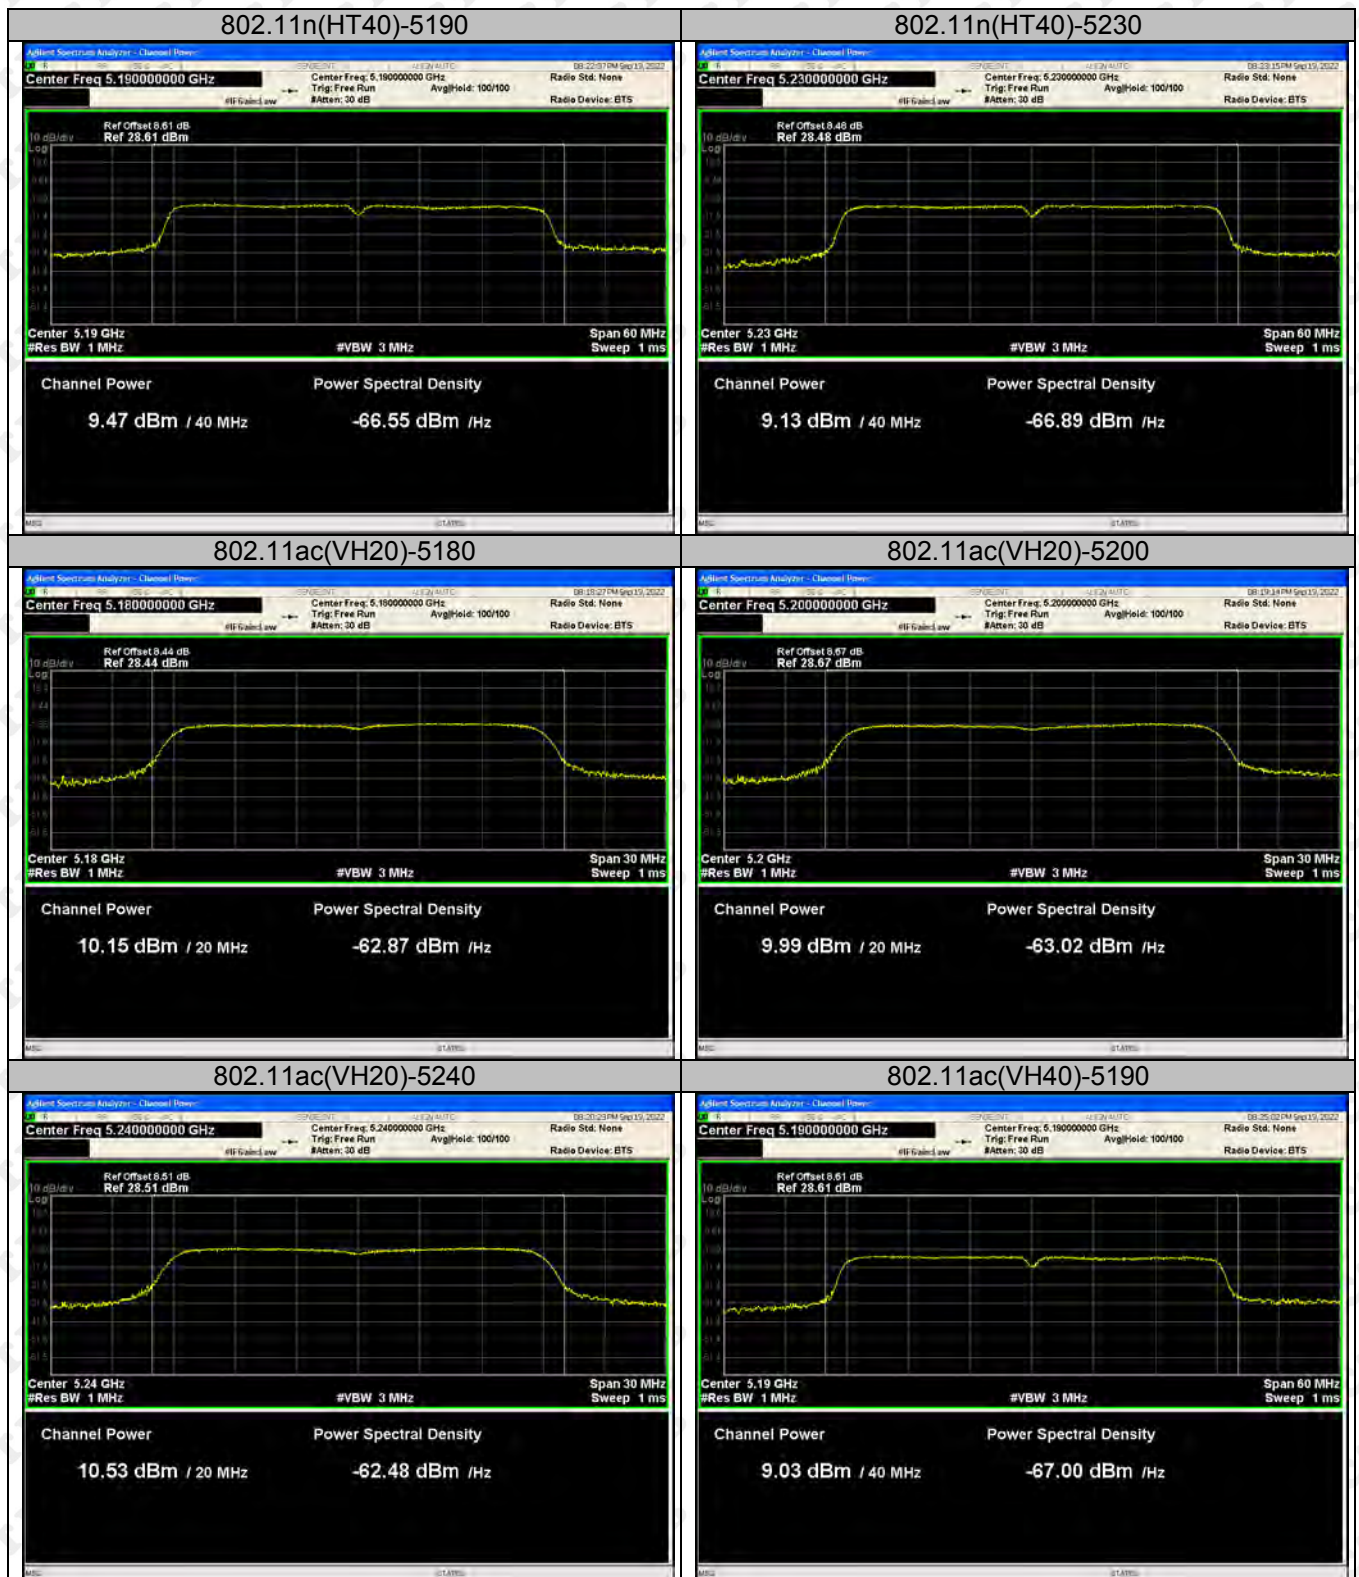


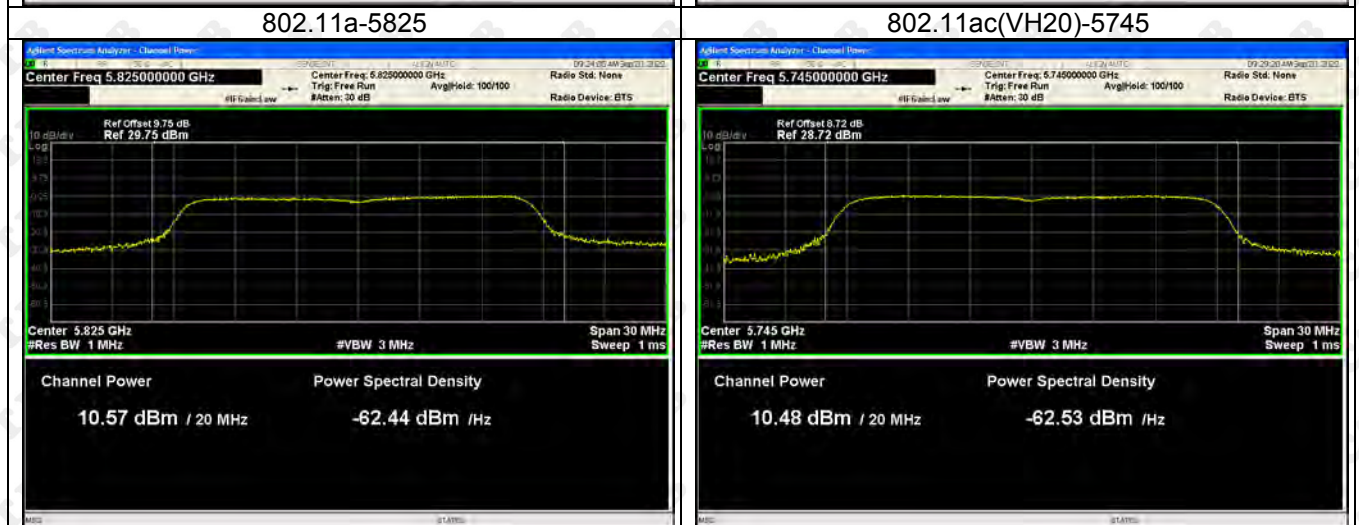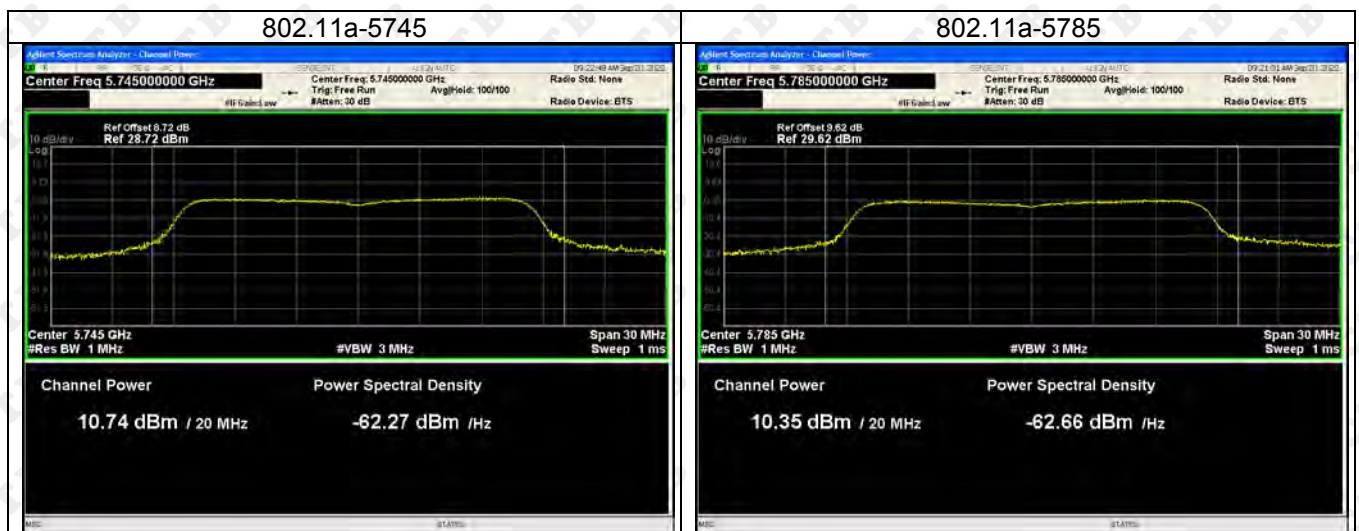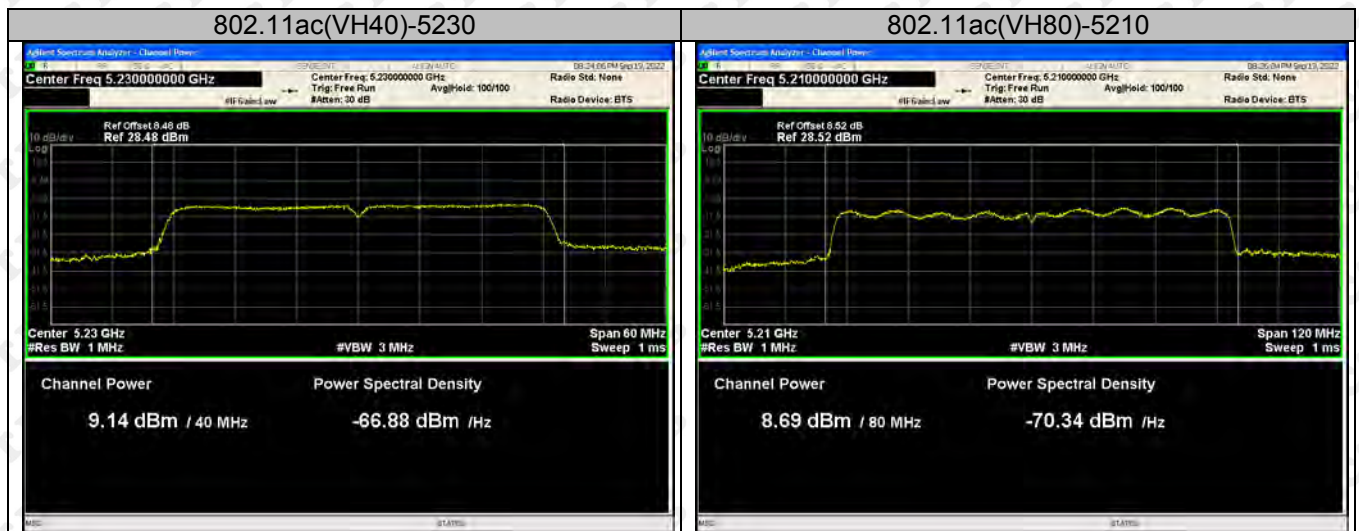


802.11ac(VH20)-5785

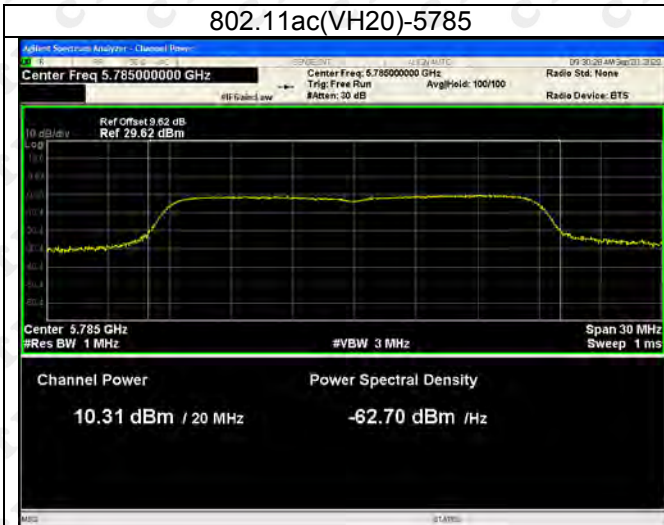


802.11ac(VH20)-5825

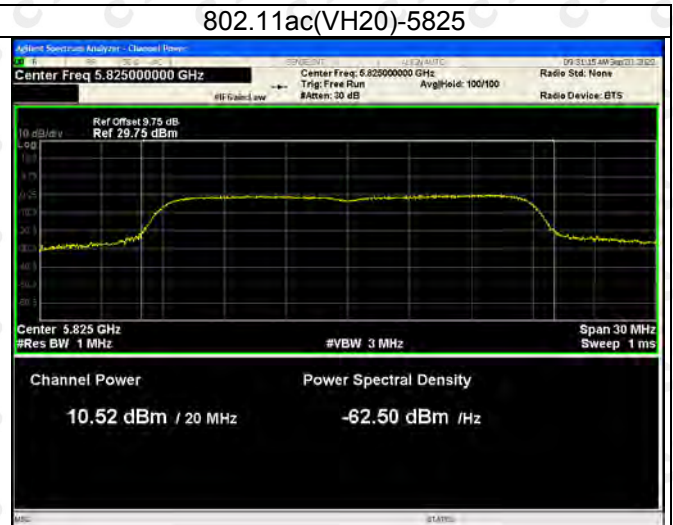


802.11ac(VH40)-5755

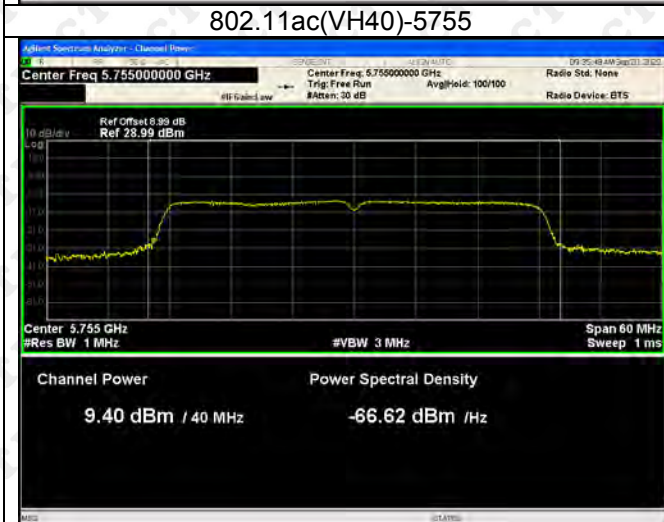


802.11ac(VH40)-5795

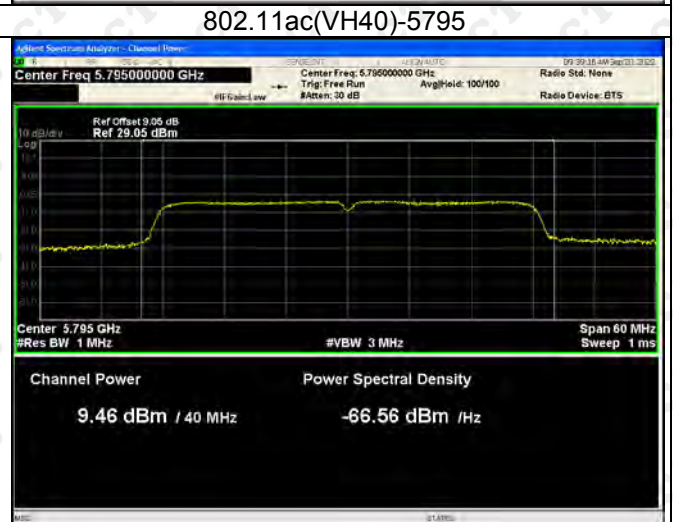


802.11n(HT20)-5745

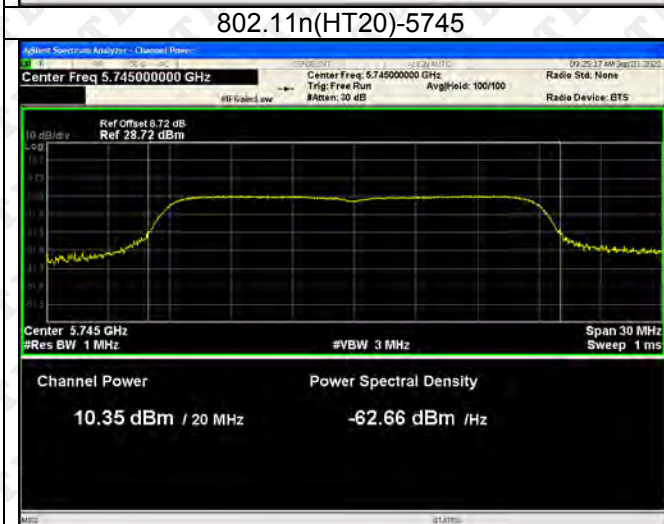


802.11n(HT20)-5785

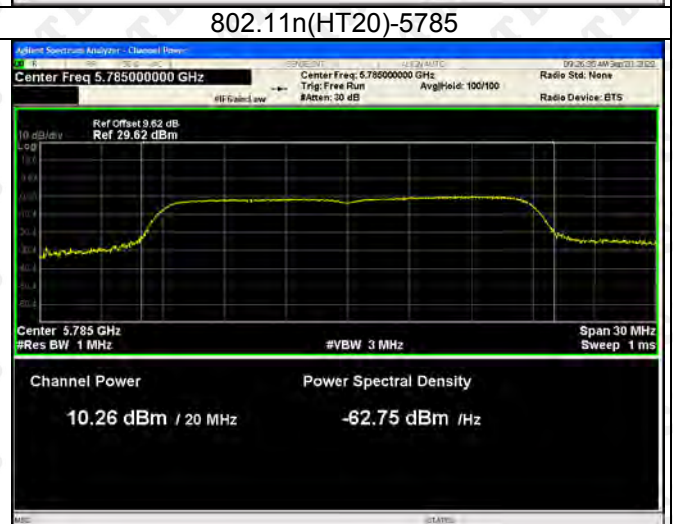


802.11n(HT20)-5825

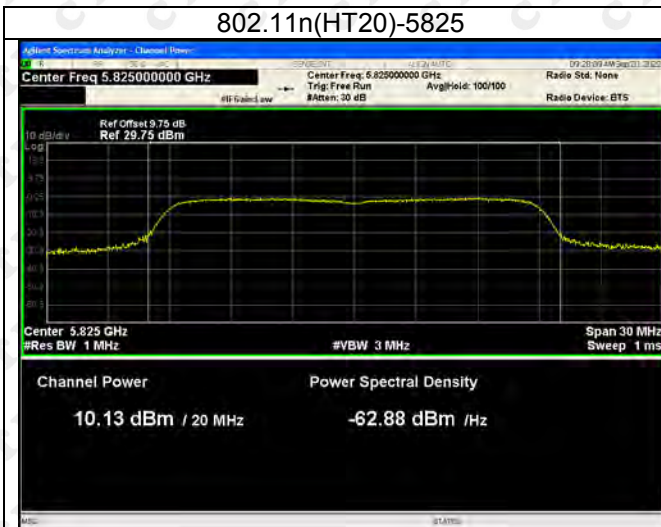


802.11n(HT40)-5755

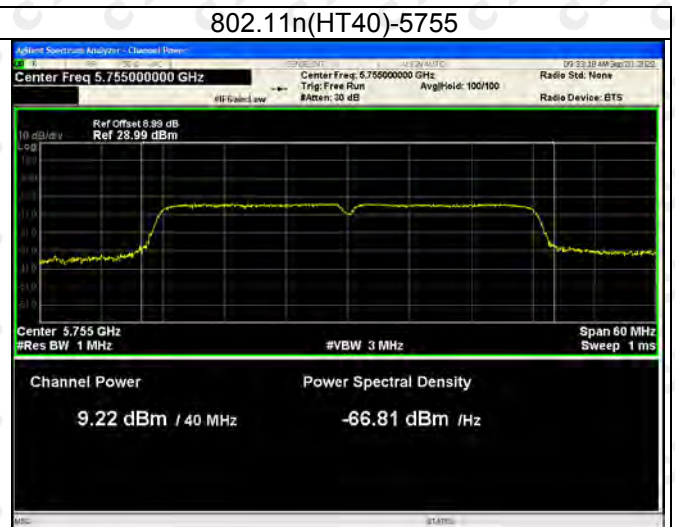


802.11n(HT40)-5795

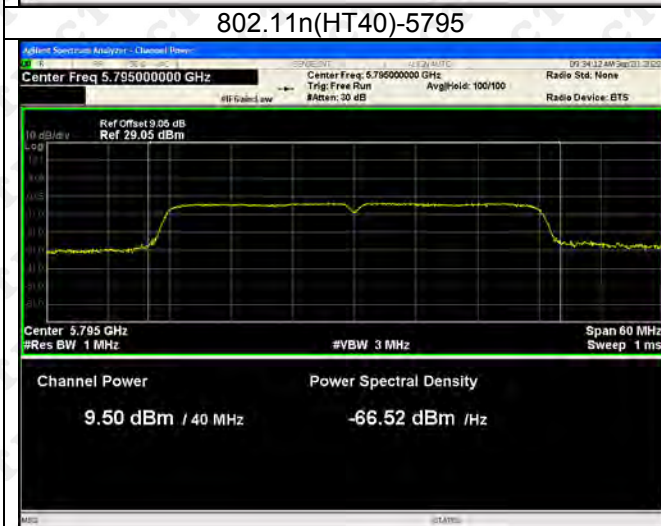


802.11ac(HT80)-5775

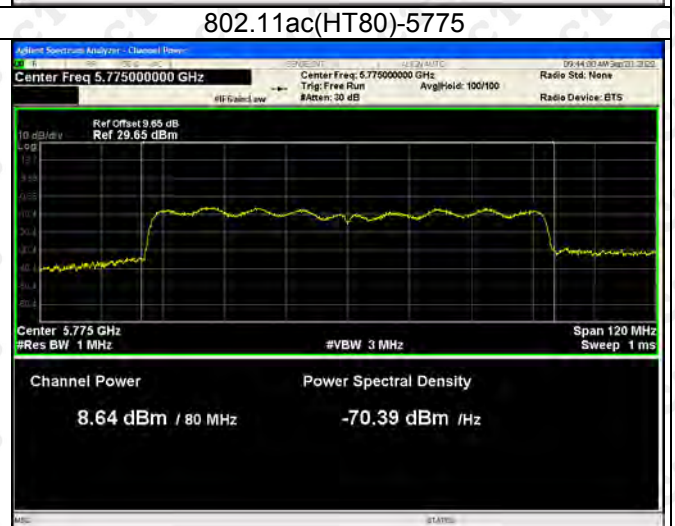


ANT 2

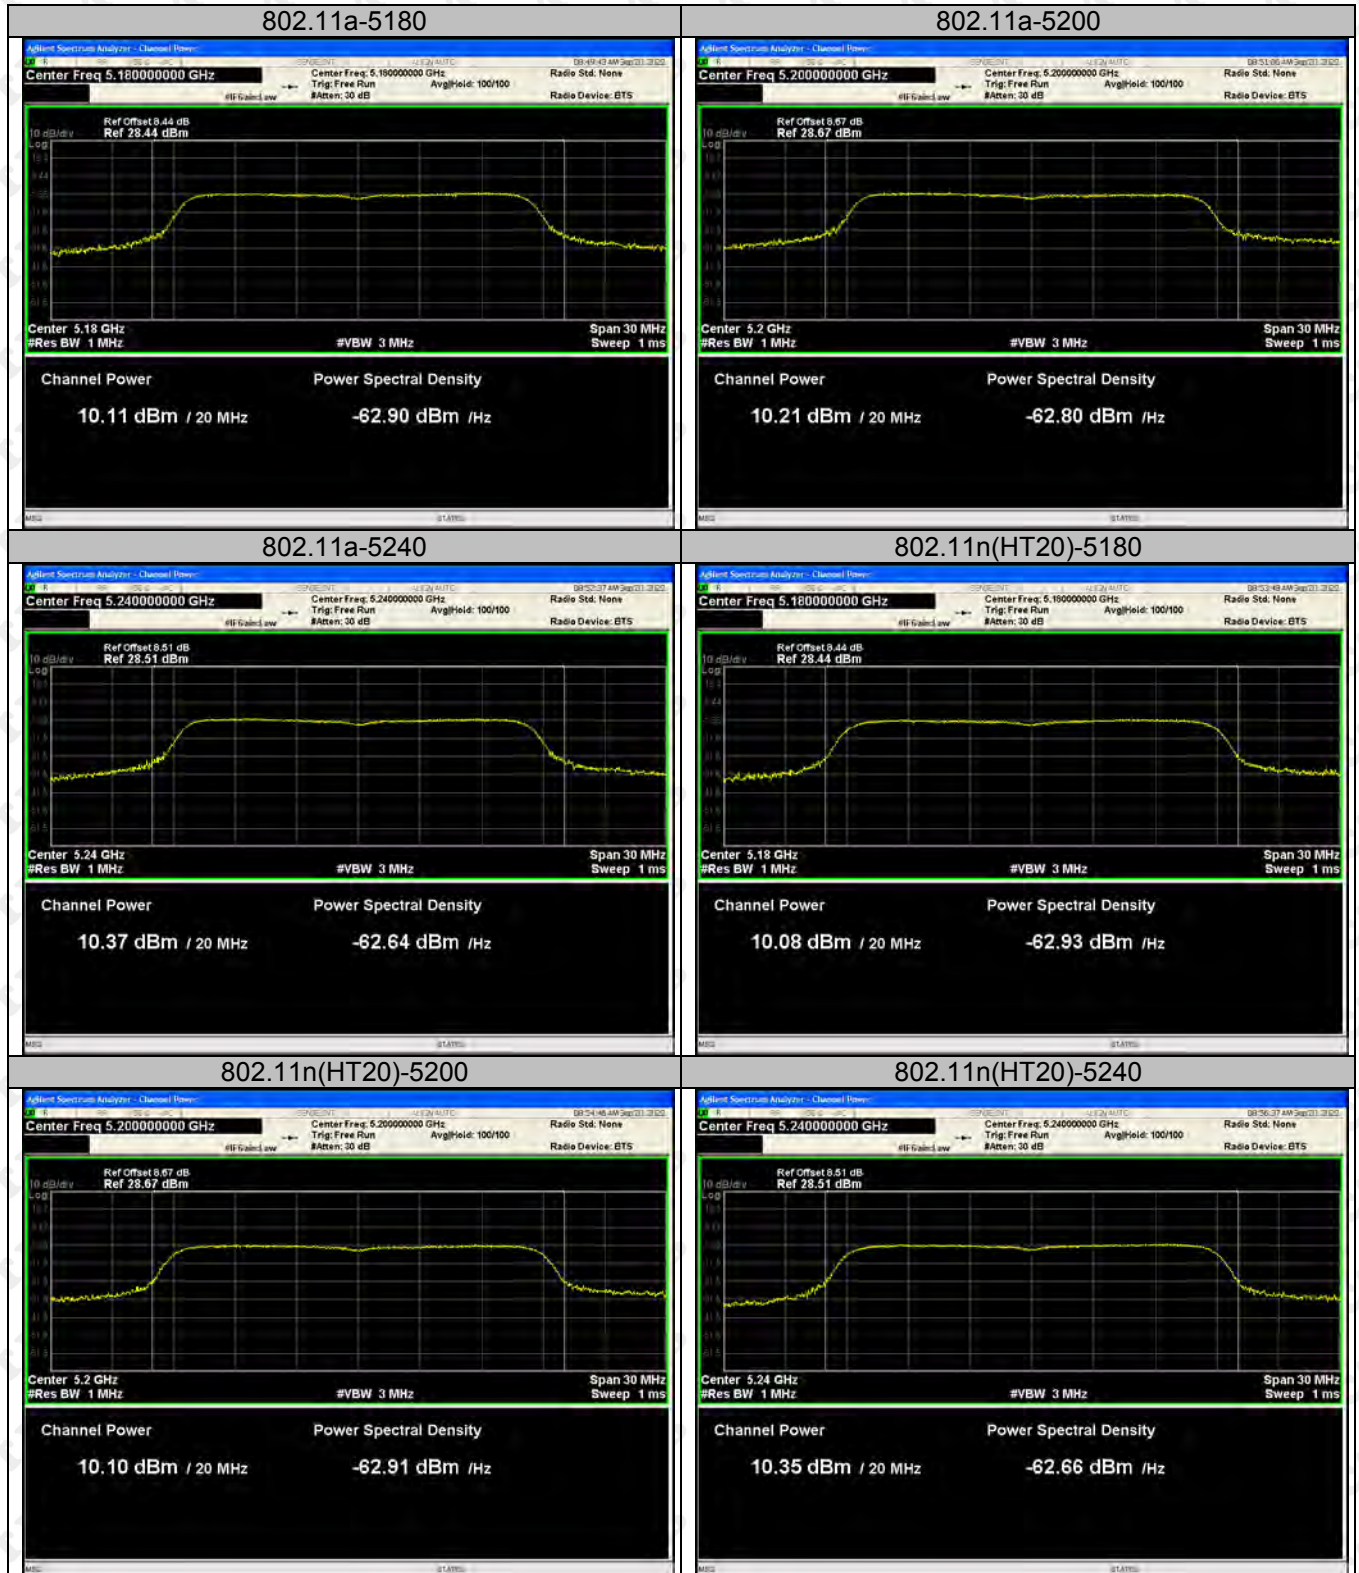


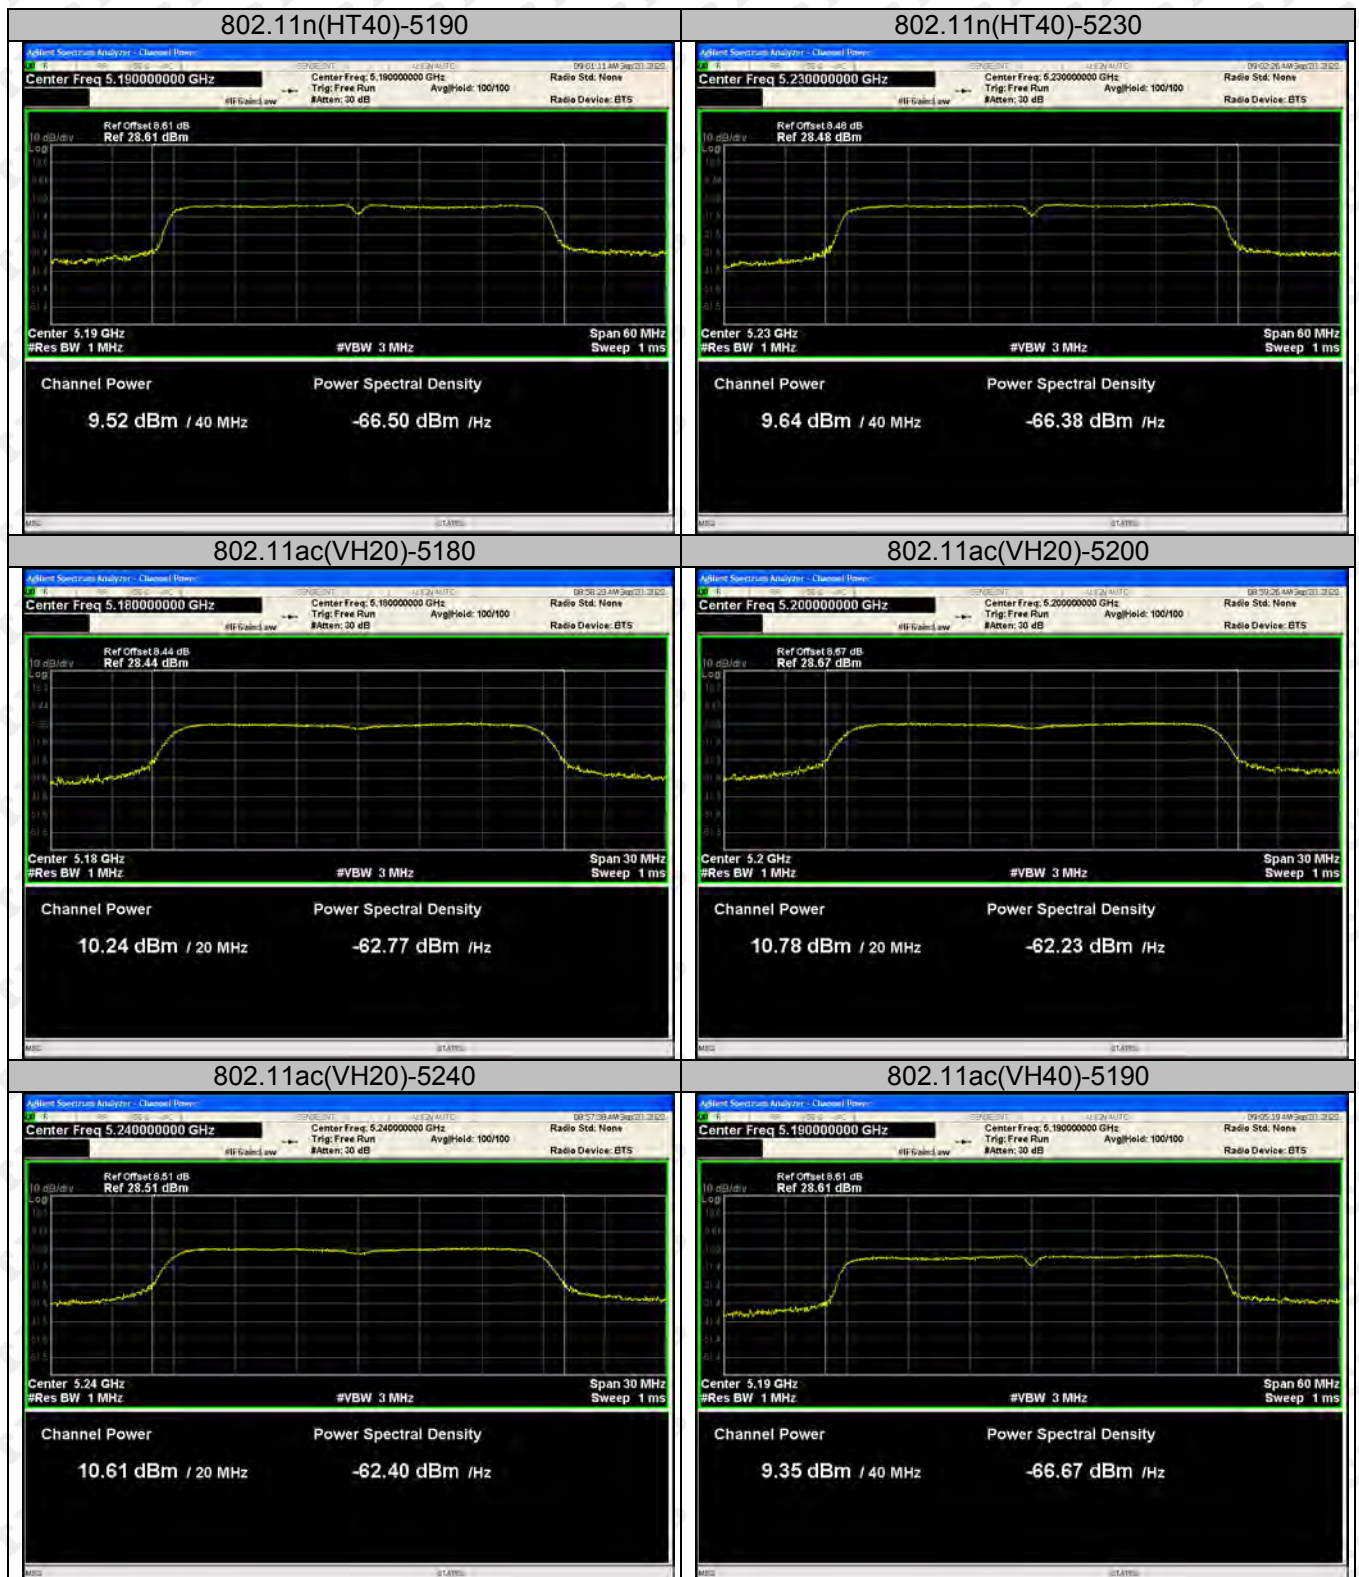


802.11ac(VH40)-5230

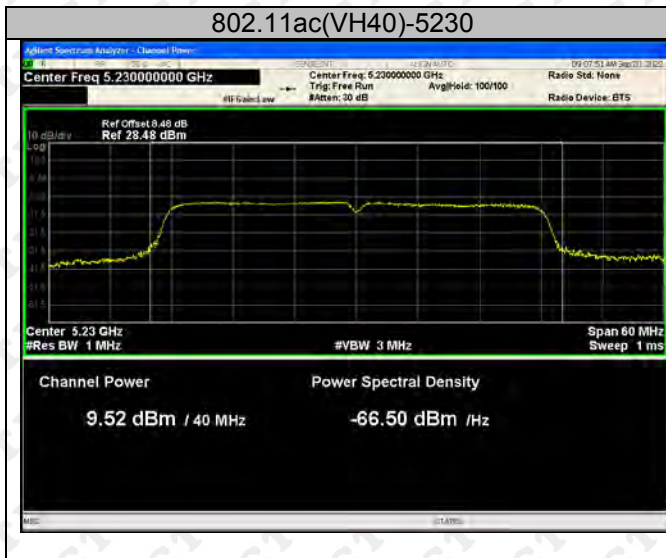


802.11ac(VH80)-5210

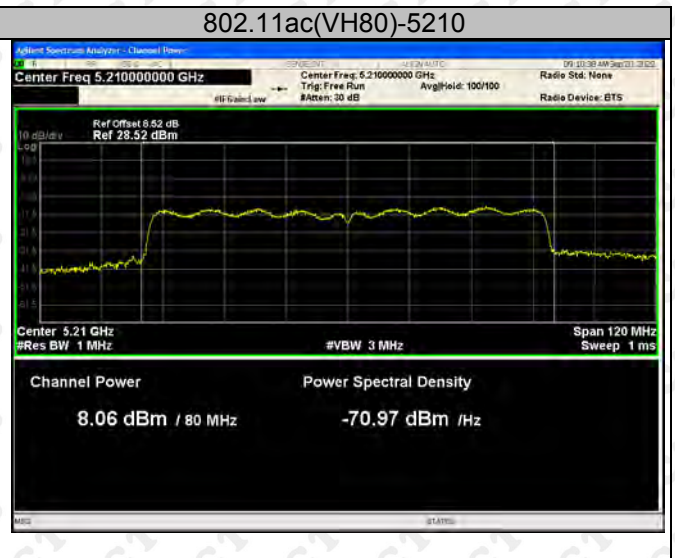


802.11a-5745

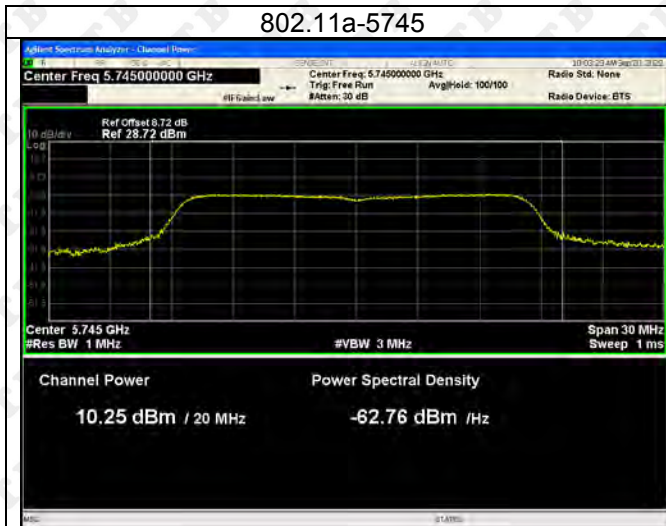


802.11a-5785

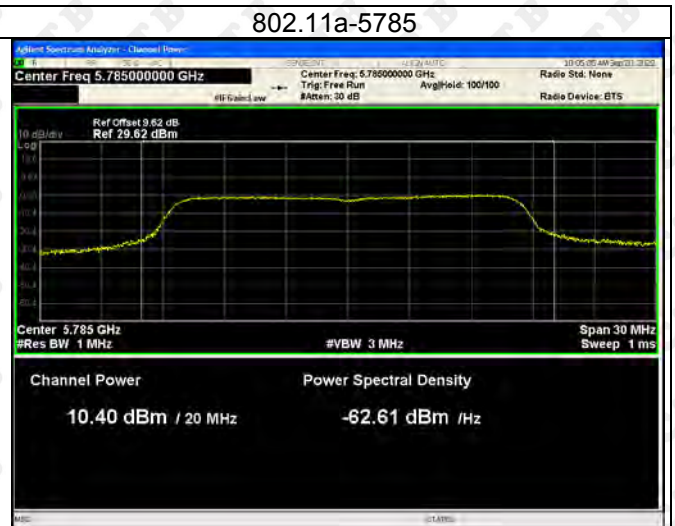

802.11a-5825

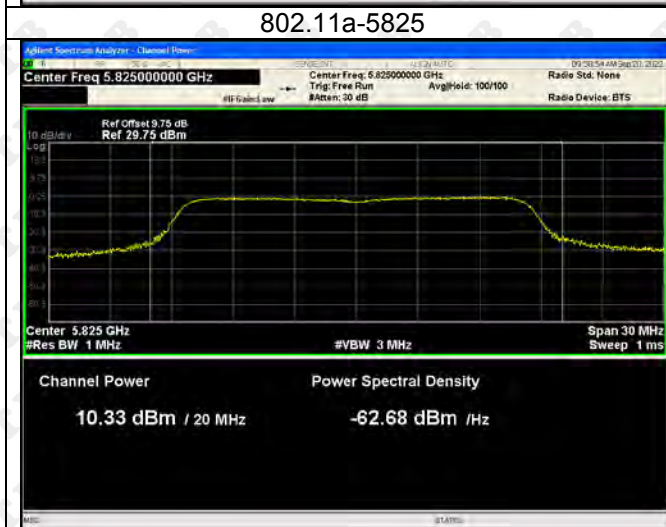

802.11ac(VH20)-5745

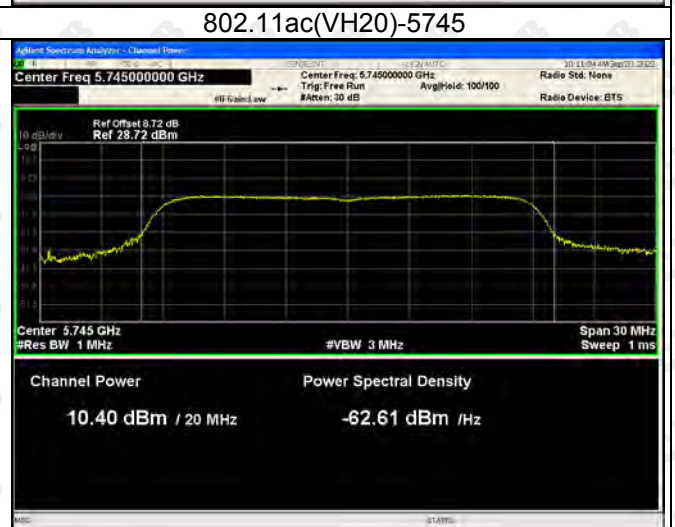


802.11ac(VH20)-5785




802.11ac(VH20)-5825



802.11ac(VH40)-5755

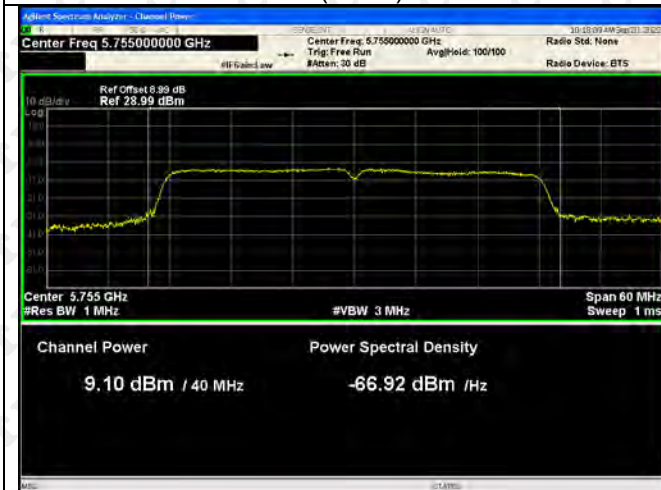

802.11ac(VH40)-5795

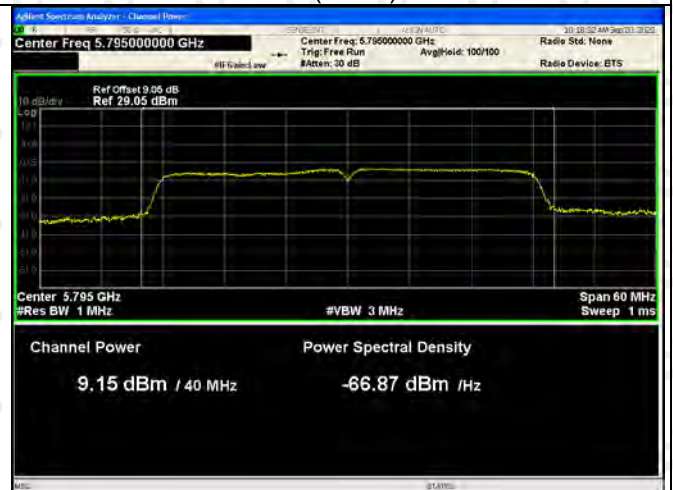


802.11n(HT20)-5745




802.11n(HT20)-5785




802.11n(HT20)-5825

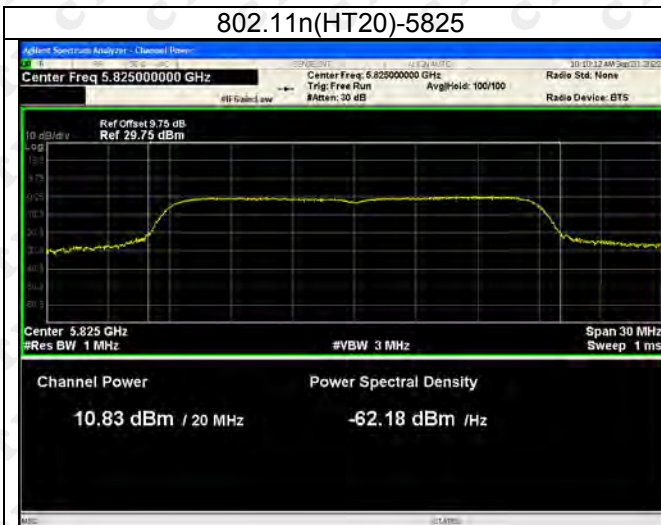


802.11n(HT40)-5755

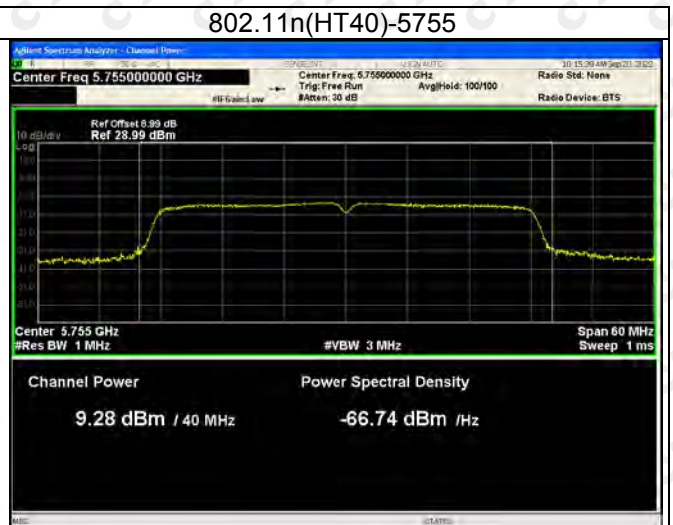

802.11n(HT40)-5795

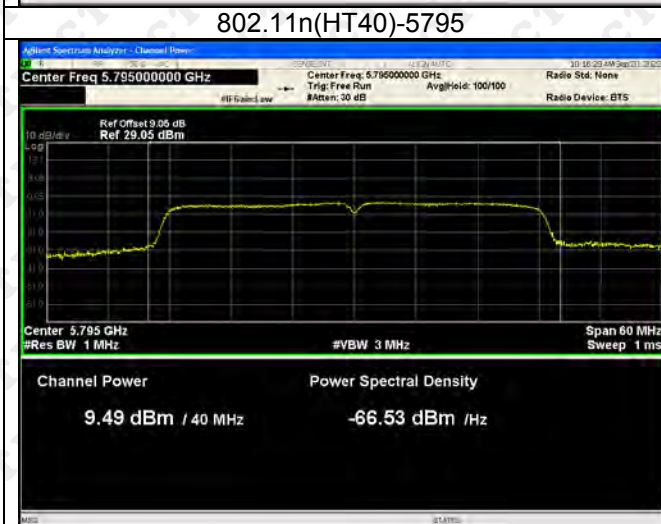


802.11ac(HT80)-5775

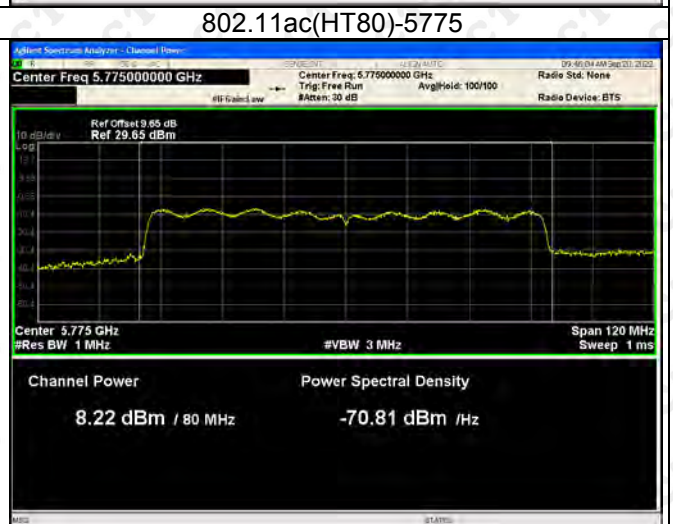

10. EMISSION BANDWIDTH& OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

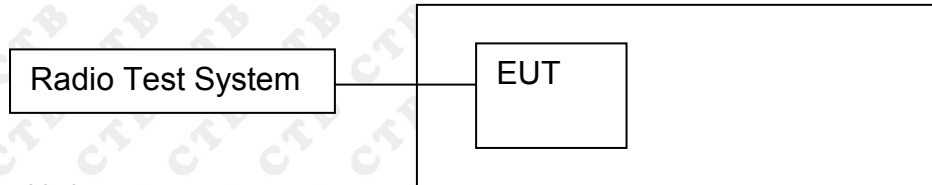

10.2 Limits

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

10.3 Test Procedure

According to KDB789033 D02v02r01 sectionE, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725–5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 kHz for the band 5.725–5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 * \text{RBW}$.
- Detector = Peak.

- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described in this section. For devices that use channel aggregation refer to III.A and III.C for determining emission bandwidth.

99% Occupied Bandwidth

The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. Measurement of the 99% occupied bandwidth is *required* only as a condition for using the optional band-edge measurement techniques described in II.G.3.d). Measurements of 99% occupied bandwidth may also optionally be used in lieu of the EBW to define the minimum frequency range over which the 789033 D02 General UNII Test Procedures New Rules v02r01 Page 4 spectrum is integrated when measuring maximum conducted output power as described in II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with Section 15.407(a).

The following procedure shall be used for measuring (99%) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1% to 5% of the OBW
4. Set VBW $\geq 3 * \text{RBW}$
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99% power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99% power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

10.4 Test Results

Test mode ANT 1	Test Channel (MHz)	26dB Bandwidth (MHz)
802.11a	5180	25.62
	5200	23.984
	5240	24.881
802.11ac20	5180	25.925
	5200	23.989
	5240	25.867
802.11ac40	5190	44.27
	5230	43.469
802.11ac80	5210	83.552
802.11n(HT20)	5180	23.971
	5200	24.643
	5240	24.69
802.11n(HT40)	5190	44.174
	5230	44.147


Test mode ANT 2	Test Channel (MHz)	26dB Bandwidth (MHz)
802.11a	5180	23.049
	5200	24.121
	5240	23.417
802.11ac20	5180	25.655
	5200	24.579
	5240	23.606
802.11ac40	5190	44.054
	5230	41.405
802.11ac80	5210	81.968
802.11n(HT20)	5180	23.426
	5200	22.107
	5240	24.558
802.11n(HT40)	5190	44.649
	5230	42.515

5725-5850 MHz




Test mode Ant 1	Test Channel (MHz)	6dB Bandwidth (MHz)	Result
802.11a	5745	16.342	Pass
	5785	16.346	Pass
	5825	16.086	Pass
802.11ac(VH20)	5745	17.205	Pass
	5785	17.577	Pass
	5825	16.39	Pass
802.11ac(VH40)	5755	35.812	Pass
	5795	36.29	Pass
802.11ac(VH80)	5775	75.199	Pass
802.11n(VH20)	5745	17.371	Pass
	5785	17.568	Pass
	5825	16.388	Pass
802.11n(VH40)	5755	35.825	Pass
	5795	36.345	Pass

Test mode Ant 2	Test Channel (MHz)	6dB Bandwidth (MHz)	Result
802.11a	5745	16.295	Pass
	5785	16.323	Pass
	5825	16.343	Pass
802.11ac(VH20)	5745	17.311	Pass
	5785	17.582	Pass
	5825	16.929	Pass
802.11ac(VH40)	5755	36.091	Pass
	5795	36.051	Pass
802.11ac(VH80)	5775	75.191	Pass
802.11n(VH20)	5745	17.345	Pass
	5785	17.701	Pass
	5825	16.111	Pass
802.11n(VH40)	5755	36.311	Pass
	5795	36.09	Pass

Test Graph ANT 1

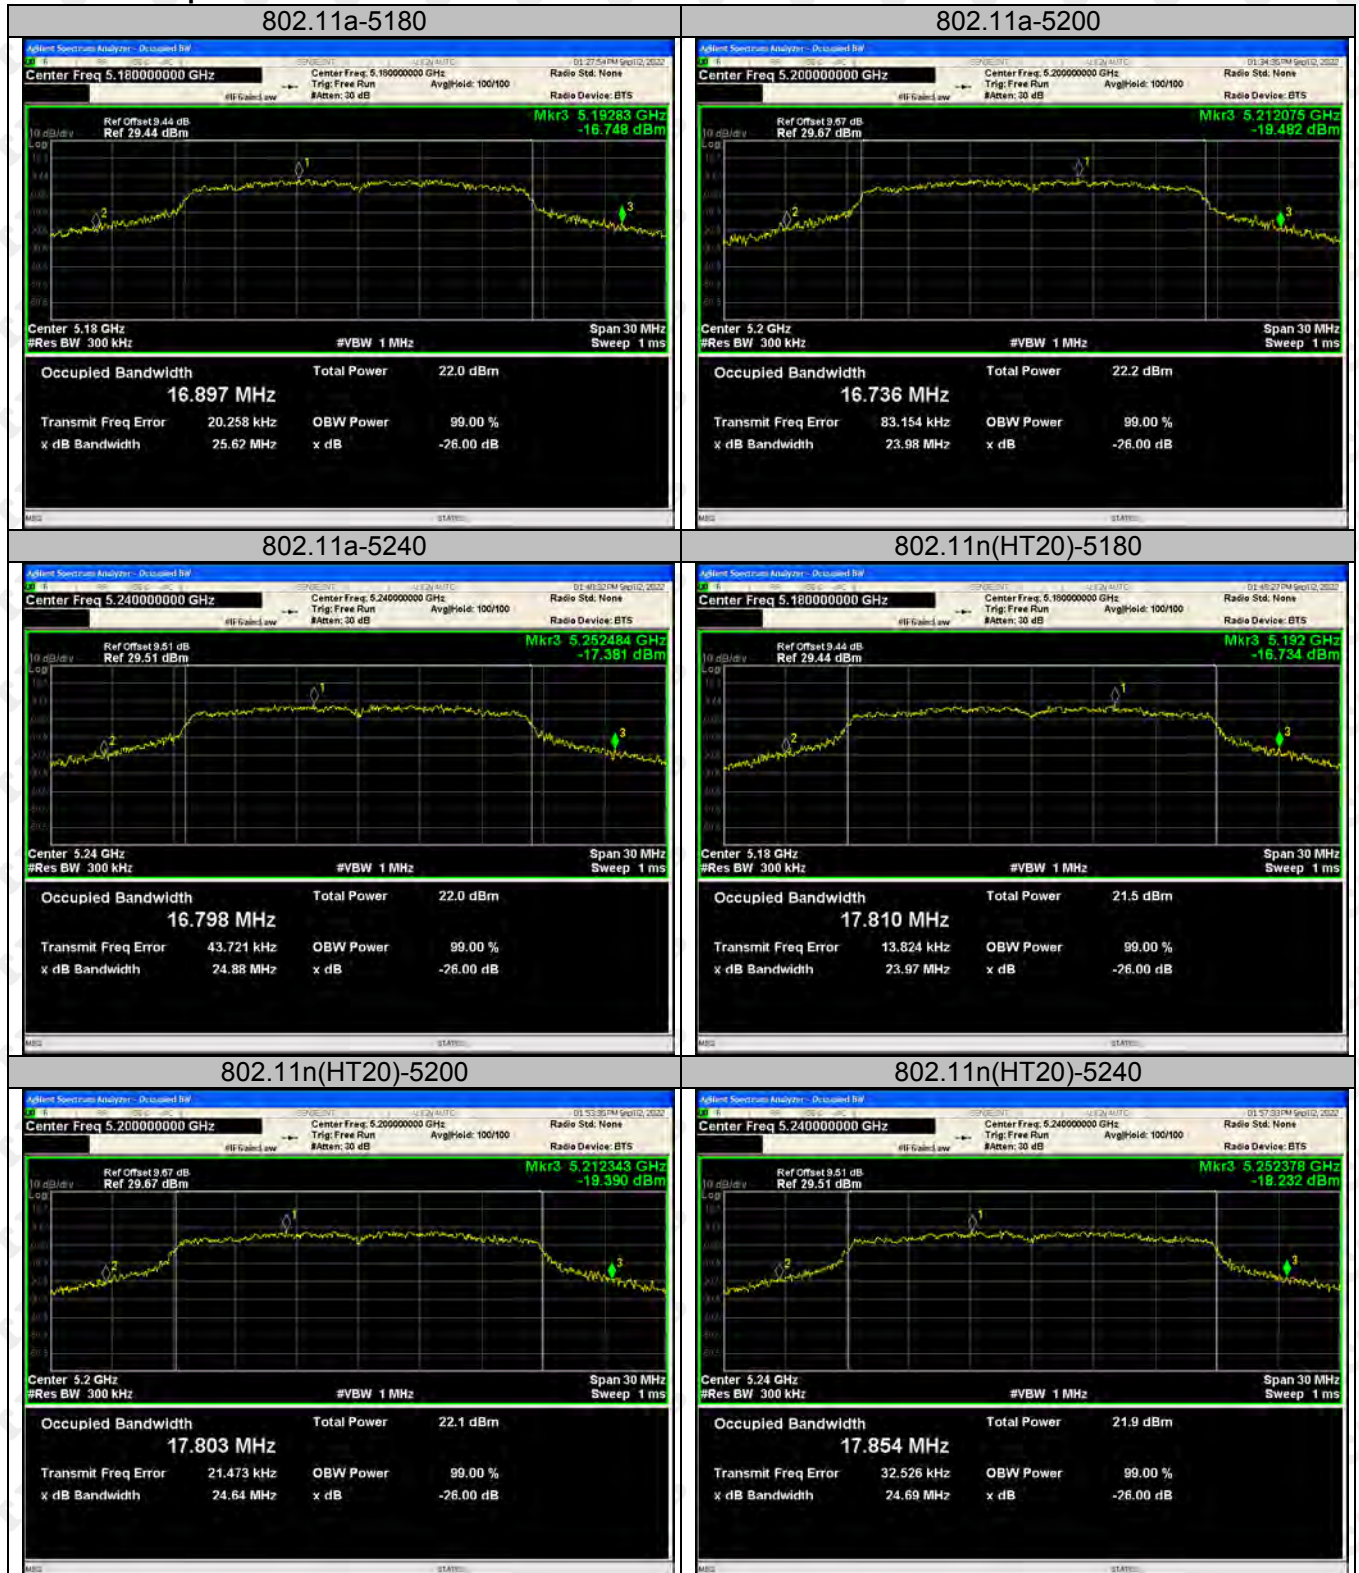



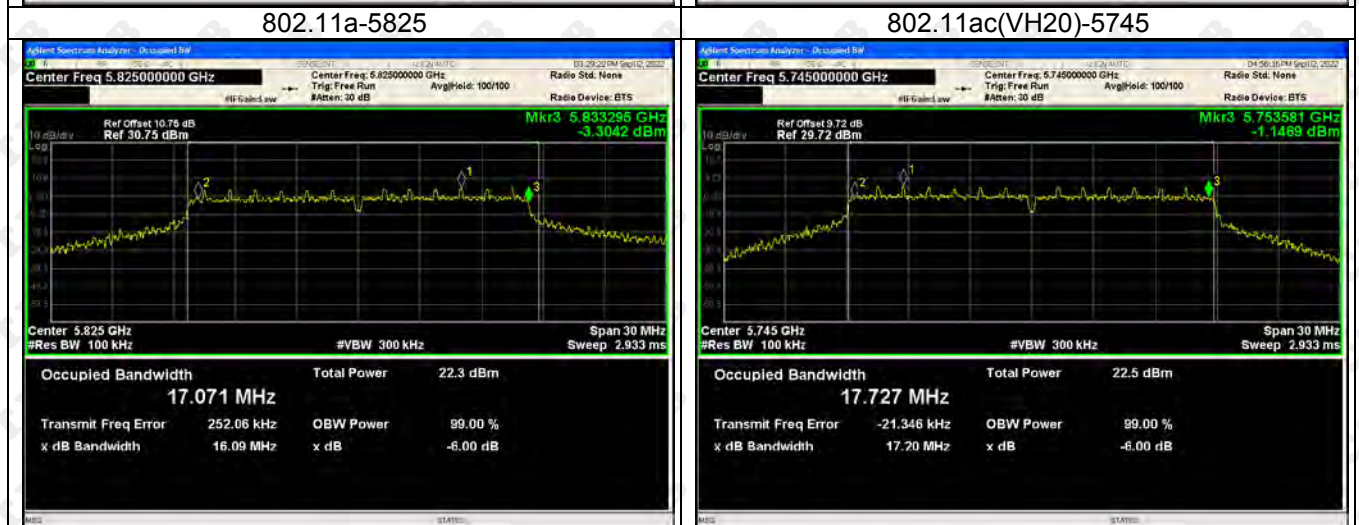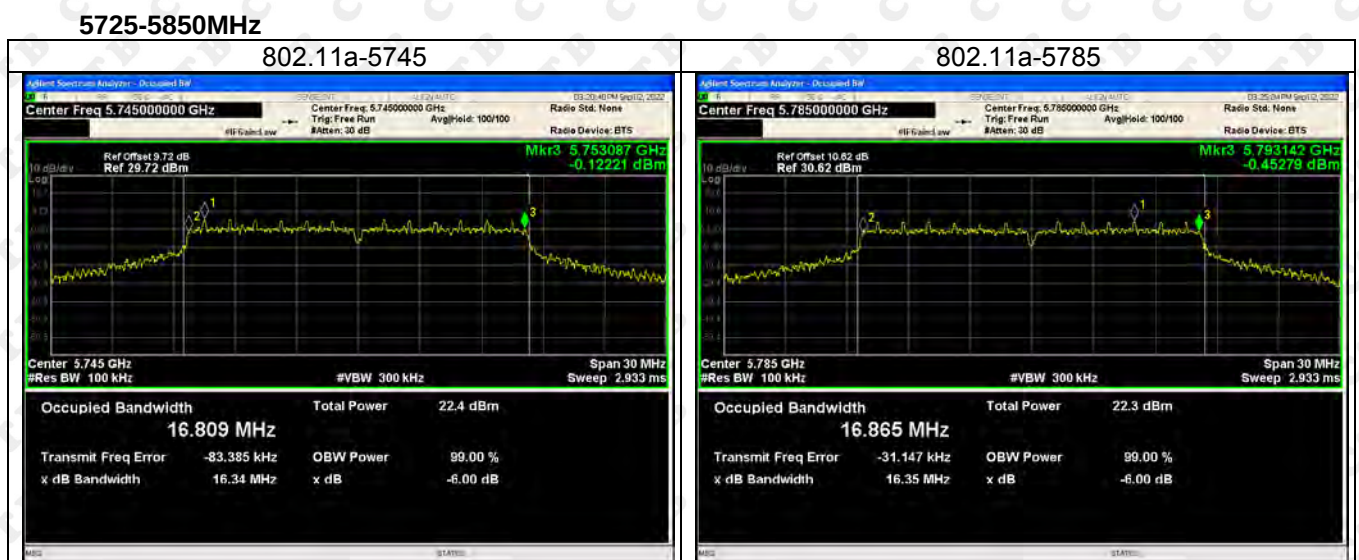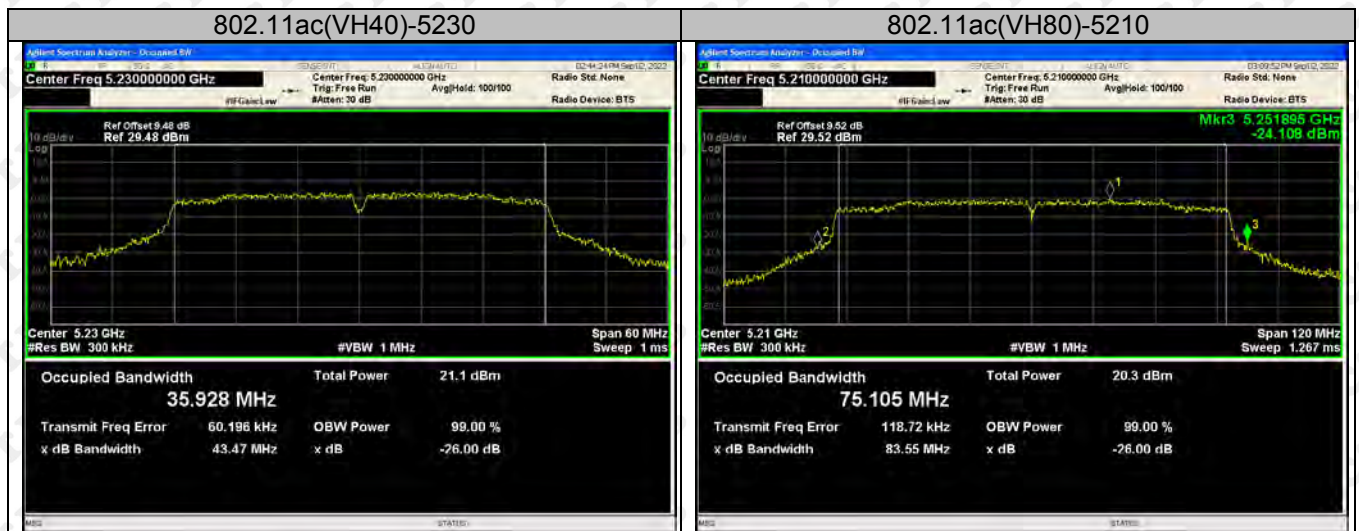

802.11ac(VH20)-5785



802.11ac(VH20)-5825



802.11ac(VH40)-5755




802.11ac(VH40)-5795



802.11n(HT20)-5745



802.11n(HT20)-5785

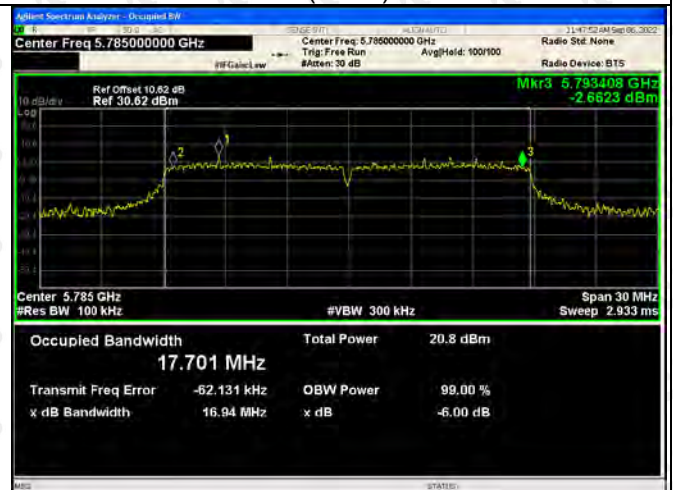

802.11n(HT20)-5825




802.11n(HT40)-5755




802.11n(HT40)-5795






802.11ac(HT80)-5775






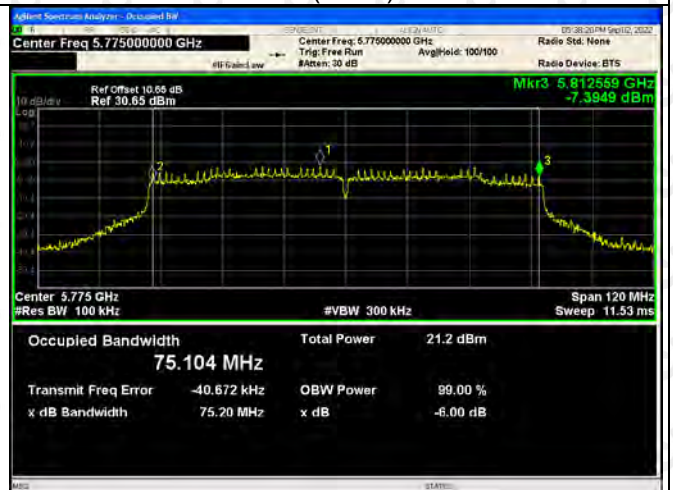


Test Graph ANT 2

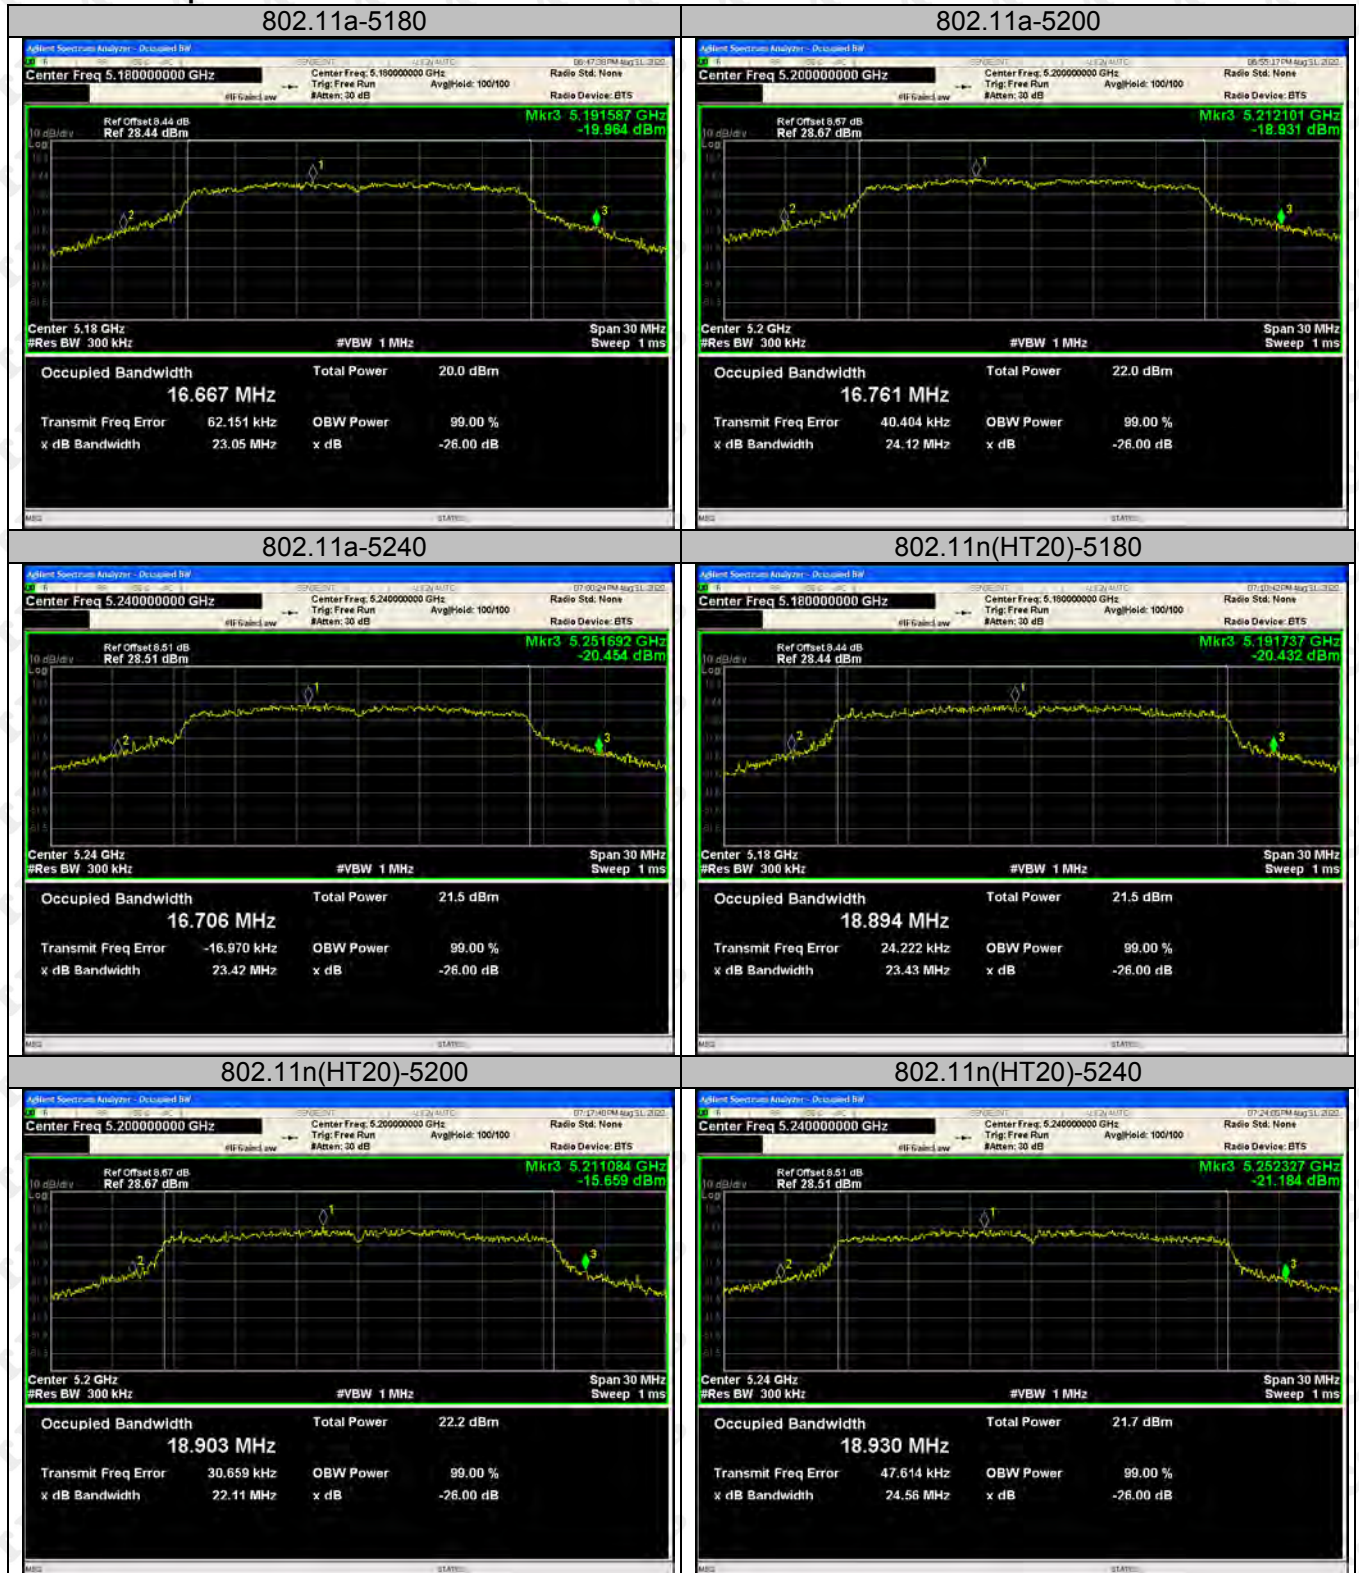



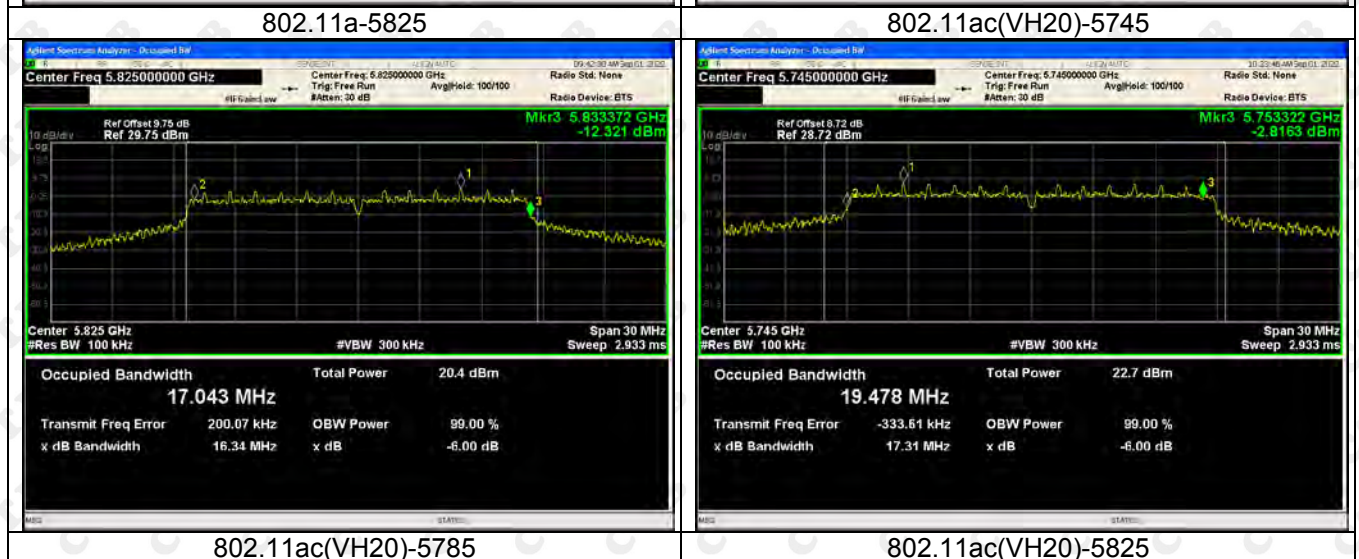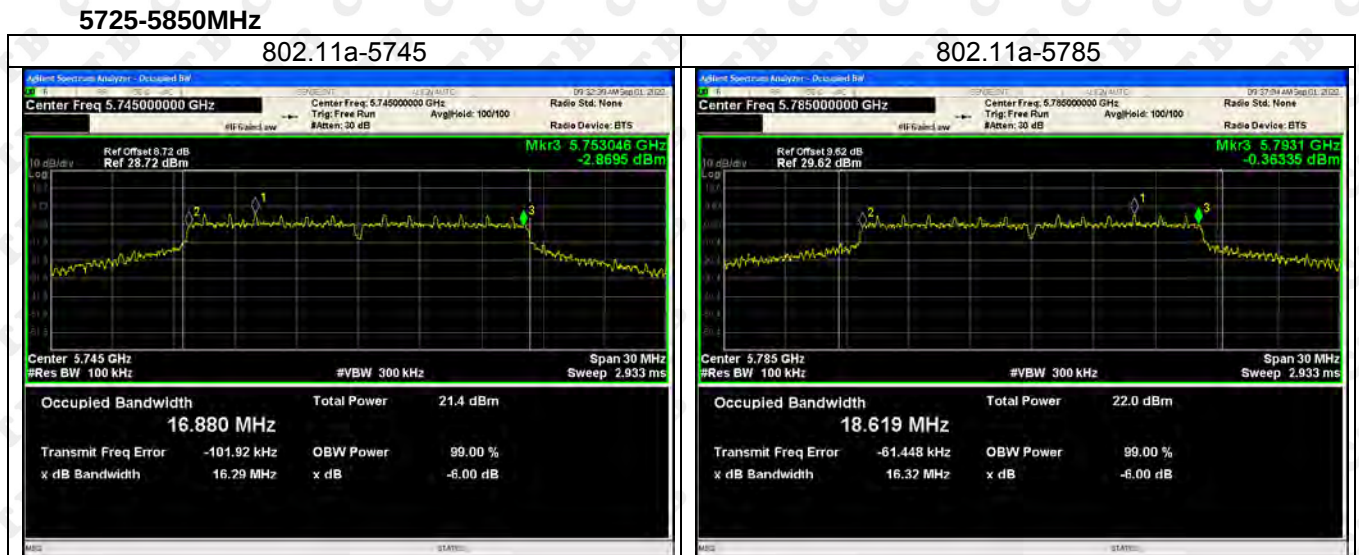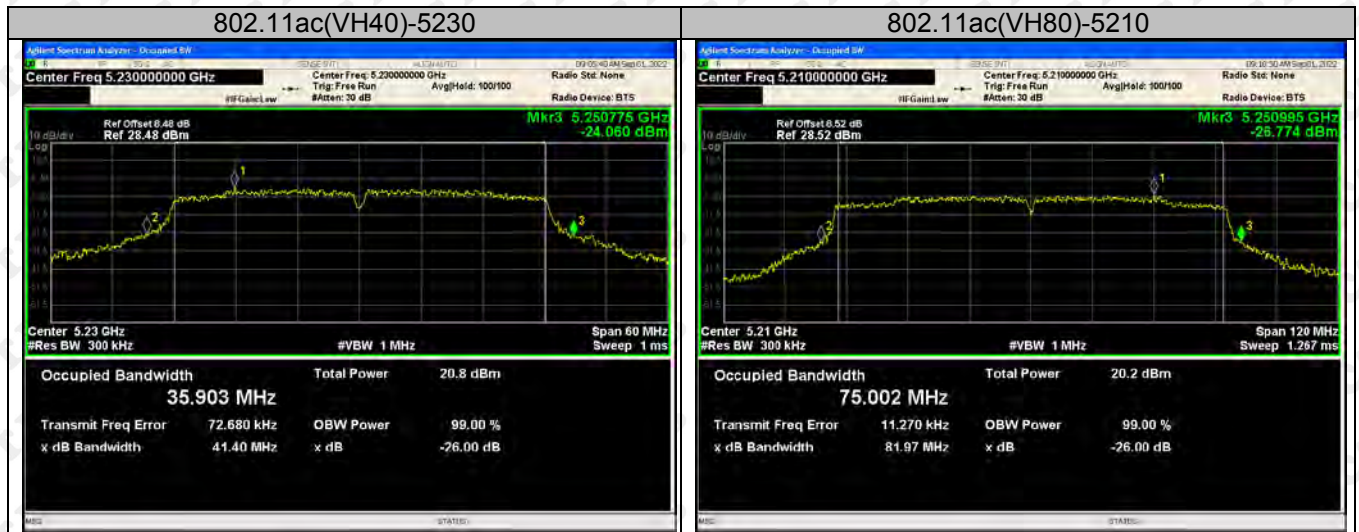


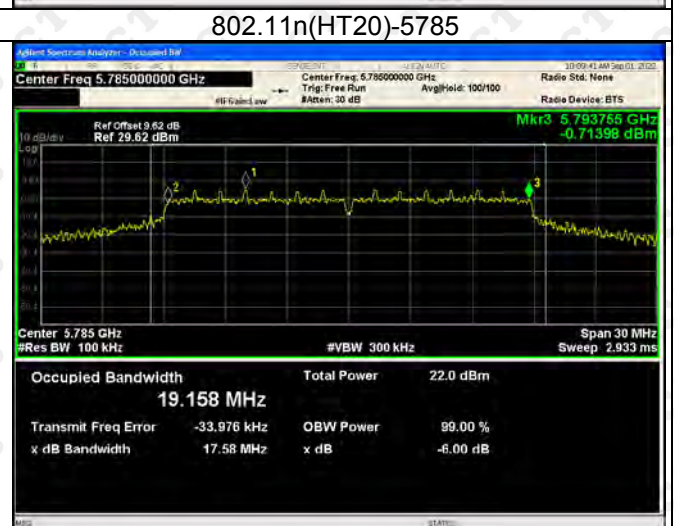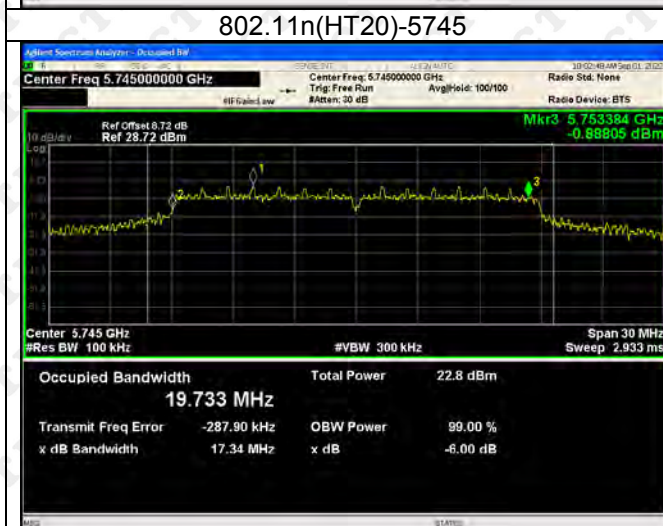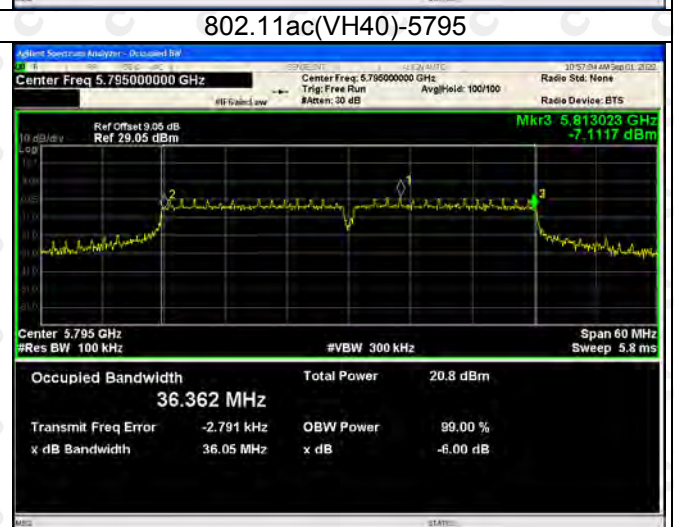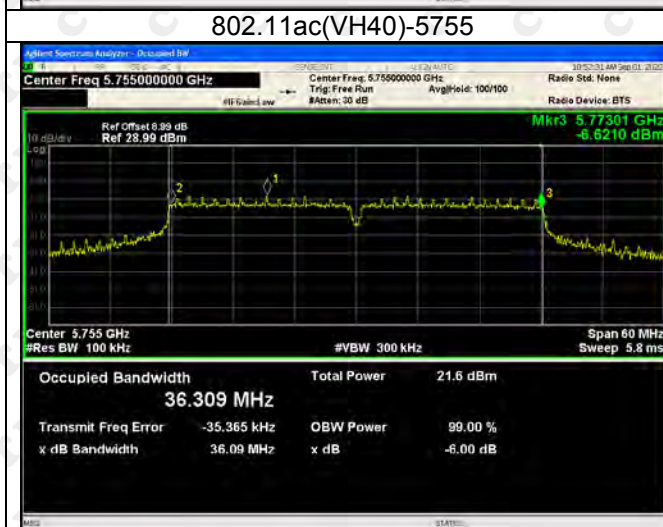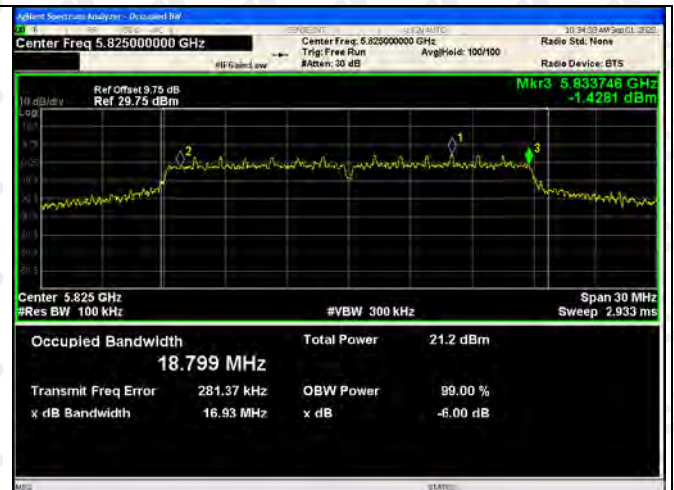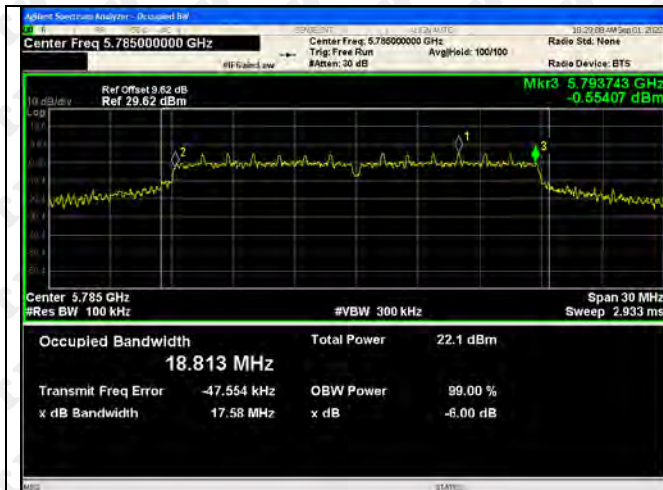



11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

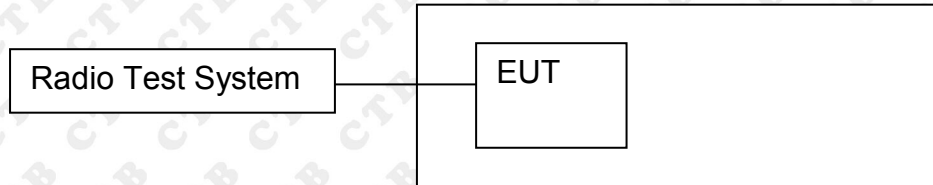

11.2 Limit

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

11.3 Test procedure

According to KDB789033 D02v02r01 sectionE, the following is the measurement procedure.

For devices operating in the bands 5.15–5.25 GHz, 5.25–5.35 GHz, and 5.47–5.725 GHz, the preceding procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in Section 15.407(a)(5). For devices operating in the band 5.725–5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:

a) Set $\text{RBW} \geq 1/T$, where T is defined in II.B.I.a).

b) Set $\text{VBW} \geq 3 \text{ RBW}$.

c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log (500 \text{ kHz}/\text{RBW})$ to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.

d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log (1\text{MHz}/\text{RBW})$ to the measured result, whereas RBW ($< 1 \text{ MHz}$) is the reduced resolution bandwidth of spectrum analyzer set during measurement.

e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the II.F.5.c) and II.F.5.d), since RBW=100 kHz is available on nearly all spectrum analyzers.


11.4 Test Result


ANT 1+2


Test mode	Test Channel (MHz)	PSD [dBm/MHz] ANT 1	PSD [dBm/MHz] ANT 2	PSD [dBm/MHz] Total	Limit (dBm)	Result
802.11a	5180	5.755	5.419	/	11	Pass
	5200	6.282	5.88	/	11	Pass
	5240	5.427	5.544	/	11	Pass
802.11ac(VH20)	5180	5.305	5.011	8.171	11	Pass
	5200	5.819	5.398	8.624	11	Pass
	5240	5.98	5.999	9.000	11	Pass
802.11ac(VH40)	5190	3.053	3.515	6.300	11	Pass
	5230	3.81	3.444	6.641	11	Pass
802.11n(VH20)	5180	5.164	5.425	8.307	11	Pass
	5200	6.305	5.097	8.753	11	Pass
	5240	5.843	6.061	8.964	11	Pass
802.11n(VH40)	5190	3.991	3.708	6.862	11	Pass
	5230	4.053	2.869	6.512	11	Pass
802.11ac(VH80)	5230	1.023	1.051	4.047	11	Pass

Test mode	Test Channel (MHz)	PSD [dBm/MHz] ANT 1	PSD [dBm/MHz] ANT 2	PSD [dBm/MHz] Total	Limit (dBm)	Result
802.11a	5745	3.744	3.368	/	11	Pass
	5785	4.13	3.452	/	11	Pass
	5825	4.204	3.596	/	11	Pass
802.11ac(VH20)	5745	3.002	3.144	6.084	11	Pass
	5785	3.318	3.28	6.309	11	Pass
	5825	3.702	3.747	6.735	11	Pass
802.11ac(VH40)	5755	0.715	1.037	3.889	11	Pass
	5795	0.961	0.803	3.893	11	Pass
802.11n(VH20)	5775	3.12	3.732	6.447	11	Pass
	5745	3.568	3.524	6.556	11	Pass
	5785	3.94	4.082	7.022	11	Pass
802.11n(VH40)	5825	1.461	1.057	4.274	11	Pass
	5755	1.639	1.837	4.749	11	Pass
802.11ac(VH80)	5795	0.172	-0.763	2.740	11	Pass

ANT 1

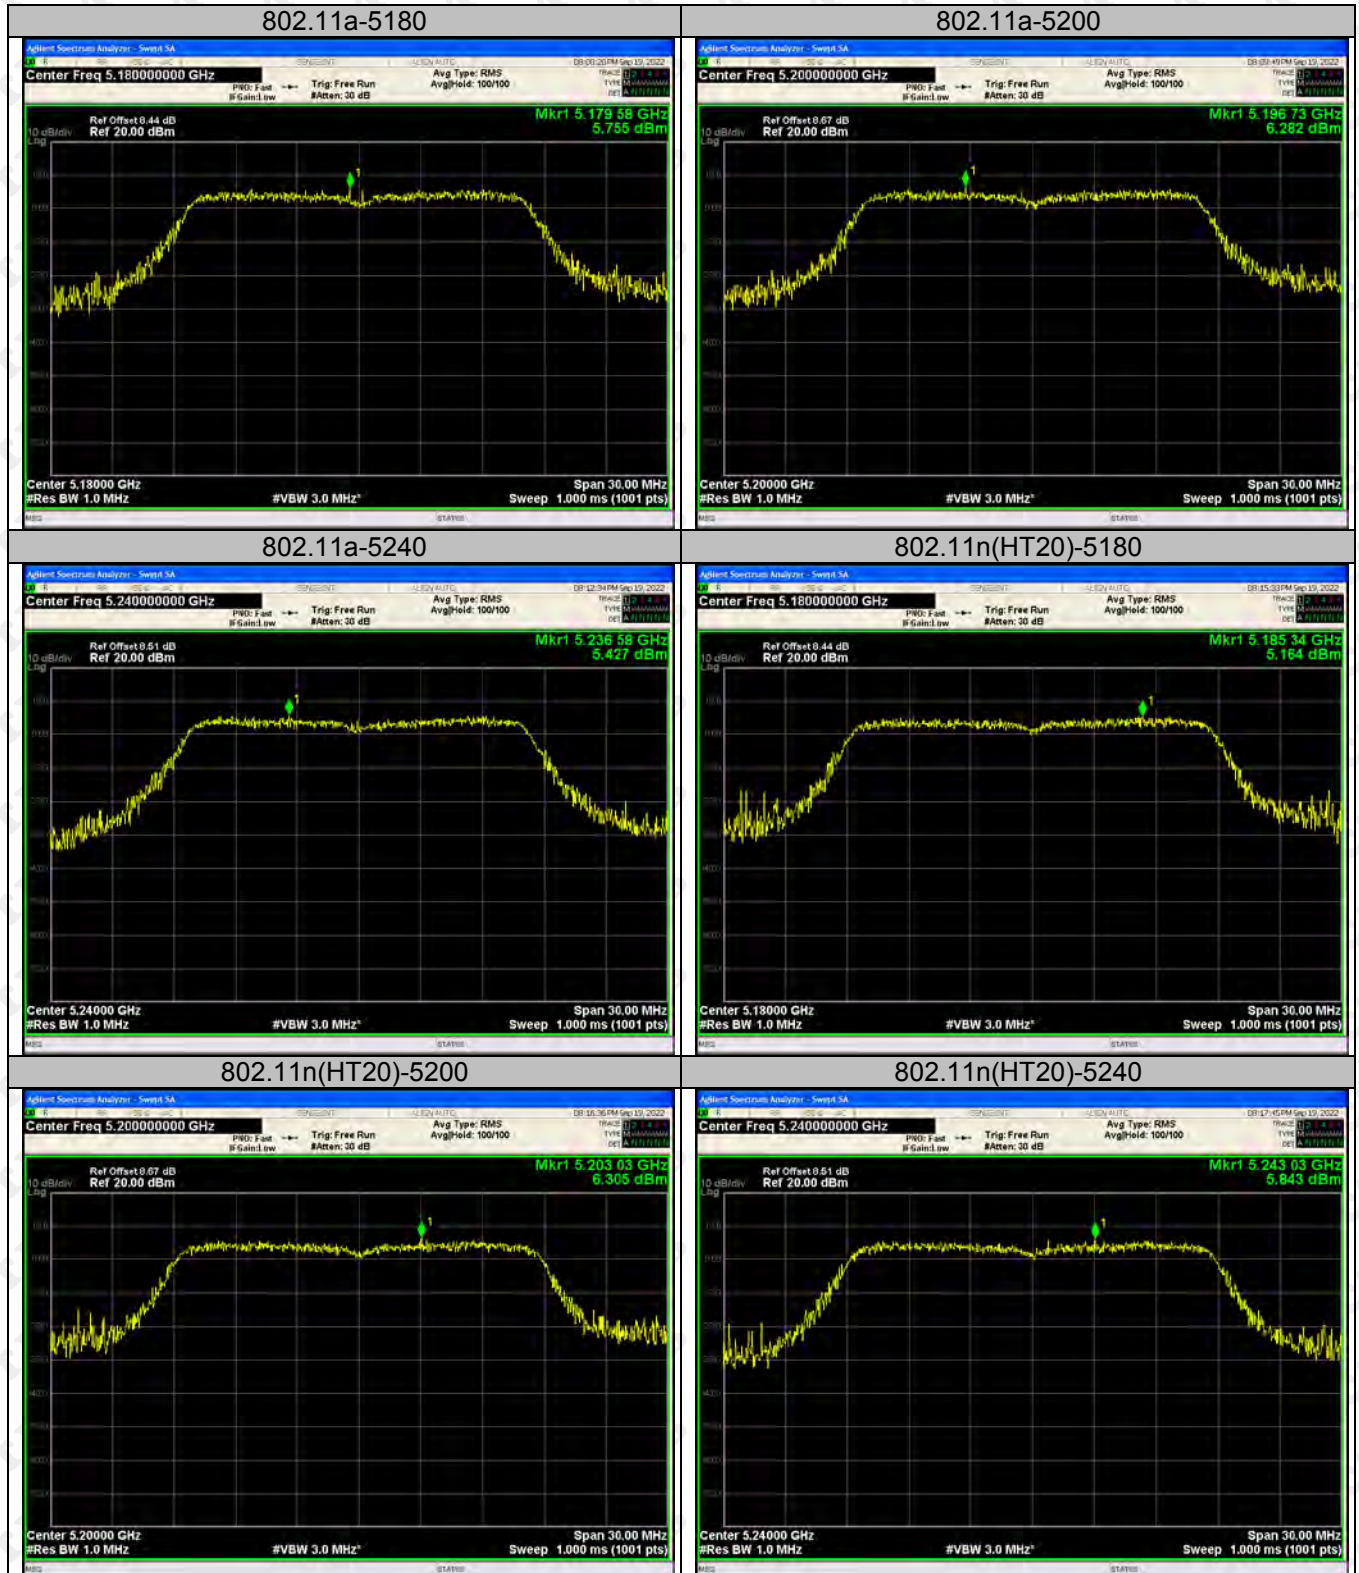

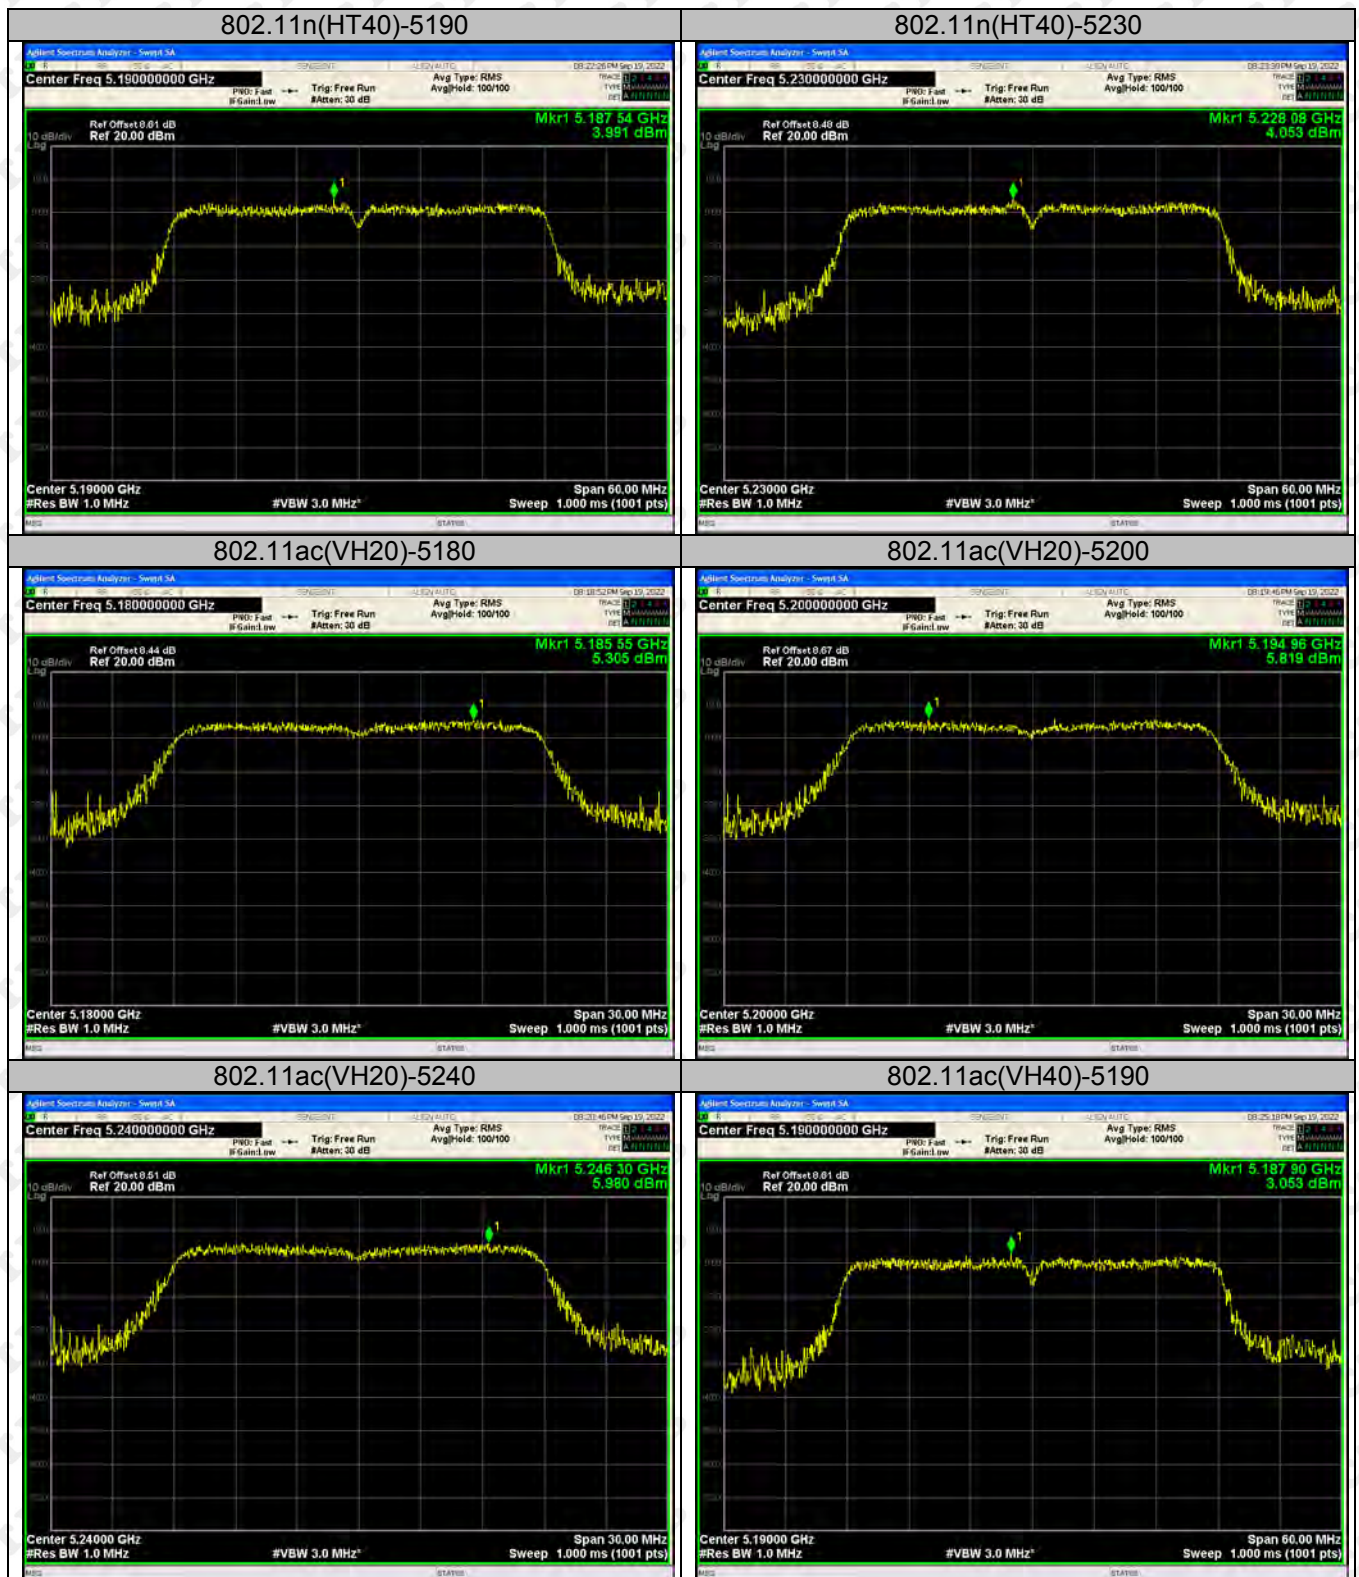

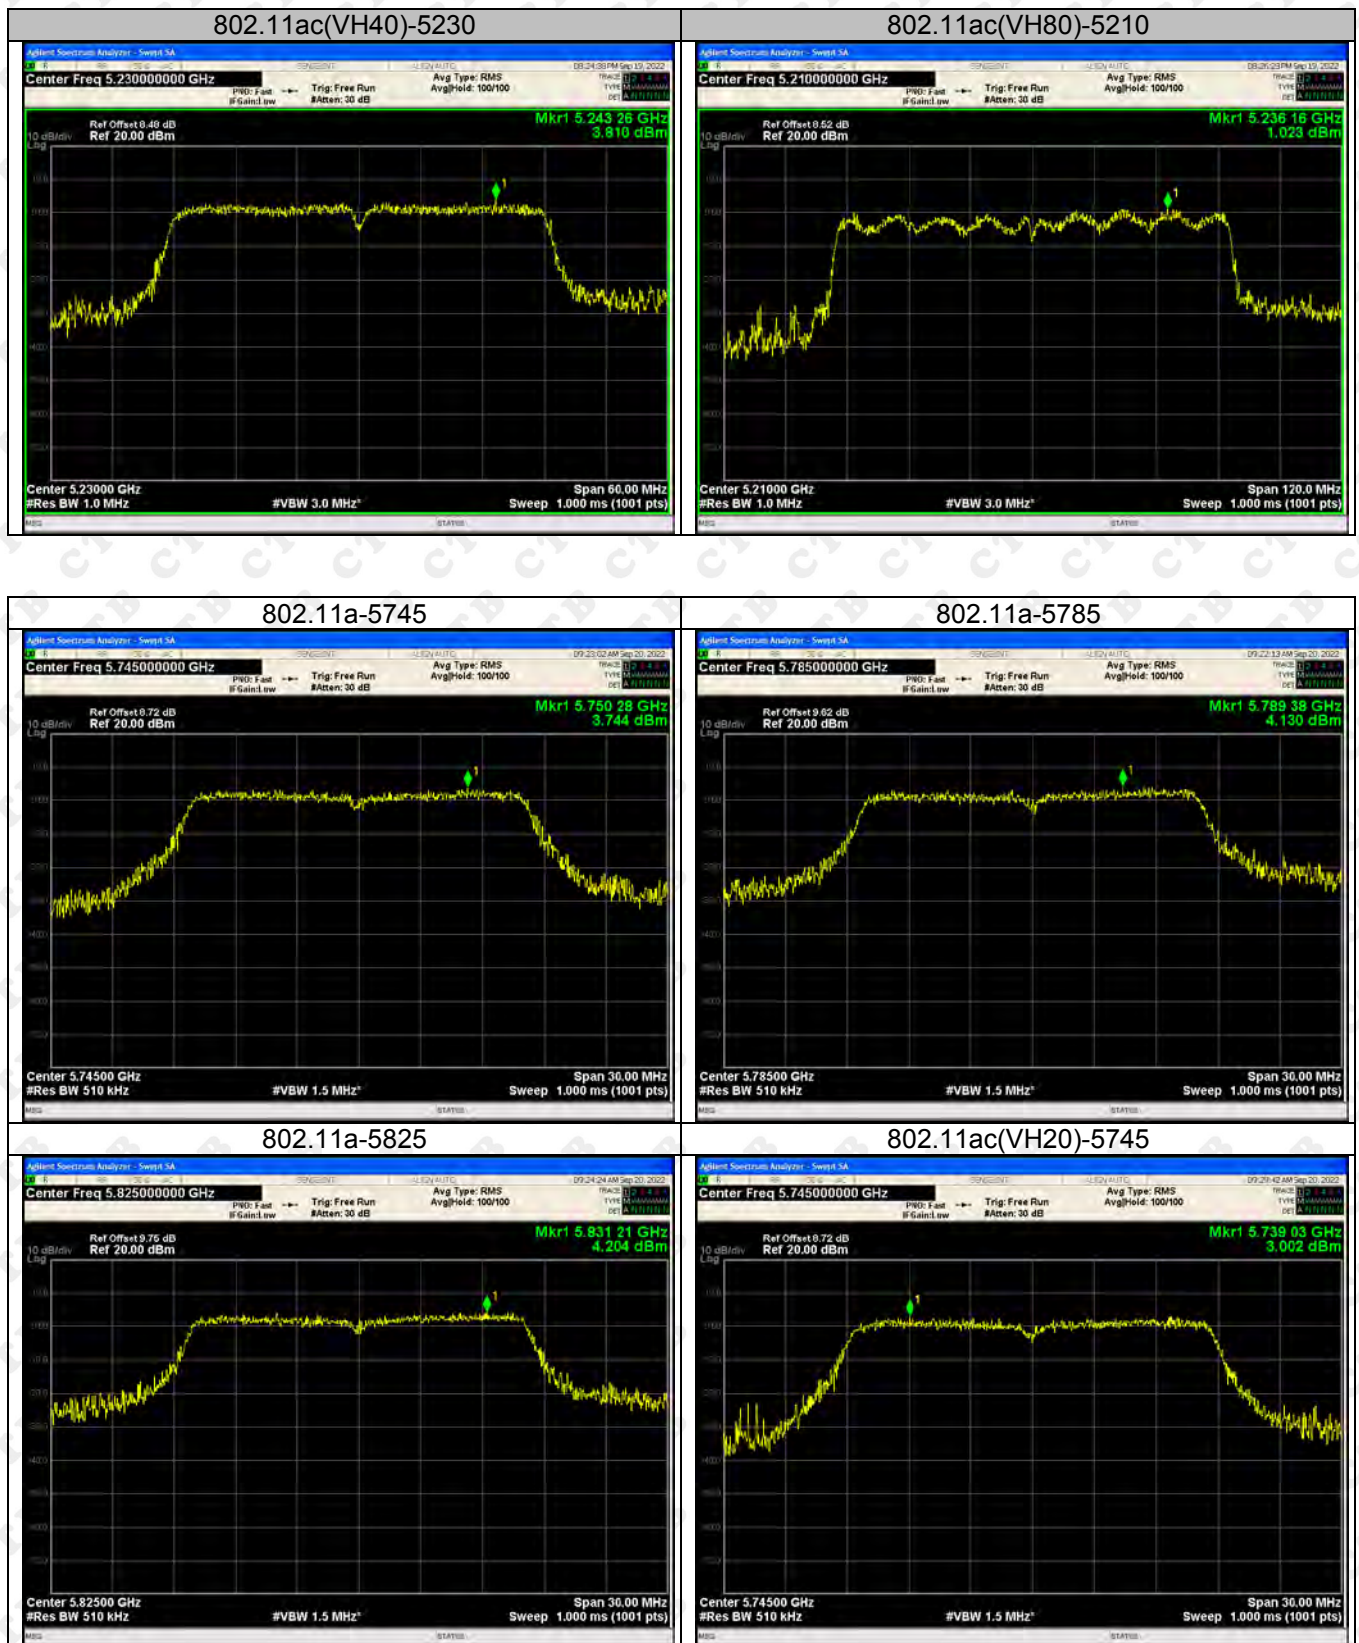

802.11ac(VH20)-5785



802.11ac(VH20)-5825



802.11ac(VH40)-5755



802.11ac(VH40)-5795




802.11n(HT20)-5745





802.11n(HT20)-5785




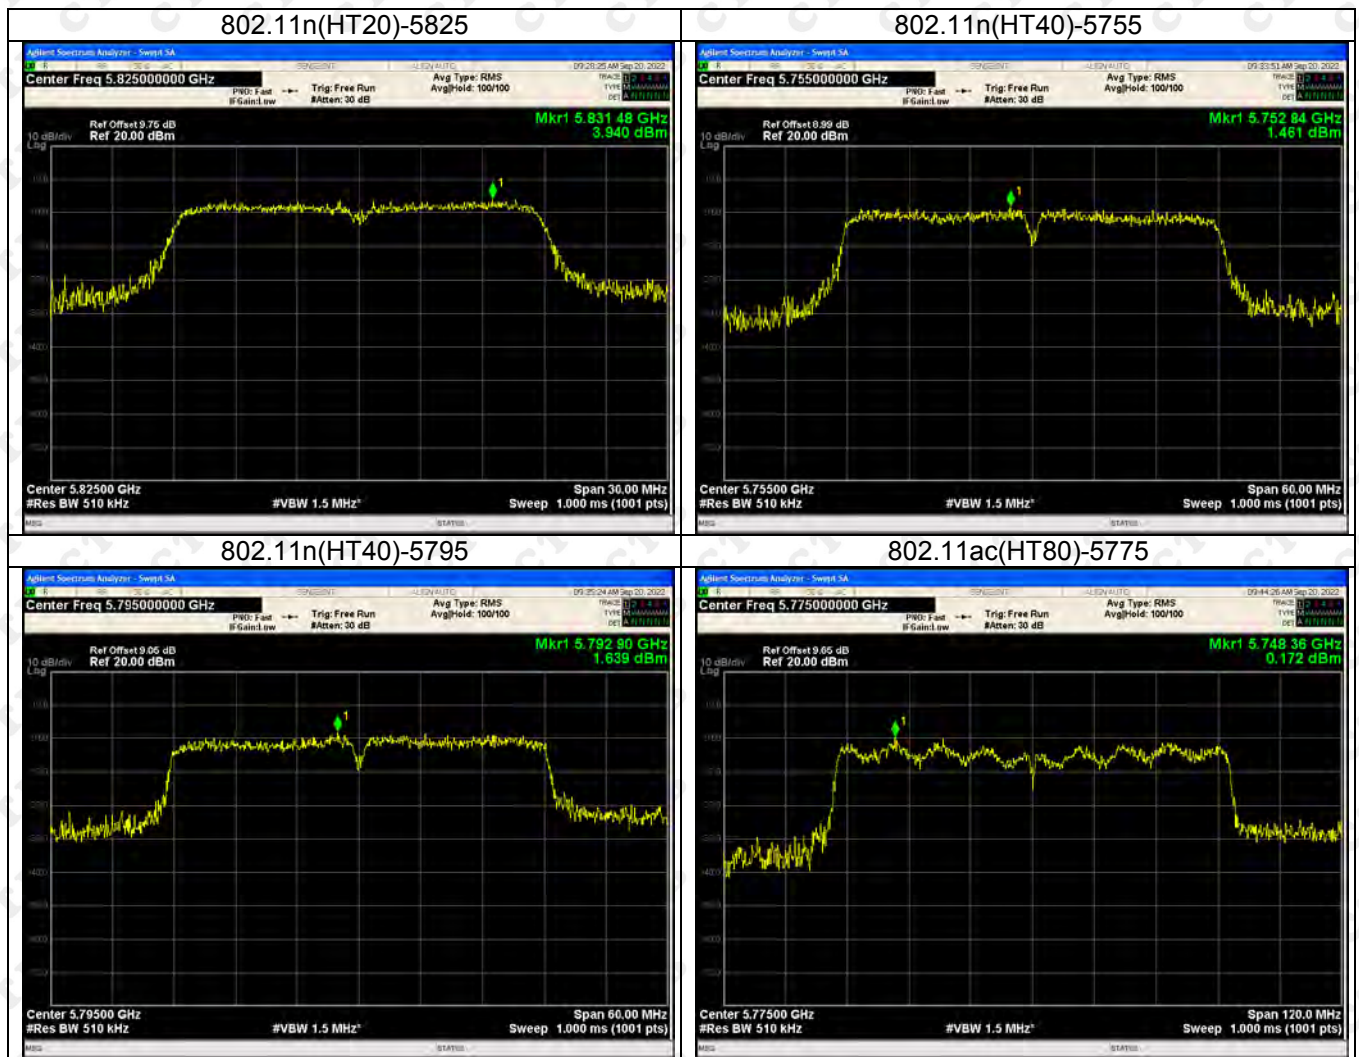


ANT 2

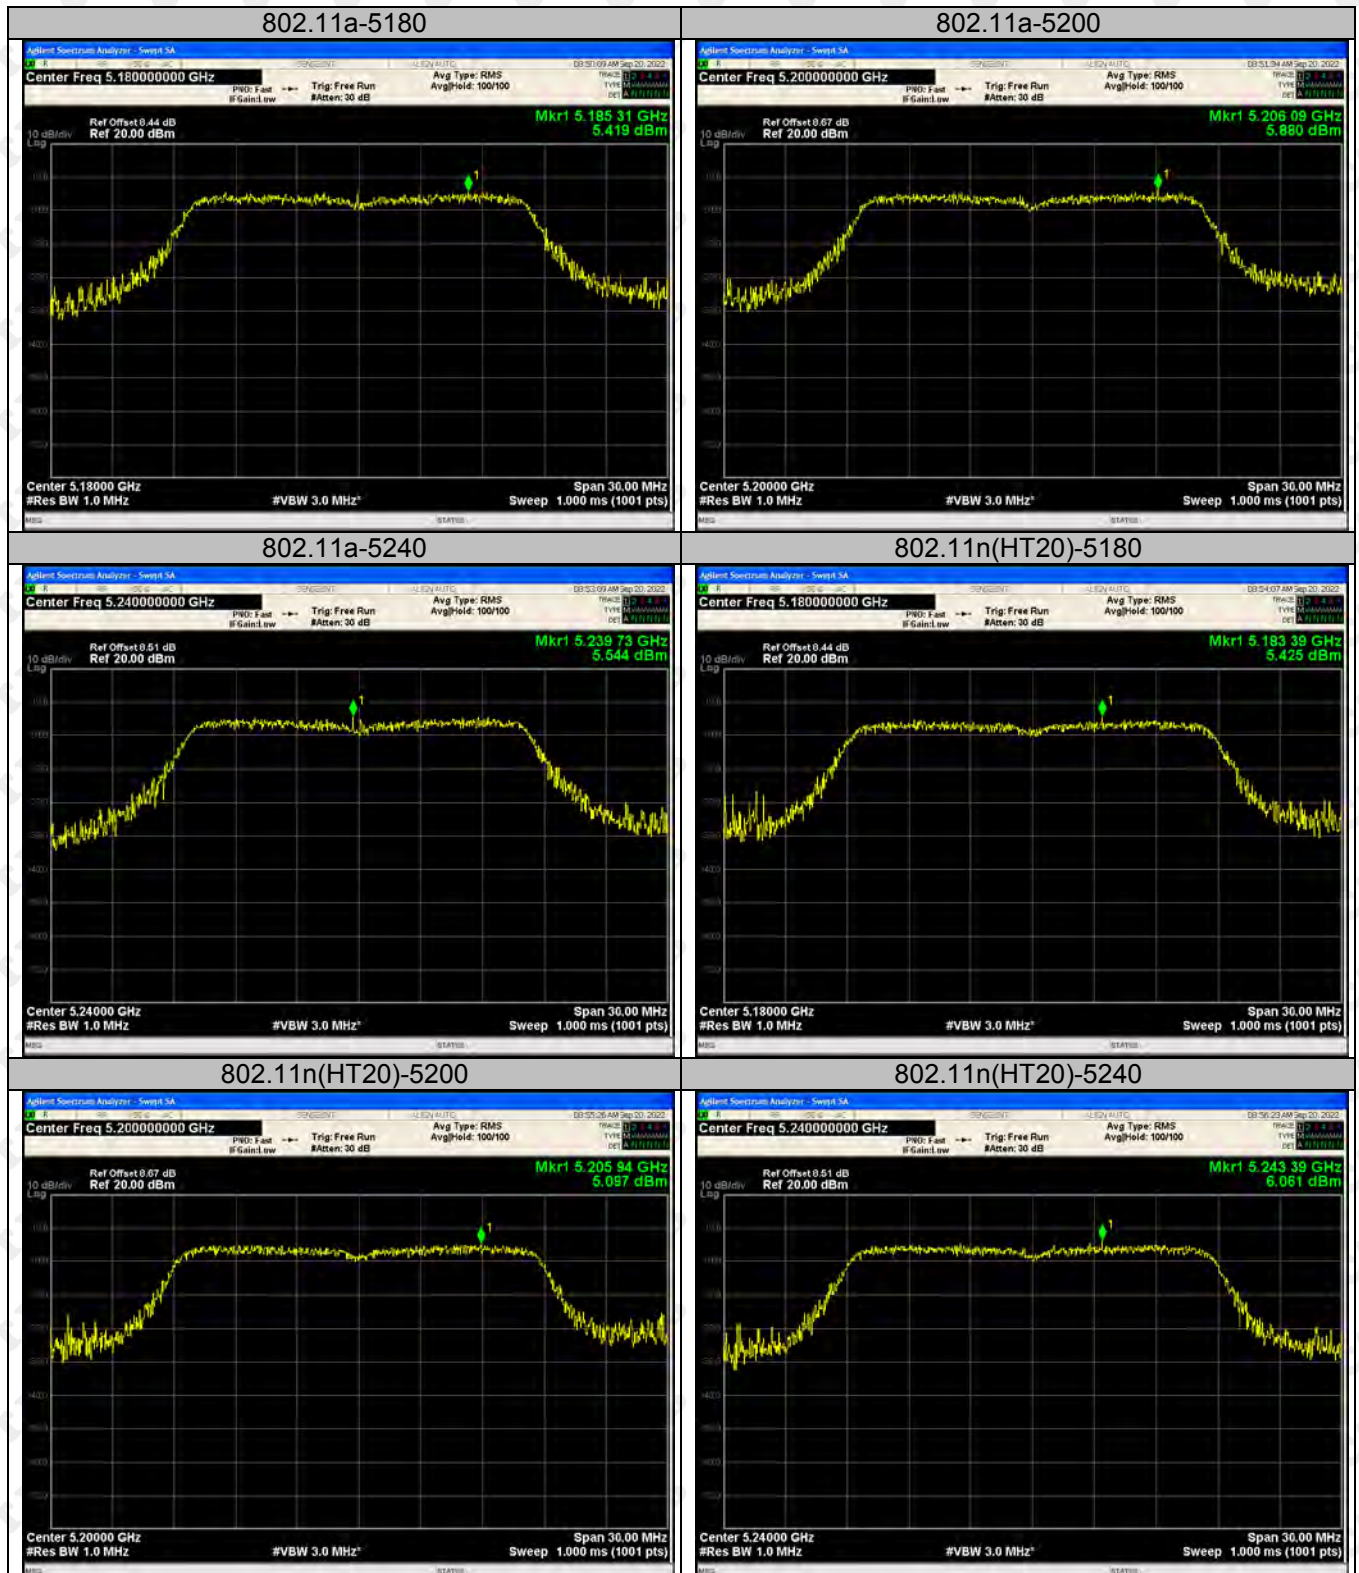

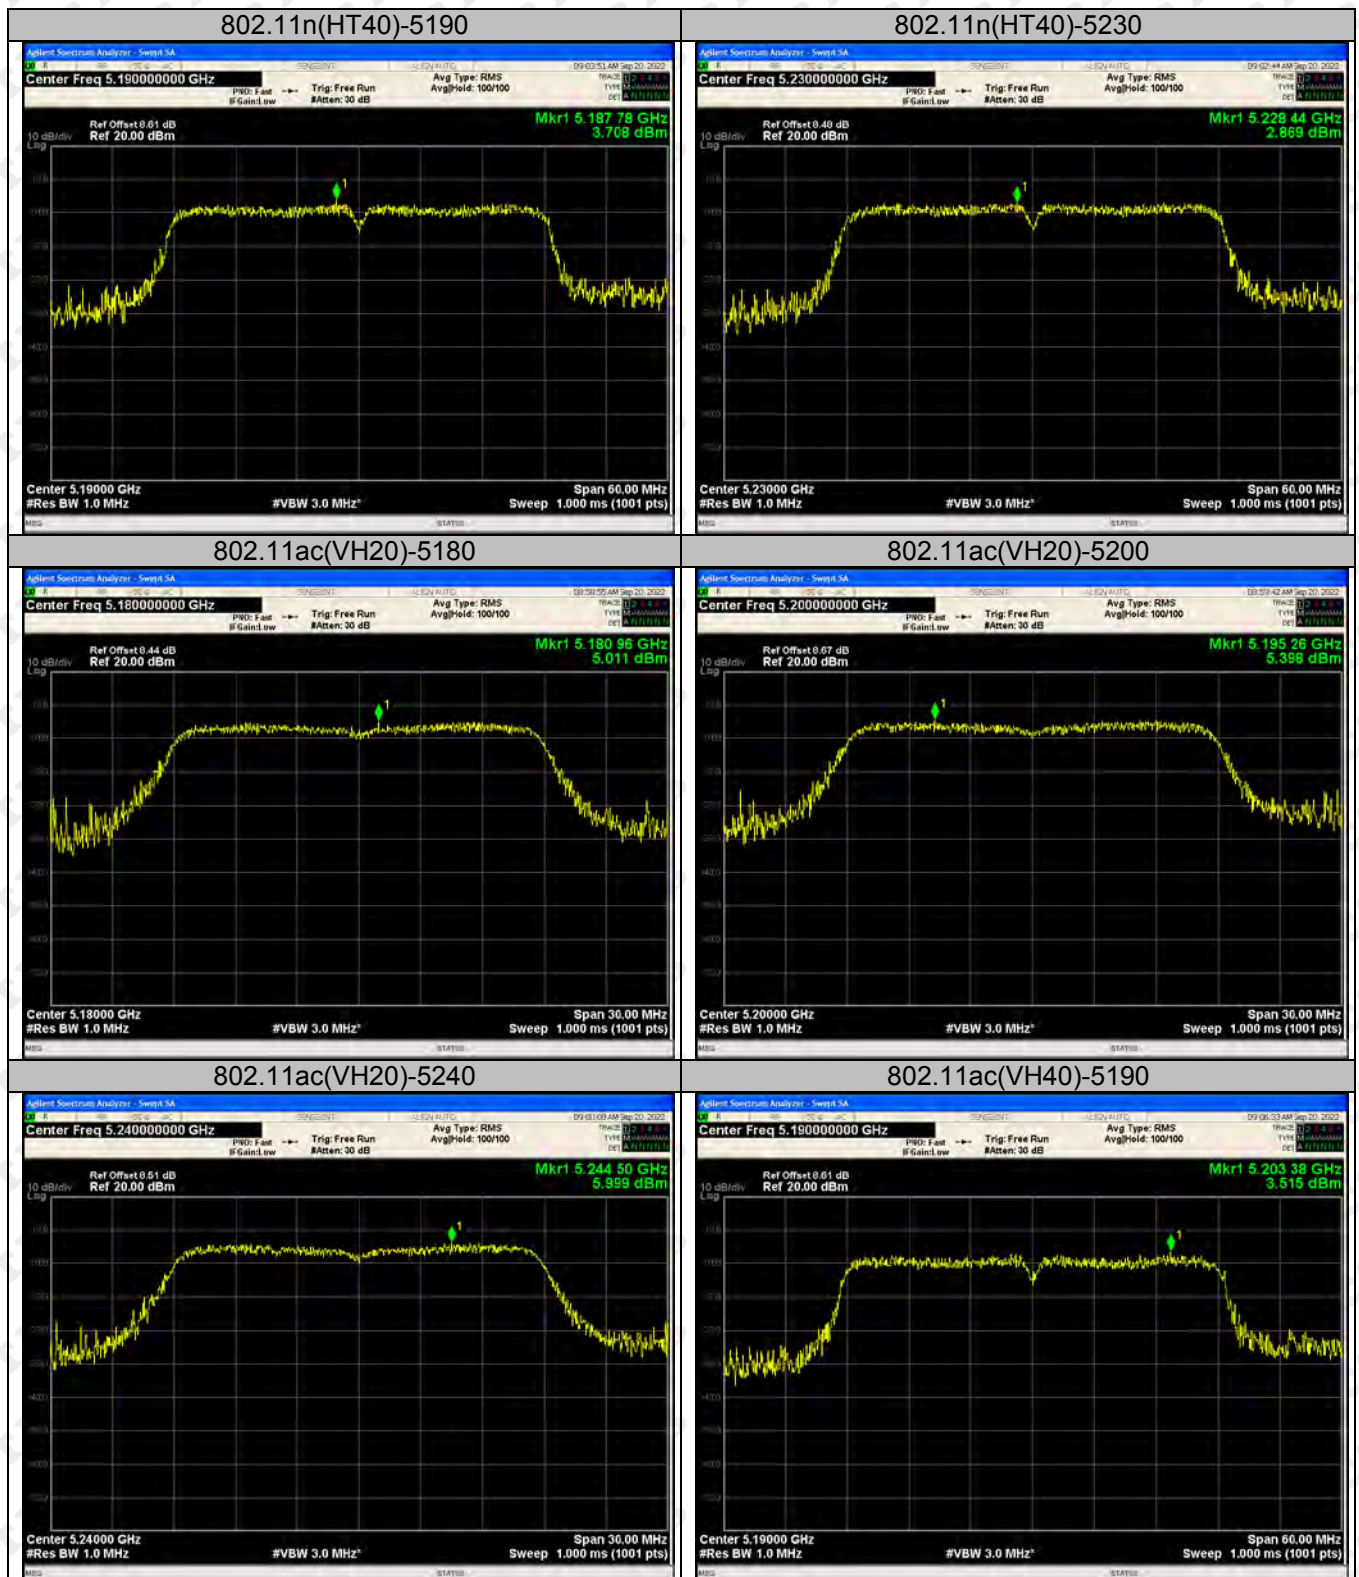

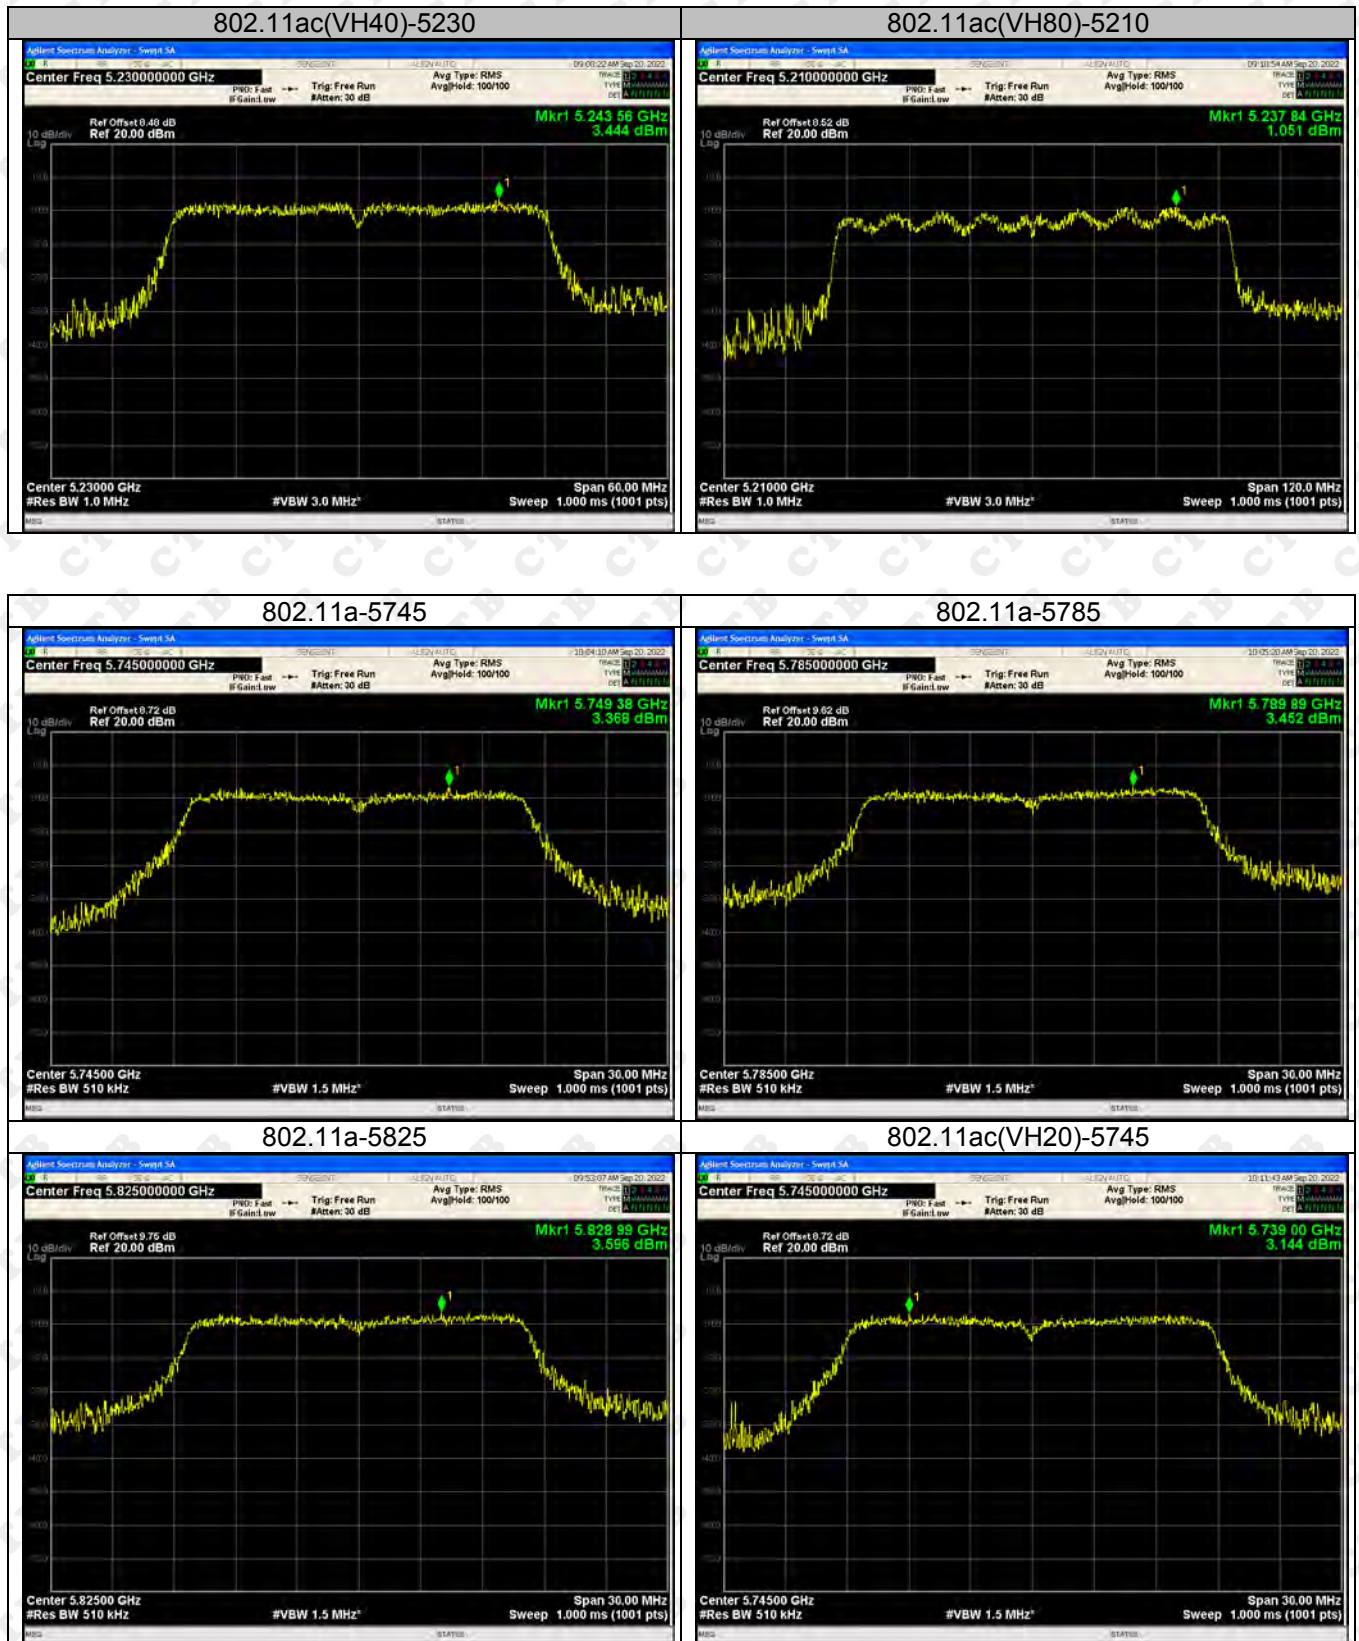

802.11ac(VH20)-5785

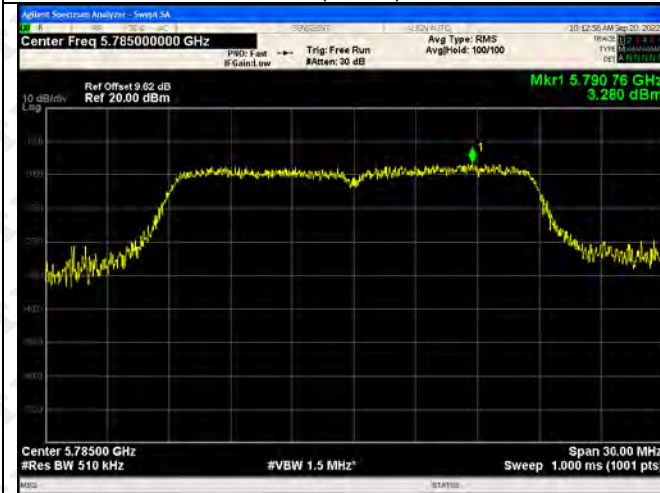

802.11ac(VH20)-5825



802.11ac(VH40)-5755



802.11ac(VH40)-5795



802.11n(HT20)-5745



802.11n(HT20)-5785



802.11n(HT20)-5825



802.11n(HT40)-575



802.11n(HT40)-5795




802.11ac(HT80)-5775



12. FREQUENCY STABILITY

12.1 Block Diagram Of Test Setup

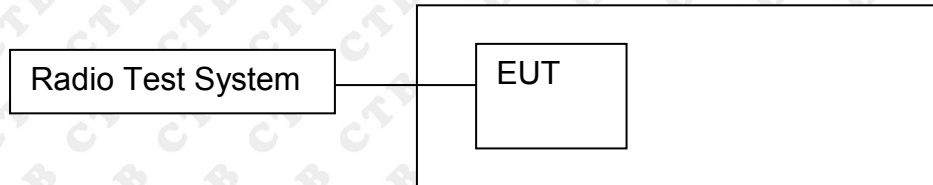

12.2 Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

12.3 Test procedure

1. The EUT was placed inside temperature chamber and powered and powered by nominal DC voltage.
2. Set EUT as normal operation.
3. Turn the EUT on and couple its output to spectrum.
4. Turn the EUT off and set the chamber to the highest temperature specified.
5. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT and measure the operating frequency.
6. Repeat step with the temperature chamber set to the lowest temperature.

12.4 Test Result

ANT1:

TX Frequency (5180-5240MHz)

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120	5180.0546	5180	0.0546	10.5405
		V max (V)	132	5180.0313	5180	0.0313	6.0425
		V min (V)	108	5180.0149	5180	0.0149	2.8764
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.7	T (°C)	-20	5180.0014	5180	0.0014	0.2703
		T (°C)	-10	5180.0125	5180	0.0125	2.4131
		T (°C)	0	5180.0223	5180	0.0223	4.3050
		T (°C)	10	5180.0386	5180	0.0386	7.4517
		T (°C)	20	5180.0193	5180	0.0193	3.7259
		T (°C)	30	5180.0218	5180	0.0218	4.2085
		T (°C)	40	5180.0125	5180	0.0125	2.4131
		T (°C)	50	5180.0097	5180	0.0097	1.8726
		T (°C)	60	5180.0414	5180	0.0414	7.9923
		T (°C)	70	5180.0697	5180	0.0697	13.4556
Limits				±20ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120	5200.0234	5200	0.0234	4.5000
		V max (V)	132	5200.0248	5200	0.0248	4.7692
		V min (V)	108	5200.0574	5200	0.0574	11.0385
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5200.0633	5200	0.0633	12.1731
		T (°C)	-10	5200.0526	5200	0.0526	10.1154
		T (°C)	0	5200.0434	5200	0.0434	8.3462
		T (°C)	10	5200.0828	5200	0.0828	15.9231
		T (°C)	20	5200.0535	5200	0.0535	10.2885
		T (°C)	30	5200.0174	5200	0.0174	3.3462
		T (°C)	40	5200.0533	5200	0.0533	10.2500
		T (°C)	50	5200.0316	5200	0.0316	6.0769
		T (°C)	60	5200.0275	5200	0.0275	5.2885
		T (°C)	70	5200.0417	5200	0.0417	8.0192
Limits				±20ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120	5240.0136	5240	0.0136	2.5954
		V max (V)	132	5240.0414	5240	0.0414	7.9008
		V min (V)	108	5240.0097	5240	0.0097	1.8511
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5240.0094	5240	0.0094	1.7939
		T (°C)	-10	5240.0035	5240	0.0035	0.6679
		T (°C)	0	5240.0144	5240	0.0144	2.7481
		T (°C)	10	5240.0856	5240	0.0856	16.3359
		T (°C)	20	5240.0114	5240	0.0114	2.1756
		T (°C)	30	5240.0125	5240	0.0125	2.3855
		T (°C)	40	5240.0063	5240	0.0063	1.2023
		T (°C)	50	5240.0076	5240	0.0076	1.4504
		T (°C)	60	5240.0053	5240	0.0053	1.0115
		T (°C)	70	5240.0105	5240	0.0105	2.0038
Limits				±20ppm			
Result				Complies			

ANT2:

TX Frequency (5180-5240MHz)

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120	5180.0557	5180	0.0557	10.7490
		V max (V)	132	5180.0320	5180	0.0320	6.1776
		V min (V)	108	5180.0247	5180	0.0247	4.7683
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5180.0051	5180	0.0051	0.9846
		T (°C)	-10	5180.0107	5180	0.0107	2.0656
		T (°C)	0	5180.0321	5180	0.0321	6.1969
		T (°C)	10	5180.0383	5180	0.0382	7.3842
		T (°C)	20	5180.0235	5180	0.0235	4.5367
		T (°C)	30	5180.0219	5180	0.0219	4.2278
		T (°C)	40	5180.0127	5180	0.0127	2.4517
		T (°C)	50	5180.0097	5180	0.0097	1.8726
		T (°C)	60	5180.0417	5180	0.0417	8.0502
		T (°C)	70	5180.0695	5180	0.0695	13.4170
Limits				±20ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120	5200.0252	5200	0.0252	4.8462
		V max (V)	132	5200.0427	5200	0.0427	8.2115
		V min (V)	108	5200.0696	5200	0.0696	13.3846
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5200.0637	5200	0.0637	12.2500
		T (°C)	-10	5200.0523	5200	0.0523	10.0577
		T (°C)	0	5200.0437	5200	0.0437	8.4038
		T (°C)	10	5200.0925	5200	0.0925	17.7885
		T (°C)	20	5200.0639	5200	0.0639	12.2885
		T (°C)	30	5200.0121	5200	0.0121	2.3269
		T (°C)	40	5200.0738	5200	0.0738	14.1923
		T (°C)	50	5200.0416	5200	0.0416	8.0000
		T (°C)	60	5200.0329	5200	0.0329	6.3269
		T (°C)	70	5200.0421	5200	0.0421	8.0962
Limits				±20ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120	5240.0138	5240	0.0138	2.6336
		V max (V)	132	5240.0411	5240	0.0411	7.8435
		V min (V)	108	5240.0102	5240	0.0102	1.9466
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5240.0097	5240	0.0097	1.8511
		T (°C)	-10	5240.0033	5240	0.0033	0.6298
		T (°C)	0	5240.0148	5240	0.0148	2.8244
		T (°C)	10	5240.0856	5240	0.0856	16.3359
		T (°C)	20	5240.0119	5240	0.0119	2.2710
		T (°C)	30	5240.0125	5240	0.0125	2.3855
		T (°C)	40	5240.0061	5240	0.0061	1.1641
		T (°C)	50	5240.0076	5240	0.0076	1.4504
		T (°C)	60	5240.0059	5240	0.0059	1.1260
		T (°C)	70	5240.0107	5240	0.0107	2.0420
Limits				±20ppm			
Result				Complies			

13. OPERATION IN THE ABSENCE OF INFORMATION TO THE TRANSMIT

13.1 Requirement

15.407(c) requirement:

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signal ling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

13.2 Test Results

Operation in the absence of information to the transmit:

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ASK message transmitting from remote device and verify whether it shall resend or discontinue transmission. (manufacturer declare)

14. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is Internal Antenna and no consideration of replacement. The best case gain of the antenna is 5.2G WIFI 188dBi, 5.8G WIFI 2.31dBi.

15. EUT PHOTOGRAPHS

EUT Photo 1



EUT Photo 2



16. EUT TEST SETUP PHOTOGRAPHS

Spurious emissions

Below 1GHz



Above 1GHz



Conducted Emission



※※※※※ END OF REPORT ※※※※※