


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

PSD


5240MHz

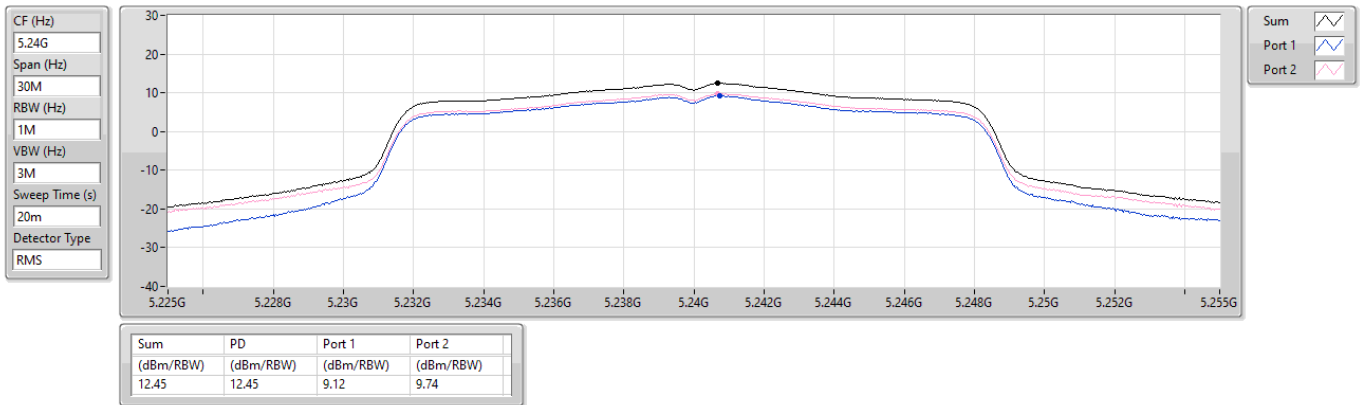

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

PSD


5260MHz

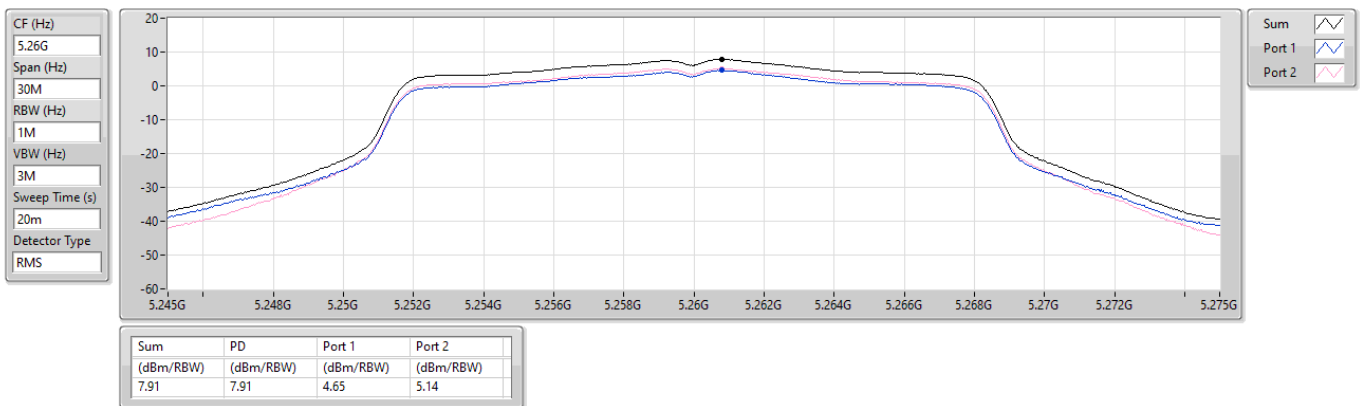

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

PSD


5300MHz

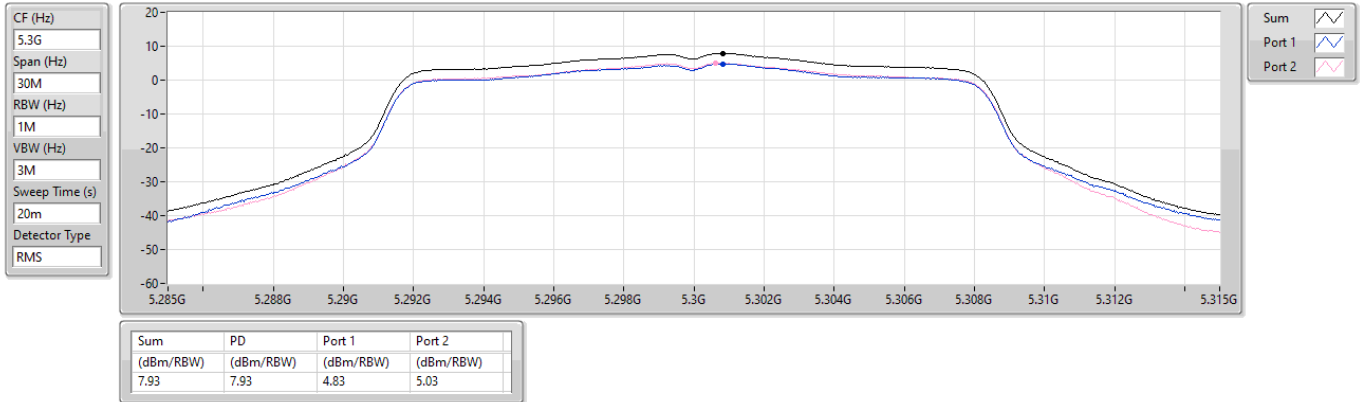

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5320MHz

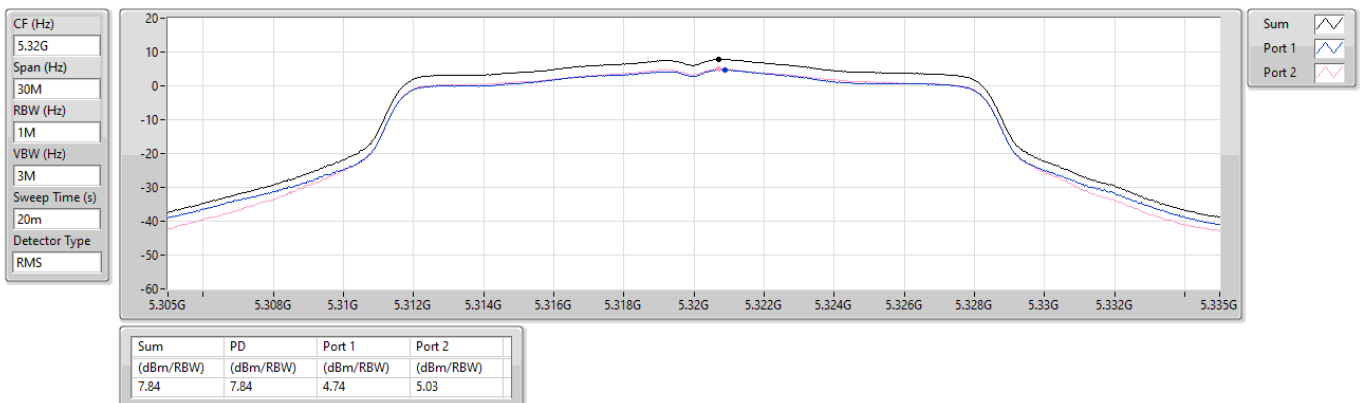

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5500MHz

CF (Hz)
5.5G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

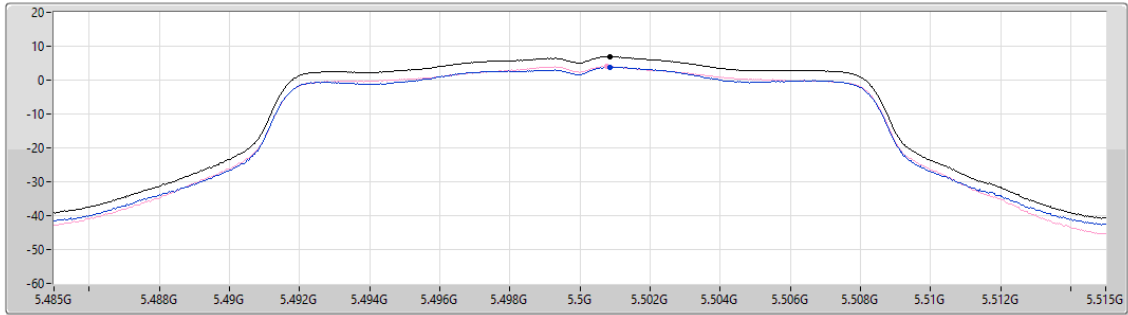

Sum (dBm/Hz)	PD (dBm/Hz)	Port 1 (dBm/Hz)	Port 2 (dBm/Hz)
6.88	6.88	3.80	4.04

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5580MHz

CF (Hz)
5.58G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

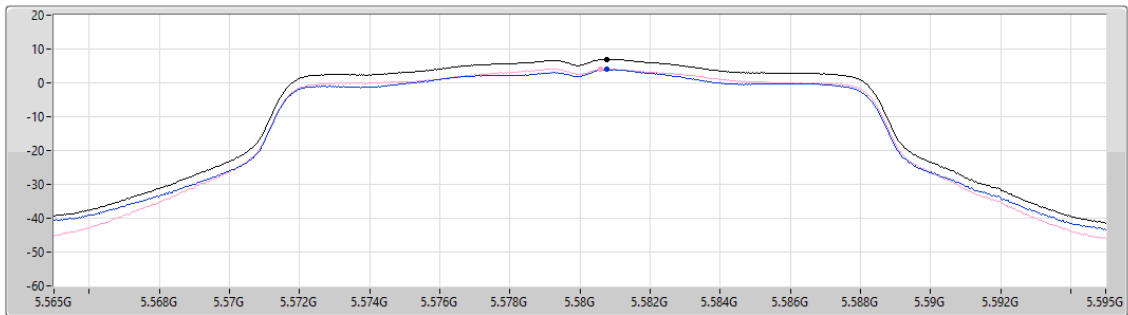


Sum (dBm/Hz)	PD (dBm/Hz)	Port 1 (dBm/Hz)	Port 2 (dBm/Hz)
6.98	6.98	3.98	4.14

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

PSD


5700MHz

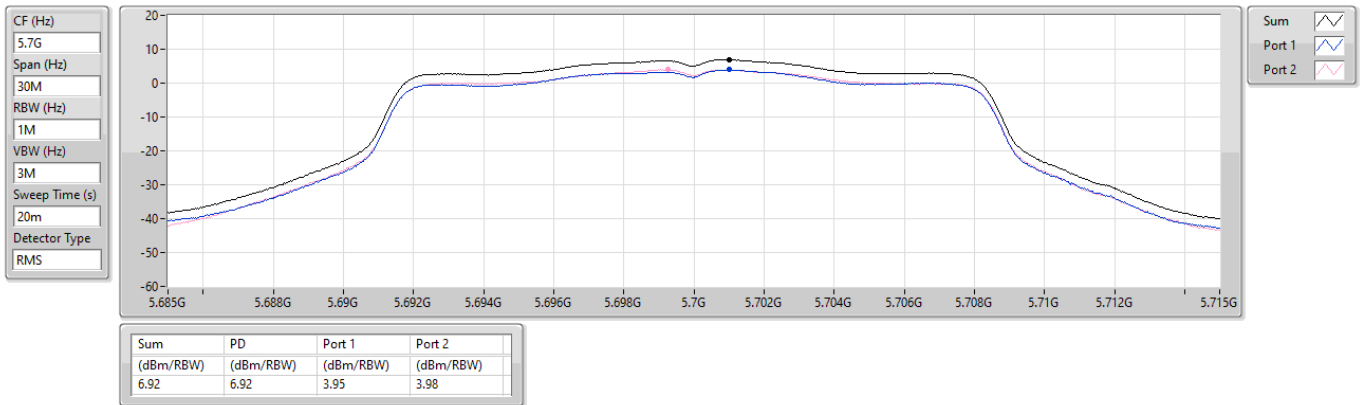

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

PSD


5720MHz Straddle 5.47-5.725GHz

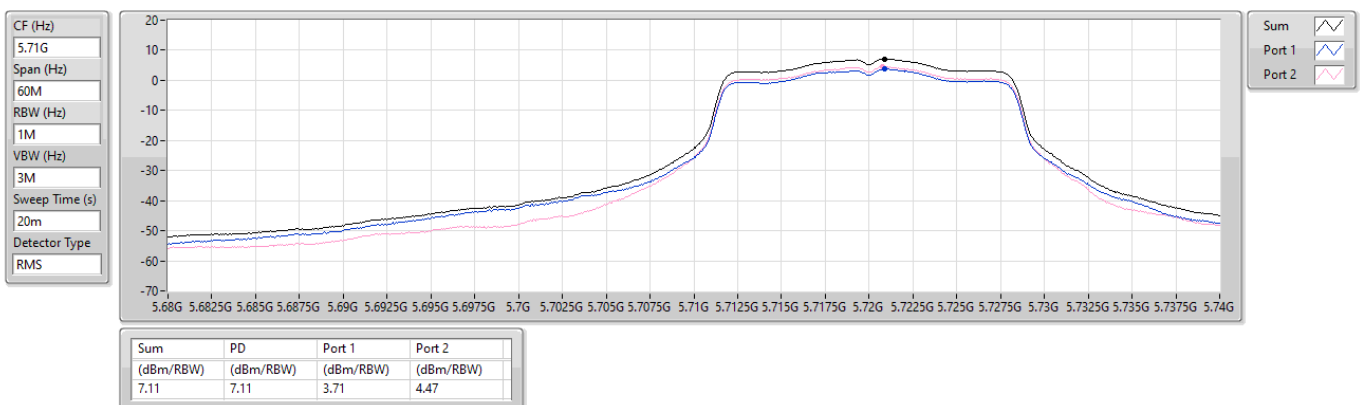

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

PSD


5720MHz Straddle 5.725-5.85GHz

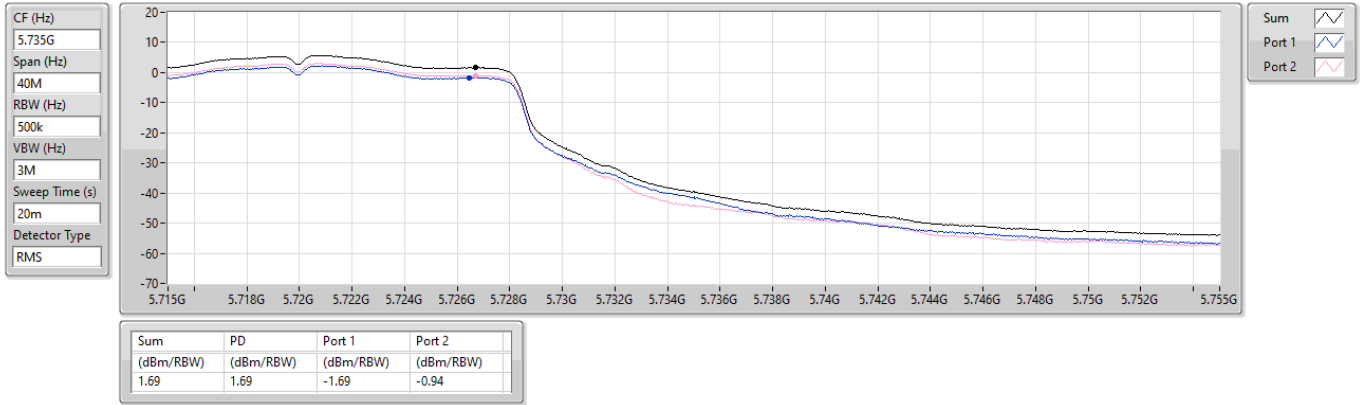

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

PSD


5745MHz

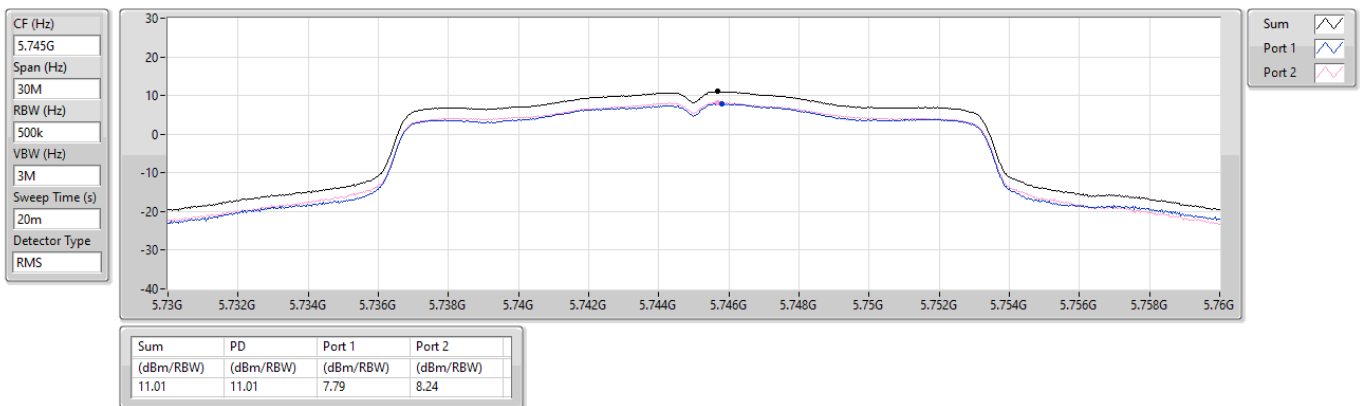

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

PSD


5785MHz

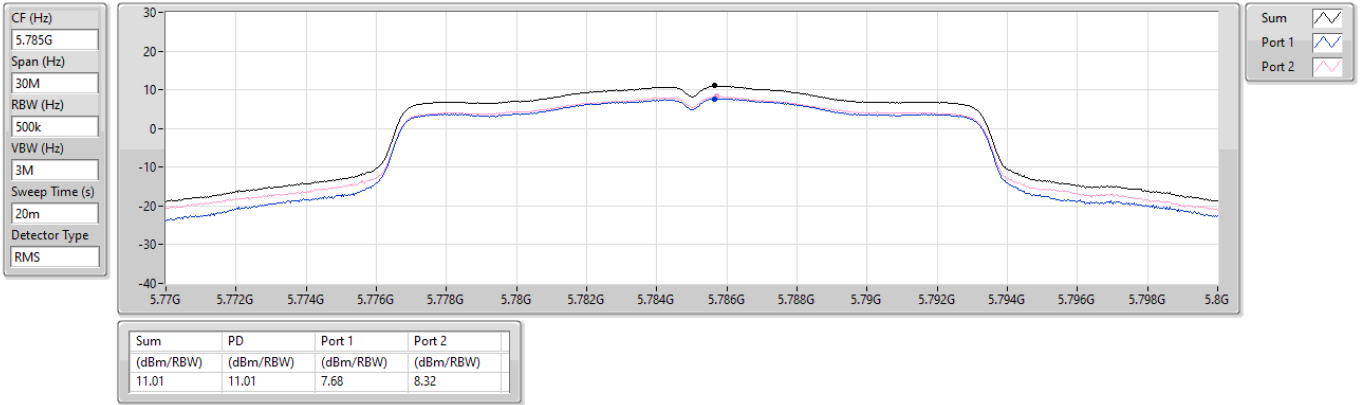

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

PSD


5825MHz

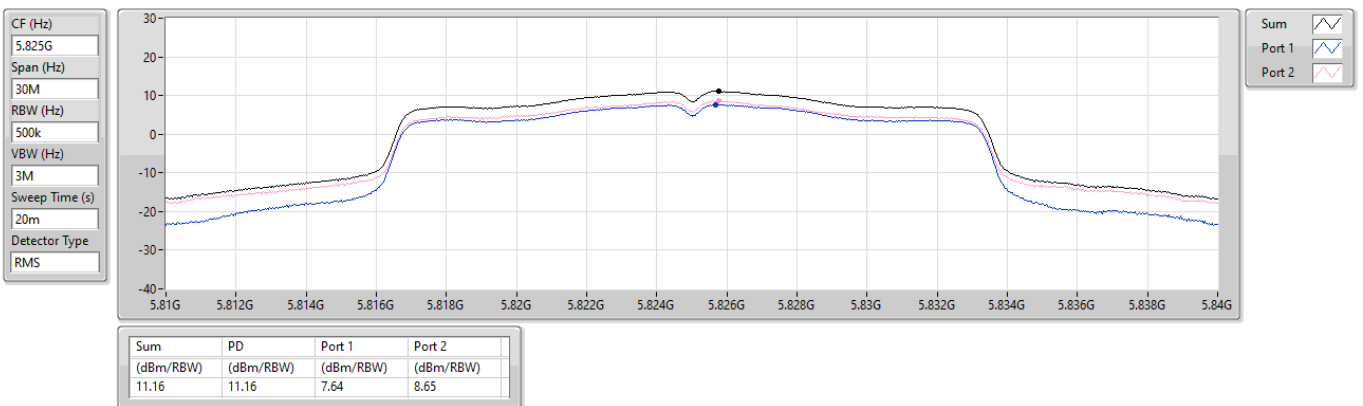

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

PSD


5180MHz

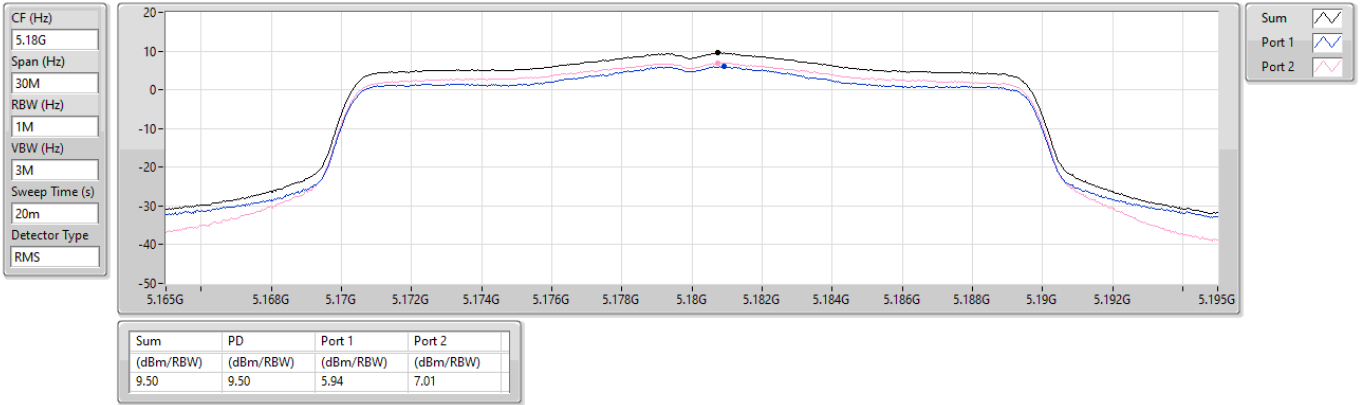

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

PSD


5200MHz

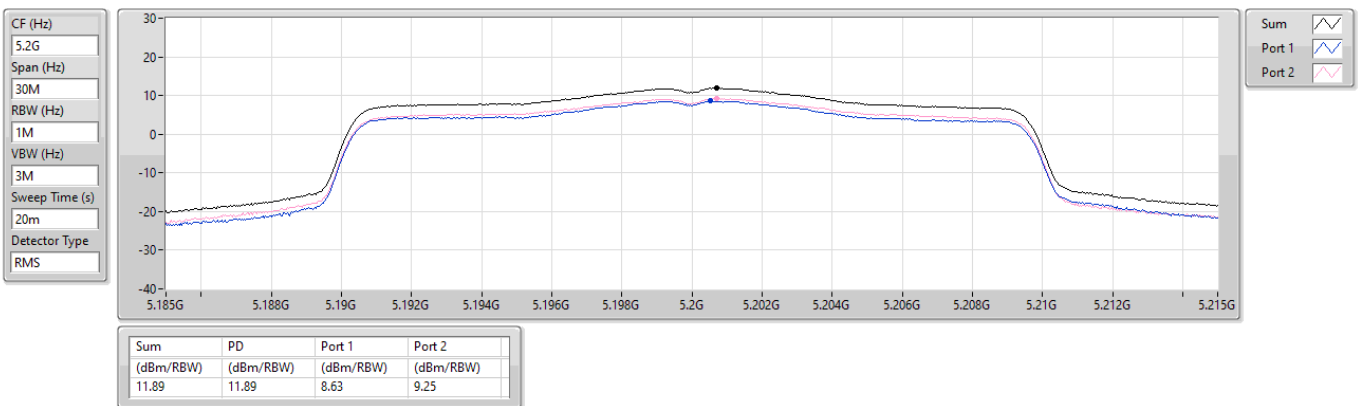

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

PSD


5240MHz

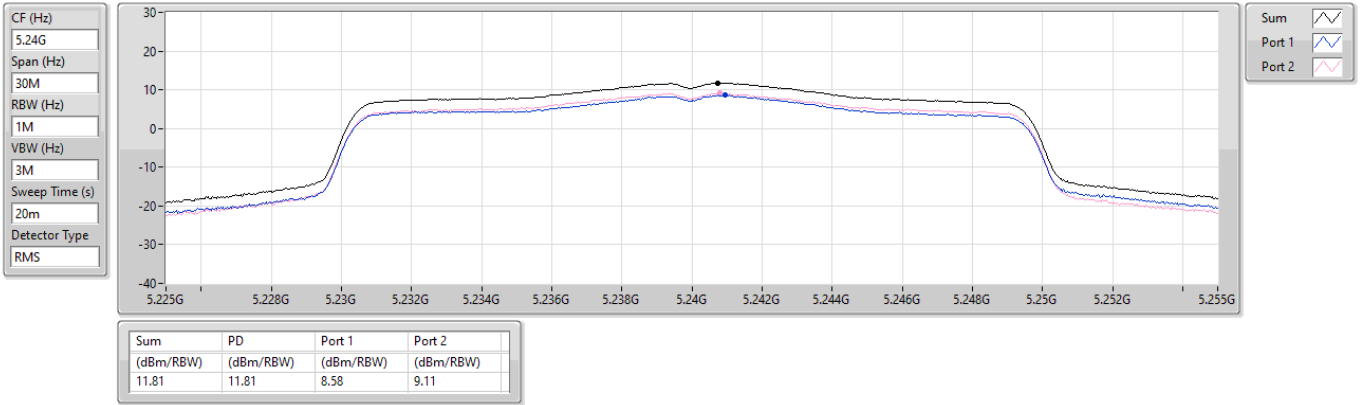

5.25-5.35GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

PSD

5260MHz

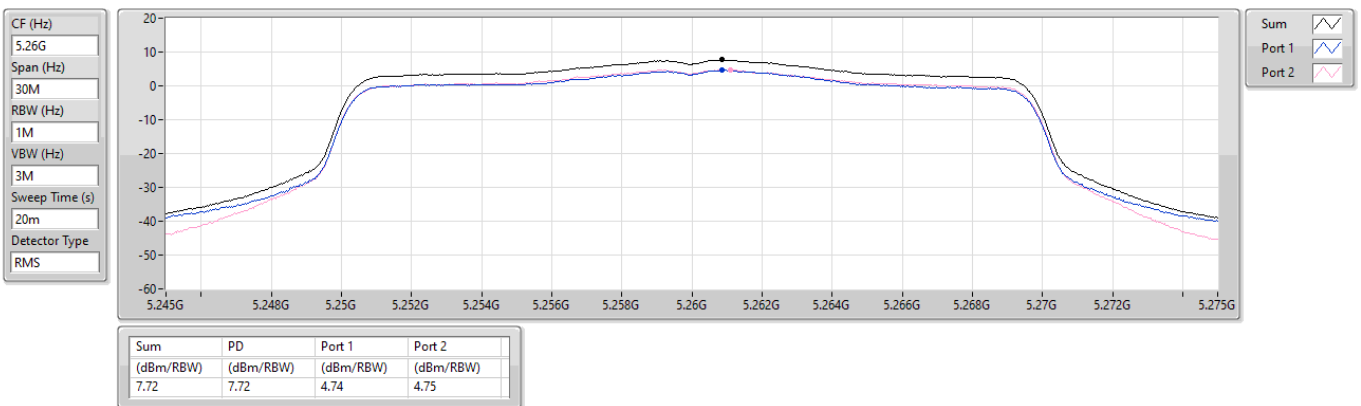

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

PSD

5300MHz

CF (Hz)
5.3G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

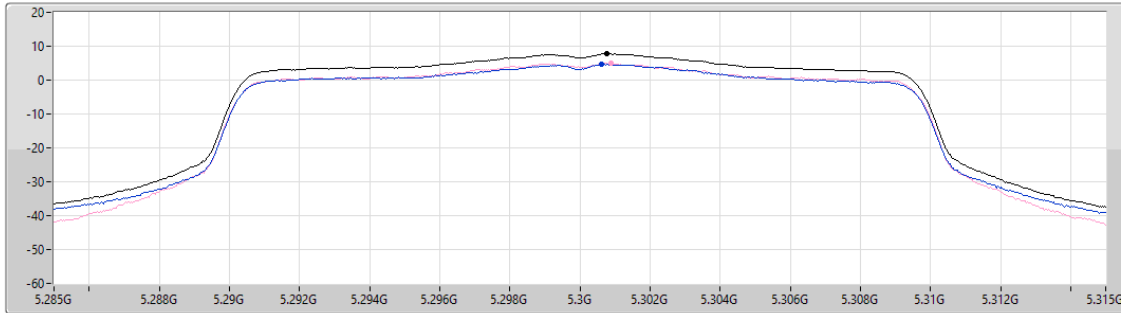

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.81	7.81	4.69	5.04

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

PSD

5320MHz

CF (Hz)
5.32G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

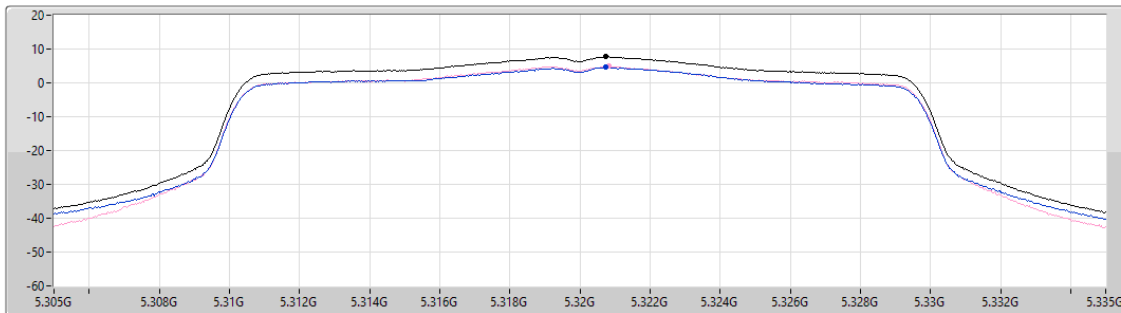

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.70	7.70	4.57	4.88

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

PSD

5500MHz

CF (Hz)
5.5G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

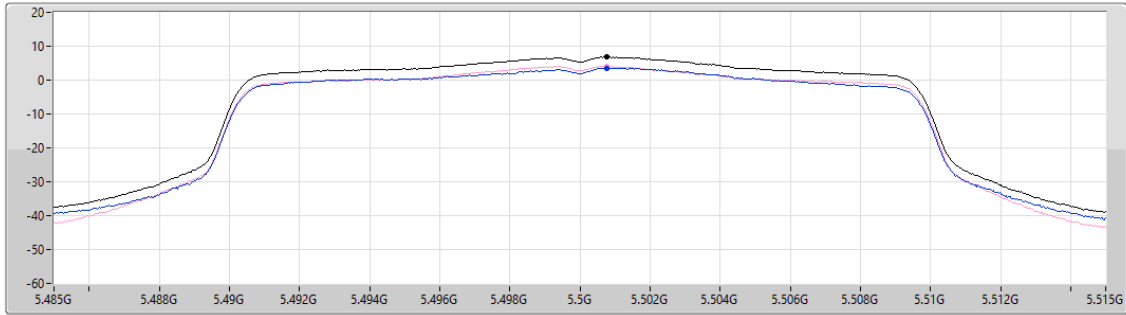

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.85	6.85	3.57	4.10

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

PSD

5580MHz

CF (Hz)
5.58G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

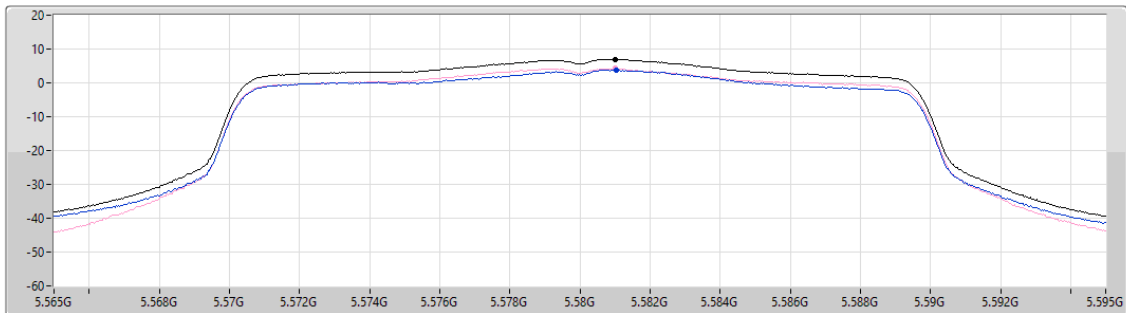

Sum 

Port 1 


Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.01	7.01	3.86	4.22

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

PSD


5700MHz

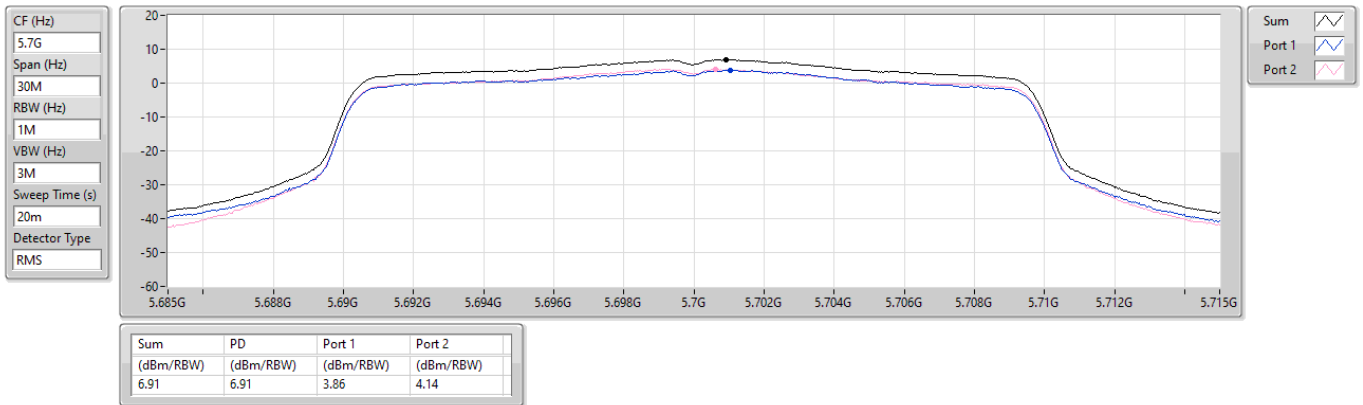

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

PSD


5720MHz Straddle 5.47-5.725GHz

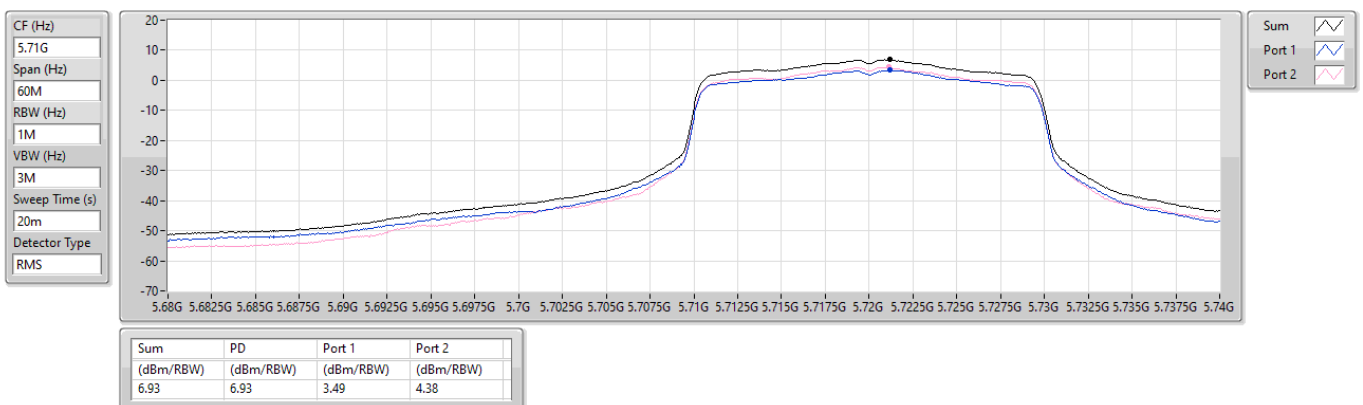

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

PSD


5720MHz Straddle 5.725-5.85GHz

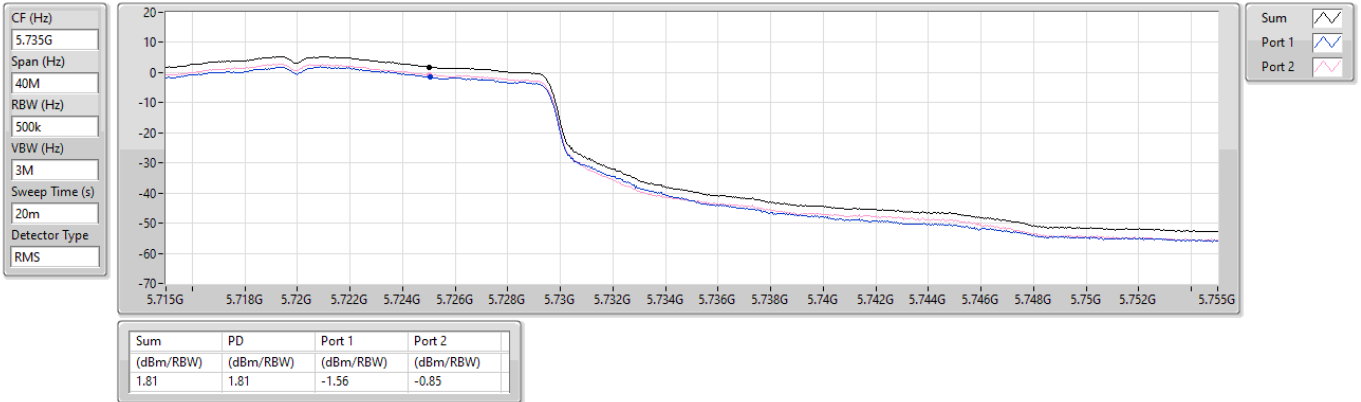

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

PSD

5745MHz

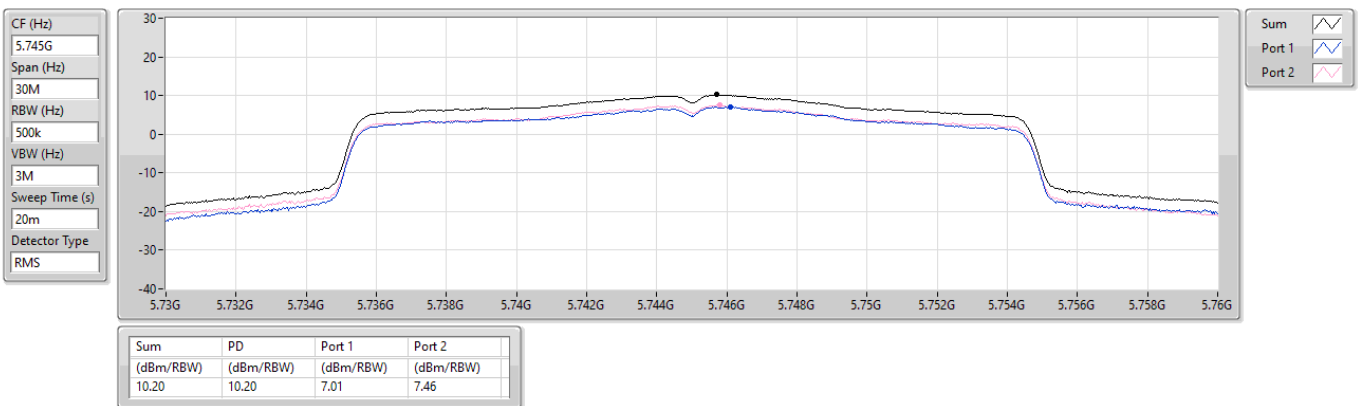




5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

PSD


5785MHz

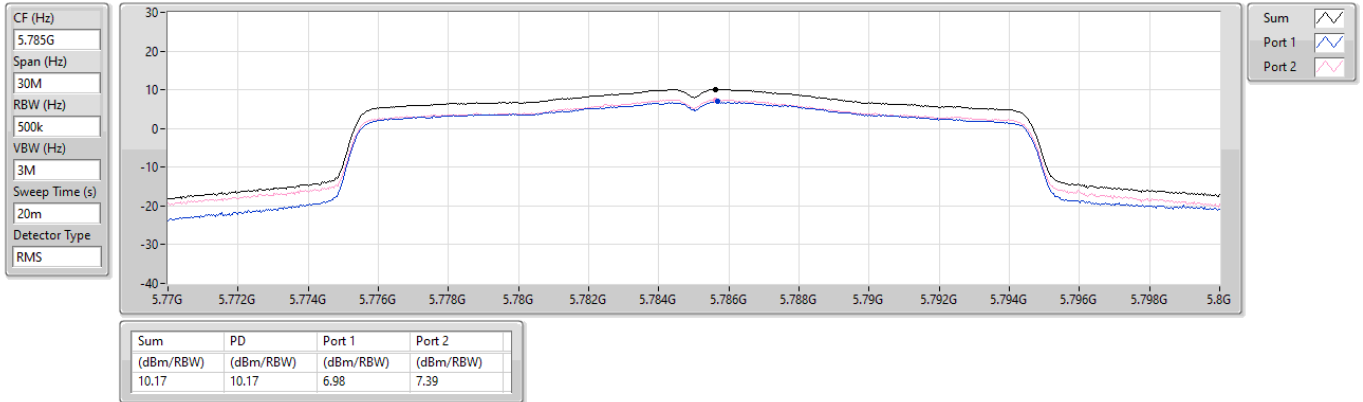

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

PSD


5825MHz

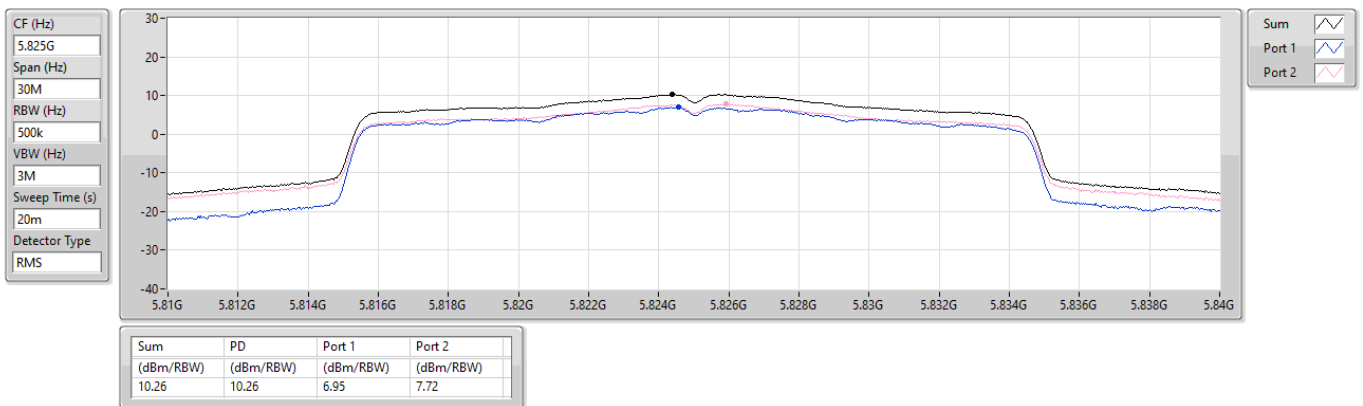

5.15-5.25GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

PSD


5190MHz

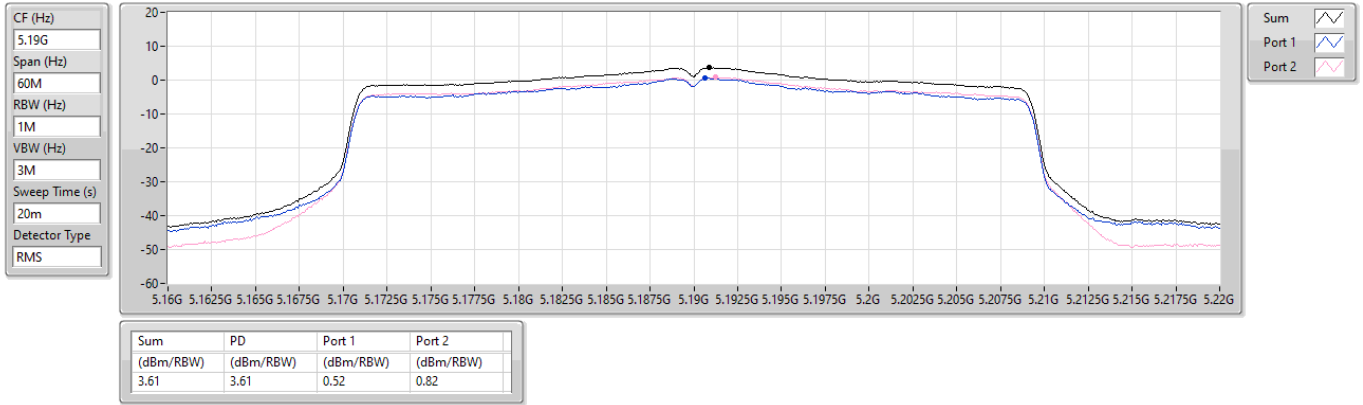

5.15-5.25GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

PSD

5230MHz

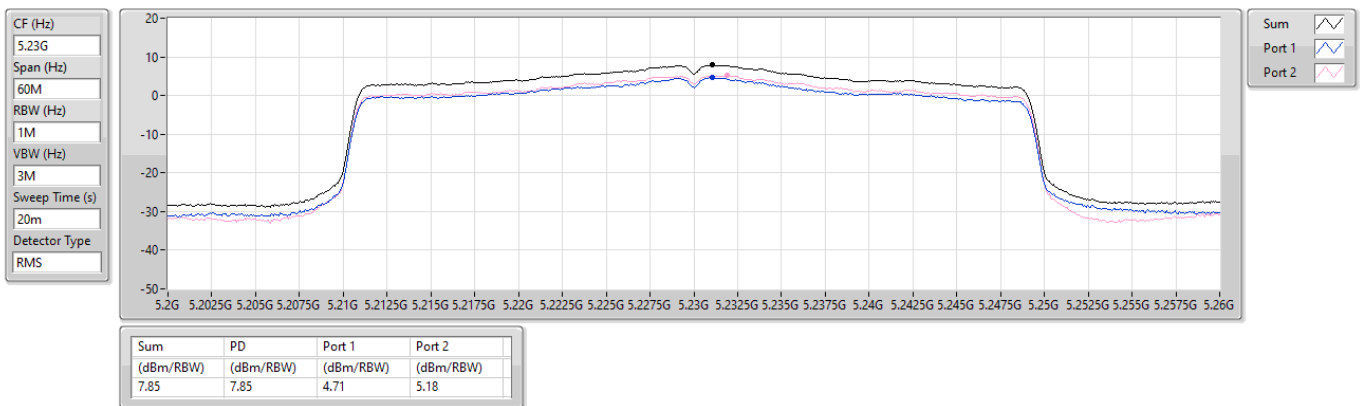




5.25-5.35GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

PSD


5270MHz

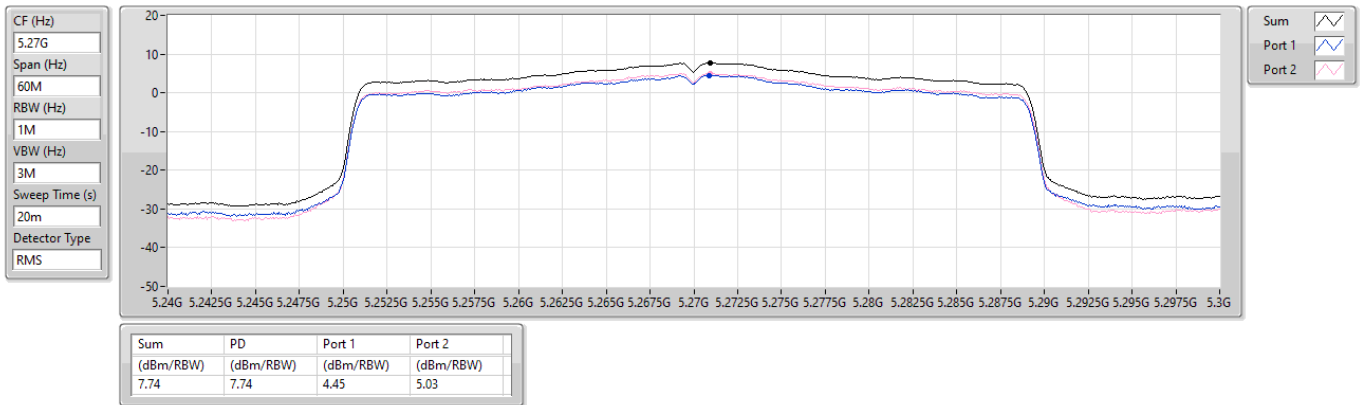

5.25-5.35GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

PSD


5310MHz

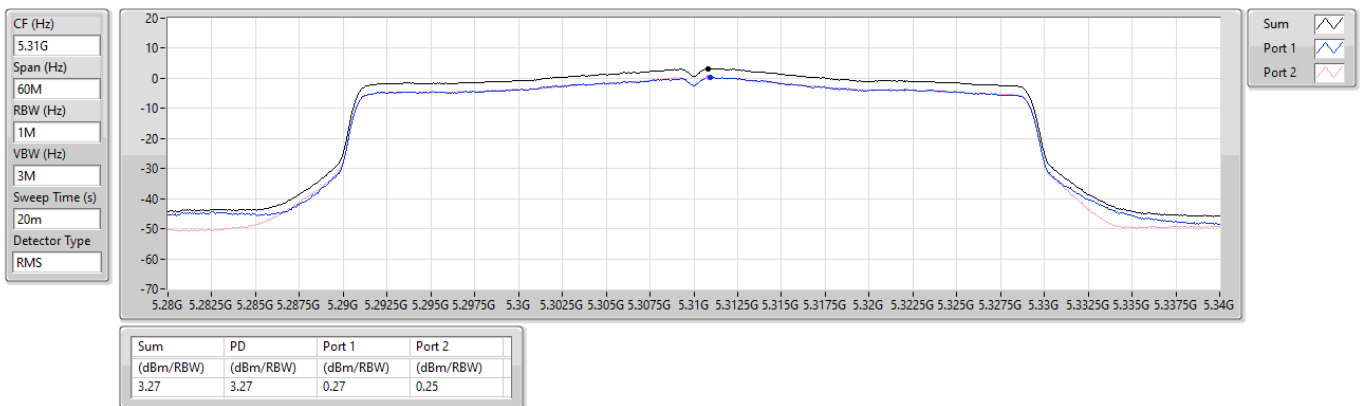

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

PSD


5510MHz

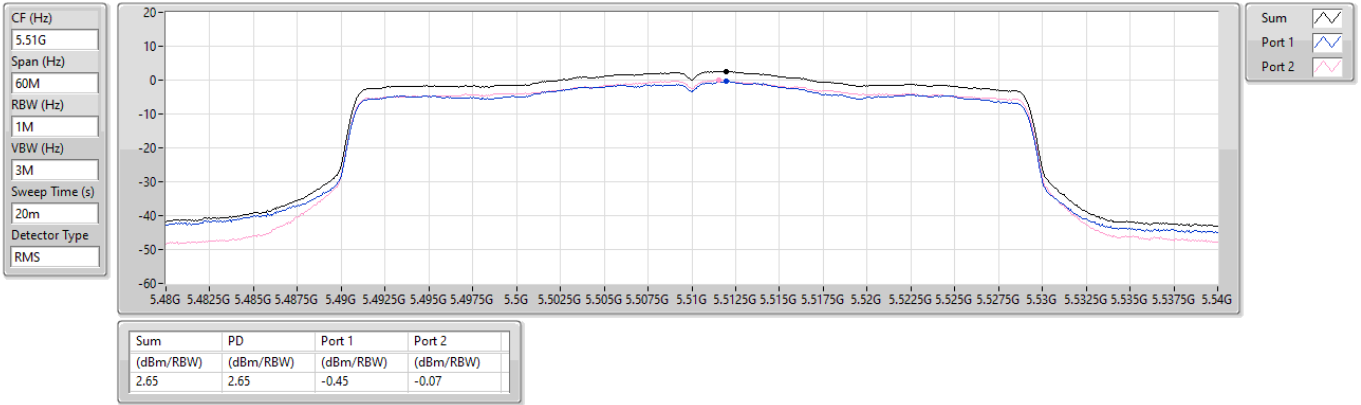

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

PSD


5590MHz

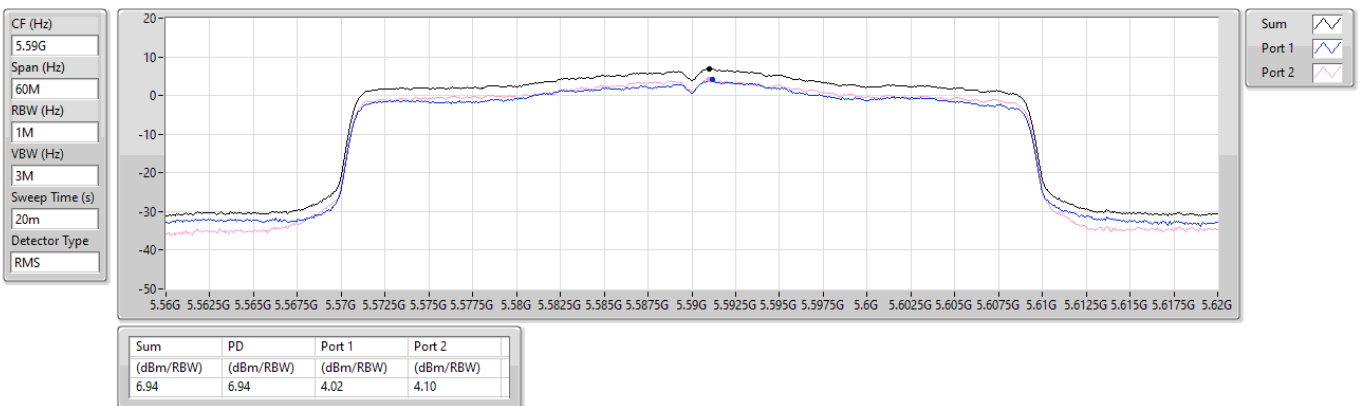

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

PSD


5670MHz

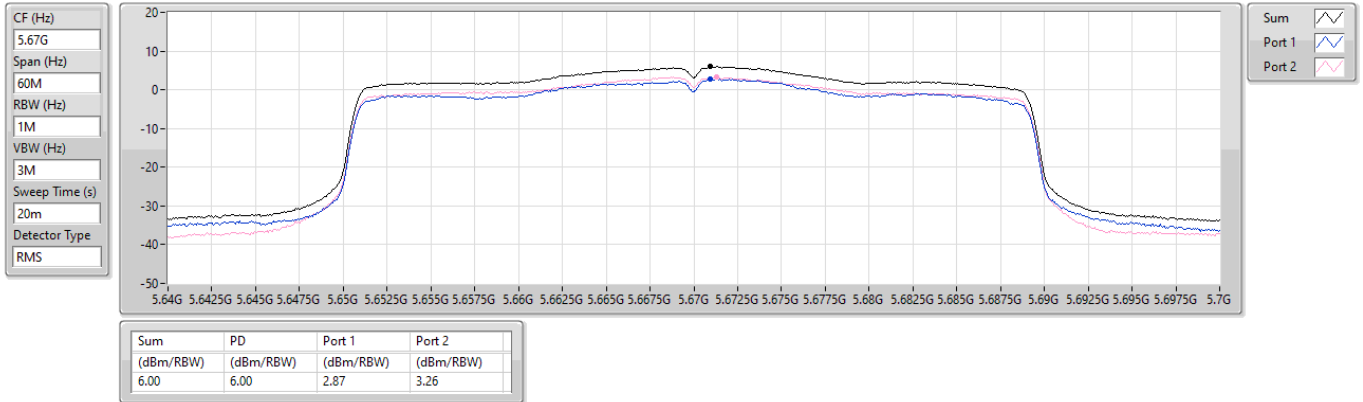

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

PSD


5710MHz Straddle 5.47-5.725GHz

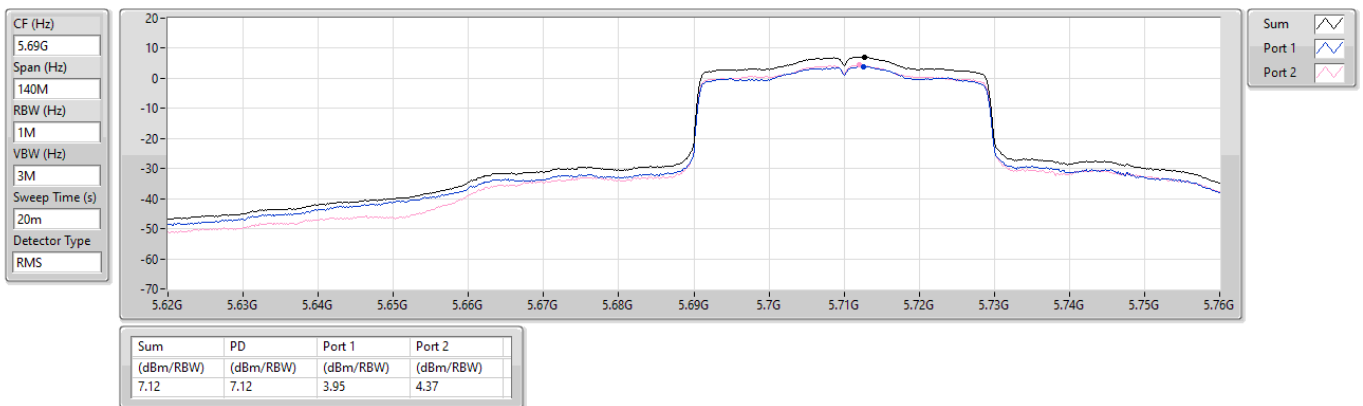

5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

PSD


5710MHz Straddle 5.725-5.85GHz

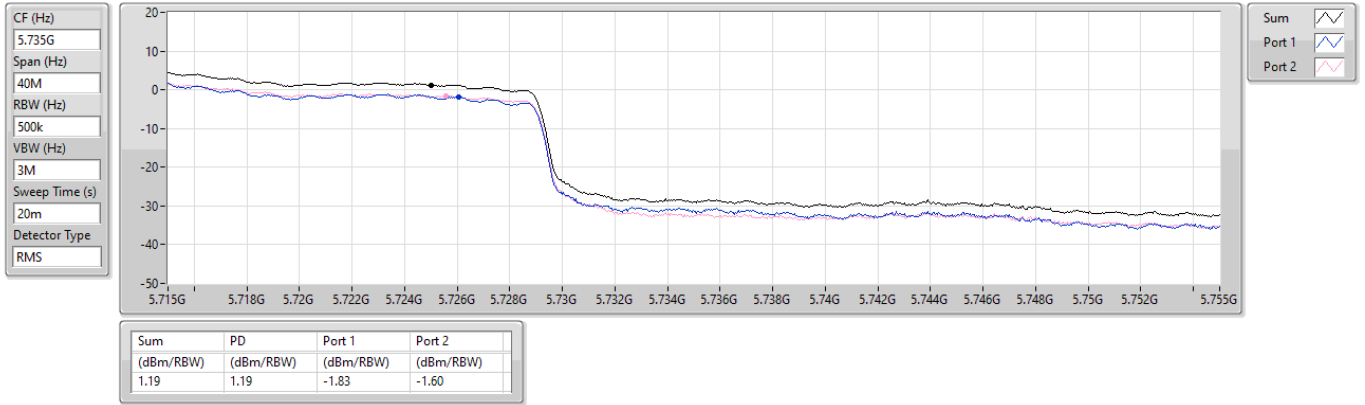

5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

PSD


5755MHz

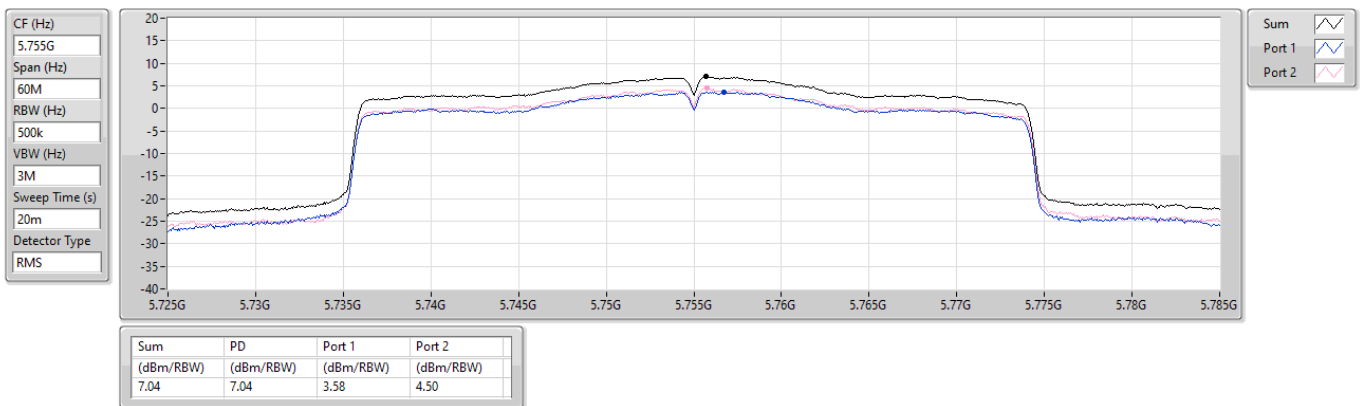

5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

PSD


5795MHz

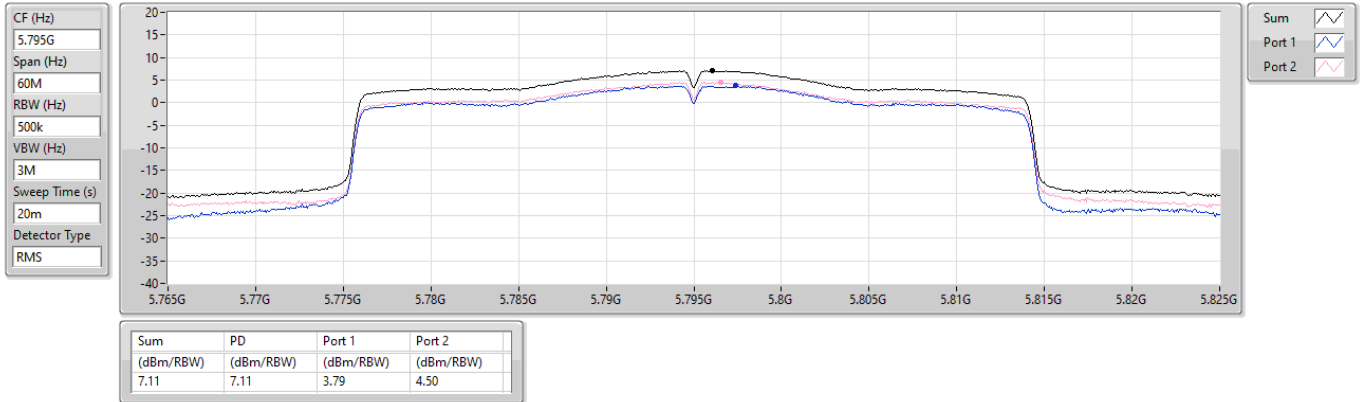

5.15-5.25GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

PSD

5210MHz

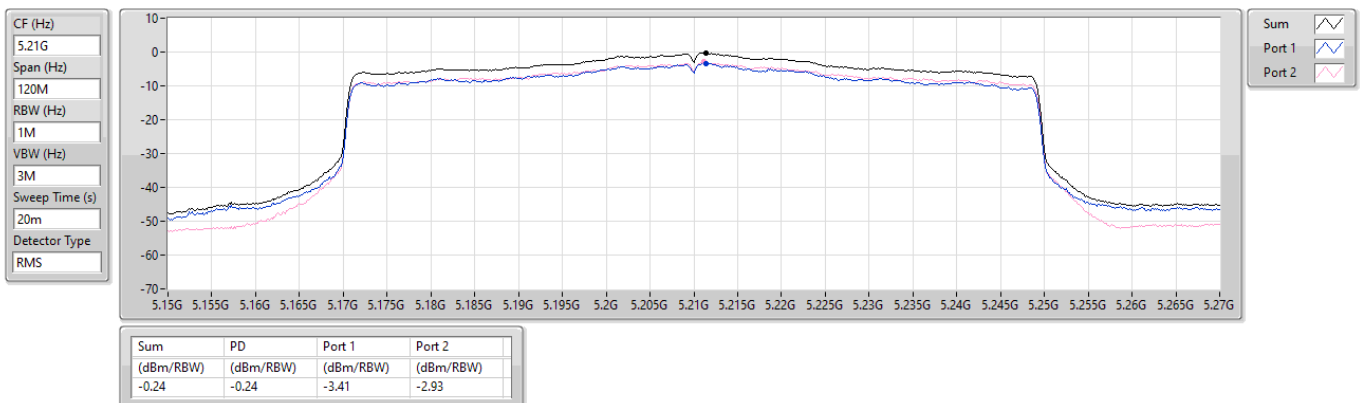

5.25-5.35GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

PSD

5290MHz

CF (Hz)
5.29G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

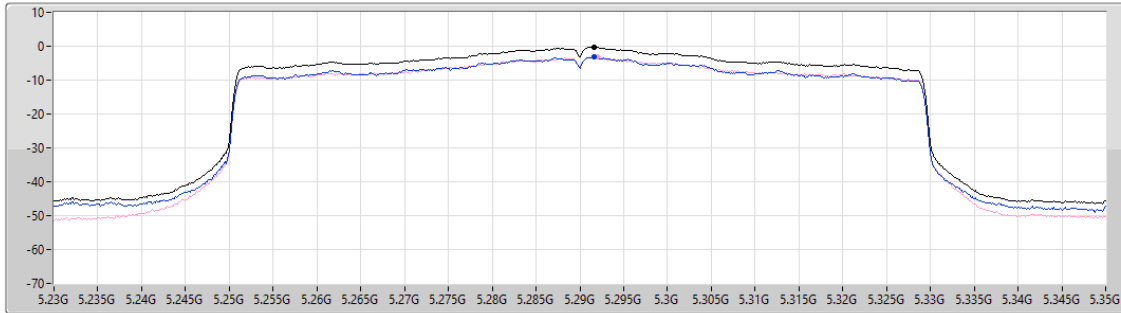

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.18	-0.18	-3.07	-3.18

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

PSD

5530MHz

CF (Hz)
5.53G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

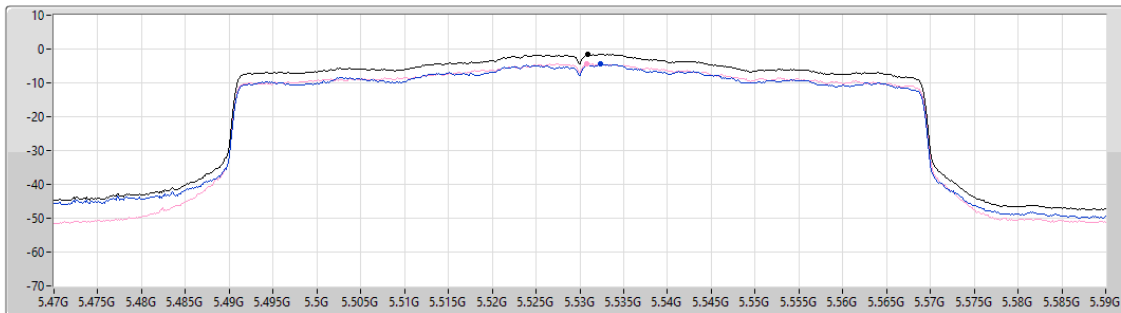

Sum 

Port 1 

Port 2 


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.44	-1.44	-4.33	-4.25



5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

PSD


5610MHz

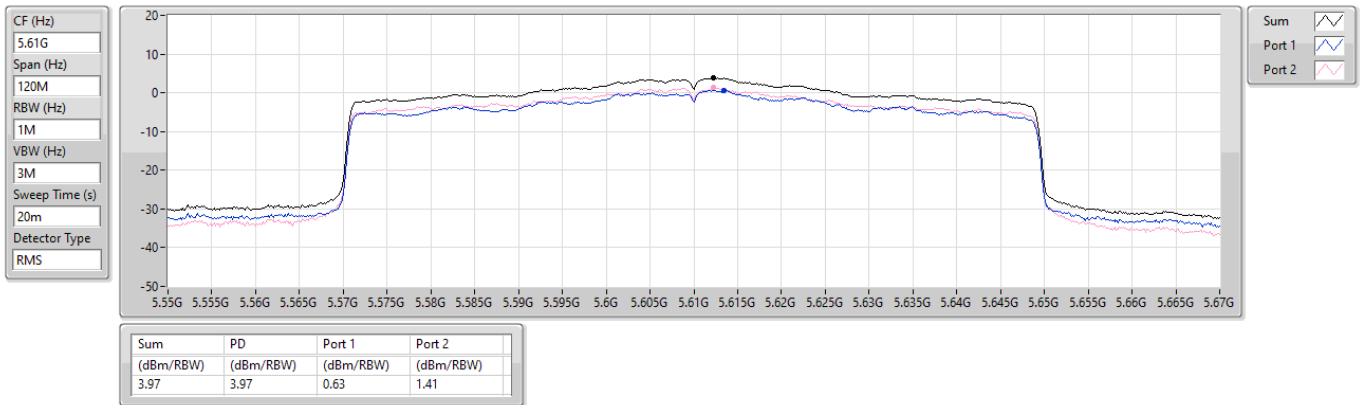

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

PSD

5690MHz Straddle 5.47-5.725GHz

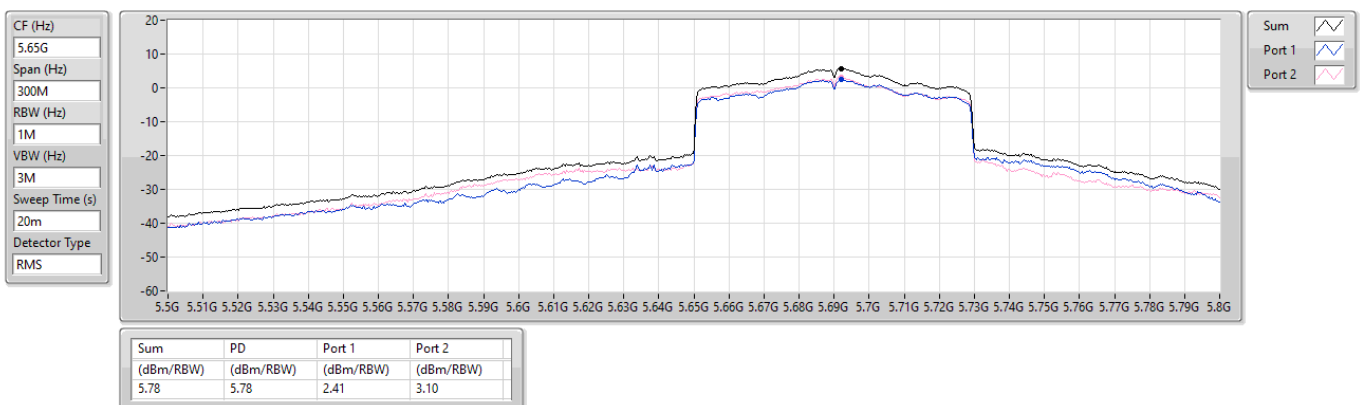




5.725-5.85GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

PSD


5690MHz Straddle 5.725-5.85GHz

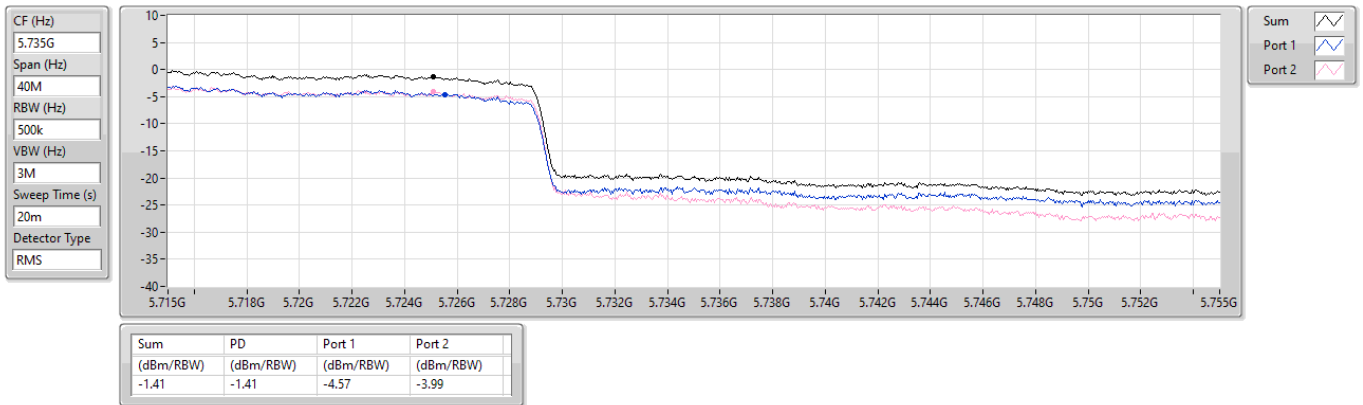

5.725-5.85GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

PSD

5775MHz

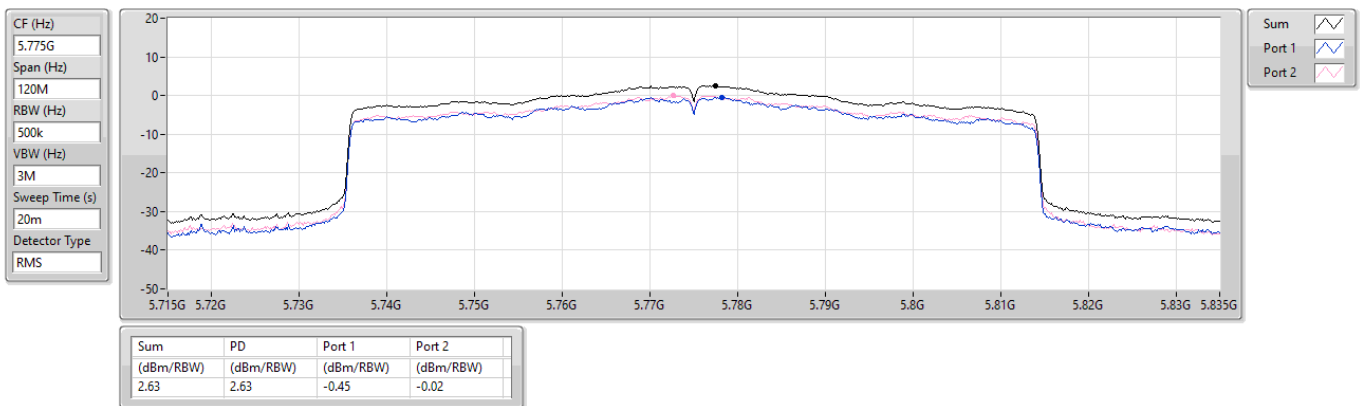




5.15-5.25GHz_802.11ax HEW160_Nss1,(MCS0)_2TX

PSD


5250MHz Straddle 5.15-5.25GHz

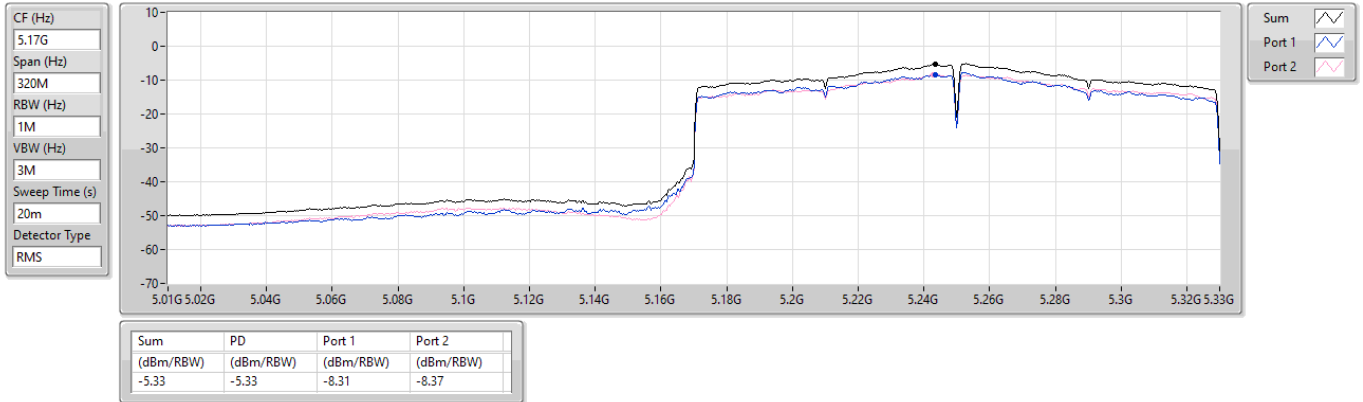

5.25-5.35GHz_802.11ax HEW160_Nss1,(MCS0)_2TX

PSD

5250MHz Straddle 5.25-5.35GHz

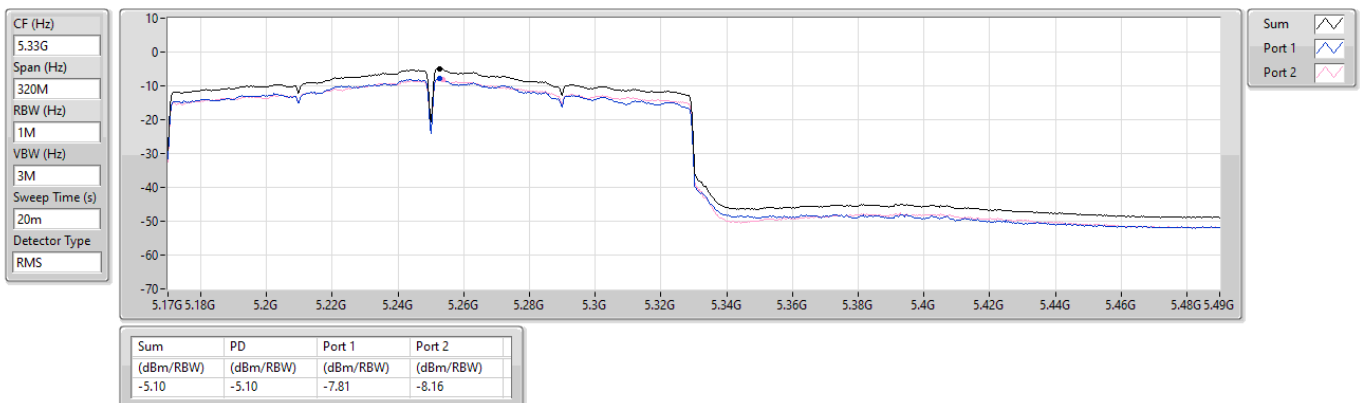




5.47-5.725GHz_802.11ax HEW160_Nss1,(MCS0)_2TX

PSD

5570MHz

CF (Hz)
5.57G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

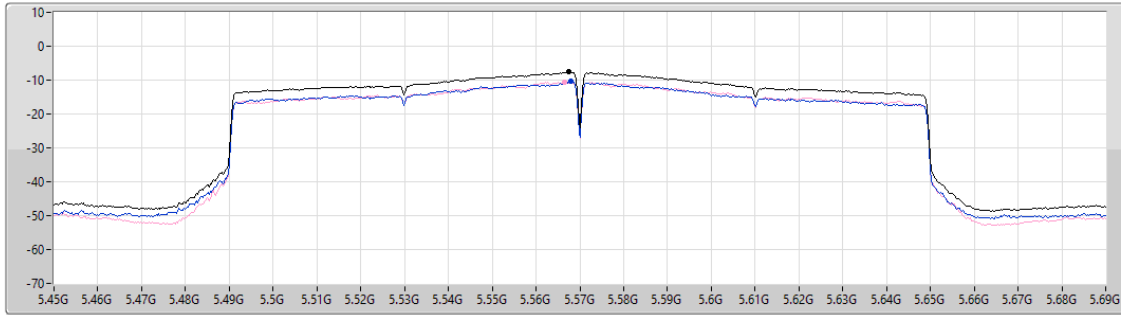

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-7.61	-7.61	-10.39	-10.53



Adapter mode

Unwanted Emissions (Below 1GHz)

Modulation	11a	Test Freq. (MHz)	5240
Polarization	Horizontal		
Test By :Allen Lee Temperature(°C):24 Humidity(%):63			
Level (dBUV/m) <			



Modulation	11a	Test Freq. (MHz)	5240
Polarization	Vertical		
Test By :Allen Lee Temperature(°C):24 Humidity(%):63			
Level (dBuV/m) <			



Modulation	11a	Test Freq. (MHz)	5825
Polarization	Horizontal		
Test By :Allen Lee Temperature(°C):24 Humidity(%):63			
Level (dBuV/m)			



Modulation	11a	Test Freq. (MHz)	5825
Polarization	Vertical		
Test By :Allen Lee Temperature(°C):24 Humidity(%):63			
Level (dBuV/m)			



POE mode

Unwanted Emissions (Below 1GHz)

Modulation	11a	Test Freq. (MHz)	5240
Polarization	Horizontal		
Test By :Allen Lee Temperature(°C):24 Humidity(%):63			
Level (dBUV/m)			



Modulation	11a	Test Freq. (MHz)	5240
Polarization	Vertical		
Test By :Allen Lee Temperature(°C):24 Humidity(%):63			
Level (dBuV/m) </			



Modulation	11a	Test Freq. (MHz)	5825
Polarization	Horizontal		
Test By :Allen Lee Temperature(°C):24 Humidity(%):63			
Level (dBUV/m)			




Modulation	11a	Test Freq. (MHz)	5825
Polarization	Vertical		
Test By :Allen Lee Temperature(°C):24 Humidity(%):63			
Level (dBuV/m)			




Unwanted Emissions (Above 1GHz) for 11a

Modulation	11a	Test Freq. (MHz)	5180
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):24 Humidity(%):63			
Level (dBuV/m)			

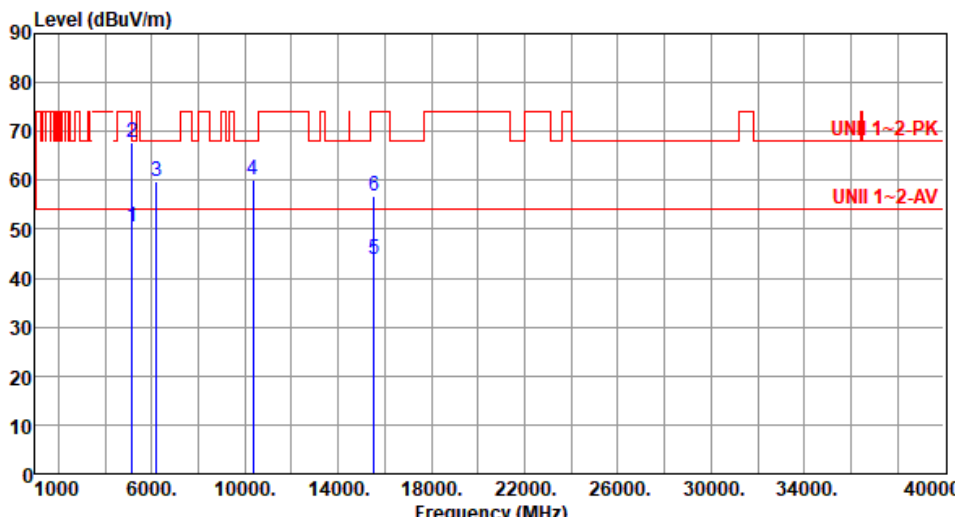


Modulation	11a	Test Freq. (MHz)	5180						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):24 Humidity(%):63									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	50.59	54.00	-3.41	50.09	0.50	Average	100	354
2	5150.00	67.63	74.00	-6.37	67.13	0.50	Peak	100	354
3	6216.00	59.82	68.20	-8.38	58.15	1.67	Peak	205	331
4	10360.00	60.08	68.20	-8.12	52.45	7.63	Peak	236	41
5	15540.00	43.70	54.00	-10.30	39.45	4.25	Average	325	351
6	15540.00	56.84	74.00	-17.16	52.59	4.25	Peak	325	351
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									

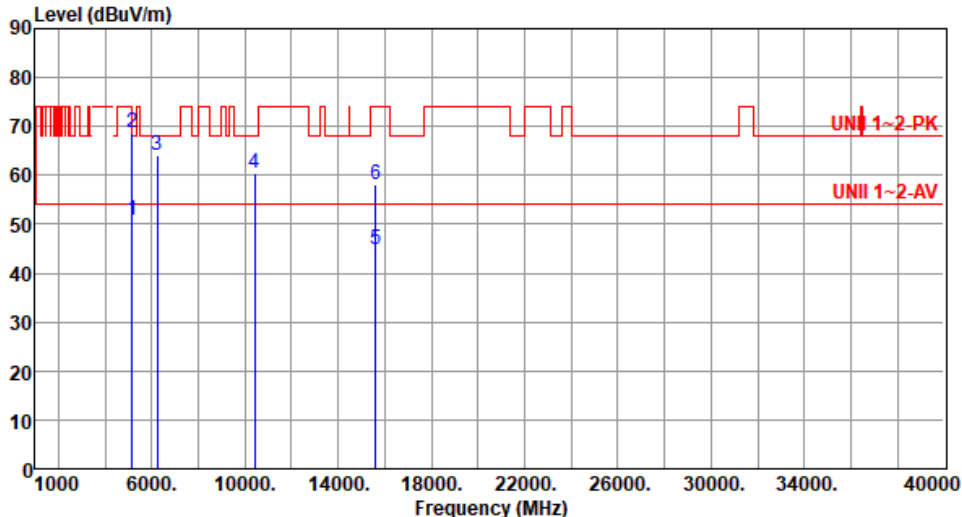

Modulation	11a	Test Freq. (MHz)	5200																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>50.81</td><td>54.00</td><td>-3.19</td><td>50.31</td><td>0.50</td><td>Average</td><td>224</td><td>356</td></tr><tr><td>2</td><td>5150.00</td><td>68.76</td><td>74.00</td><td>-5.24</td><td>68.26</td><td>0.50</td><td>Peak</td><td>224</td><td>356</td></tr><tr><td>3</td><td>6240.00</td><td>64.23</td><td>68.20</td><td>-3.97</td><td>62.43</td><td>1.80</td><td>Peak</td><td>293</td><td>332</td></tr><tr><td>4</td><td>10400.00</td><td>60.28</td><td>68.20</td><td>-7.92</td><td>52.59</td><td>7.69</td><td>Peak</td><td>107</td><td>5</td></tr><tr><td>5</td><td>15600.00</td><td>44.96</td><td>54.00</td><td>-9.04</td><td>40.95</td><td>4.01</td><td>Average</td><td>108</td><td>9</td></tr><tr><td>6</td><td>15600.00</td><td>58.22</td><td>74.00</td><td>-15.78</td><td>54.21</td><td>4.01</td><td>Peak</td><td>108</td><td>9</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	50.81	54.00	-3.19	50.31	0.50	Average	224	356	2	5150.00	68.76	74.00	-5.24	68.26	0.50	Peak	224	356	3	6240.00	64.23	68.20	-3.97	62.43	1.80	Peak	293	332	4	10400.00	60.28	68.20	-7.92	52.59	7.69	Peak	107	5	5	15600.00	44.96	54.00	-9.04	40.95	4.01	Average	108	9	6	15600.00	58.22	74.00	-15.78	54.21	4.01	Peak	108	9
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5150.00	50.81	54.00	-3.19	50.31	0.50	Average	224	356																																																																
2	5150.00	68.76	74.00	-5.24	68.26	0.50	Peak	224	356																																																																
3	6240.00	64.23	68.20	-3.97	62.43	1.80	Peak	293	332																																																																
4	10400.00	60.28	68.20	-7.92	52.59	7.69	Peak	107	5																																																																
5	15600.00	44.96	54.00	-9.04	40.95	4.01	Average	108	9																																																																
6	15600.00	58.22	74.00	-15.78	54.21	4.01	Peak	108	9																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

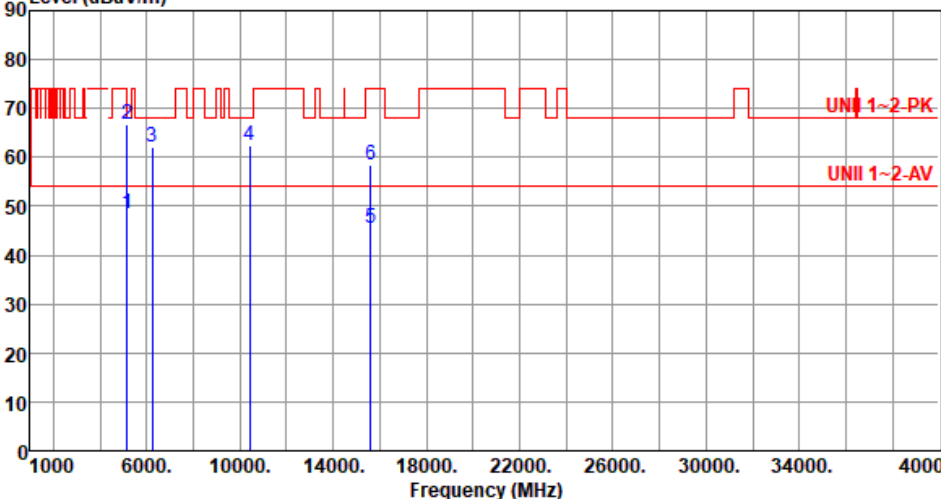

Modulation	11a	Test Freq. (MHz)	5200																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>48.62</td><td>54.00</td><td>-5.38</td><td>48.12</td><td>0.50</td><td>Average</td><td>103</td><td>355</td></tr><tr><td>2</td><td>5150.00</td><td>66.61</td><td>74.00</td><td>-7.39</td><td>66.11</td><td>0.50</td><td>Peak</td><td>103</td><td>355</td></tr><tr><td>3</td><td>6240.00</td><td>62.01</td><td>68.20</td><td>-6.19</td><td>60.21</td><td>1.80</td><td>Peak</td><td>203</td><td>331</td></tr><tr><td>4</td><td>10400.00</td><td>62.45</td><td>68.20</td><td>-5.75</td><td>54.76</td><td>7.69</td><td>Peak</td><td>236</td><td>36</td></tr><tr><td>5</td><td>15600.00</td><td>45.46</td><td>54.00</td><td>-8.54</td><td>41.45</td><td>4.01</td><td>Average</td><td>323</td><td>355</td></tr><tr><td>6</td><td>15600.00</td><td>58.60</td><td>74.00</td><td>-15.40</td><td>54.59</td><td>4.01</td><td>Peak</td><td>323</td><td>355</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	48.62	54.00	-5.38	48.12	0.50	Average	103	355	2	5150.00	66.61	74.00	-7.39	66.11	0.50	Peak	103	355	3	6240.00	62.01	68.20	-6.19	60.21	1.80	Peak	203	331	4	10400.00	62.45	68.20	-5.75	54.76	7.69	Peak	236	36	5	15600.00	45.46	54.00	-8.54	41.45	4.01	Average	323	355	6	15600.00	58.60	74.00	-15.40	54.59	4.01	Peak	323	355
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5150.00	48.62	54.00	-5.38	48.12	0.50	Average	103	355																																																																
2	5150.00	66.61	74.00	-7.39	66.11	0.50	Peak	103	355																																																																
3	6240.00	62.01	68.20	-6.19	60.21	1.80	Peak	203	331																																																																
4	10400.00	62.45	68.20	-5.75	54.76	7.69	Peak	236	36																																																																
5	15600.00	45.46	54.00	-8.54	41.45	4.01	Average	323	355																																																																
6	15600.00	58.60	74.00	-15.40	54.59	4.01	Peak	323	355																																																																



Modulation	11a	Test Freq. (MHz)	5240																																																																																										
Polarization	Horizontal																																																																																												
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																																													
Level (dBuV/m) UNII 1-2-PK UNII 1-2-AV <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>46.05</td><td>54.00</td><td>-7.95</td><td>45.55</td><td>0.50</td><td>Average</td><td>224</td><td>353</td></tr><tr><td>2</td><td>5150.00</td><td>58.44</td><td>74.00</td><td>-15.56</td><td>57.94</td><td>0.50</td><td>Peak</td><td>224</td><td>353</td></tr><tr><td>3</td><td>5350.00</td><td>44.13</td><td>54.00</td><td>-9.87</td><td>44.25</td><td>-0.12</td><td>Average</td><td>224</td><td>353</td></tr><tr><td>4</td><td>5350.00</td><td>55.13</td><td>74.00</td><td>-18.87</td><td>55.25</td><td>-0.12</td><td>Peak</td><td>224</td><td>353</td></tr><tr><td>5</td><td>6288.00</td><td>64.28</td><td>68.20</td><td>-3.92</td><td>62.30</td><td>1.98</td><td>Peak</td><td>295</td><td>330</td></tr><tr><td>6</td><td>10480.00</td><td>60.05</td><td>68.20</td><td>-8.15</td><td>52.36</td><td>7.69</td><td>Peak</td><td>106</td><td>4</td></tr><tr><td>7</td><td>15720.00</td><td>45.38</td><td>54.00</td><td>-8.62</td><td>41.13</td><td>4.25</td><td>Average</td><td>105</td><td>8</td></tr><tr><td>8</td><td>15720.00</td><td>57.89</td><td>74.00</td><td>-16.11</td><td>53.64</td><td>4.25</td><td>Peak</td><td>105</td><td>8</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	46.05	54.00	-7.95	45.55	0.50	Average	224	353	2	5150.00	58.44	74.00	-15.56	57.94	0.50	Peak	224	353	3	5350.00	44.13	54.00	-9.87	44.25	-0.12	Average	224	353	4	5350.00	55.13	74.00	-18.87	55.25	-0.12	Peak	224	353	5	6288.00	64.28	68.20	-3.92	62.30	1.98	Peak	295	330	6	10480.00	60.05	68.20	-8.15	52.36	7.69	Peak	106	4	7	15720.00	45.38	54.00	-8.62	41.13	4.25	Average	105	8	8	15720.00	57.89	74.00	-16.11	53.64	4.25	Peak	105	8
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5150.00	46.05	54.00	-7.95	45.55	0.50	Average	224	353																																																																																				
2	5150.00	58.44	74.00	-15.56	57.94	0.50	Peak	224	353																																																																																				
3	5350.00	44.13	54.00	-9.87	44.25	-0.12	Average	224	353																																																																																				
4	5350.00	55.13	74.00	-18.87	55.25	-0.12	Peak	224	353																																																																																				
5	6288.00	64.28	68.20	-3.92	62.30	1.98	Peak	295	330																																																																																				
6	10480.00	60.05	68.20	-8.15	52.36	7.69	Peak	106	4																																																																																				
7	15720.00	45.38	54.00	-8.62	41.13	4.25	Average	105	8																																																																																				
8	15720.00	57.89	74.00	-16.11	53.64	4.25	Peak	105	8																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													




Modulation	11a	Test Freq. (MHz)	5240																																																																																										
Polarization	Vertical																																																																																												
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																																													
Level (dBuV/m) UNII 1~2-PK UNII 1~2-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>43.91</td><td>54.00</td><td>-10.09</td><td>43.41</td><td>0.50</td><td>Average</td><td>105</td><td>356</td></tr><tr><td>2</td><td>5150.00</td><td>56.09</td><td>74.00</td><td>-17.91</td><td>55.59</td><td>0.50</td><td>Peak</td><td>105</td><td>356</td></tr><tr><td>3</td><td>5350.00</td><td>42.48</td><td>54.00</td><td>-11.52</td><td>42.60</td><td>-0.12</td><td>Average</td><td>105</td><td>356</td></tr><tr><td>4</td><td>5350.00</td><td>53.91</td><td>74.00</td><td>-20.09</td><td>54.03</td><td>-0.12</td><td>Peak</td><td>105</td><td>356</td></tr><tr><td>5</td><td>6288.00</td><td>61.96</td><td>68.20</td><td>-6.24</td><td>59.98</td><td>1.98</td><td>Peak</td><td>202</td><td>328</td></tr><tr><td>6</td><td>10480.00</td><td>62.36</td><td>68.20</td><td>-5.84</td><td>54.67</td><td>7.69</td><td>Peak</td><td>235</td><td>38</td></tr><tr><td>7</td><td>15720.00</td><td>45.85</td><td>54.00</td><td>-8.15</td><td>41.60</td><td>4.25</td><td>Average</td><td>326</td><td>358</td></tr><tr><td>8</td><td>15720.00</td><td>59.03</td><td>74.00</td><td>-14.97</td><td>54.78</td><td>4.25</td><td>Peak</td><td>326</td><td>358</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	43.91	54.00	-10.09	43.41	0.50	Average	105	356	2	5150.00	56.09	74.00	-17.91	55.59	0.50	Peak	105	356	3	5350.00	42.48	54.00	-11.52	42.60	-0.12	Average	105	356	4	5350.00	53.91	74.00	-20.09	54.03	-0.12	Peak	105	356	5	6288.00	61.96	68.20	-6.24	59.98	1.98	Peak	202	328	6	10480.00	62.36	68.20	-5.84	54.67	7.69	Peak	235	38	7	15720.00	45.85	54.00	-8.15	41.60	4.25	Average	326	358	8	15720.00	59.03	74.00	-14.97	54.78	4.25	Peak	326	358
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5150.00	43.91	54.00	-10.09	43.41	0.50	Average	105	356																																																																																				
2	5150.00	56.09	74.00	-17.91	55.59	0.50	Peak	105	356																																																																																				
3	5350.00	42.48	54.00	-11.52	42.60	-0.12	Average	105	356																																																																																				
4	5350.00	53.91	74.00	-20.09	54.03	-0.12	Peak	105	356																																																																																				
5	6288.00	61.96	68.20	-6.24	59.98	1.98	Peak	202	328																																																																																				
6	10480.00	62.36	68.20	-5.84	54.67	7.69	Peak	235	38																																																																																				
7	15720.00	45.85	54.00	-8.15	41.60	4.25	Average	326	358																																																																																				
8	15720.00	59.03	74.00	-14.97	54.78	4.25	Peak	326	358																																																																																				



Modulation	11a	Test Freq. (MHz)	5260																																																																																
Polarization	Horizontal																																																																																		
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																																			
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>43.62</td><td>54.00</td><td>-10.38</td><td>43.12</td><td>0.50</td><td>Average</td><td>215</td><td>355</td></tr><tr><td>2</td><td>5150.00</td><td>55.09</td><td>74.00</td><td>-18.91</td><td>54.59</td><td>0.50</td><td>Peak</td><td>215</td><td>355</td></tr><tr><td>3</td><td>5350.00</td><td>43.44</td><td>54.00</td><td>-10.56</td><td>43.56</td><td>-0.12</td><td>Average</td><td>215</td><td>355</td></tr><tr><td>4</td><td>5350.00</td><td>54.78</td><td>74.00</td><td>-19.22</td><td>54.90</td><td>-0.12</td><td>Peak</td><td>215</td><td>355</td></tr><tr><td>5</td><td>10520.00</td><td>54.96</td><td>68.20</td><td>-13.24</td><td>47.29</td><td>7.67</td><td>Peak</td><td>100</td><td>30</td></tr><tr><td>6</td><td>15780.00</td><td>42.66</td><td>54.00</td><td>-11.34</td><td>38.37</td><td>4.29</td><td>Average</td><td>100</td><td>40</td></tr><tr><td>7</td><td>15780.00</td><td>55.06</td><td>74.00</td><td>-18.94</td><td>50.77</td><td>4.29</td><td>Peak</td><td>100</td><td>40</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	43.62	54.00	-10.38	43.12	0.50	Average	215	355	2	5150.00	55.09	74.00	-18.91	54.59	0.50	Peak	215	355	3	5350.00	43.44	54.00	-10.56	43.56	-0.12	Average	215	355	4	5350.00	54.78	74.00	-19.22	54.90	-0.12	Peak	215	355	5	10520.00	54.96	68.20	-13.24	47.29	7.67	Peak	100	30	6	15780.00	42.66	54.00	-11.34	38.37	4.29	Average	100	40	7	15780.00	55.06	74.00	-18.94	50.77	4.29	Peak	100	40
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5150.00	43.62	54.00	-10.38	43.12	0.50	Average	215	355																																																																										
2	5150.00	55.09	74.00	-18.91	54.59	0.50	Peak	215	355																																																																										
3	5350.00	43.44	54.00	-10.56	43.56	-0.12	Average	215	355																																																																										
4	5350.00	54.78	74.00	-19.22	54.90	-0.12	Peak	215	355																																																																										
5	10520.00	54.96	68.20	-13.24	47.29	7.67	Peak	100	30																																																																										
6	15780.00	42.66	54.00	-11.34	38.37	4.29	Average	100	40																																																																										
7	15780.00	55.06	74.00	-18.94	50.77	4.29	Peak	100	40																																																																										

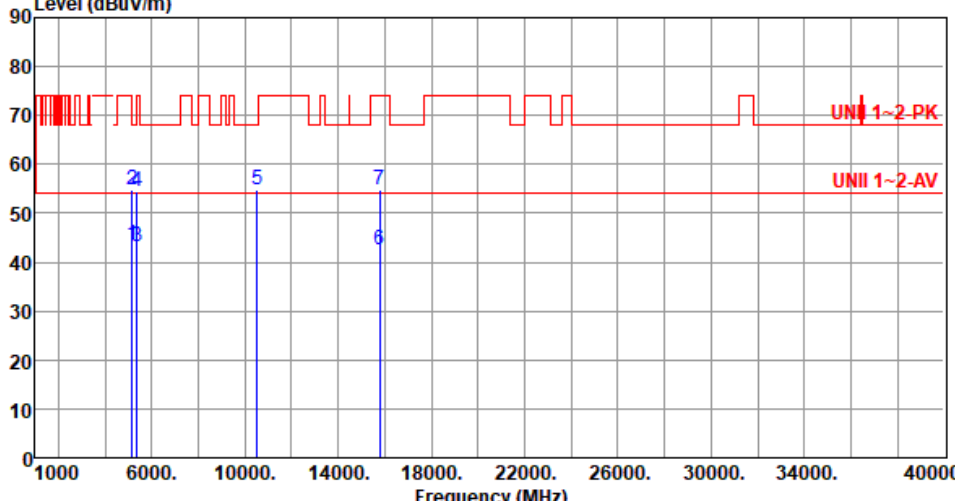

Modulation	11a	Test Freq. (MHz)	5260																																																																																
Polarization	Vertical																																																																																		
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																																			
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>43.52</td><td>54.00</td><td>-10.48</td><td>43.02</td><td>0.50</td><td>Average</td><td>100</td><td>358</td></tr><tr><td>2</td><td>5150.00</td><td>54.76</td><td>74.00</td><td>-19.24</td><td>54.26</td><td>0.50</td><td>Peak</td><td>100</td><td>358</td></tr><tr><td>3</td><td>5350.00</td><td>43.18</td><td>54.00</td><td>-10.82</td><td>43.30</td><td>-0.12</td><td>Average</td><td>100</td><td>358</td></tr><tr><td>4</td><td>5350.00</td><td>54.48</td><td>74.00</td><td>-19.52</td><td>54.60</td><td>-0.12</td><td>Peak</td><td>100</td><td>358</td></tr><tr><td>5</td><td>10520.00</td><td>54.69</td><td>68.20</td><td>-13.51</td><td>47.02</td><td>7.67</td><td>Peak</td><td>100</td><td>60</td></tr><tr><td>6</td><td>15780.00</td><td>42.49</td><td>54.00</td><td>-11.51</td><td>38.20</td><td>4.29</td><td>Average</td><td>100</td><td>10</td></tr><tr><td>7</td><td>15780.00</td><td>54.93</td><td>74.00</td><td>-19.07</td><td>50.64</td><td>4.29</td><td>Peak</td><td>100</td><td>10</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	43.52	54.00	-10.48	43.02	0.50	Average	100	358	2	5150.00	54.76	74.00	-19.24	54.26	0.50	Peak	100	358	3	5350.00	43.18	54.00	-10.82	43.30	-0.12	Average	100	358	4	5350.00	54.48	74.00	-19.52	54.60	-0.12	Peak	100	358	5	10520.00	54.69	68.20	-13.51	47.02	7.67	Peak	100	60	6	15780.00	42.49	54.00	-11.51	38.20	4.29	Average	100	10	7	15780.00	54.93	74.00	-19.07	50.64	4.29	Peak	100	10
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5150.00	43.52	54.00	-10.48	43.02	0.50	Average	100	358																																																																										
2	5150.00	54.76	74.00	-19.24	54.26	0.50	Peak	100	358																																																																										
3	5350.00	43.18	54.00	-10.82	43.30	-0.12	Average	100	358																																																																										
4	5350.00	54.48	74.00	-19.52	54.60	-0.12	Peak	100	358																																																																										
5	10520.00	54.69	68.20	-13.51	47.02	7.67	Peak	100	60																																																																										
6	15780.00	42.49	54.00	-11.51	38.20	4.29	Average	100	10																																																																										
7	15780.00	54.93	74.00	-19.07	50.64	4.29	Peak	100	10																																																																										



Modulation	11a	Test Freq. (MHz)	5300																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5350.00</td><td>43.47</td><td>54.00</td><td>-10.53</td><td>43.59</td><td>-0.12</td><td>Average</td><td>213</td><td>354</td></tr><tr><td>2</td><td>5350.00</td><td>54.65</td><td>74.00</td><td>-19.35</td><td>54.77</td><td>-0.12</td><td>Peak</td><td>213</td><td>354</td></tr><tr><td>3</td><td>10600.00</td><td>42.04</td><td>54.00</td><td>-11.96</td><td>34.25</td><td>7.79</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>4</td><td>10600.00</td><td>54.95</td><td>74.00</td><td>-19.05</td><td>47.16</td><td>7.79</td><td>Peak</td><td>100</td><td>50</td></tr><tr><td>5</td><td>15900.00</td><td>42.95</td><td>54.00</td><td>-11.05</td><td>38.52</td><td>4.43</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>6</td><td>15900.00</td><td>55.34</td><td>74.00</td><td>-18.66</td><td>50.91</td><td>4.43</td><td>Peak</td><td>100</td><td>20</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5350.00	43.47	54.00	-10.53	43.59	-0.12	Average	213	354	2	5350.00	54.65	74.00	-19.35	54.77	-0.12	Peak	213	354	3	10600.00	42.04	54.00	-11.96	34.25	7.79	Average	100	50	4	10600.00	54.95	74.00	-19.05	47.16	7.79	Peak	100	50	5	15900.00	42.95	54.00	-11.05	38.52	4.43	Average	100	20	6	15900.00	55.34	74.00	-18.66	50.91	4.43	Peak	100	20
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5350.00	43.47	54.00	-10.53	43.59	-0.12	Average	213	354																																																																
2	5350.00	54.65	74.00	-19.35	54.77	-0.12	Peak	213	354																																																																
3	10600.00	42.04	54.00	-11.96	34.25	7.79	Average	100	50																																																																
4	10600.00	54.95	74.00	-19.05	47.16	7.79	Peak	100	50																																																																
5	15900.00	42.95	54.00	-11.05	38.52	4.43	Average	100	20																																																																
6	15900.00	55.34	74.00	-18.66	50.91	4.43	Peak	100	20																																																																



Modulation	11a	Test Freq. (MHz)	5300																																																																																							
Polarization	Vertical																																																																																									
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																																										
Level (dBuV/m) <table><thead><tr><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5350.00</td><td>43.10</td><td>54.00</td><td>-10.90</td><td>43.22</td><td>-0.12</td><td>Average</td><td>100</td><td>356</td></tr><tr><td>2</td><td>5350.00</td><td>54.18</td><td>74.00</td><td>-19.82</td><td>54.30</td><td>-0.12</td><td>Peak</td><td>100</td><td>356</td></tr><tr><td>3</td><td>10600.00</td><td>41.96</td><td>54.00</td><td>-12.04</td><td>34.17</td><td>7.79</td><td>Average</td><td>100</td><td>100</td></tr><tr><td>4</td><td>10600.00</td><td>54.85</td><td>74.00</td><td>-19.15</td><td>47.06</td><td>7.79</td><td>Peak</td><td>100</td><td>100</td></tr><tr><td>5</td><td>15900.00</td><td>42.86</td><td>54.00</td><td>-11.14</td><td>38.43</td><td>4.43</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>6</td><td>15900.00</td><td>55.08</td><td>74.00</td><td>-18.92</td><td>50.65</td><td>4.43</td><td>Peak</td><td>100</td><td>30</td></tr></tbody></table>				Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	MHz	level			reading			High	Table								cm	deg	1	5350.00	43.10	54.00	-10.90	43.22	-0.12	Average	100	356	2	5350.00	54.18	74.00	-19.82	54.30	-0.12	Peak	100	356	3	10600.00	41.96	54.00	-12.04	34.17	7.79	Average	100	100	4	10600.00	54.85	74.00	-19.15	47.06	7.79	Peak	100	100	5	15900.00	42.86	54.00	-11.14	38.43	4.43	Average	100	30	6	15900.00	55.08	74.00	-18.92	50.65	4.43	Peak	100	30
Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																		
MHz	level			reading			High	Table																																																																																		
							cm	deg																																																																																		
1	5350.00	43.10	54.00	-10.90	43.22	-0.12	Average	100	356																																																																																	
2	5350.00	54.18	74.00	-19.82	54.30	-0.12	Peak	100	356																																																																																	
3	10600.00	41.96	54.00	-12.04	34.17	7.79	Average	100	100																																																																																	
4	10600.00	54.85	74.00	-19.15	47.06	7.79	Peak	100	100																																																																																	
5	15900.00	42.86	54.00	-11.14	38.43	4.43	Average	100	30																																																																																	
6	15900.00	55.08	74.00	-18.92	50.65	4.43	Peak	100	30																																																																																	
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																										



Modulation	11a	Test Freq. (MHz)	5320																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5350.00</td><td>47.11</td><td>54.00</td><td>-6.89</td><td>47.23</td><td>-0.12</td><td>Average</td><td>222</td><td>353</td></tr><tr><td>2</td><td>5350.00</td><td>58.16</td><td>74.00</td><td>-15.84</td><td>58.28</td><td>-0.12</td><td>Peak</td><td>222</td><td>353</td></tr><tr><td>3</td><td>10640.00</td><td>41.91</td><td>54.00</td><td>-12.09</td><td>34.14</td><td>7.77</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>4</td><td>10640.00</td><td>55.02</td><td>74.00</td><td>-18.98</td><td>47.25</td><td>7.77</td><td>Peak</td><td>100</td><td>30</td></tr><tr><td>5</td><td>15960.00</td><td>42.69</td><td>54.00</td><td>-11.31</td><td>38.42</td><td>4.27</td><td>Average</td><td>100</td><td>90</td></tr><tr><td>6</td><td>15960.00</td><td>54.92</td><td>74.00</td><td>-19.08</td><td>50.65</td><td>4.27</td><td>Peak</td><td>100</td><td>90</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5350.00	47.11	54.00	-6.89	47.23	-0.12	Average	222	353	2	5350.00	58.16	74.00	-15.84	58.28	-0.12	Peak	222	353	3	10640.00	41.91	54.00	-12.09	34.14	7.77	Average	100	30	4	10640.00	55.02	74.00	-18.98	47.25	7.77	Peak	100	30	5	15960.00	42.69	54.00	-11.31	38.42	4.27	Average	100	90	6	15960.00	54.92	74.00	-19.08	50.65	4.27	Peak	100	90
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5350.00	47.11	54.00	-6.89	47.23	-0.12	Average	222	353																																																																
2	5350.00	58.16	74.00	-15.84	58.28	-0.12	Peak	222	353																																																																
3	10640.00	41.91	54.00	-12.09	34.14	7.77	Average	100	30																																																																
4	10640.00	55.02	74.00	-18.98	47.25	7.77	Peak	100	30																																																																
5	15960.00	42.69	54.00	-11.31	38.42	4.27	Average	100	90																																																																
6	15960.00	54.92	74.00	-19.08	50.65	4.27	Peak	100	90																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	11a	Test Freq. (MHz)	5320																																																																																										
Polarization	Vertical																																																																																												
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																																													
Level (dBuV/m) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5350.00</td><td>43.45</td><td>54.00</td><td>-10.55</td><td>43.57</td><td>-0.12</td><td>Average</td><td>100</td><td>355</td></tr><tr><td>2</td><td>5350.00</td><td>55.48</td><td>74.00</td><td>-18.52</td><td>55.60</td><td>-0.12</td><td>Peak</td><td>100</td><td>355</td></tr><tr><td>3</td><td>10640.00</td><td>41.78</td><td>54.00</td><td>-12.22</td><td>34.01</td><td>7.77</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>4</td><td>10640.00</td><td>54.78</td><td>74.00</td><td>-19.22</td><td>47.01</td><td>7.77</td><td>Peak</td><td>100</td><td>50</td></tr><tr><td>5</td><td>15960.00</td><td>42.49</td><td>54.00</td><td>-11.51</td><td>38.22</td><td>4.27</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>6</td><td>15960.00</td><td>54.75</td><td>74.00</td><td>-19.25</td><td>50.48</td><td>4.27</td><td>Peak</td><td>100</td><td>20</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5350.00	43.45	54.00	-10.55	43.57	-0.12	Average	100	355	2	5350.00	55.48	74.00	-18.52	55.60	-0.12	Peak	100	355	3	10640.00	41.78	54.00	-12.22	34.01	7.77	Average	100	50	4	10640.00	54.78	74.00	-19.22	47.01	7.77	Peak	100	50	5	15960.00	42.49	54.00	-11.51	38.22	4.27	Average	100	20	6	15960.00	54.75	74.00	-19.25	50.48	4.27	Peak	100	20
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	5350.00	43.45	54.00	-10.55	43.57	-0.12	Average	100	355																																																																																				
2	5350.00	55.48	74.00	-18.52	55.60	-0.12	Peak	100	355																																																																																				
3	10640.00	41.78	54.00	-12.22	34.01	7.77	Average	100	50																																																																																				
4	10640.00	54.78	74.00	-19.22	47.01	7.77	Peak	100	50																																																																																				
5	15960.00	42.49	54.00	-11.51	38.22	4.27	Average	100	20																																																																																				
6	15960.00	54.75	74.00	-19.25	50.48	4.27	Peak	100	20																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													



Modulation	11a	Test Freq. (MHz)	5500						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):24 Humidity(%):63									
Level (dBuV/m)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	46.13	54.00	-7.87	45.89	0.24	Average	216	348
2	5460.00	60.92	74.00	-13.08	60.68	0.24	Peak	216	348
3	5470.00	62.70	68.20	-5.50	62.44	0.26	Peak	216	348
4	5760.00	59.53	68.20	-8.67	58.78	0.75	Peak	216	348
5	11000.00	46.61	54.00	-7.39	38.65	7.96	Average	141	352
6	11000.00	59.41	74.00	-14.59	51.45	7.96	Peak	141	352
7	16500.00	57.54	68.20	-10.66	50.78	6.76	Peak	100	40
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Modulation	11a	Test Freq. (MHz)	5500																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																																																							
Level (dBuV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5460.00</td><td>44.16</td><td>54.00</td><td>-9.84</td><td>43.92</td><td>0.24</td><td>Average</td><td>185</td><td>354</td></tr><tr><td>2</td><td>5460.00</td><td>56.53</td><td>74.00</td><td>-17.47</td><td>56.29</td><td>0.24</td><td>Peak</td><td>185</td><td>354</td></tr><tr><td>3</td><td>5470.00</td><td>57.63</td><td>68.20</td><td>-10.57</td><td>57.37</td><td>0.26</td><td>Peak</td><td>185</td><td>354</td></tr><tr><td>4</td><td>5760.00</td><td>58.78</td><td>68.20</td><td>-9.42</td><td>58.03</td><td>0.75</td><td>Peak</td><td>185</td><td>354</td></tr><tr><td>5</td><td>11000.00</td><td>44.98</td><td>54.00</td><td>-9.02</td><td>37.02</td><td>7.96</td><td>Average</td><td>100</td><td>358</td></tr><tr><td>6</td><td>11000.00</td><td>58.17</td><td>74.00</td><td>-15.83</td><td>50.21</td><td>7.96</td><td>Peak</td><td>100</td><td>358</td></tr><tr><td>7</td><td>16500.00</td><td>57.35</td><td>68.20</td><td>-10.85</td><td>50.59</td><td>6.76</td><td>Peak</td><td>100</td><td>20</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5460.00	44.16	54.00	-9.84	43.92	0.24	Average	185	354	2	5460.00	56.53	74.00	-17.47	56.29	0.24	Peak	185	354	3	5470.00	57.63	68.20	-10.57	57.37	0.26	Peak	185	354	4	5760.00	58.78	68.20	-9.42	58.03	0.75	Peak	185	354	5	11000.00	44.98	54.00	-9.02	37.02	7.96	Average	100	358	6	11000.00	58.17	74.00	-15.83	50.21	7.96	Peak	100	358	7	16500.00	57.35	68.20	-10.85	50.59	6.76	Peak	100	20
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																														
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																														
		dBuV/m			dBuV			cm	deg																																																																																														
1	5460.00	44.16	54.00	-9.84	43.92	0.24	Average	185	354																																																																																														
2	5460.00	56.53	74.00	-17.47	56.29	0.24	Peak	185	354																																																																																														
3	5470.00	57.63	68.20	-10.57	57.37	0.26	Peak	185	354																																																																																														
4	5760.00	58.78	68.20	-9.42	58.03	0.75	Peak	185	354																																																																																														
5	11000.00	44.98	54.00	-9.02	37.02	7.96	Average	100	358																																																																																														
6	11000.00	58.17	74.00	-15.83	50.21	7.96	Peak	100	358																																																																																														
7	16500.00	57.35	68.20	-10.85	50.59	6.76	Peak	100	20																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																							



Modulation	11a	Test Freq. (MHz)	5580						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):24 Humidity(%):63									
Level (dBuV/m) UNII 1~2-PK UNII 1~2-AV Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5460.00	43.26	54.00	-10.74	43.02	0.24	Average	220	348
2	5460.00	54.97	74.00	-19.03	54.73	0.24	Peak	220	348
3	5470.00	55.59	68.20	-12.61	55.33	0.26	Peak	220	348
4	5725.00	56.21	68.20	-11.99	55.59	0.62	Peak	220	348
5	5760.00	59.31	68.20	-8.89	58.56	0.75	Peak	220	348
6	11160.00	45.90	54.00	-8.10	38.81	7.09	Average	137	351
7	11160.00	58.38	74.00	-15.62	51.29	7.09	Peak	137	351
8	16740.00	58.20	68.20	-10.00	51.05	7.15	Peak	100	90
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									




Modulation	11a	Test Freq. (MHz)	5580																																																																																										
Polarization	Vertical																																																																																												
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																																													
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>43.09</td><td>54.00</td><td>-10.91</td><td>42.85</td><td>0.24</td><td>Average</td><td>186</td><td>355</td></tr><tr><td>2</td><td>5460.00</td><td>54.80</td><td>74.00</td><td>-19.20</td><td>54.56</td><td>0.24</td><td>Peak</td><td>186</td><td>355</td></tr><tr><td>3</td><td>5470.00</td><td>55.02</td><td>68.20</td><td>-13.18</td><td>54.76</td><td>0.26</td><td>Peak</td><td>186</td><td>355</td></tr><tr><td>4</td><td>5725.00</td><td>55.95</td><td>68.20</td><td>-12.25</td><td>55.33</td><td>0.62</td><td>Peak</td><td>186</td><td>355</td></tr><tr><td>5</td><td>5760.00</td><td>58.77</td><td>68.20</td><td>-9.43</td><td>58.02</td><td>0.75</td><td>Peak</td><td>186</td><td>355</td></tr><tr><td>6</td><td>11160.00</td><td>44.08</td><td>54.00</td><td>-9.92</td><td>36.99</td><td>7.09</td><td>Average</td><td>100</td><td>359</td></tr><tr><td>7</td><td>11160.00</td><td>55.74</td><td>74.00</td><td>-18.26</td><td>48.65</td><td>7.09</td><td>Peak</td><td>100</td><td>359</td></tr><tr><td>8</td><td>16740.00</td><td>58.28</td><td>68.20</td><td>-9.92</td><td>51.13</td><td>7.15</td><td>Peak</td><td>100</td><td>50</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	43.09	54.00	-10.91	42.85	0.24	Average	186	355	2	5460.00	54.80	74.00	-19.20	54.56	0.24	Peak	186	355	3	5470.00	55.02	68.20	-13.18	54.76	0.26	Peak	186	355	4	5725.00	55.95	68.20	-12.25	55.33	0.62	Peak	186	355	5	5760.00	58.77	68.20	-9.43	58.02	0.75	Peak	186	355	6	11160.00	44.08	54.00	-9.92	36.99	7.09	Average	100	359	7	11160.00	55.74	74.00	-18.26	48.65	7.09	Peak	100	359	8	16740.00	58.28	68.20	-9.92	51.13	7.15	Peak	100	50
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5460.00	43.09	54.00	-10.91	42.85	0.24	Average	186	355																																																																																				
2	5460.00	54.80	74.00	-19.20	54.56	0.24	Peak	186	355																																																																																				
3	5470.00	55.02	68.20	-13.18	54.76	0.26	Peak	186	355																																																																																				
4	5725.00	55.95	68.20	-12.25	55.33	0.62	Peak	186	355																																																																																				
5	5760.00	58.77	68.20	-9.43	58.02	0.75	Peak	186	355																																																																																				
6	11160.00	44.08	54.00	-9.92	36.99	7.09	Average	100	359																																																																																				
7	11160.00	55.74	74.00	-18.26	48.65	7.09	Peak	100	359																																																																																				
8	16740.00	58.28	68.20	-9.92	51.13	7.15	Peak	100	50																																																																																				



Modulation	11a	Test Freq. (MHz)	5700																																																																																
Polarization	Horizontal																																																																																		
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																																			
Level (dBuV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5725.00</td><td>59.26</td><td>68.20</td><td>-8.94</td><td>58.64</td><td>0.62</td><td>Peak</td><td>204</td><td>349</td></tr><tr><td>2</td><td>5760.00</td><td>59.46</td><td>68.20</td><td>-8.74</td><td>58.71</td><td>0.75</td><td>Peak</td><td>204</td><td>349</td></tr><tr><td>3</td><td>11400.00</td><td>45.98</td><td>54.00</td><td>-8.02</td><td>38.65</td><td>7.33</td><td>Average</td><td>140</td><td>354</td></tr><tr><td>4</td><td>11400.00</td><td>58.79</td><td>74.00</td><td>-15.21</td><td>51.46</td><td>7.33</td><td>Peak</td><td>140</td><td>354</td></tr><tr><td>5</td><td>17100.00</td><td>57.80</td><td>68.20</td><td>-10.40</td><td>51.21</td><td>6.59</td><td>Peak</td><td>100</td><td>80</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5725.00	59.26	68.20	-8.94	58.64	0.62	Peak	204	349	2	5760.00	59.46	68.20	-8.74	58.71	0.75	Peak	204	349	3	11400.00	45.98	54.00	-8.02	38.65	7.33	Average	140	354	4	11400.00	58.79	74.00	-15.21	51.46	7.33	Peak	140	354	5	17100.00	57.80	68.20	-10.40	51.21	6.59	Peak	100	80
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																										
	MHz	level			reading			High	Table																																																																										
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																										
1	5725.00	59.26	68.20	-8.94	58.64	0.62	Peak	204	349																																																																										
2	5760.00	59.46	68.20	-8.74	58.71	0.75	Peak	204	349																																																																										
3	11400.00	45.98	54.00	-8.02	38.65	7.33	Average	140	354																																																																										
4	11400.00	58.79	74.00	-15.21	51.46	7.33	Peak	140	354																																																																										
5	17100.00	57.80	68.20	-10.40	51.21	6.59	Peak	100	80																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																			

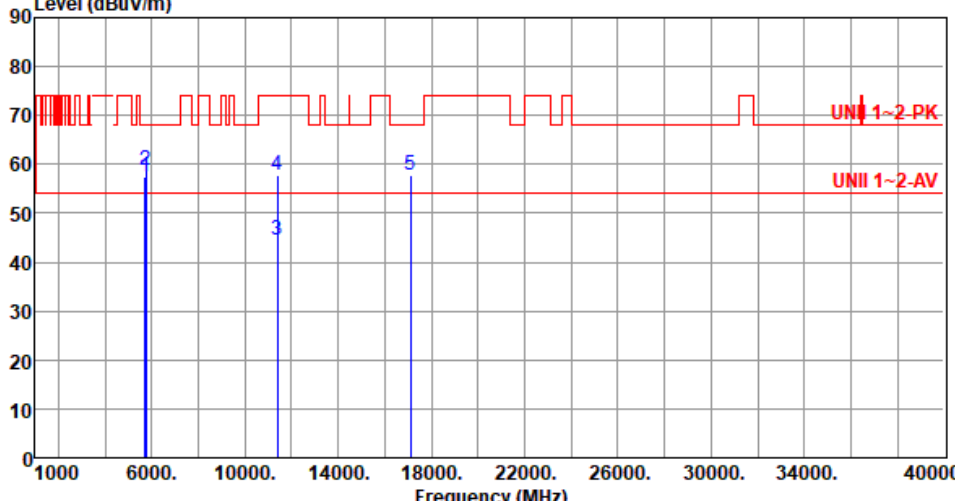

Modulation	11a	Test Freq. (MHz)	5700																																																																																
Polarization	Vertical																																																																																		
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																																			
Level (dBuV/m)  <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5725.00</td><td>57.37</td><td>68.20</td><td>-10.83</td><td>56.75</td><td>0.62</td><td>Peak</td><td>189</td><td>355</td></tr><tr><td>2</td><td>5760.00</td><td>58.80</td><td>68.20</td><td>-9.40</td><td>58.05</td><td>0.75</td><td>Peak</td><td>189</td><td>355</td></tr><tr><td>3</td><td>11400.00</td><td>44.58</td><td>54.00</td><td>-9.42</td><td>37.25</td><td>7.33</td><td>Average</td><td>100</td><td>356</td></tr><tr><td>4</td><td>11400.00</td><td>57.70</td><td>74.00</td><td>-16.30</td><td>50.37</td><td>7.33</td><td>Peak</td><td>100</td><td>356</td></tr><tr><td>5</td><td>17100.00</td><td>57.64</td><td>68.20</td><td>-10.56</td><td>51.05</td><td>6.59</td><td>Peak</td><td>100</td><td>60</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5725.00	57.37	68.20	-10.83	56.75	0.62	Peak	189	355	2	5760.00	58.80	68.20	-9.40	58.05	0.75	Peak	189	355	3	11400.00	44.58	54.00	-9.42	37.25	7.33	Average	100	356	4	11400.00	57.70	74.00	-16.30	50.37	7.33	Peak	100	356	5	17100.00	57.64	68.20	-10.56	51.05	6.59	Peak	100	60
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																										
		dBuV/m			dBuV			cm	deg																																																																										
1	5725.00	57.37	68.20	-10.83	56.75	0.62	Peak	189	355																																																																										
2	5760.00	58.80	68.20	-9.40	58.05	0.75	Peak	189	355																																																																										
3	11400.00	44.58	54.00	-9.42	37.25	7.33	Average	100	356																																																																										
4	11400.00	57.70	74.00	-16.30	50.37	7.33	Peak	100	356																																																																										
5	17100.00	57.64	68.20	-10.56	51.05	6.59	Peak	100	60																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																			




Modulation	11a	Test Freq. (MHz)	5720																																																		
Polarization	Horizontal																																																				
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																					
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5850.00</td><td>55.60</td><td>68.20</td><td>-12.60</td><td>54.64</td><td>0.96</td><td>Peak</td><td>333</td><td>349</td></tr><tr><td>2</td><td>11440.00</td><td>45.81</td><td>54.00</td><td>-8.19</td><td>38.49</td><td>7.32</td><td>Average</td><td>136</td><td>355</td></tr><tr><td>3</td><td>11440.00</td><td>58.88</td><td>74.00</td><td>-15.12</td><td>51.56</td><td>7.32</td><td>Peak</td><td>136</td><td>355</td></tr><tr><td>4</td><td>17160.00</td><td>57.75</td><td>68.20</td><td>-10.45</td><td>51.33</td><td>6.42</td><td>Peak</td><td>100</td><td>60</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5850.00	55.60	68.20	-12.60	54.64	0.96	Peak	333	349	2	11440.00	45.81	54.00	-8.19	38.49	7.32	Average	136	355	3	11440.00	58.88	74.00	-15.12	51.56	7.32	Peak	136	355	4	17160.00	57.75	68.20	-10.45	51.33	6.42	Peak	100	60
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	5850.00	55.60	68.20	-12.60	54.64	0.96	Peak	333	349																																												
2	11440.00	45.81	54.00	-8.19	38.49	7.32	Average	136	355																																												
3	11440.00	58.88	74.00	-15.12	51.56	7.32	Peak	136	355																																												
4	17160.00	57.75	68.20	-10.45	51.33	6.42	Peak	100	60																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					




Modulation	11a	Test Freq. (MHz)	5720																																																		
Polarization	Vertical																																																				
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																					
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5850.00</td><td>55.78</td><td>68.20</td><td>-12.42</td><td>54.82</td><td>0.96</td><td>Peak</td><td>187</td><td>349</td></tr><tr><td>2</td><td>11440.00</td><td>44.07</td><td>54.00</td><td>-9.93</td><td>36.75</td><td>7.32</td><td>Average</td><td>100</td><td>326</td></tr><tr><td>3</td><td>11440.00</td><td>55.91</td><td>74.00</td><td>-18.09</td><td>48.59</td><td>7.32</td><td>Peak</td><td>100</td><td>326</td></tr><tr><td>4</td><td>17160.00</td><td>57.76</td><td>68.20</td><td>-10.44</td><td>51.34</td><td>6.42</td><td>Peak</td><td>100</td><td>215</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5850.00	55.78	68.20	-12.42	54.82	0.96	Peak	187	349	2	11440.00	44.07	54.00	-9.93	36.75	7.32	Average	100	326	3	11440.00	55.91	74.00	-18.09	48.59	7.32	Peak	100	326	4	17160.00	57.76	68.20	-10.44	51.34	6.42	Peak	100	215
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	5850.00	55.78	68.20	-12.42	54.82	0.96	Peak	187	349																																												
2	11440.00	44.07	54.00	-9.93	36.75	7.32	Average	100	326																																												
3	11440.00	55.91	74.00	-18.09	48.59	7.32	Peak	100	326																																												
4	17160.00	57.76	68.20	-10.44	51.34	6.42	Peak	100	215																																												

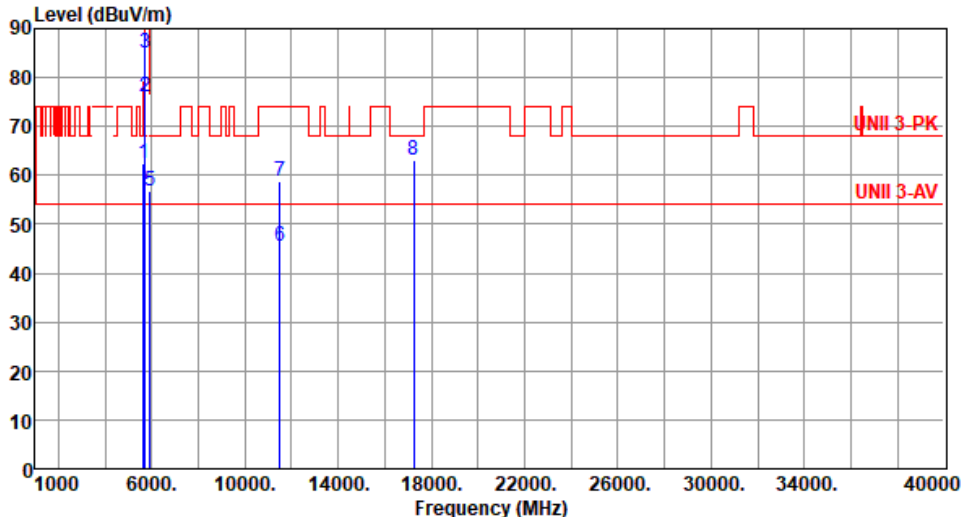

Modulation	11a	Test Freq. (MHz)	5745																																																																																										
Polarization	Horizontal																																																																																												
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>62.34</td><td>68.20</td><td>-5.86</td><td>62.06</td><td>0.28</td><td>Peak</td><td>312</td><td>347</td></tr><tr><td>2</td><td>5700.00</td><td>76.02</td><td>105.20</td><td>-29.18</td><td>75.51</td><td>0.51</td><td>Peak</td><td>312</td><td>347</td></tr><tr><td>3</td><td>5720.00</td><td>84.92</td><td>110.80</td><td>-25.88</td><td>84.33</td><td>0.59</td><td>Peak</td><td>312</td><td>347</td></tr><tr><td>4</td><td>5725.00</td><td>89.35</td><td>122.20</td><td>-32.85</td><td>88.73</td><td>0.62</td><td>Peak</td><td>312</td><td>347</td></tr><tr><td>5</td><td>5925.00</td><td>56.83</td><td>68.20</td><td>-11.37</td><td>55.66</td><td>1.17</td><td>Peak</td><td>312</td><td>347</td></tr><tr><td>6</td><td>11490.00</td><td>45.58</td><td>54.00</td><td>-8.42</td><td>38.12</td><td>7.46</td><td>Average</td><td>115</td><td>52</td></tr><tr><td>7</td><td>11490.00</td><td>58.67</td><td>74.00</td><td>-15.33</td><td>51.21</td><td>7.46</td><td>Peak</td><td>115</td><td>52</td></tr><tr><td>8</td><td>17235.00</td><td>63.12</td><td>68.20</td><td>-5.08</td><td>56.65</td><td>6.47</td><td>Peak</td><td>185</td><td>45</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	62.34	68.20	-5.86	62.06	0.28	Peak	312	347	2	5700.00	76.02	105.20	-29.18	75.51	0.51	Peak	312	347	3	5720.00	84.92	110.80	-25.88	84.33	0.59	Peak	312	347	4	5725.00	89.35	122.20	-32.85	88.73	0.62	Peak	312	347	5	5925.00	56.83	68.20	-11.37	55.66	1.17	Peak	312	347	6	11490.00	45.58	54.00	-8.42	38.12	7.46	Average	115	52	7	11490.00	58.67	74.00	-15.33	51.21	7.46	Peak	115	52	8	17235.00	63.12	68.20	-5.08	56.65	6.47	Peak	185	45
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5650.00	62.34	68.20	-5.86	62.06	0.28	Peak	312	347																																																																																				
2	5700.00	76.02	105.20	-29.18	75.51	0.51	Peak	312	347																																																																																				
3	5720.00	84.92	110.80	-25.88	84.33	0.59	Peak	312	347																																																																																				
4	5725.00	89.35	122.20	-32.85	88.73	0.62	Peak	312	347																																																																																				
5	5925.00	56.83	68.20	-11.37	55.66	1.17	Peak	312	347																																																																																				
6	11490.00	45.58	54.00	-8.42	38.12	7.46	Average	115	52																																																																																				
7	11490.00	58.67	74.00	-15.33	51.21	7.46	Peak	115	52																																																																																				
8	17235.00	63.12	68.20	-5.08	56.65	6.47	Peak	185	45																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													

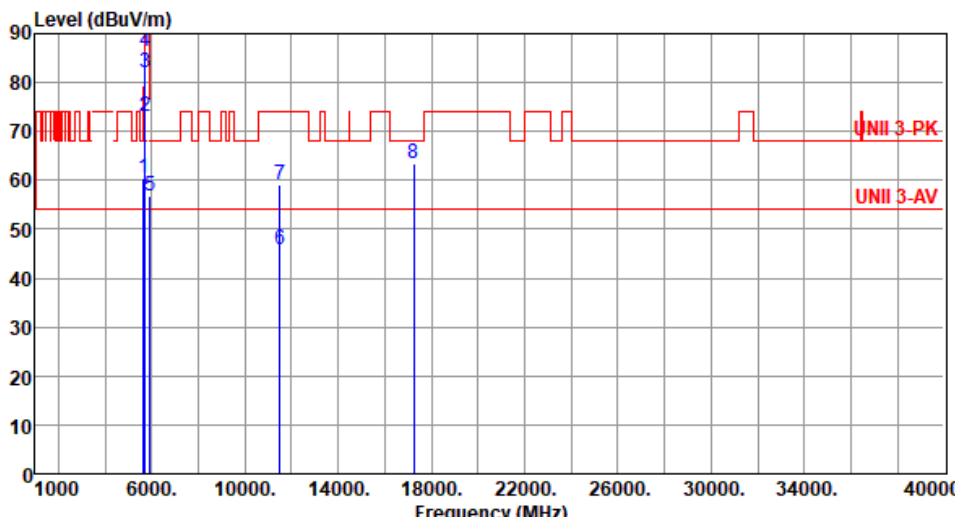

Modulation	11a	Test Freq. (MHz)	5745																																																																																										
Polarization	Vertical																																																																																												
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>60.31</td><td>68.20</td><td>-7.89</td><td>60.03</td><td>0.28</td><td>Peak</td><td>145</td><td>323</td></tr><tr><td>2</td><td>5700.00</td><td>72.96</td><td>105.20</td><td>-32.24</td><td>72.45</td><td>0.51</td><td>Peak</td><td>145</td><td>323</td></tr><tr><td>3</td><td>5720.00</td><td>82.16</td><td>110.80</td><td>-28.64</td><td>81.57</td><td>0.59</td><td>Peak</td><td>145</td><td>323</td></tr><tr><td>4</td><td>5725.00</td><td>86.31</td><td>122.20</td><td>-35.89</td><td>85.69</td><td>0.62</td><td>Peak</td><td>145</td><td>323</td></tr><tr><td>5</td><td>5925.00</td><td>56.62</td><td>68.20</td><td>-11.58</td><td>55.45</td><td>1.17</td><td>Peak</td><td>145</td><td>323</td></tr><tr><td>6</td><td>11490.00</td><td>45.88</td><td>54.00</td><td>-8.12</td><td>38.42</td><td>7.46</td><td>Average</td><td>188</td><td>346</td></tr><tr><td>7</td><td>11490.00</td><td>59.10</td><td>74.00</td><td>-14.90</td><td>51.64</td><td>7.46</td><td>Peak</td><td>188</td><td>346</td></tr><tr><td>8</td><td>17235.00</td><td>63.54</td><td>68.20</td><td>-4.66</td><td>57.07</td><td>6.47</td><td>Peak</td><td>331</td><td>318</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	60.31	68.20	-7.89	60.03	0.28	Peak	145	323	2	5700.00	72.96	105.20	-32.24	72.45	0.51	Peak	145	323	3	5720.00	82.16	110.80	-28.64	81.57	0.59	Peak	145	323	4	5725.00	86.31	122.20	-35.89	85.69	0.62	Peak	145	323	5	5925.00	56.62	68.20	-11.58	55.45	1.17	Peak	145	323	6	11490.00	45.88	54.00	-8.12	38.42	7.46	Average	188	346	7	11490.00	59.10	74.00	-14.90	51.64	7.46	Peak	188	346	8	17235.00	63.54	68.20	-4.66	57.07	6.47	Peak	331	318
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5650.00	60.31	68.20	-7.89	60.03	0.28	Peak	145	323																																																																																				
2	5700.00	72.96	105.20	-32.24	72.45	0.51	Peak	145	323																																																																																				
3	5720.00	82.16	110.80	-28.64	81.57	0.59	Peak	145	323																																																																																				
4	5725.00	86.31	122.20	-35.89	85.69	0.62	Peak	145	323																																																																																				
5	5925.00	56.62	68.20	-11.58	55.45	1.17	Peak	145	323																																																																																				
6	11490.00	45.88	54.00	-8.12	38.42	7.46	Average	188	346																																																																																				
7	11490.00	59.10	74.00	-14.90	51.64	7.46	Peak	188	346																																																																																				
8	17235.00	63.54	68.20	-4.66	57.07	6.47	Peak	331	318																																																																																				




Modulation	11a	Test Freq. (MHz)	5785																																																												
Polarization	Horizontal																																																														
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																															
Level (dBuV/m) UNII 3-PK UNII 3-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>57.93</td><td>68.20</td><td>-10.27</td><td>57.65</td><td>0.28</td><td>Peak</td><td>315</td><td>344</td></tr><tr><td>2</td><td>5925.00</td><td>60.96</td><td>68.20</td><td>-7.24</td><td>59.79</td><td>1.17</td><td>Peak</td><td>315</td><td>344</td></tr><tr><td>3</td><td>11570.00</td><td>45.30</td><td>54.00</td><td>-8.70</td><td>38.03</td><td>7.27</td><td>Average</td><td>118</td><td>56</td></tr><tr><td>4</td><td>11570.00</td><td>58.44</td><td>74.00</td><td>-15.56</td><td>51.17</td><td>7.27</td><td>Peak</td><td>118</td><td>56</td></tr><tr><td>5</td><td>17355.00</td><td>62.09</td><td>68.20</td><td>-6.11</td><td>55.42</td><td>6.67</td><td>Peak</td><td>182</td><td>44</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	57.93	68.20	-10.27	57.65	0.28	Peak	315	344	2	5925.00	60.96	68.20	-7.24	59.79	1.17	Peak	315	344	3	11570.00	45.30	54.00	-8.70	38.03	7.27	Average	118	56	4	11570.00	58.44	74.00	-15.56	51.17	7.27	Peak	118	56	5	17355.00	62.09	68.20	-6.11	55.42	6.67	Peak	182	44
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	5650.00	57.93	68.20	-10.27	57.65	0.28	Peak	315	344																																																						
2	5925.00	60.96	68.20	-7.24	59.79	1.17	Peak	315	344																																																						
3	11570.00	45.30	54.00	-8.70	38.03	7.27	Average	118	56																																																						
4	11570.00	58.44	74.00	-15.56	51.17	7.27	Peak	118	56																																																						
5	17355.00	62.09	68.20	-6.11	55.42	6.67	Peak	182	44																																																						




Modulation	11a	Test Freq. (MHz)	5785						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):24 Humidity(%):63									
Level (dBuV/m) UNII 3-PK UNII 3-AV Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	57.58	68.20	-10.62	57.30	0.28	Peak	145	322
2	5925.00	58.76	68.20	-9.44	57.59	1.17	Peak	145	322
3	11570.00	45.64	54.00	-8.36	38.37	7.27	Average	185	350
4	11570.00	58.75	74.00	-15.25	51.48	7.27	Peak	185	350
5	17355.00	62.37	68.20	-5.83	55.70	6.67	Peak	340	319
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

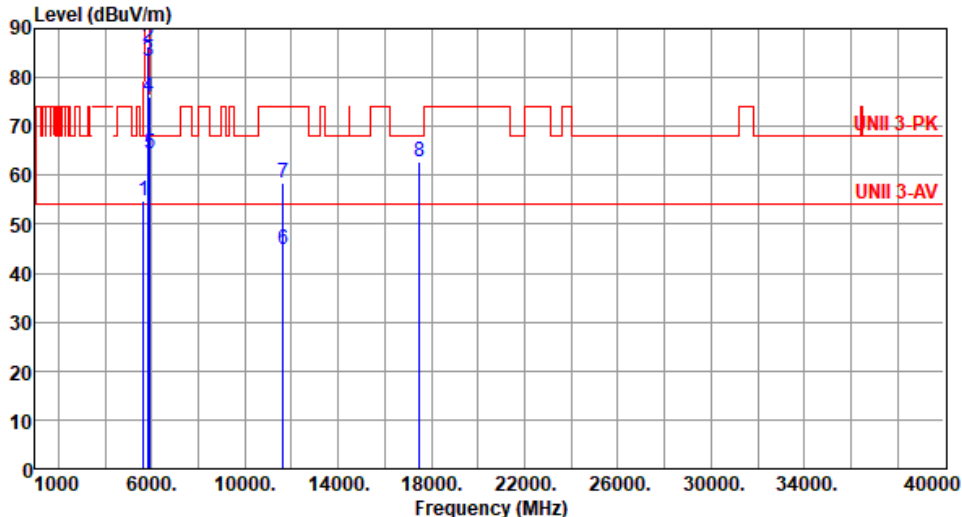

Modulation	11a	Test Freq. (MHz)	5825																																																																																										
Polarization	Horizontal																																																																																												
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																																													
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>54.85</td><td>68.20</td><td>-13.35</td><td>54.57</td><td>0.28</td><td>Peak</td><td>313</td><td>346</td></tr><tr><td>2</td><td>5850.00</td><td>86.42</td><td>122.20</td><td>-35.78</td><td>85.46</td><td>0.96</td><td>Peak</td><td>313</td><td>346</td></tr><tr><td>3</td><td>5855.00</td><td>83.23</td><td>110.80</td><td>-27.57</td><td>82.25</td><td>0.98</td><td>Peak</td><td>313</td><td>346</td></tr><tr><td>4</td><td>5875.00</td><td>75.95</td><td>105.20</td><td>-29.25</td><td>74.89</td><td>1.06</td><td>Peak</td><td>313</td><td>346</td></tr><tr><td>5</td><td>5925.00</td><td>64.43</td><td>68.20</td><td>-3.77</td><td>63.26</td><td>1.17</td><td>Peak</td><td>313</td><td>346</td></tr><tr><td>6</td><td>11650.00</td><td>44.99</td><td>54.00</td><td>-9.01</td><td>38.12</td><td>6.87</td><td>Average</td><td>116</td><td>62</td></tr><tr><td>7</td><td>11650.00</td><td>58.30</td><td>74.00</td><td>-15.70</td><td>51.43</td><td>6.87</td><td>Peak</td><td>116</td><td>62</td></tr><tr><td>8</td><td>17475.00</td><td>62.71</td><td>68.20</td><td>-5.49</td><td>55.65</td><td>7.06</td><td>Peak</td><td>326</td><td>318</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	54.85	68.20	-13.35	54.57	0.28	Peak	313	346	2	5850.00	86.42	122.20	-35.78	85.46	0.96	Peak	313	346	3	5855.00	83.23	110.80	-27.57	82.25	0.98	Peak	313	346	4	5875.00	75.95	105.20	-29.25	74.89	1.06	Peak	313	346	5	5925.00	64.43	68.20	-3.77	63.26	1.17	Peak	313	346	6	11650.00	44.99	54.00	-9.01	38.12	6.87	Average	116	62	7	11650.00	58.30	74.00	-15.70	51.43	6.87	Peak	116	62	8	17475.00	62.71	68.20	-5.49	55.65	7.06	Peak	326	318
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5650.00	54.85	68.20	-13.35	54.57	0.28	Peak	313	346																																																																																				
2	5850.00	86.42	122.20	-35.78	85.46	0.96	Peak	313	346																																																																																				
3	5855.00	83.23	110.80	-27.57	82.25	0.98	Peak	313	346																																																																																				
4	5875.00	75.95	105.20	-29.25	74.89	1.06	Peak	313	346																																																																																				
5	5925.00	64.43	68.20	-3.77	63.26	1.17	Peak	313	346																																																																																				
6	11650.00	44.99	54.00	-9.01	38.12	6.87	Average	116	62																																																																																				
7	11650.00	58.30	74.00	-15.70	51.43	6.87	Peak	116	62																																																																																				
8	17475.00	62.71	68.20	-5.49	55.65	7.06	Peak	326	318																																																																																				

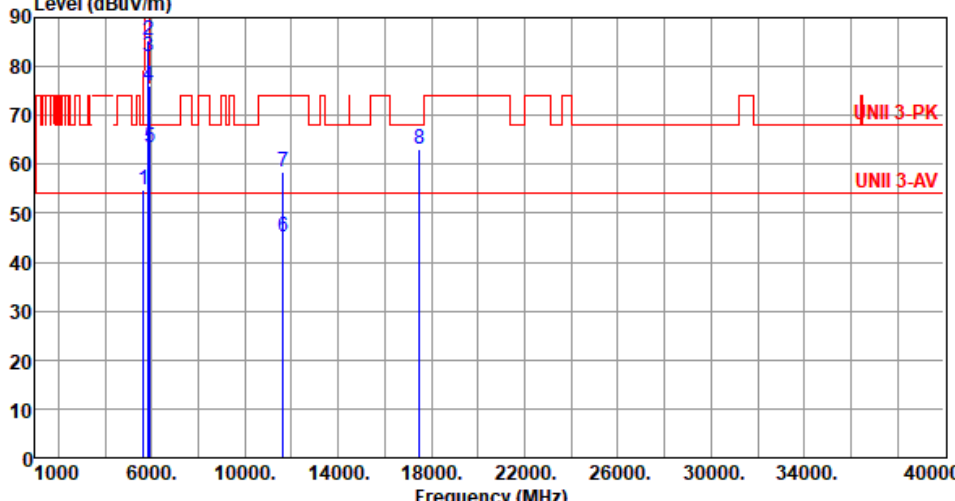

Modulation	11a	Test Freq. (MHz)	5825																																																																																										
Polarization	Vertical																																																																																												
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>54.75</td><td>68.20</td><td>-13.45</td><td>54.47</td><td>0.28</td><td>Peak</td><td>141</td><td>321</td></tr><tr><td>2</td><td>5850.00</td><td>85.25</td><td>122.20</td><td>-36.95</td><td>84.29</td><td>0.96</td><td>Peak</td><td>141</td><td>321</td></tr><tr><td>3</td><td>5855.00</td><td>82.00</td><td>110.80</td><td>-28.80</td><td>81.02</td><td>0.98</td><td>Peak</td><td>141</td><td>321</td></tr><tr><td>4</td><td>5875.00</td><td>76.21</td><td>105.20</td><td>-28.99</td><td>75.15</td><td>1.06</td><td>Peak</td><td>141</td><td>321</td></tr><tr><td>5</td><td>5925.00</td><td>63.46</td><td>68.20</td><td>-4.74</td><td>62.29</td><td>1.17</td><td>Peak</td><td>141</td><td>321</td></tr><tr><td>6</td><td>11650.00</td><td>45.33</td><td>54.00</td><td>-8.67</td><td>38.46</td><td>6.87</td><td>Average</td><td>188</td><td>346</td></tr><tr><td>7</td><td>11650.00</td><td>58.47</td><td>74.00</td><td>-15.53</td><td>51.60</td><td>6.87</td><td>Peak</td><td>188</td><td>346</td></tr><tr><td>8</td><td>17475.00</td><td>63.03</td><td>68.20</td><td>-5.17</td><td>55.97</td><td>7.06</td><td>Peak</td><td>331</td><td>320</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	54.75	68.20	-13.45	54.47	0.28	Peak	141	321	2	5850.00	85.25	122.20	-36.95	84.29	0.96	Peak	141	321	3	5855.00	82.00	110.80	-28.80	81.02	0.98	Peak	141	321	4	5875.00	76.21	105.20	-28.99	75.15	1.06	Peak	141	321	5	5925.00	63.46	68.20	-4.74	62.29	1.17	Peak	141	321	6	11650.00	45.33	54.00	-8.67	38.46	6.87	Average	188	346	7	11650.00	58.47	74.00	-15.53	51.60	6.87	Peak	188	346	8	17475.00	63.03	68.20	-5.17	55.97	7.06	Peak	331	320
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5650.00	54.75	68.20	-13.45	54.47	0.28	Peak	141	321																																																																																				
2	5850.00	85.25	122.20	-36.95	84.29	0.96	Peak	141	321																																																																																				
3	5855.00	82.00	110.80	-28.80	81.02	0.98	Peak	141	321																																																																																				
4	5875.00	76.21	105.20	-28.99	75.15	1.06	Peak	141	321																																																																																				
5	5925.00	63.46	68.20	-4.74	62.29	1.17	Peak	141	321																																																																																				
6	11650.00	45.33	54.00	-8.67	38.46	6.87	Average	188	346																																																																																				
7	11650.00	58.47	74.00	-15.53	51.60	6.87	Peak	188	346																																																																																				
8	17475.00	63.03	68.20	-5.17	55.97	7.06	Peak	331	320																																																																																				


Unwanted Emissions (Above 1GHz) for be EHT20

Modulation	be EHT20	Test Freq. (MHz)	5180
Polarization	Horizontal		
Test By :Allen Lee Temperature(°C):22 Humidity(%):65			
Level (dBUV/m)			




Modulation	be EHT20	Test Freq. (MHz)	5180
Polarization	Vertical		
Test By :Allen Lee Temperature(°C):22 Humidity(%):65			
Level (dBUV/m)			

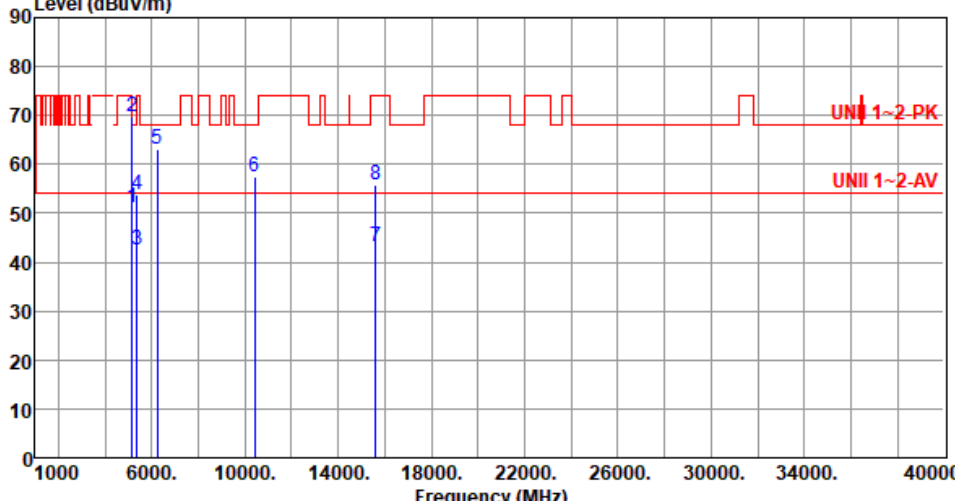

Modulation	be EHT20	Test Freq. (MHz)	5200																																																																																										
Polarization	Horizontal																																																																																												
Test By :Allen Lee Temperature(°C):22 Humidity(%):65																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>51.27</td><td>54.00</td><td>-2.73</td><td>50.77</td><td>0.50</td><td>Average</td><td>228</td><td>358</td></tr><tr><td>2</td><td>5150.00</td><td>69.85</td><td>74.00</td><td>-4.15</td><td>69.35</td><td>0.50</td><td>Peak</td><td>228</td><td>358</td></tr><tr><td>3</td><td>5350.00</td><td>42.35</td><td>54.00</td><td>-11.65</td><td>42.47</td><td>-0.12</td><td>Average</td><td>228</td><td>358</td></tr><tr><td>4</td><td>5350.00</td><td>53.90</td><td>74.00</td><td>-20.10</td><td>54.02</td><td>-0.12</td><td>Peak</td><td>228</td><td>358</td></tr><tr><td>5</td><td>6240.00</td><td>63.01</td><td>68.20</td><td>-5.19</td><td>61.21</td><td>1.80</td><td>Peak</td><td>294</td><td>333</td></tr><tr><td>6</td><td>10400.00</td><td>57.29</td><td>68.20</td><td>-10.91</td><td>49.60</td><td>7.69</td><td>Peak</td><td>110</td><td>9</td></tr><tr><td>7</td><td>15600.00</td><td>43.06</td><td>54.00</td><td>-10.94</td><td>39.05</td><td>4.01</td><td>Average</td><td>215</td><td>316</td></tr><tr><td>8</td><td>15600.00</td><td>55.87</td><td>74.00</td><td>-18.13</td><td>51.86</td><td>4.01</td><td>Peak</td><td>215</td><td>316</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	51.27	54.00	-2.73	50.77	0.50	Average	228	358	2	5150.00	69.85	74.00	-4.15	69.35	0.50	Peak	228	358	3	5350.00	42.35	54.00	-11.65	42.47	-0.12	Average	228	358	4	5350.00	53.90	74.00	-20.10	54.02	-0.12	Peak	228	358	5	6240.00	63.01	68.20	-5.19	61.21	1.80	Peak	294	333	6	10400.00	57.29	68.20	-10.91	49.60	7.69	Peak	110	9	7	15600.00	43.06	54.00	-10.94	39.05	4.01	Average	215	316	8	15600.00	55.87	74.00	-18.13	51.86	4.01	Peak	215	316
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5150.00	51.27	54.00	-2.73	50.77	0.50	Average	228	358																																																																																				
2	5150.00	69.85	74.00	-4.15	69.35	0.50	Peak	228	358																																																																																				
3	5350.00	42.35	54.00	-11.65	42.47	-0.12	Average	228	358																																																																																				
4	5350.00	53.90	74.00	-20.10	54.02	-0.12	Peak	228	358																																																																																				
5	6240.00	63.01	68.20	-5.19	61.21	1.80	Peak	294	333																																																																																				
6	10400.00	57.29	68.20	-10.91	49.60	7.69	Peak	110	9																																																																																				
7	15600.00	43.06	54.00	-10.94	39.05	4.01	Average	215	316																																																																																				
8	15600.00	55.87	74.00	-18.13	51.86	4.01	Peak	215	316																																																																																				

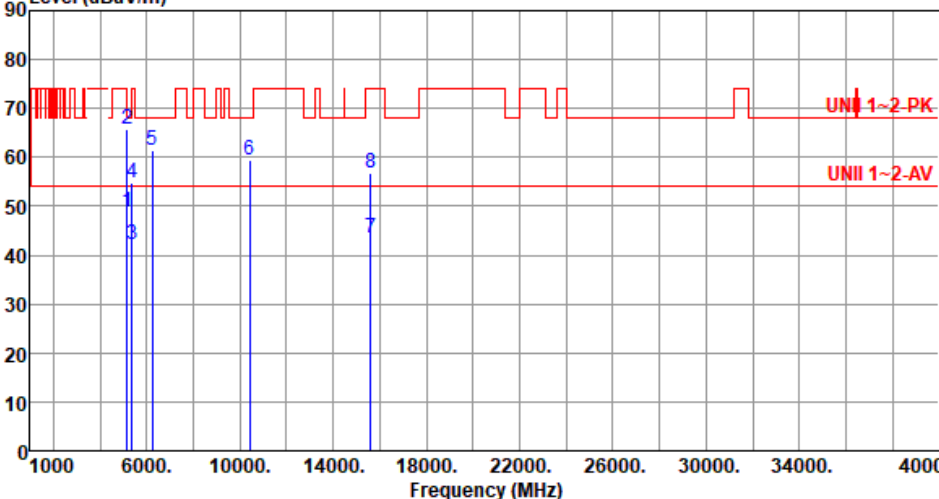

Modulation	be EHT20	Test Freq. (MHz)	5200																																																																																										
Polarization	Vertical																																																																																												
Test By :Allen Lee Temperature(°C):22 Humidity(%):65																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>48.79</td><td>54.00</td><td>-5.21</td><td>48.29</td><td>0.50</td><td>Average</td><td>233</td><td>316</td></tr><tr><td>2</td><td>5150.00</td><td>65.92</td><td>74.00</td><td>-8.08</td><td>65.42</td><td>0.50</td><td>Peak</td><td>233</td><td>316</td></tr><tr><td>3</td><td>5350.00</td><td>42.05</td><td>54.00</td><td>-11.95</td><td>42.17</td><td>-0.12</td><td>Average</td><td>233</td><td>316</td></tr><tr><td>4</td><td>5350.00</td><td>54.80</td><td>74.00</td><td>-19.20</td><td>54.92</td><td>-0.12</td><td>Peak</td><td>233</td><td>316</td></tr><tr><td>5</td><td>6240.00</td><td>61.57</td><td>68.20</td><td>-6.63</td><td>59.77</td><td>1.80</td><td>Peak</td><td>170</td><td>328</td></tr><tr><td>6</td><td>10400.00</td><td>59.60</td><td>68.20</td><td>-8.60</td><td>51.91</td><td>7.69</td><td>Peak</td><td>241</td><td>39</td></tr><tr><td>7</td><td>15600.00</td><td>43.42</td><td>54.00</td><td>-10.58</td><td>39.41</td><td>4.01</td><td>Average</td><td>185</td><td>31</td></tr><tr><td>8</td><td>15600.00</td><td>56.77</td><td>74.00</td><td>-17.23</td><td>52.76</td><td>4.01</td><td>Peak</td><td>185</td><td>31</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	48.79	54.00	-5.21	48.29	0.50	Average	233	316	2	5150.00	65.92	74.00	-8.08	65.42	0.50	Peak	233	316	3	5350.00	42.05	54.00	-11.95	42.17	-0.12	Average	233	316	4	5350.00	54.80	74.00	-19.20	54.92	-0.12	Peak	233	316	5	6240.00	61.57	68.20	-6.63	59.77	1.80	Peak	170	328	6	10400.00	59.60	68.20	-8.60	51.91	7.69	Peak	241	39	7	15600.00	43.42	54.00	-10.58	39.41	4.01	Average	185	31	8	15600.00	56.77	74.00	-17.23	52.76	4.01	Peak	185	31
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5150.00	48.79	54.00	-5.21	48.29	0.50	Average	233	316																																																																																				
2	5150.00	65.92	74.00	-8.08	65.42	0.50	Peak	233	316																																																																																				
3	5350.00	42.05	54.00	-11.95	42.17	-0.12	Average	233	316																																																																																				
4	5350.00	54.80	74.00	-19.20	54.92	-0.12	Peak	233	316																																																																																				
5	6240.00	61.57	68.20	-6.63	59.77	1.80	Peak	170	328																																																																																				
6	10400.00	59.60	68.20	-8.60	51.91	7.69	Peak	241	39																																																																																				
7	15600.00	43.42	54.00	-10.58	39.41	4.01	Average	185	31																																																																																				
8	15600.00	56.77	74.00	-17.23	52.76	4.01	Peak	185	31																																																																																				



Modulation	be EHT20	Test Freq. (MHz)	5240																																																																																										
Polarization	Horizontal																																																																																												
Test By :Allen Lee Temperature(°C):22 Humidity(%):65																																																																																													
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>48.75</td><td>54.00</td><td>-5.25</td><td>48.25</td><td>0.50</td><td>Average</td><td>224</td><td>359</td></tr><tr><td>2</td><td>5150.00</td><td>61.58</td><td>74.00</td><td>-12.42</td><td>61.08</td><td>0.50</td><td>Peak</td><td>224</td><td>359</td></tr><tr><td>3</td><td>5350.00</td><td>45.12</td><td>54.00</td><td>-8.88</td><td>45.24</td><td>-0.12</td><td>Average</td><td>224</td><td>359</td></tr><tr><td>4</td><td>5350.00</td><td>58.76</td><td>74.00</td><td>-15.24</td><td>58.88</td><td>-0.12</td><td>Peak</td><td>224</td><td>359</td></tr><tr><td>5</td><td>6288.00</td><td>63.40</td><td>68.20</td><td>-4.80</td><td>61.42</td><td>1.98</td><td>Peak</td><td>299</td><td>334</td></tr><tr><td>6</td><td>10480.00</td><td>56.47</td><td>68.20</td><td>-11.73</td><td>48.78</td><td>7.69</td><td>Peak</td><td>105</td><td>5</td></tr><tr><td>7</td><td>15720.00</td><td>43.29</td><td>54.00</td><td>-10.71</td><td>39.04</td><td>4.25</td><td>Average</td><td>106</td><td>8</td></tr><tr><td>8</td><td>15720.00</td><td>55.64</td><td>74.00</td><td>-18.36</td><td>51.39</td><td>4.25</td><td>Peak</td><td>106</td><td>8</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	48.75	54.00	-5.25	48.25	0.50	Average	224	359	2	5150.00	61.58	74.00	-12.42	61.08	0.50	Peak	224	359	3	5350.00	45.12	54.00	-8.88	45.24	-0.12	Average	224	359	4	5350.00	58.76	74.00	-15.24	58.88	-0.12	Peak	224	359	5	6288.00	63.40	68.20	-4.80	61.42	1.98	Peak	299	334	6	10480.00	56.47	68.20	-11.73	48.78	7.69	Peak	105	5	7	15720.00	43.29	54.00	-10.71	39.04	4.25	Average	106	8	8	15720.00	55.64	74.00	-18.36	51.39	4.25	Peak	106	8
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5150.00	48.75	54.00	-5.25	48.25	0.50	Average	224	359																																																																																				
2	5150.00	61.58	74.00	-12.42	61.08	0.50	Peak	224	359																																																																																				
3	5350.00	45.12	54.00	-8.88	45.24	-0.12	Average	224	359																																																																																				
4	5350.00	58.76	74.00	-15.24	58.88	-0.12	Peak	224	359																																																																																				
5	6288.00	63.40	68.20	-4.80	61.42	1.98	Peak	299	334																																																																																				
6	10480.00	56.47	68.20	-11.73	48.78	7.69	Peak	105	5																																																																																				
7	15720.00	43.29	54.00	-10.71	39.04	4.25	Average	106	8																																																																																				
8	15720.00	55.64	74.00	-18.36	51.39	4.25	Peak	106	8																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													



Modulation	be EHT20	Test Freq. (MHz)	5240																																																																																										
Polarization	Vertical																																																																																												
Test By :Allen Lee Temperature(°C):22 Humidity(%):65																																																																																													
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>52.34</td><td>54.00</td><td>-1.66</td><td>51.84</td><td>0.50</td><td>Average</td><td>170</td><td>348</td></tr><tr><td>2</td><td>5150.00</td><td>65.69</td><td>74.00</td><td>-8.31</td><td>65.19</td><td>0.50</td><td>Peak</td><td>170</td><td>348</td></tr><tr><td>3</td><td>5350.00</td><td>45.40</td><td>54.00</td><td>-8.60</td><td>45.52</td><td>-0.12</td><td>Average</td><td>170</td><td>348</td></tr><tr><td>4</td><td>5350.00</td><td>58.26</td><td>74.00</td><td>-15.74</td><td>58.38</td><td>-0.12</td><td>Peak</td><td>170</td><td>348</td></tr><tr><td>5</td><td>6288.00</td><td>62.84</td><td>68.20</td><td>-5.36</td><td>60.86</td><td>1.98</td><td>Peak</td><td>185</td><td>330</td></tr><tr><td>6</td><td>10480.00</td><td>58.61</td><td>68.20</td><td>-9.59</td><td>50.92</td><td>7.69</td><td>Peak</td><td>219</td><td>35</td></tr><tr><td>7</td><td>15720.00</td><td>43.67</td><td>54.00</td><td>-10.33</td><td>39.42</td><td>4.25</td><td>Average</td><td>189</td><td>340</td></tr><tr><td>8</td><td>15720.00</td><td>56.13</td><td>74.00</td><td>-17.87</td><td>51.88</td><td>4.25</td><td>Peak</td><td>189</td><td>340</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	52.34	54.00	-1.66	51.84	0.50	Average	170	348	2	5150.00	65.69	74.00	-8.31	65.19	0.50	Peak	170	348	3	5350.00	45.40	54.00	-8.60	45.52	-0.12	Average	170	348	4	5350.00	58.26	74.00	-15.74	58.38	-0.12	Peak	170	348	5	6288.00	62.84	68.20	-5.36	60.86	1.98	Peak	185	330	6	10480.00	58.61	68.20	-9.59	50.92	7.69	Peak	219	35	7	15720.00	43.67	54.00	-10.33	39.42	4.25	Average	189	340	8	15720.00	56.13	74.00	-17.87	51.88	4.25	Peak	189	340
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5150.00	52.34	54.00	-1.66	51.84	0.50	Average	170	348																																																																																				
2	5150.00	65.69	74.00	-8.31	65.19	0.50	Peak	170	348																																																																																				
3	5350.00	45.40	54.00	-8.60	45.52	-0.12	Average	170	348																																																																																				
4	5350.00	58.26	74.00	-15.74	58.38	-0.12	Peak	170	348																																																																																				
5	6288.00	62.84	68.20	-5.36	60.86	1.98	Peak	185	330																																																																																				
6	10480.00	58.61	68.20	-9.59	50.92	7.69	Peak	219	35																																																																																				
7	15720.00	43.67	54.00	-10.33	39.42	4.25	Average	189	340																																																																																				
8	15720.00	56.13	74.00	-17.87	51.88	4.25	Peak	189	340																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																													




Modulation	be EHT20	Test Freq. (MHz)	5260																																																																																
Polarization	Horizontal																																																																																		
Test By :Allen Lee Temperature(°C):22 Humidity(%):65																																																																																			
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>43.02</td><td>54.00</td><td>-10.98</td><td>42.52</td><td>0.50</td><td>Average</td><td>267</td><td>7</td></tr><tr><td>2</td><td>5150.00</td><td>53.89</td><td>74.00</td><td>-20.11</td><td>53.39</td><td>0.50</td><td>Peak</td><td>267</td><td>7</td></tr><tr><td>3</td><td>5350.00</td><td>42.46</td><td>54.00</td><td>-11.54</td><td>42.58</td><td>-0.12</td><td>Average</td><td>267</td><td>7</td></tr><tr><td>4</td><td>5350.00</td><td>52.92</td><td>74.00</td><td>-21.08</td><td>53.04</td><td>-0.12</td><td>Peak</td><td>267</td><td>7</td></tr><tr><td>5</td><td>10520.00</td><td>55.23</td><td>68.20</td><td>-12.97</td><td>47.56</td><td>7.67</td><td>Peak</td><td>165</td><td>32</td></tr><tr><td>6</td><td>15780.00</td><td>41.93</td><td>54.00</td><td>-12.07</td><td>37.64</td><td>4.29</td><td>Average</td><td>100</td><td>332</td></tr><tr><td>7</td><td>15780.00</td><td>55.50</td><td>74.00</td><td>-18.50</td><td>51.21</td><td>4.29</td><td>Peak</td><td>100</td><td>332</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	43.02	54.00	-10.98	42.52	0.50	Average	267	7	2	5150.00	53.89	74.00	-20.11	53.39	0.50	Peak	267	7	3	5350.00	42.46	54.00	-11.54	42.58	-0.12	Average	267	7	4	5350.00	52.92	74.00	-21.08	53.04	-0.12	Peak	267	7	5	10520.00	55.23	68.20	-12.97	47.56	7.67	Peak	165	32	6	15780.00	41.93	54.00	-12.07	37.64	4.29	Average	100	332	7	15780.00	55.50	74.00	-18.50	51.21	4.29	Peak	100	332
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5150.00	43.02	54.00	-10.98	42.52	0.50	Average	267	7																																																																										
2	5150.00	53.89	74.00	-20.11	53.39	0.50	Peak	267	7																																																																										
3	5350.00	42.46	54.00	-11.54	42.58	-0.12	Average	267	7																																																																										
4	5350.00	52.92	74.00	-21.08	53.04	-0.12	Peak	267	7																																																																										
5	10520.00	55.23	68.20	-12.97	47.56	7.67	Peak	165	32																																																																										
6	15780.00	41.93	54.00	-12.07	37.64	4.29	Average	100	332																																																																										
7	15780.00	55.50	74.00	-18.50	51.21	4.29	Peak	100	332																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																			



Modulation	be EHT20	Test Freq. (MHz)	5260																																																																																
Polarization	Vertical																																																																																		
Test By :Allen Lee Temperature(°C):22 Humidity(%):65																																																																																			
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>43.01</td><td>54.00</td><td>-10.99</td><td>42.51</td><td>0.50</td><td>Average</td><td>179</td><td>349</td></tr><tr><td>2</td><td>5150.00</td><td>54.89</td><td>74.00</td><td>-19.11</td><td>54.39</td><td>0.50</td><td>Peak</td><td>179</td><td>349</td></tr><tr><td>3</td><td>5350.00</td><td>42.09</td><td>54.00</td><td>-11.91</td><td>42.21</td><td>-0.12</td><td>Average</td><td>179</td><td>349</td></tr><tr><td>4</td><td>5350.00</td><td>54.31</td><td>74.00</td><td>-19.69</td><td>54.43</td><td>-0.12</td><td>Peak</td><td>179</td><td>349</td></tr><tr><td>5</td><td>10520.00</td><td>54.88</td><td>68.20</td><td>-13.32</td><td>47.21</td><td>7.67</td><td>Peak</td><td>135</td><td>49</td></tr><tr><td>6</td><td>15780.00</td><td>41.76</td><td>54.00</td><td>-12.24</td><td>37.47</td><td>4.29</td><td>Average</td><td>100</td><td>15</td></tr><tr><td>7</td><td>15780.00</td><td>55.73</td><td>74.00</td><td>-18.27</td><td>51.44</td><td>4.29</td><td>Peak</td><td>100</td><td>15</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	43.01	54.00	-10.99	42.51	0.50	Average	179	349	2	5150.00	54.89	74.00	-19.11	54.39	0.50	Peak	179	349	3	5350.00	42.09	54.00	-11.91	42.21	-0.12	Average	179	349	4	5350.00	54.31	74.00	-19.69	54.43	-0.12	Peak	179	349	5	10520.00	54.88	68.20	-13.32	47.21	7.67	Peak	135	49	6	15780.00	41.76	54.00	-12.24	37.47	4.29	Average	100	15	7	15780.00	55.73	74.00	-18.27	51.44	4.29	Peak	100	15
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5150.00	43.01	54.00	-10.99	42.51	0.50	Average	179	349																																																																										
2	5150.00	54.89	74.00	-19.11	54.39	0.50	Peak	179	349																																																																										
3	5350.00	42.09	54.00	-11.91	42.21	-0.12	Average	179	349																																																																										
4	5350.00	54.31	74.00	-19.69	54.43	-0.12	Peak	179	349																																																																										
5	10520.00	54.88	68.20	-13.32	47.21	7.67	Peak	135	49																																																																										
6	15780.00	41.76	54.00	-12.24	37.47	4.29	Average	100	15																																																																										
7	15780.00	55.73	74.00	-18.27	51.44	4.29	Peak	100	15																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																			

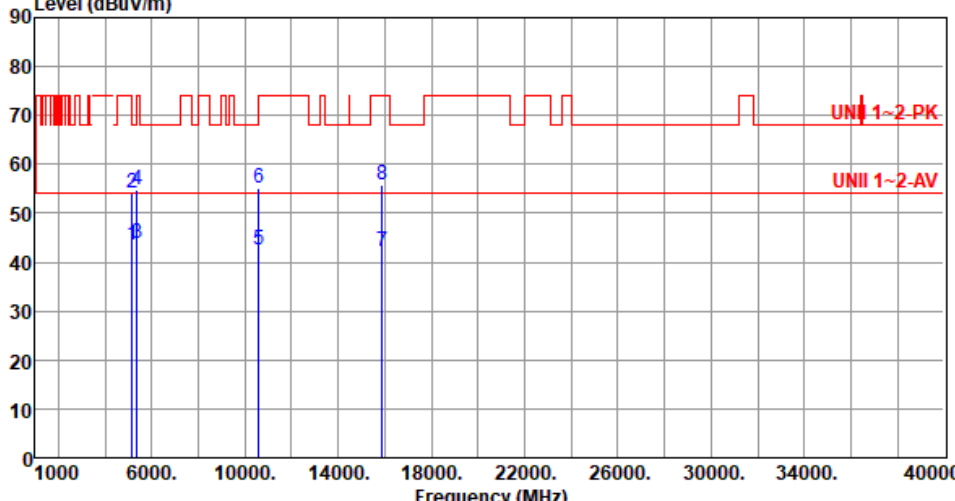

Modulation	be EHT20	Test Freq. (MHz)	5300																																																																																										
Polarization	Horizontal																																																																																												
Test By :Allen Lee Temperature(°C):22 Humidity(%):65																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>43.56</td><td>54.00</td><td>-10.44</td><td>43.06</td><td>0.50</td><td>Average</td><td>232</td><td>359</td></tr><tr><td>2</td><td>5150.00</td><td>54.18</td><td>74.00</td><td>-19.82</td><td>53.68</td><td>0.50</td><td>Peak</td><td>232</td><td>359</td></tr><tr><td>3</td><td>5350.00</td><td>43.70</td><td>54.00</td><td>-10.30</td><td>43.82</td><td>-0.12</td><td>Average</td><td>232</td><td>359</td></tr><tr><td>4</td><td>5350.00</td><td>54.79</td><td>74.00</td><td>-19.21</td><td>54.91</td><td>-0.12</td><td>Peak</td><td>232</td><td>359</td></tr><tr><td>5</td><td>10600.00</td><td>42.51</td><td>54.00</td><td>-11.49</td><td>34.72</td><td>7.79</td><td>Average</td><td>161</td><td>31</td></tr><tr><td>6</td><td>10600.00</td><td>55.19</td><td>74.00</td><td>-18.81</td><td>47.40</td><td>7.79</td><td>Peak</td><td>161</td><td>31</td></tr><tr><td>7</td><td>15900.00</td><td>42.26</td><td>54.00</td><td>-11.74</td><td>37.83</td><td>4.43</td><td>Average</td><td>100</td><td>333</td></tr><tr><td>8</td><td>15900.00</td><td>55.67</td><td>74.00</td><td>-18.33</td><td>51.24</td><td>4.43</td><td>Peak</td><td>100</td><td>333</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	43.56	54.00	-10.44	43.06	0.50	Average	232	359	2	5150.00	54.18	74.00	-19.82	53.68	0.50	Peak	232	359	3	5350.00	43.70	54.00	-10.30	43.82	-0.12	Average	232	359	4	5350.00	54.79	74.00	-19.21	54.91	-0.12	Peak	232	359	5	10600.00	42.51	54.00	-11.49	34.72	7.79	Average	161	31	6	10600.00	55.19	74.00	-18.81	47.40	7.79	Peak	161	31	7	15900.00	42.26	54.00	-11.74	37.83	4.43	Average	100	333	8	15900.00	55.67	74.00	-18.33	51.24	4.43	Peak	100	333
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5150.00	43.56	54.00	-10.44	43.06	0.50	Average	232	359																																																																																				
2	5150.00	54.18	74.00	-19.82	53.68	0.50	Peak	232	359																																																																																				
3	5350.00	43.70	54.00	-10.30	43.82	-0.12	Average	232	359																																																																																				
4	5350.00	54.79	74.00	-19.21	54.91	-0.12	Peak	232	359																																																																																				
5	10600.00	42.51	54.00	-11.49	34.72	7.79	Average	161	31																																																																																				
6	10600.00	55.19	74.00	-18.81	47.40	7.79	Peak	161	31																																																																																				
7	15900.00	42.26	54.00	-11.74	37.83	4.43	Average	100	333																																																																																				
8	15900.00	55.67	74.00	-18.33	51.24	4.43	Peak	100	333																																																																																				



Modulation	be EHT20	Test Freq. (MHz)	5300																																																																																										
Polarization	Vertical																																																																																												
Test By :Allen Lee Temperature(°C):22 Humidity(%):65																																																																																													
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>42.95</td><td>54.00</td><td>-11.05</td><td>42.45</td><td>0.50</td><td>Average</td><td>185</td><td>346</td></tr><tr><td>2</td><td>5150.00</td><td>53.53</td><td>74.00</td><td>-20.47</td><td>53.03</td><td>0.50</td><td>Peak</td><td>185</td><td>346</td></tr><tr><td>3</td><td>5350.00</td><td>42.58</td><td>54.00</td><td>-11.42</td><td>42.70</td><td>-0.12</td><td>Average</td><td>185</td><td>346</td></tr><tr><td>4</td><td>5350.00</td><td>53.95</td><td>74.00</td><td>-20.05</td><td>54.07</td><td>-0.12</td><td>Peak</td><td>185</td><td>346</td></tr><tr><td>5</td><td>10600.00</td><td>42.50</td><td>54.00</td><td>-11.50</td><td>34.71</td><td>7.79</td><td>Average</td><td>138</td><td>51</td></tr><tr><td>6</td><td>10600.00</td><td>54.87</td><td>74.00</td><td>-19.13</td><td>47.08</td><td>7.79</td><td>Peak</td><td>138</td><td>51</td></tr><tr><td>7</td><td>15900.00</td><td>42.08</td><td>54.00</td><td>-11.92</td><td>37.65</td><td>4.43</td><td>Average</td><td>100</td><td>11</td></tr><tr><td>8</td><td>15900.00</td><td>56.07</td><td>74.00</td><td>-17.93</td><td>51.64</td><td>4.43</td><td>Peak</td><td>100</td><td>11</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	42.95	54.00	-11.05	42.45	0.50	Average	185	346	2	5150.00	53.53	74.00	-20.47	53.03	0.50	Peak	185	346	3	5350.00	42.58	54.00	-11.42	42.70	-0.12	Average	185	346	4	5350.00	53.95	74.00	-20.05	54.07	-0.12	Peak	185	346	5	10600.00	42.50	54.00	-11.50	34.71	7.79	Average	138	51	6	10600.00	54.87	74.00	-19.13	47.08	7.79	Peak	138	51	7	15900.00	42.08	54.00	-11.92	37.65	4.43	Average	100	11	8	15900.00	56.07	74.00	-17.93	51.64	4.43	Peak	100	11
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5150.00	42.95	54.00	-11.05	42.45	0.50	Average	185	346																																																																																				
2	5150.00	53.53	74.00	-20.47	53.03	0.50	Peak	185	346																																																																																				
3	5350.00	42.58	54.00	-11.42	42.70	-0.12	Average	185	346																																																																																				
4	5350.00	53.95	74.00	-20.05	54.07	-0.12	Peak	185	346																																																																																				
5	10600.00	42.50	54.00	-11.50	34.71	7.79	Average	138	51																																																																																				
6	10600.00	54.87	74.00	-19.13	47.08	7.79	Peak	138	51																																																																																				
7	15900.00	42.08	54.00	-11.92	37.65	4.43	Average	100	11																																																																																				
8	15900.00	56.07	74.00	-17.93	51.64	4.43	Peak	100	11																																																																																				



Modulation	be EHT20	Test Freq. (MHz)	5320																																																																																										
Polarization	Horizontal																																																																																												
Test By :Allen Lee Temperature(°C):22 Humidity(%):65																																																																																													
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5350.00</td><td>49.47</td><td>54.00</td><td>-4.53</td><td>49.59</td><td>-0.12</td><td>Average</td><td>225</td><td>359</td></tr><tr><td>2</td><td>5350.00</td><td>63.02</td><td>74.00</td><td>-10.98</td><td>63.14</td><td>-0.12</td><td>Peak</td><td>225</td><td>359</td></tr><tr><td>3</td><td>10640.00</td><td>42.29</td><td>54.00</td><td>-11.71</td><td>34.52</td><td>7.77</td><td>Average</td><td>165</td><td>33</td></tr><tr><td>4</td><td>10640.00</td><td>55.35</td><td>74.00</td><td>-18.65</td><td>47.58</td><td>7.77</td><td>Peak</td><td>165</td><td>33</td></tr><tr><td>5</td><td>15960.00</td><td>41.85</td><td>54.00</td><td>-12.15</td><td>37.58</td><td>4.27</td><td>Average</td><td>100</td><td>335</td></tr><tr><td>6</td><td>15960.00</td><td>55.70</td><td>74.00</td><td>-18.30</td><td>51.43</td><td>4.27</td><td>Peak</td><td>100</td><td>335</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5350.00	49.47	54.00	-4.53	49.59	-0.12	Average	225	359	2	5350.00	63.02	74.00	-10.98	63.14	-0.12	Peak	225	359	3	10640.00	42.29	54.00	-11.71	34.52	7.77	Average	165	33	4	10640.00	55.35	74.00	-18.65	47.58	7.77	Peak	165	33	5	15960.00	41.85	54.00	-12.15	37.58	4.27	Average	100	335	6	15960.00	55.70	74.00	-18.30	51.43	4.27	Peak	100	335
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	5350.00	49.47	54.00	-4.53	49.59	-0.12	Average	225	359																																																																																				
2	5350.00	63.02	74.00	-10.98	63.14	-0.12	Peak	225	359																																																																																				
3	10640.00	42.29	54.00	-11.71	34.52	7.77	Average	165	33																																																																																				
4	10640.00	55.35	74.00	-18.65	47.58	7.77	Peak	165	33																																																																																				
5	15960.00	41.85	54.00	-12.15	37.58	4.27	Average	100	335																																																																																				
6	15960.00	55.70	74.00	-18.30	51.43	4.27	Peak	100	335																																																																																				



Modulation	be EHT20	Test Freq. (MHz)	5320																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):22 Humidity(%):65																																																																									
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5350.00</td><td>47.62</td><td>54.00</td><td>-6.38</td><td>47.74</td><td>-0.12</td><td>Average</td><td>100</td><td>1</td></tr><tr><td>2</td><td>5350.00</td><td>60.34</td><td>74.00</td><td>-13.66</td><td>60.46</td><td>-0.12</td><td>Peak</td><td>100</td><td>1</td></tr><tr><td>3</td><td>10640.00</td><td>42.34</td><td>54.00</td><td>-11.66</td><td>34.57</td><td>7.77</td><td>Average</td><td>135</td><td>49</td></tr><tr><td>4</td><td>10640.00</td><td>54.97</td><td>74.00</td><td>-19.03</td><td>47.20</td><td>7.77</td><td>Peak</td><td>135</td><td>49</td></tr><tr><td>5</td><td>15960.00</td><td>41.75</td><td>54.00</td><td>-12.25</td><td>37.48</td><td>4.27</td><td>Average</td><td>100</td><td>16</td></tr><tr><td>6</td><td>15960.00</td><td>56.03</td><td>74.00</td><td>-17.97</td><td>51.76</td><td>4.27</td><td>Peak</td><td>100</td><td>16</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5350.00	47.62	54.00	-6.38	47.74	-0.12	Average	100	1	2	5350.00	60.34	74.00	-13.66	60.46	-0.12	Peak	100	1	3	10640.00	42.34	54.00	-11.66	34.57	7.77	Average	135	49	4	10640.00	54.97	74.00	-19.03	47.20	7.77	Peak	135	49	5	15960.00	41.75	54.00	-12.25	37.48	4.27	Average	100	16	6	15960.00	56.03	74.00	-17.97	51.76	4.27	Peak	100	16
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5350.00	47.62	54.00	-6.38	47.74	-0.12	Average	100	1																																																																
2	5350.00	60.34	74.00	-13.66	60.46	-0.12	Peak	100	1																																																																
3	10640.00	42.34	54.00	-11.66	34.57	7.77	Average	135	49																																																																
4	10640.00	54.97	74.00	-19.03	47.20	7.77	Peak	135	49																																																																
5	15960.00	41.75	54.00	-12.25	37.48	4.27	Average	100	16																																																																
6	15960.00	56.03	74.00	-17.97	51.76	4.27	Peak	100	16																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT20	Test Freq. (MHz)	5500
Polarization	Horizontal		
Test By :Allen Lee Temperature(°C):22 Humidity(%):65			
Level (dBuV/m)			




Modulation	be EHT20	Test Freq. (MHz)	5500						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):22 Humidity(%):65									
Level (dBuV/m) UNII 1~2-PK UNII 1~2-AV Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5460.00	45.24	54.00	-8.76	45.00	0.24	Average	185	343
2	5460.00	58.52	74.00	-15.48	58.28	0.24	Peak	185	343
3	5470.00	60.49	68.20	-7.71	60.23	0.26	Peak	185	343
4	5760.00	58.76	68.20	-9.44	58.01	0.75	Peak	185	343
5	11000.00	43.88	54.00	-10.12	35.92	7.96	Average	121	5
6	11000.00	58.22	74.00	-15.78	50.26	7.96	Peak	121	5
7	16500.00	58.35	68.20	-9.85	51.59	6.76	Peak	100	115
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Modulation	be EHT20	Test Freq. (MHz)	5580																																																																																										
Polarization	Horizontal																																																																																												
Test By :Allen Lee Temperature(°C):22 Humidity(%):65																																																																																													
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>42.66</td><td>54.00</td><td>-11.34</td><td>42.42</td><td>0.24</td><td>Average</td><td>226</td><td>353</td></tr><tr><td>2</td><td>5460.00</td><td>53.38</td><td>74.00</td><td>-20.62</td><td>53.14</td><td>0.24</td><td>Peak</td><td>226</td><td>353</td></tr><tr><td>3</td><td>5470.00</td><td>54.34</td><td>68.20</td><td>-13.86</td><td>54.08</td><td>0.26</td><td>Peak</td><td>226</td><td>353</td></tr><tr><td>4</td><td>5725.00</td><td>55.78</td><td>68.20</td><td>-12.42</td><td>55.16</td><td>0.62</td><td>Peak</td><td>226</td><td>353</td></tr><tr><td>5</td><td>5760.00</td><td>59.44</td><td>68.20</td><td>-8.76</td><td>58.69</td><td>0.75</td><td>Peak</td><td>226</td><td>353</td></tr><tr><td>6</td><td>11160.00</td><td>44.21</td><td>54.00</td><td>-9.79</td><td>37.12</td><td>7.09</td><td>Average</td><td>166</td><td>1</td></tr><tr><td>7</td><td>11160.00</td><td>57.77</td><td>74.00</td><td>-16.23</td><td>50.68</td><td>7.09</td><td>Peak</td><td>166</td><td>1</td></tr><tr><td>8</td><td>16740.00</td><td>58.63</td><td>68.20</td><td>-9.57</td><td>51.48</td><td>7.15</td><td>Peak</td><td>100</td><td>62</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	42.66	54.00	-11.34	42.42	0.24	Average	226	353	2	5460.00	53.38	74.00	-20.62	53.14	0.24	Peak	226	353	3	5470.00	54.34	68.20	-13.86	54.08	0.26	Peak	226	353	4	5725.00	55.78	68.20	-12.42	55.16	0.62	Peak	226	353	5	5760.00	59.44	68.20	-8.76	58.69	0.75	Peak	226	353	6	11160.00	44.21	54.00	-9.79	37.12	7.09	Average	166	1	7	11160.00	57.77	74.00	-16.23	50.68	7.09	Peak	166	1	8	16740.00	58.63	68.20	-9.57	51.48	7.15	Peak	100	62
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5460.00	42.66	54.00	-11.34	42.42	0.24	Average	226	353																																																																																				
2	5460.00	53.38	74.00	-20.62	53.14	0.24	Peak	226	353																																																																																				
3	5470.00	54.34	68.20	-13.86	54.08	0.26	Peak	226	353																																																																																				
4	5725.00	55.78	68.20	-12.42	55.16	0.62	Peak	226	353																																																																																				
5	5760.00	59.44	68.20	-8.76	58.69	0.75	Peak	226	353																																																																																				
6	11160.00	44.21	54.00	-9.79	37.12	7.09	Average	166	1																																																																																				
7	11160.00	57.77	74.00	-16.23	50.68	7.09	Peak	166	1																																																																																				
8	16740.00	58.63	68.20	-9.57	51.48	7.15	Peak	100	62																																																																																				

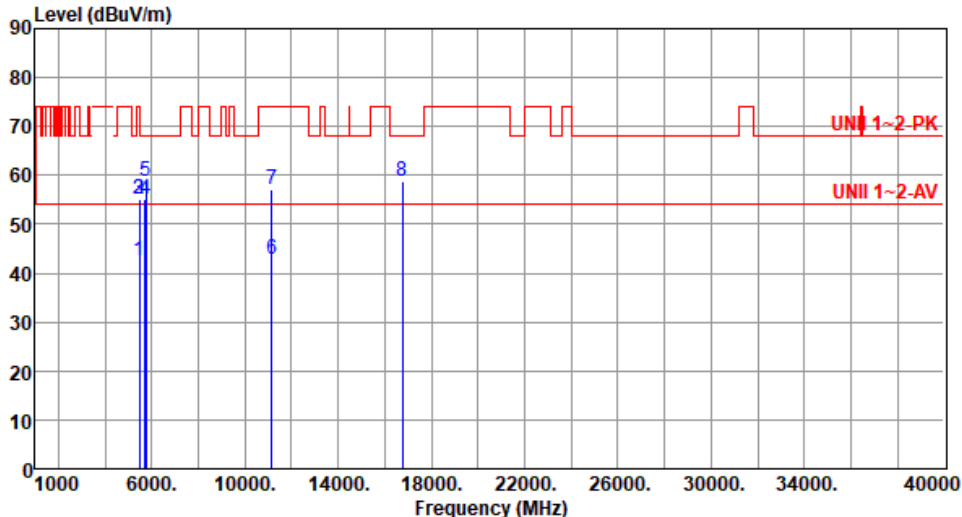

Modulation	be EHT20	Test Freq. (MHz)	5580						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):22 Humidity(%):65									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	42.45	54.00	-11.55	42.21	0.24	Average	175	352
2	5460.00	55.22	74.00	-18.78	54.98	0.24	Peak	175	352
3	5470.00	55.29	68.20	-12.91	55.03	0.26	Peak	175	352
4	5725.00	55.18	68.20	-13.02	54.56	0.62	Peak	175	352
5	5760.00	58.69	68.20	-9.51	57.94	0.75	Peak	175	352
6	11160.00	42.98	54.00	-11.02	35.89	7.09	Average	119	6
7	11160.00	57.28	74.00	-16.72	50.19	7.09	Peak	119	6
8	16740.00	58.92	68.20	-9.28	51.77	7.15	Peak	109	114
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Modulation	be EHT20	Test Freq. (MHz)	5700																																																												
Polarization	Horizontal																																																														
Test By :Allen Lee Temperature(°C):22 Humidity(%):65																																																															
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5725.00</td><td>60.72</td><td>68.20</td><td>-7.48</td><td>60.10</td><td>0.62</td><td>Peak</td><td>228</td><td>347</td></tr><tr><td>2</td><td>5760.00</td><td>59.39</td><td>68.20</td><td>-8.81</td><td>58.64</td><td>0.75</td><td>Peak</td><td>228</td><td>347</td></tr><tr><td>3</td><td>11400.00</td><td>42.99</td><td>54.00</td><td>-11.01</td><td>35.66</td><td>7.33</td><td>Average</td><td>122</td><td>354</td></tr><tr><td>4</td><td>11400.00</td><td>56.08</td><td>74.00</td><td>-17.92</td><td>48.75</td><td>7.33</td><td>Peak</td><td>122</td><td>354</td></tr><tr><td>5</td><td>17100.00</td><td>58.88</td><td>68.20</td><td>-9.32</td><td>52.29</td><td>6.59</td><td>Peak</td><td>100</td><td>94</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5725.00	60.72	68.20	-7.48	60.10	0.62	Peak	228	347	2	5760.00	59.39	68.20	-8.81	58.64	0.75	Peak	228	347	3	11400.00	42.99	54.00	-11.01	35.66	7.33	Average	122	354	4	11400.00	56.08	74.00	-17.92	48.75	7.33	Peak	122	354	5	17100.00	58.88	68.20	-9.32	52.29	6.59	Peak	100	94
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	5725.00	60.72	68.20	-7.48	60.10	0.62	Peak	228	347																																																						
2	5760.00	59.39	68.20	-8.81	58.64	0.75	Peak	228	347																																																						
3	11400.00	42.99	54.00	-11.01	35.66	7.33	Average	122	354																																																						
4	11400.00	56.08	74.00	-17.92	48.75	7.33	Peak	122	354																																																						
5	17100.00	58.88	68.20	-9.32	52.29	6.59	Peak	100	94																																																						



Modulation	be EHT20	Test Freq. (MHz)	5700
Polarization	Vertical		
Test By :Allen Lee Temperature(°C):22 Humidity(%):65			
Level (dBuV/m)			



Modulation	be EHT20	Test Freq. (MHz)	5720																																																		
Polarization	Horizontal																																																				
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																					
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5850.00</td><td>55.55</td><td>68.20</td><td>-12.65</td><td>54.59</td><td>0.96</td><td>Peak</td><td>328</td><td>343</td></tr><tr><td>2</td><td>11440.00</td><td>44.53</td><td>54.00</td><td>-9.47</td><td>37.21</td><td>7.32</td><td>Average</td><td>165</td><td>3</td></tr><tr><td>3</td><td>11440.00</td><td>57.77</td><td>74.00</td><td>-16.23</td><td>50.45</td><td>7.32</td><td>Peak</td><td>165</td><td>3</td></tr><tr><td>4</td><td>17160.00</td><td>57.98</td><td>68.20</td><td>-10.22</td><td>51.56</td><td>6.42</td><td>Peak</td><td>100</td><td>55</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5850.00	55.55	68.20	-12.65	54.59	0.96	Peak	328	343	2	11440.00	44.53	54.00	-9.47	37.21	7.32	Average	165	3	3	11440.00	57.77	74.00	-16.23	50.45	7.32	Peak	165	3	4	17160.00	57.98	68.20	-10.22	51.56	6.42	Peak	100	55
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	5850.00	55.55	68.20	-12.65	54.59	0.96	Peak	328	343																																												
2	11440.00	44.53	54.00	-9.47	37.21	7.32	Average	165	3																																												
3	11440.00	57.77	74.00	-16.23	50.45	7.32	Peak	165	3																																												
4	17160.00	57.98	68.20	-10.22	51.56	6.42	Peak	100	55																																												




Modulation	be EHT20	Test Freq. (MHz)	5720																																																		
Polarization	Vertical																																																				
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																					
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5850.00</td><td>55.57</td><td>68.20</td><td>-12.63</td><td>54.61</td><td>0.96</td><td>Peak</td><td>183</td><td>356</td></tr><tr><td>2</td><td>11440.00</td><td>44.16</td><td>54.00</td><td>-9.84</td><td>36.84</td><td>7.32</td><td>Average</td><td>100</td><td>123</td></tr><tr><td>3</td><td>11440.00</td><td>56.26</td><td>74.00</td><td>-17.74</td><td>48.94</td><td>7.32</td><td>Peak</td><td>100</td><td>123</td></tr><tr><td>4</td><td>17160.00</td><td>57.90</td><td>68.20</td><td>-10.30</td><td>51.48</td><td>6.42</td><td>Peak</td><td>100</td><td>23</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5850.00	55.57	68.20	-12.63	54.61	0.96	Peak	183	356	2	11440.00	44.16	54.00	-9.84	36.84	7.32	Average	100	123	3	11440.00	56.26	74.00	-17.74	48.94	7.32	Peak	100	123	4	17160.00	57.90	68.20	-10.30	51.48	6.42	Peak	100	23
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	5850.00	55.57	68.20	-12.63	54.61	0.96	Peak	183	356																																												
2	11440.00	44.16	54.00	-9.84	36.84	7.32	Average	100	123																																												
3	11440.00	56.26	74.00	-17.74	48.94	7.32	Peak	100	123																																												
4	17160.00	57.90	68.20	-10.30	51.48	6.42	Peak	100	23																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Modulation	be EHT20	Test Freq. (MHz)	5745						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):23 Humidity(%):65									
Level (dBuV/m) UNII 3-PK UNII 3-AV Frequency (MHz)									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT	Turn
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		High cm	Table deg
1	5650.00	64.12	68.20	-4.08	63.84	0.28	Peak	330	343
2	5700.00	76.84	105.20	-28.36	76.33	0.51	Peak	330	343
3	5720.00	85.75	110.80	-25.05	85.16	0.59	Peak	330	343
4	5725.00	91.43	122.20	-30.77	90.81	0.62	Peak	330	343
5	5925.00	56.85	68.20	-11.35	55.68	1.17	Peak	330	343
6	11490.00	45.35	54.00	-8.65	37.89	7.46	Average	115	55
7	11490.00	58.71	74.00	-15.29	51.25	7.46	Peak	115	55
8	17235.00	62.86	68.20	-5.34	56.39	6.47	Peak	185	45

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

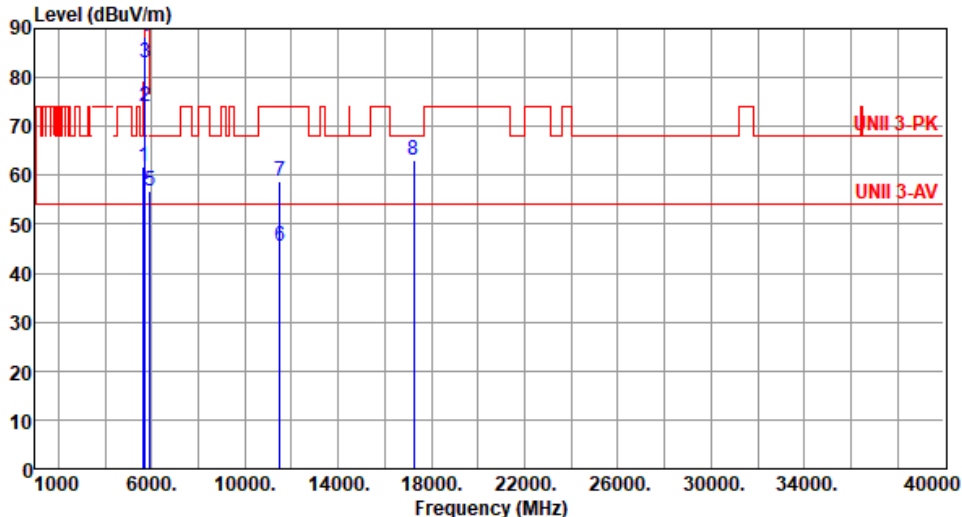


Modulation	be EHT20	Test Freq. (MHz)	5745																																																																																										
Polarization	Vertical																																																																																												
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>61.87</td><td>68.20</td><td>-6.33</td><td>61.59</td><td>0.28</td><td>Peak</td><td>145</td><td>322</td></tr><tr><td>2</td><td>5700.00</td><td>73.96</td><td>105.20</td><td>-31.24</td><td>73.45</td><td>0.51</td><td>Peak</td><td>145</td><td>322</td></tr><tr><td>3</td><td>5720.00</td><td>82.89</td><td>110.80</td><td>-27.91</td><td>82.30</td><td>0.59</td><td>Peak</td><td>145</td><td>322</td></tr><tr><td>4</td><td>5725.00</td><td>88.27</td><td>122.20</td><td>-33.93</td><td>87.65</td><td>0.62</td><td>Peak</td><td>145</td><td>322</td></tr><tr><td>5</td><td>5925.00</td><td>56.62</td><td>68.20</td><td>-11.58</td><td>55.45</td><td>1.17</td><td>Peak</td><td>145</td><td>322</td></tr><tr><td>6</td><td>11490.00</td><td>45.58</td><td>54.00</td><td>-8.42</td><td>38.12</td><td>7.46</td><td>Average</td><td>185</td><td>343</td></tr><tr><td>7</td><td>11490.00</td><td>58.91</td><td>74.00</td><td>-15.09</td><td>51.45</td><td>7.46</td><td>Peak</td><td>185</td><td>343</td></tr><tr><td>8</td><td>17235.00</td><td>63.15</td><td>68.20</td><td>-5.05</td><td>56.68</td><td>6.47</td><td>Peak</td><td>342</td><td>321</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	61.87	68.20	-6.33	61.59	0.28	Peak	145	322	2	5700.00	73.96	105.20	-31.24	73.45	0.51	Peak	145	322	3	5720.00	82.89	110.80	-27.91	82.30	0.59	Peak	145	322	4	5725.00	88.27	122.20	-33.93	87.65	0.62	Peak	145	322	5	5925.00	56.62	68.20	-11.58	55.45	1.17	Peak	145	322	6	11490.00	45.58	54.00	-8.42	38.12	7.46	Average	185	343	7	11490.00	58.91	74.00	-15.09	51.45	7.46	Peak	185	343	8	17235.00	63.15	68.20	-5.05	56.68	6.47	Peak	342	321
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5650.00	61.87	68.20	-6.33	61.59	0.28	Peak	145	322																																																																																				
2	5700.00	73.96	105.20	-31.24	73.45	0.51	Peak	145	322																																																																																				
3	5720.00	82.89	110.80	-27.91	82.30	0.59	Peak	145	322																																																																																				
4	5725.00	88.27	122.20	-33.93	87.65	0.62	Peak	145	322																																																																																				
5	5925.00	56.62	68.20	-11.58	55.45	1.17	Peak	145	322																																																																																				
6	11490.00	45.58	54.00	-8.42	38.12	7.46	Average	185	343																																																																																				
7	11490.00	58.91	74.00	-15.09	51.45	7.46	Peak	185	343																																																																																				
8	17235.00	63.15	68.20	-5.05	56.68	6.47	Peak	342	321																																																																																				




Modulation	be EHT20	Test Freq. (MHz)	5785
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65			
Level (dBuV/m) <			

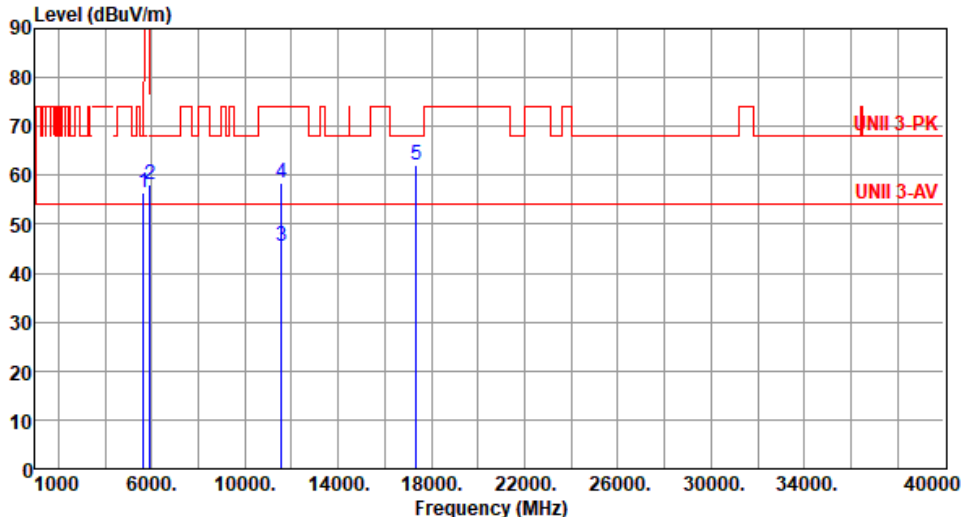

Modulation	be EHT20	Test Freq. (MHz)	5785																																																																																
Polarization	Vertical																																																																																		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																			
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5650.00</td><td>56.54</td><td>68.20</td><td>-11.66</td><td>56.26</td><td>0.28</td><td>Peak</td><td>144</td><td>323</td></tr><tr><td>2</td><td>5925.00</td><td>58.02</td><td>68.20</td><td>-10.18</td><td>56.85</td><td>1.17</td><td>Peak</td><td>144</td><td>323</td></tr><tr><td>3</td><td>11570.00</td><td>45.42</td><td>54.00</td><td>-8.58</td><td>38.15</td><td>7.27</td><td>Average</td><td>182</td><td>349</td></tr><tr><td>4</td><td>11570.00</td><td>58.48</td><td>74.00</td><td>-15.52</td><td>51.21</td><td>7.27</td><td>Peak</td><td>182</td><td>349</td></tr><tr><td>5</td><td>17355.00</td><td>62.15</td><td>68.20</td><td>-6.05</td><td>55.48</td><td>6.67</td><td>Peak</td><td>345</td><td>320</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5650.00	56.54	68.20	-11.66	56.26	0.28	Peak	144	323	2	5925.00	58.02	68.20	-10.18	56.85	1.17	Peak	144	323	3	11570.00	45.42	54.00	-8.58	38.15	7.27	Average	182	349	4	11570.00	58.48	74.00	-15.52	51.21	7.27	Peak	182	349	5	17355.00	62.15	68.20	-6.05	55.48	6.67	Peak	345	320
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																										
		dBuV/m			dBuV			cm	deg																																																																										
1	5650.00	56.54	68.20	-11.66	56.26	0.28	Peak	144	323																																																																										
2	5925.00	58.02	68.20	-10.18	56.85	1.17	Peak	144	323																																																																										
3	11570.00	45.42	54.00	-8.58	38.15	7.27	Average	182	349																																																																										
4	11570.00	58.48	74.00	-15.52	51.21	7.27	Peak	182	349																																																																										
5	17355.00	62.15	68.20	-6.05	55.48	6.67	Peak	345	320																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																			

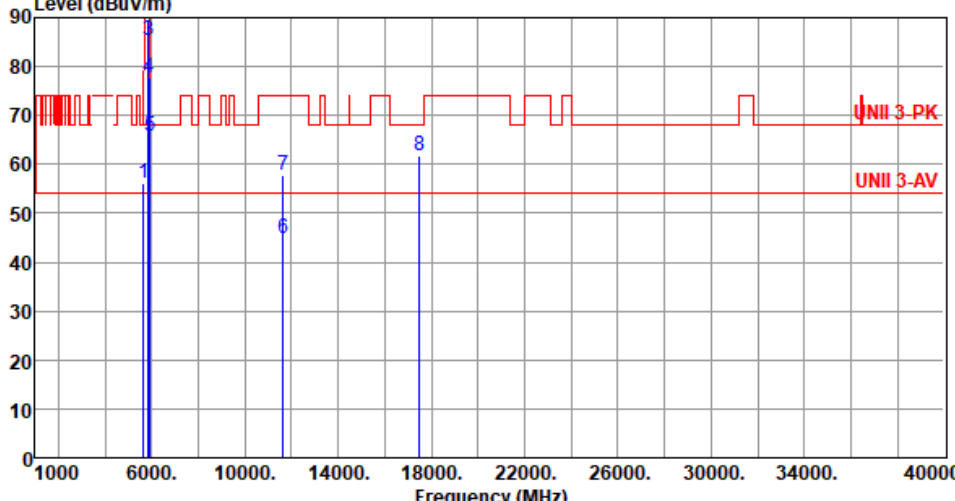

Modulation	be EHT20	Test Freq. (MHz)	5825																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>56.23</td><td>68.20</td><td>-11.97</td><td>55.95</td><td>0.28</td><td>Peak</td><td>317</td><td>342</td></tr><tr><td>2</td><td>5850.00</td><td>89.27</td><td>122.20</td><td>-32.93</td><td>88.31</td><td>0.96</td><td>Peak</td><td>317</td><td>342</td></tr><tr><td>3</td><td>5855.00</td><td>85.47</td><td>110.80</td><td>-25.33</td><td>84.49</td><td>0.98</td><td>Peak</td><td>317</td><td>342</td></tr><tr><td>4</td><td>5875.00</td><td>77.59</td><td>105.20</td><td>-27.61</td><td>76.53</td><td>1.06</td><td>Peak</td><td>317</td><td>342</td></tr><tr><td>5</td><td>5925.00</td><td>65.61</td><td>68.20</td><td>-2.59</td><td>64.44</td><td>1.17</td><td>Peak</td><td>317</td><td>342</td></tr><tr><td>6</td><td>11650.00</td><td>44.76</td><td>54.00</td><td>-9.24</td><td>37.89</td><td>6.87</td><td>Average</td><td>116</td><td>52</td></tr><tr><td>7</td><td>11650.00</td><td>57.76</td><td>74.00</td><td>-16.24</td><td>50.89</td><td>6.87</td><td>Peak</td><td>116</td><td>52</td></tr><tr><td>8</td><td>17475.00</td><td>61.77</td><td>68.20</td><td>-6.43</td><td>54.71</td><td>7.06</td><td>Peak</td><td>185</td><td>49</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5650.00	56.23	68.20	-11.97	55.95	0.28	Peak	317	342	2	5850.00	89.27	122.20	-32.93	88.31	0.96	Peak	317	342	3	5855.00	85.47	110.80	-25.33	84.49	0.98	Peak	317	342	4	5875.00	77.59	105.20	-27.61	76.53	1.06	Peak	317	342	5	5925.00	65.61	68.20	-2.59	64.44	1.17	Peak	317	342	6	11650.00	44.76	54.00	-9.24	37.89	6.87	Average	116	52	7	11650.00	57.76	74.00	-16.24	50.89	6.87	Peak	116	52	8	17475.00	61.77	68.20	-6.43	54.71	7.06	Peak	185	49
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1	5650.00	56.23	68.20	-11.97	55.95	0.28	Peak	317	342																																																																																																								
2	5850.00	89.27	122.20	-32.93	88.31	0.96	Peak	317	342																																																																																																								
3	5855.00	85.47	110.80	-25.33	84.49	0.98	Peak	317	342																																																																																																								
4	5875.00	77.59	105.20	-27.61	76.53	1.06	Peak	317	342																																																																																																								
5	5925.00	65.61	68.20	-2.59	64.44	1.17	Peak	317	342																																																																																																								
6	11650.00	44.76	54.00	-9.24	37.89	6.87	Average	116	52																																																																																																								
7	11650.00	57.76	74.00	-16.24	50.89	6.87	Peak	116	52																																																																																																								
8	17475.00	61.77	68.20	-6.43	54.71	7.06	Peak	185	49																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																																	



Modulation	be EHT20	Test Freq. (MHz)	5825																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																																																	
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5650.00</td><td>55.77</td><td>68.20</td><td>-12.43</td><td>55.49</td><td>0.28</td><td>Peak</td><td>145</td><td>322</td></tr><tr><td>2</td><td>5850.00</td><td>87.11</td><td>122.20</td><td>-35.09</td><td>86.15</td><td>0.96</td><td>Peak</td><td>145</td><td>322</td></tr><tr><td>3</td><td>5855.00</td><td>83.10</td><td>110.80</td><td>-27.70</td><td>82.12</td><td>0.98</td><td>Peak</td><td>145</td><td>322</td></tr><tr><td>4</td><td>5875.00</td><td>74.55</td><td>105.20</td><td>-30.65</td><td>73.49</td><td>1.06</td><td>Peak</td><td>145</td><td>322</td></tr><tr><td>5</td><td>5925.00</td><td>63.38</td><td>68.20</td><td>-4.82</td><td>62.21</td><td>1.17</td><td>Peak</td><td>145</td><td>322</td></tr><tr><td>6</td><td>11650.00</td><td>45.04</td><td>54.00</td><td>-8.96</td><td>38.17</td><td>6.87</td><td>Average</td><td>186</td><td>342</td></tr><tr><td>7</td><td>11650.00</td><td>58.16</td><td>74.00</td><td>-15.84</td><td>51.29</td><td>6.87</td><td>Peak</td><td>186</td><td>342</td></tr><tr><td>8</td><td>17475.00</td><td>62.11</td><td>68.20</td><td>-6.09</td><td>55.05</td><td>7.06</td><td>Peak</td><td>344</td><td>319</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table									cm	deg	1	5650.00	55.77	68.20	-12.43	55.49	0.28	Peak	145	322	2	5850.00	87.11	122.20	-35.09	86.15	0.96	Peak	145	322	3	5855.00	83.10	110.80	-27.70	82.12	0.98	Peak	145	322	4	5875.00	74.55	105.20	-30.65	73.49	1.06	Peak	145	322	5	5925.00	63.38	68.20	-4.82	62.21	1.17	Peak	145	322	6	11650.00	45.04	54.00	-8.96	38.17	6.87	Average	186	342	7	11650.00	58.16	74.00	-15.84	51.29	6.87	Peak	186	342	8	17475.00	62.11	68.20	-6.09	55.05	7.06	Peak	344	319
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
								cm	deg																																																																																																								
1	5650.00	55.77	68.20	-12.43	55.49	0.28	Peak	145	322																																																																																																								
2	5850.00	87.11	122.20	-35.09	86.15	0.96	Peak	145	322																																																																																																								
3	5855.00	83.10	110.80	-27.70	82.12	0.98	Peak	145	322																																																																																																								
4	5875.00	74.55	105.20	-30.65	73.49	1.06	Peak	145	322																																																																																																								
5	5925.00	63.38	68.20	-4.82	62.21	1.17	Peak	145	322																																																																																																								
6	11650.00	45.04	54.00	-8.96	38.17	6.87	Average	186	342																																																																																																								
7	11650.00	58.16	74.00	-15.84	51.29	6.87	Peak	186	342																																																																																																								
8	17475.00	62.11	68.20	-6.09	55.05	7.06	Peak	344	319																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																																	

Unwanted Emissions (Above 1GHz) for be EHT40

Modulation	be EHT40	Test Freq. (MHz)	5190
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65			
Level (dBuV/m) <			




Modulation	be EHT40	Test Freq. (MHz)	5190																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5150.00</td><td>50.65</td><td>54.00</td><td>-3.35</td><td>50.15</td><td>0.50</td><td>Average</td><td>100</td><td>355</td></tr><tr><td>2</td><td>5150.00</td><td>65.09</td><td>74.00</td><td>-8.91</td><td>64.59</td><td>0.50</td><td>Peak</td><td>100</td><td>355</td></tr><tr><td>3</td><td>6228.00</td><td>57.92</td><td>68.20</td><td>-10.28</td><td>56.18</td><td>1.74</td><td>Peak</td><td>203</td><td>331</td></tr><tr><td>4</td><td>10380.00</td><td>54.77</td><td>68.20</td><td>-13.43</td><td>47.11</td><td>7.66</td><td>Peak</td><td>100</td><td>5</td></tr><tr><td>5</td><td>15570.00</td><td>41.84</td><td>54.00</td><td>-12.16</td><td>37.69</td><td>4.15</td><td>Average</td><td>100</td><td>7</td></tr><tr><td>6</td><td>15570.00</td><td>56.17</td><td>74.00</td><td>-17.83</td><td>52.02</td><td>4.15</td><td>Peak</td><td>100</td><td>7</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	50.65	54.00	-3.35	50.15	0.50	Average	100	355	2	5150.00	65.09	74.00	-8.91	64.59	0.50	Peak	100	355	3	6228.00	57.92	68.20	-10.28	56.18	1.74	Peak	203	331	4	10380.00	54.77	68.20	-13.43	47.11	7.66	Peak	100	5	5	15570.00	41.84	54.00	-12.16	37.69	4.15	Average	100	7	6	15570.00	56.17	74.00	-17.83	52.02	4.15	Peak	100	7
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5150.00	50.65	54.00	-3.35	50.15	0.50	Average	100	355																																																																
2	5150.00	65.09	74.00	-8.91	64.59	0.50	Peak	100	355																																																																
3	6228.00	57.92	68.20	-10.28	56.18	1.74	Peak	203	331																																																																
4	10380.00	54.77	68.20	-13.43	47.11	7.66	Peak	100	5																																																																
5	15570.00	41.84	54.00	-12.16	37.69	4.15	Average	100	7																																																																
6	15570.00	56.17	74.00	-17.83	52.02	4.15	Peak	100	7																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT40	Test Freq. (MHz)	5230																																																																																										
Polarization	Horizontal																																																																																												
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																													
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>52.76</td><td>54.00</td><td>-1.24</td><td>52.26</td><td>0.50</td><td>Average</td><td>222</td><td>1</td></tr><tr><td>2</td><td>5150.00</td><td>67.44</td><td>74.00</td><td>-6.56</td><td>66.94</td><td>0.50</td><td>Peak</td><td>222</td><td>1</td></tr><tr><td>3</td><td>5350.00</td><td>44.77</td><td>54.00</td><td>-9.23</td><td>44.89</td><td>-0.12</td><td>Average</td><td>222</td><td>1</td></tr><tr><td>4</td><td>5350.00</td><td>57.70</td><td>74.00</td><td>-16.30</td><td>57.82</td><td>-0.12</td><td>Peak</td><td>222</td><td>1</td></tr><tr><td>5</td><td>6276.00</td><td>60.34</td><td>68.20</td><td>-7.86</td><td>58.40</td><td>1.94</td><td>Peak</td><td>308</td><td>337</td></tr><tr><td>6</td><td>10460.00</td><td>55.00</td><td>68.20</td><td>-13.20</td><td>47.26</td><td>7.74</td><td>Peak</td><td>100</td><td>5</td></tr><tr><td>7</td><td>15690.00</td><td>42.03</td><td>54.00</td><td>-11.97</td><td>37.95</td><td>4.08</td><td>Average</td><td>102</td><td>5</td></tr><tr><td>8</td><td>15690.00</td><td>55.97</td><td>74.00</td><td>-18.03</td><td>51.89</td><td>4.08</td><td>Peak</td><td>102</td><td>5</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	52.76	54.00	-1.24	52.26	0.50	Average	222	1	2	5150.00	67.44	74.00	-6.56	66.94	0.50	Peak	222	1	3	5350.00	44.77	54.00	-9.23	44.89	-0.12	Average	222	1	4	5350.00	57.70	74.00	-16.30	57.82	-0.12	Peak	222	1	5	6276.00	60.34	68.20	-7.86	58.40	1.94	Peak	308	337	6	10460.00	55.00	68.20	-13.20	47.26	7.74	Peak	100	5	7	15690.00	42.03	54.00	-11.97	37.95	4.08	Average	102	5	8	15690.00	55.97	74.00	-18.03	51.89	4.08	Peak	102	5
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5150.00	52.76	54.00	-1.24	52.26	0.50	Average	222	1																																																																																				
2	5150.00	67.44	74.00	-6.56	66.94	0.50	Peak	222	1																																																																																				
3	5350.00	44.77	54.00	-9.23	44.89	-0.12	Average	222	1																																																																																				
4	5350.00	57.70	74.00	-16.30	57.82	-0.12	Peak	222	1																																																																																				
5	6276.00	60.34	68.20	-7.86	58.40	1.94	Peak	308	337																																																																																				
6	10460.00	55.00	68.20	-13.20	47.26	7.74	Peak	100	5																																																																																				
7	15690.00	42.03	54.00	-11.97	37.95	4.08	Average	102	5																																																																																				
8	15690.00	55.97	74.00	-18.03	51.89	4.08	Peak	102	5																																																																																				

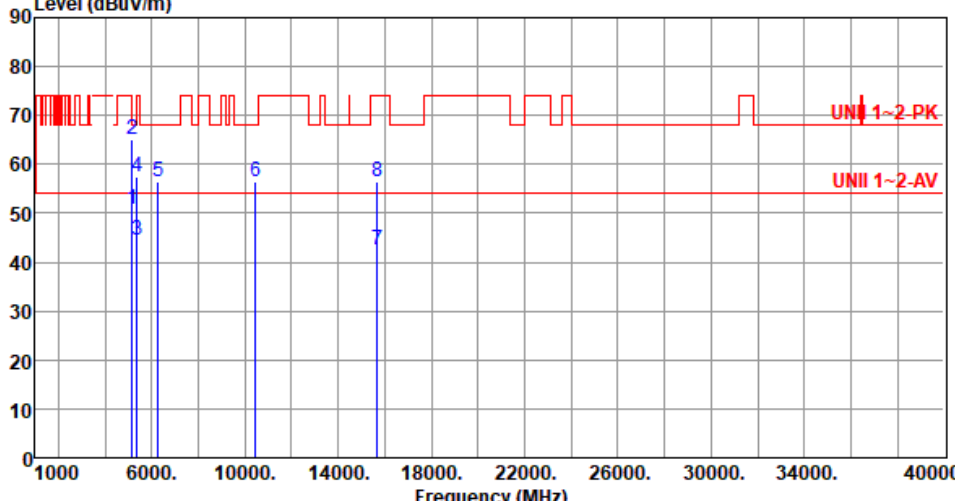

Modulation	be EHT40	Test Freq. (MHz)	5230																																																																																										
Polarization	Vertical																																																																																												
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																													
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>50.65</td><td>54.00</td><td>-3.35</td><td>50.15</td><td>0.50</td><td>Average</td><td>100</td><td>358</td></tr><tr><td>2</td><td>5150.00</td><td>65.06</td><td>74.00</td><td>-8.94</td><td>64.56</td><td>0.50</td><td>Peak</td><td>100</td><td>358</td></tr><tr><td>3</td><td>5350.00</td><td>44.48</td><td>54.00</td><td>-9.52</td><td>44.60</td><td>-0.12</td><td>Average</td><td>100</td><td>358</td></tr><tr><td>4</td><td>5350.00</td><td>57.45</td><td>74.00</td><td>-16.55</td><td>57.57</td><td>-0.12</td><td>Peak</td><td>100</td><td>358</td></tr><tr><td>5</td><td>6276.00</td><td>56.50</td><td>68.20</td><td>-11.70</td><td>54.56</td><td>1.94</td><td>Peak</td><td>205</td><td>331</td></tr><tr><td>6</td><td>10460.00</td><td>56.36</td><td>68.20</td><td>-11.84</td><td>48.62</td><td>7.74</td><td>Peak</td><td>255</td><td>32</td></tr><tr><td>7</td><td>15690.00</td><td>42.37</td><td>54.00</td><td>-11.63</td><td>38.29</td><td>4.08</td><td>Average</td><td>188</td><td>35</td></tr><tr><td>8</td><td>15690.00</td><td>56.50</td><td>74.00</td><td>-17.50</td><td>52.42</td><td>4.08</td><td>Peak</td><td>188</td><td>35</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	50.65	54.00	-3.35	50.15	0.50	Average	100	358	2	5150.00	65.06	74.00	-8.94	64.56	0.50	Peak	100	358	3	5350.00	44.48	54.00	-9.52	44.60	-0.12	Average	100	358	4	5350.00	57.45	74.00	-16.55	57.57	-0.12	Peak	100	358	5	6276.00	56.50	68.20	-11.70	54.56	1.94	Peak	205	331	6	10460.00	56.36	68.20	-11.84	48.62	7.74	Peak	255	32	7	15690.00	42.37	54.00	-11.63	38.29	4.08	Average	188	35	8	15690.00	56.50	74.00	-17.50	52.42	4.08	Peak	188	35
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5150.00	50.65	54.00	-3.35	50.15	0.50	Average	100	358																																																																																				
2	5150.00	65.06	74.00	-8.94	64.56	0.50	Peak	100	358																																																																																				
3	5350.00	44.48	54.00	-9.52	44.60	-0.12	Average	100	358																																																																																				
4	5350.00	57.45	74.00	-16.55	57.57	-0.12	Peak	100	358																																																																																				
5	6276.00	56.50	68.20	-11.70	54.56	1.94	Peak	205	331																																																																																				
6	10460.00	56.36	68.20	-11.84	48.62	7.74	Peak	255	32																																																																																				
7	15690.00	42.37	54.00	-11.63	38.29	4.08	Average	188	35																																																																																				
8	15690.00	56.50	74.00	-17.50	52.42	4.08	Peak	188	35																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																													



Modulation	be EHT40	Test Freq. (MHz)	5270																																																																																
Polarization	Horizontal																																																																																		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																			
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>45.33</td><td>54.00</td><td>-8.67</td><td>44.83</td><td>0.50</td><td>Average</td><td>220</td><td>358</td></tr><tr><td>2</td><td>5150.00</td><td>56.97</td><td>74.00</td><td>-17.03</td><td>56.47</td><td>0.50</td><td>Peak</td><td>220</td><td>358</td></tr><tr><td>3</td><td>5350.00</td><td>47.72</td><td>54.00</td><td>-6.28</td><td>47.84</td><td>-0.12</td><td>Average</td><td>220</td><td>358</td></tr><tr><td>4</td><td>5350.00</td><td>61.33</td><td>74.00</td><td>-12.67</td><td>61.45</td><td>-0.12</td><td>Peak</td><td>220</td><td>358</td></tr><tr><td>5</td><td>10540.00</td><td>55.35</td><td>68.20</td><td>-12.85</td><td>47.65</td><td>7.70</td><td>Peak</td><td>100</td><td>60</td></tr><tr><td>6</td><td>15810.00</td><td>42.60</td><td>54.00</td><td>-11.40</td><td>38.42</td><td>4.18</td><td>Average</td><td>100</td><td>90</td></tr><tr><td>7</td><td>15810.00</td><td>55.20</td><td>74.00</td><td>-18.80</td><td>51.02</td><td>4.18</td><td>Peak</td><td>100</td><td>90</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	45.33	54.00	-8.67	44.83	0.50	Average	220	358	2	5150.00	56.97	74.00	-17.03	56.47	0.50	Peak	220	358	3	5350.00	47.72	54.00	-6.28	47.84	-0.12	Average	220	358	4	5350.00	61.33	74.00	-12.67	61.45	-0.12	Peak	220	358	5	10540.00	55.35	68.20	-12.85	47.65	7.70	Peak	100	60	6	15810.00	42.60	54.00	-11.40	38.42	4.18	Average	100	90	7	15810.00	55.20	74.00	-18.80	51.02	4.18	Peak	100	90
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5150.00	45.33	54.00	-8.67	44.83	0.50	Average	220	358																																																																										
2	5150.00	56.97	74.00	-17.03	56.47	0.50	Peak	220	358																																																																										
3	5350.00	47.72	54.00	-6.28	47.84	-0.12	Average	220	358																																																																										
4	5350.00	61.33	74.00	-12.67	61.45	-0.12	Peak	220	358																																																																										
5	10540.00	55.35	68.20	-12.85	47.65	7.70	Peak	100	60																																																																										
6	15810.00	42.60	54.00	-11.40	38.42	4.18	Average	100	90																																																																										
7	15810.00	55.20	74.00	-18.80	51.02	4.18	Peak	100	90																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																			



Modulation	be EHT40	Test Freq. (MHz)	5270																																																																																
Polarization	Vertical																																																																																		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																			
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>45.06</td><td>54.00</td><td>-8.94</td><td>44.56</td><td>0.50</td><td>Average</td><td>100</td><td>358</td></tr><tr><td>2</td><td>5150.00</td><td>56.39</td><td>74.00</td><td>-17.61</td><td>55.89</td><td>0.50</td><td>Peak</td><td>100</td><td>358</td></tr><tr><td>3</td><td>5350.00</td><td>45.54</td><td>54.00</td><td>-8.46</td><td>45.66</td><td>-0.12</td><td>Average</td><td>100</td><td>358</td></tr><tr><td>4</td><td>5350.00</td><td>58.58</td><td>74.00</td><td>-15.42</td><td>58.70</td><td>-0.12</td><td>Peak</td><td>100</td><td>358</td></tr><tr><td>5</td><td>10540.00</td><td>55.59</td><td>68.20</td><td>-12.61</td><td>47.89</td><td>7.70</td><td>Peak</td><td>100</td><td>20</td></tr><tr><td>6</td><td>15810.00</td><td>42.73</td><td>54.00</td><td>-11.27</td><td>38.55</td><td>4.18</td><td>Average</td><td>100</td><td>40</td></tr><tr><td>7</td><td>15810.00</td><td>55.39</td><td>74.00</td><td>-18.61</td><td>51.21</td><td>4.18</td><td>Peak</td><td>100</td><td>40</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	45.06	54.00	-8.94	44.56	0.50	Average	100	358	2	5150.00	56.39	74.00	-17.61	55.89	0.50	Peak	100	358	3	5350.00	45.54	54.00	-8.46	45.66	-0.12	Average	100	358	4	5350.00	58.58	74.00	-15.42	58.70	-0.12	Peak	100	358	5	10540.00	55.59	68.20	-12.61	47.89	7.70	Peak	100	20	6	15810.00	42.73	54.00	-11.27	38.55	4.18	Average	100	40	7	15810.00	55.39	74.00	-18.61	51.21	4.18	Peak	100	40
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5150.00	45.06	54.00	-8.94	44.56	0.50	Average	100	358																																																																										
2	5150.00	56.39	74.00	-17.61	55.89	0.50	Peak	100	358																																																																										
3	5350.00	45.54	54.00	-8.46	45.66	-0.12	Average	100	358																																																																										
4	5350.00	58.58	74.00	-15.42	58.70	-0.12	Peak	100	358																																																																										
5	10540.00	55.59	68.20	-12.61	47.89	7.70	Peak	100	20																																																																										
6	15810.00	42.73	54.00	-11.27	38.55	4.18	Average	100	40																																																																										
7	15810.00	55.39	74.00	-18.61	51.21	4.18	Peak	100	40																																																																										



Modulation	be EHT40	Test Freq. (MHz)	5310
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65			
Level (dBuV/m) <			



Modulation	be EHT40	Test Freq. (MHz)	5310
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65			
Level (dBuV/m) </			



Modulation	be EHT40	Test Freq. (MHz)	5510
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65			
Level (dBuV/m)			



Modulation	be EHT40	Test Freq. (MHz)	5510
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65			
Level (dBuV/m) </			



Modulation	be EHT40	Test Freq. (MHz)	5590
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65			
Level (dBuV/m) <			



Modulation	be EHT40	Test Freq. (MHz)	5590
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65			
Level (dBuV/m) <			



Modulation	be EHT40	Test Freq. (MHz)	5670																																																		
Polarization	Horizontal																																																				
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																					
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5725.00</td><td>66.97</td><td>68.20</td><td>-1.23</td><td>66.35</td><td>0.62</td><td>Peak</td><td>294</td><td>346</td></tr><tr><td>2</td><td>11340.00</td><td>43.45</td><td>54.00</td><td>-10.55</td><td>36.22</td><td>7.23</td><td>Average</td><td>165</td><td>5</td></tr><tr><td>3</td><td>11340.00</td><td>57.38</td><td>74.00</td><td>-16.62</td><td>50.15</td><td>7.23</td><td>Peak</td><td>165</td><td>5</td></tr><tr><td>4</td><td>17010.00</td><td>57.97</td><td>68.20</td><td>-10.23</td><td>51.19</td><td>6.78</td><td>Peak</td><td>100</td><td>20</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5725.00	66.97	68.20	-1.23	66.35	0.62	Peak	294	346	2	11340.00	43.45	54.00	-10.55	36.22	7.23	Average	165	5	3	11340.00	57.38	74.00	-16.62	50.15	7.23	Peak	165	5	4	17010.00	57.97	68.20	-10.23	51.19	6.78	Peak	100	20
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	5725.00	66.97	68.20	-1.23	66.35	0.62	Peak	294	346																																												
2	11340.00	43.45	54.00	-10.55	36.22	7.23	Average	165	5																																												
3	11340.00	57.38	74.00	-16.62	50.15	7.23	Peak	165	5																																												
4	17010.00	57.97	68.20	-10.23	51.19	6.78	Peak	100	20																																												



Modulation	be EHT40	Test Freq. (MHz)	5670
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65			
Level (dBuV/m) </			




Modulation	be EHT40	Test Freq. (MHz)	5710																																																		
Polarization	Horizontal																																																				
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																					
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5850.00</td><td>57.79</td><td>68.20</td><td>-10.41</td><td>56.83</td><td>0.96</td><td>Peak</td><td>326</td><td>352</td></tr><tr><td>2</td><td>11420.00</td><td>43.75</td><td>54.00</td><td>-10.25</td><td>36.42</td><td>7.33</td><td>Average</td><td>166</td><td>6</td></tr><tr><td>3</td><td>11420.00</td><td>57.52</td><td>74.00</td><td>-16.48</td><td>50.19</td><td>7.33</td><td>Peak</td><td>166</td><td>6</td></tr><tr><td>4</td><td>17130.00</td><td>58.04</td><td>68.20</td><td>-10.16</td><td>51.56</td><td>6.48</td><td>Peak</td><td>100</td><td>20</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5850.00	57.79	68.20	-10.41	56.83	0.96	Peak	326	352	2	11420.00	43.75	54.00	-10.25	36.42	7.33	Average	166	6	3	11420.00	57.52	74.00	-16.48	50.19	7.33	Peak	166	6	4	17130.00	58.04	68.20	-10.16	51.56	6.48	Peak	100	20
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	5850.00	57.79	68.20	-10.41	56.83	0.96	Peak	326	352																																												
2	11420.00	43.75	54.00	-10.25	36.42	7.33	Average	166	6																																												
3	11420.00	57.52	74.00	-16.48	50.19	7.33	Peak	166	6																																												
4	17130.00	58.04	68.20	-10.16	51.56	6.48	Peak	100	20																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					




Modulation	be EHT40	Test Freq. (MHz)	5710																																																		
Polarization	Vertical																																																				
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																					
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5850.00</td><td>58.45</td><td>68.20</td><td>-9.75</td><td>57.49</td><td>0.96</td><td>Peak</td><td>188</td><td>345</td></tr><tr><td>2</td><td>11420.00</td><td>43.91</td><td>54.00</td><td>-10.09</td><td>36.58</td><td>7.33</td><td>Average</td><td>100</td><td>124</td></tr><tr><td>3</td><td>11420.00</td><td>56.32</td><td>74.00</td><td>-17.68</td><td>48.99</td><td>7.33</td><td>Peak</td><td>100</td><td>124</td></tr><tr><td>4</td><td>17130.00</td><td>57.98</td><td>68.20</td><td>-10.22</td><td>51.50</td><td>6.48</td><td>Peak</td><td>100</td><td>51</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5850.00	58.45	68.20	-9.75	57.49	0.96	Peak	188	345	2	11420.00	43.91	54.00	-10.09	36.58	7.33	Average	100	124	3	11420.00	56.32	74.00	-17.68	48.99	7.33	Peak	100	124	4	17130.00	57.98	68.20	-10.22	51.50	6.48	Peak	100	51
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	5850.00	58.45	68.20	-9.75	57.49	0.96	Peak	188	345																																												
2	11420.00	43.91	54.00	-10.09	36.58	7.33	Average	100	124																																												
3	11420.00	56.32	74.00	-17.68	48.99	7.33	Peak	100	124																																												
4	17130.00	57.98	68.20	-10.22	51.50	6.48	Peak	100	51																																												

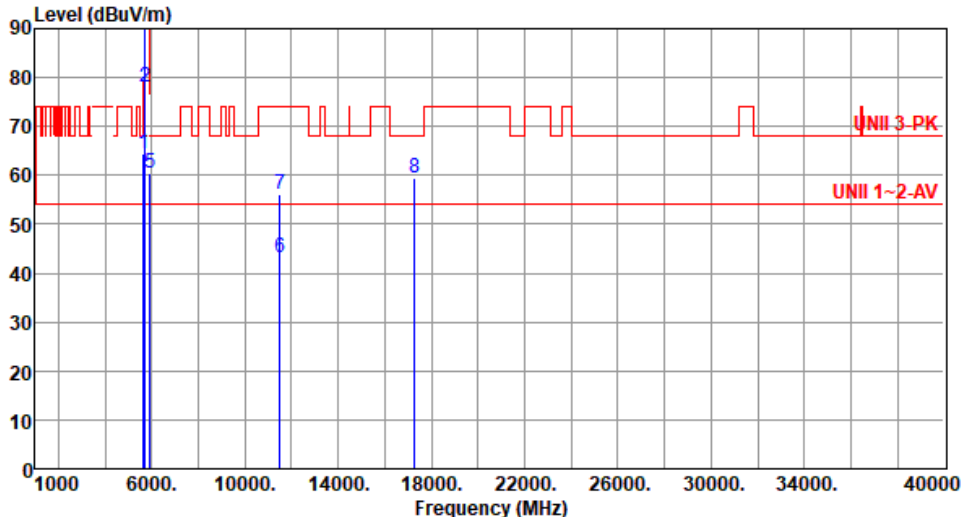

Modulation	be EHT40	Test Freq. (MHz)	5755																																																																																										
Polarization	Horizontal																																																																																												
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>64.53</td><td>68.20</td><td>-3.67</td><td>64.25</td><td>0.28</td><td>Peak</td><td>321</td><td>343</td></tr><tr><td>2</td><td>5700.00</td><td>78.10</td><td>105.20</td><td>-27.10</td><td>77.59</td><td>0.51</td><td>Peak</td><td>321</td><td>343</td></tr><tr><td>3</td><td>5720.00</td><td>89.29</td><td>110.80</td><td>-21.51</td><td>88.70</td><td>0.59</td><td>Peak</td><td>321</td><td>343</td></tr><tr><td>4</td><td>5725.00</td><td>90.03</td><td>122.20</td><td>-32.17</td><td>89.41</td><td>0.62</td><td>Peak</td><td>321</td><td>343</td></tr><tr><td>5</td><td>5925.00</td><td>60.44</td><td>68.20</td><td>-7.76</td><td>59.27</td><td>1.17</td><td>Peak</td><td>321</td><td>343</td></tr><tr><td>6</td><td>11510.00</td><td>43.24</td><td>54.00</td><td>-10.76</td><td>35.76</td><td>7.48</td><td>Average</td><td>117</td><td>55</td></tr><tr><td>7</td><td>11510.00</td><td>56.15</td><td>74.00</td><td>-17.85</td><td>48.67</td><td>7.48</td><td>Peak</td><td>117</td><td>55</td></tr><tr><td>8</td><td>17265.00</td><td>59.54</td><td>68.20</td><td>-8.66</td><td>53.06</td><td>6.48</td><td>Peak</td><td>185</td><td>49</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	64.53	68.20	-3.67	64.25	0.28	Peak	321	343	2	5700.00	78.10	105.20	-27.10	77.59	0.51	Peak	321	343	3	5720.00	89.29	110.80	-21.51	88.70	0.59	Peak	321	343	4	5725.00	90.03	122.20	-32.17	89.41	0.62	Peak	321	343	5	5925.00	60.44	68.20	-7.76	59.27	1.17	Peak	321	343	6	11510.00	43.24	54.00	-10.76	35.76	7.48	Average	117	55	7	11510.00	56.15	74.00	-17.85	48.67	7.48	Peak	117	55	8	17265.00	59.54	68.20	-8.66	53.06	6.48	Peak	185	49
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5650.00	64.53	68.20	-3.67	64.25	0.28	Peak	321	343																																																																																				
2	5700.00	78.10	105.20	-27.10	77.59	0.51	Peak	321	343																																																																																				
3	5720.00	89.29	110.80	-21.51	88.70	0.59	Peak	321	343																																																																																				
4	5725.00	90.03	122.20	-32.17	89.41	0.62	Peak	321	343																																																																																				
5	5925.00	60.44	68.20	-7.76	59.27	1.17	Peak	321	343																																																																																				
6	11510.00	43.24	54.00	-10.76	35.76	7.48	Average	117	55																																																																																				
7	11510.00	56.15	74.00	-17.85	48.67	7.48	Peak	117	55																																																																																				
8	17265.00	59.54	68.20	-8.66	53.06	6.48	Peak	185	49																																																																																				

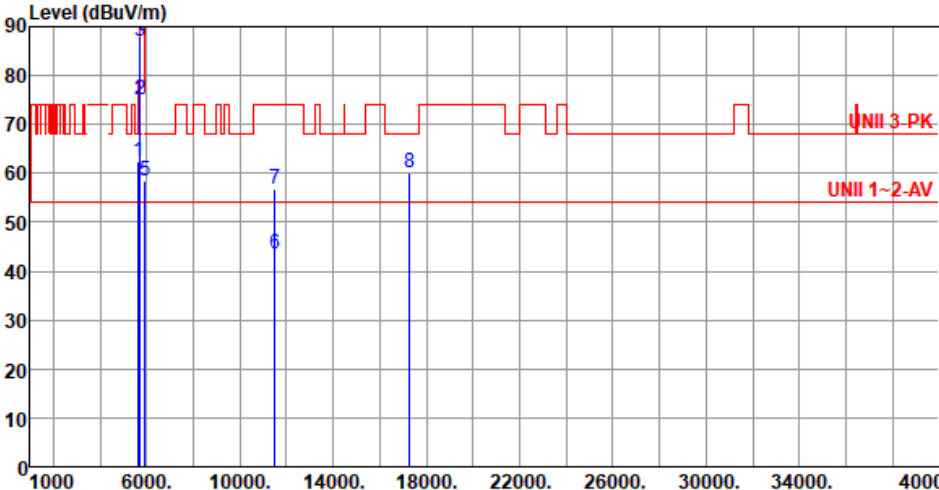


Modulation	be EHT40	Test Freq. (MHz)	5755																																																																																										
Polarization	Vertical																																																																																												
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5650.00</td><td>62.40</td><td>68.20</td><td>-5.80</td><td>62.12</td><td>0.28</td><td>Peak</td><td>145</td><td>323</td></tr><tr><td>2</td><td>5700.00</td><td>75.20</td><td>105.20</td><td>-30.00</td><td>74.69</td><td>0.51</td><td>Peak</td><td>145</td><td>323</td></tr><tr><td>3</td><td>5720.00</td><td>87.08</td><td>110.80</td><td>-23.72</td><td>86.49</td><td>0.59</td><td>Peak</td><td>145</td><td>323</td></tr><tr><td>4</td><td>5725.00</td><td>88.17</td><td>122.20</td><td>-34.03</td><td>87.55</td><td>0.62</td><td>Peak</td><td>145</td><td>323</td></tr><tr><td>5</td><td>5925.00</td><td>58.28</td><td>68.20</td><td>-9.92</td><td>57.11</td><td>1.17</td><td>Peak</td><td>145</td><td>323</td></tr><tr><td>6</td><td>11510.00</td><td>43.50</td><td>54.00</td><td>-10.50</td><td>36.02</td><td>7.48</td><td>Average</td><td>183</td><td>345</td></tr><tr><td>7</td><td>11510.00</td><td>56.69</td><td>74.00</td><td>-17.31</td><td>49.21</td><td>7.48</td><td>Peak</td><td>183</td><td>345</td></tr><tr><td>8</td><td>17265.00</td><td>60.07</td><td>68.20</td><td>-8.13</td><td>53.59</td><td>6.48</td><td>Peak</td><td>349</td><td>318</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	62.40	68.20	-5.80	62.12	0.28	Peak	145	323	2	5700.00	75.20	105.20	-30.00	74.69	0.51	Peak	145	323	3	5720.00	87.08	110.80	-23.72	86.49	0.59	Peak	145	323	4	5725.00	88.17	122.20	-34.03	87.55	0.62	Peak	145	323	5	5925.00	58.28	68.20	-9.92	57.11	1.17	Peak	145	323	6	11510.00	43.50	54.00	-10.50	36.02	7.48	Average	183	345	7	11510.00	56.69	74.00	-17.31	49.21	7.48	Peak	183	345	8	17265.00	60.07	68.20	-8.13	53.59	6.48	Peak	349	318
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5650.00	62.40	68.20	-5.80	62.12	0.28	Peak	145	323																																																																																				
2	5700.00	75.20	105.20	-30.00	74.69	0.51	Peak	145	323																																																																																				
3	5720.00	87.08	110.80	-23.72	86.49	0.59	Peak	145	323																																																																																				
4	5725.00	88.17	122.20	-34.03	87.55	0.62	Peak	145	323																																																																																				
5	5925.00	58.28	68.20	-9.92	57.11	1.17	Peak	145	323																																																																																				
6	11510.00	43.50	54.00	-10.50	36.02	7.48	Average	183	345																																																																																				
7	11510.00	56.69	74.00	-17.31	49.21	7.48	Peak	183	345																																																																																				
8	17265.00	60.07	68.20	-8.13	53.59	6.48	Peak	349	318																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													




Modulation	be EHT40	Test Freq. (MHz)	5795																																																																																										
Polarization	Horizontal																																																																																												
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																													
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>65.08</td><td>68.20</td><td>-3.12</td><td>64.80</td><td>0.28</td><td>Peak</td><td>322</td><td>345</td></tr><tr><td>2</td><td>5850.00</td><td>82.43</td><td>122.20</td><td>-39.77</td><td>81.47</td><td>0.96</td><td>Peak</td><td>322</td><td>345</td></tr><tr><td>3</td><td>5855.00</td><td>78.49</td><td>110.80</td><td>-32.31</td><td>77.51</td><td>0.98</td><td>Peak</td><td>322</td><td>345</td></tr><tr><td>4</td><td>5875.00</td><td>74.48</td><td>105.20</td><td>-30.72</td><td>73.42</td><td>1.06</td><td>Peak</td><td>322</td><td>345</td></tr><tr><td>5</td><td>5925.00</td><td>66.93</td><td>68.20</td><td>-1.27</td><td>65.76</td><td>1.17</td><td>Peak</td><td>322</td><td>345</td></tr><tr><td>6</td><td>11590.00</td><td>43.17</td><td>54.00</td><td>-10.83</td><td>36.02</td><td>7.15</td><td>Average</td><td>120</td><td>53</td></tr><tr><td>7</td><td>11590.00</td><td>56.12</td><td>74.00</td><td>-17.88</td><td>48.97</td><td>7.15</td><td>Peak</td><td>120</td><td>53</td></tr><tr><td>8</td><td>17385.00</td><td>60.35</td><td>68.20</td><td>-7.85</td><td>53.49</td><td>6.86</td><td>Peak</td><td>188</td><td>49</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	65.08	68.20	-3.12	64.80	0.28	Peak	322	345	2	5850.00	82.43	122.20	-39.77	81.47	0.96	Peak	322	345	3	5855.00	78.49	110.80	-32.31	77.51	0.98	Peak	322	345	4	5875.00	74.48	105.20	-30.72	73.42	1.06	Peak	322	345	5	5925.00	66.93	68.20	-1.27	65.76	1.17	Peak	322	345	6	11590.00	43.17	54.00	-10.83	36.02	7.15	Average	120	53	7	11590.00	56.12	74.00	-17.88	48.97	7.15	Peak	120	53	8	17385.00	60.35	68.20	-7.85	53.49	6.86	Peak	188	49
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5650.00	65.08	68.20	-3.12	64.80	0.28	Peak	322	345																																																																																				
2	5850.00	82.43	122.20	-39.77	81.47	0.96	Peak	322	345																																																																																				
3	5855.00	78.49	110.80	-32.31	77.51	0.98	Peak	322	345																																																																																				
4	5875.00	74.48	105.20	-30.72	73.42	1.06	Peak	322	345																																																																																				
5	5925.00	66.93	68.20	-1.27	65.76	1.17	Peak	322	345																																																																																				
6	11590.00	43.17	54.00	-10.83	36.02	7.15	Average	120	53																																																																																				
7	11590.00	56.12	74.00	-17.88	48.97	7.15	Peak	120	53																																																																																				
8	17385.00	60.35	68.20	-7.85	53.49	6.86	Peak	188	49																																																																																				

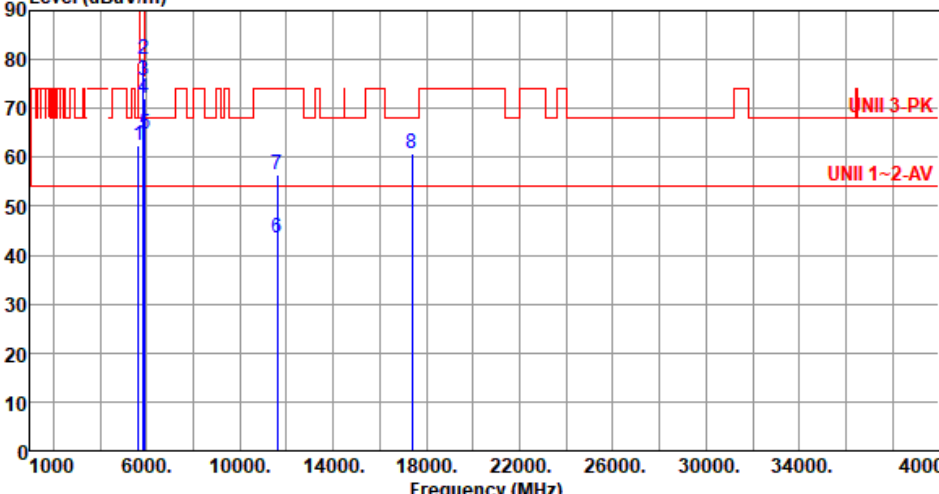

Modulation	be EHT40	Test Freq. (MHz)	5795																																																																																										
Polarization	Vertical																																																																																												
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5650.00</td><td>62.55</td><td>68.20</td><td>-5.65</td><td>62.27</td><td>0.28</td><td>Peak</td><td>145</td><td>323</td></tr><tr><td>2</td><td>5850.00</td><td>80.18</td><td>122.20</td><td>-42.02</td><td>79.22</td><td>0.96</td><td>Peak</td><td>145</td><td>323</td></tr><tr><td>3</td><td>5855.00</td><td>75.66</td><td>110.80</td><td>-35.14</td><td>74.68</td><td>0.98</td><td>Peak</td><td>145</td><td>323</td></tr><tr><td>4</td><td>5875.00</td><td>72.21</td><td>105.20</td><td>-32.99</td><td>71.15</td><td>1.06</td><td>Peak</td><td>145</td><td>323</td></tr><tr><td>5</td><td>5925.00</td><td>64.62</td><td>68.20</td><td>-3.58</td><td>63.45</td><td>1.17</td><td>Peak</td><td>145</td><td>323</td></tr><tr><td>6</td><td>11590.00</td><td>43.53</td><td>54.00</td><td>-10.47</td><td>36.38</td><td>7.15</td><td>Average</td><td>185</td><td>346</td></tr><tr><td>7</td><td>11590.00</td><td>56.54</td><td>74.00</td><td>-17.46</td><td>49.39</td><td>7.15</td><td>Peak</td><td>185</td><td>346</td></tr><tr><td>8</td><td>17385.00</td><td>60.75</td><td>68.20</td><td>-7.45</td><td>53.89</td><td>6.86</td><td>Peak</td><td>350</td><td>320</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	62.55	68.20	-5.65	62.27	0.28	Peak	145	323	2	5850.00	80.18	122.20	-42.02	79.22	0.96	Peak	145	323	3	5855.00	75.66	110.80	-35.14	74.68	0.98	Peak	145	323	4	5875.00	72.21	105.20	-32.99	71.15	1.06	Peak	145	323	5	5925.00	64.62	68.20	-3.58	63.45	1.17	Peak	145	323	6	11590.00	43.53	54.00	-10.47	36.38	7.15	Average	185	346	7	11590.00	56.54	74.00	-17.46	49.39	7.15	Peak	185	346	8	17385.00	60.75	68.20	-7.45	53.89	6.86	Peak	350	320
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5650.00	62.55	68.20	-5.65	62.27	0.28	Peak	145	323																																																																																				
2	5850.00	80.18	122.20	-42.02	79.22	0.96	Peak	145	323																																																																																				
3	5855.00	75.66	110.80	-35.14	74.68	0.98	Peak	145	323																																																																																				
4	5875.00	72.21	105.20	-32.99	71.15	1.06	Peak	145	323																																																																																				
5	5925.00	64.62	68.20	-3.58	63.45	1.17	Peak	145	323																																																																																				
6	11590.00	43.53	54.00	-10.47	36.38	7.15	Average	185	346																																																																																				
7	11590.00	56.54	74.00	-17.46	49.39	7.15	Peak	185	346																																																																																				
8	17385.00	60.75	68.20	-7.45	53.89	6.86	Peak	350	320																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													

Unwanted Emissions (Above 1GHz) for be EHT80

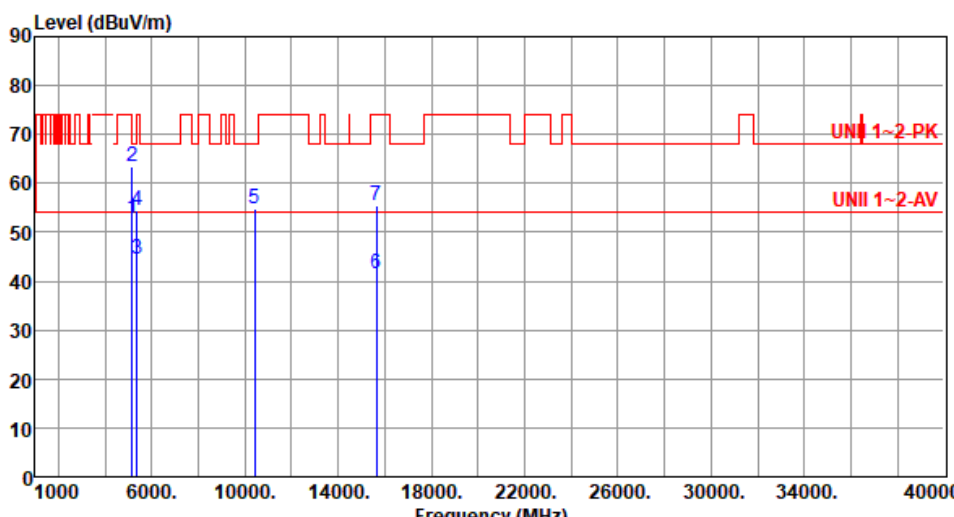Modulation	be EHT80	Test Freq. (MHz)	5210																																																																																
Polarization	Horizontal																																																																																		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																			
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>52.97</td><td>54.00</td><td>-1.03</td><td>52.47</td><td>0.50</td><td>Average</td><td>225</td><td>0</td></tr><tr><td>2</td><td>5150.00</td><td>63.58</td><td>74.00</td><td>-10.42</td><td>63.08</td><td>0.50</td><td>Peak</td><td>225</td><td>0</td></tr><tr><td>3</td><td>5350.00</td><td>44.45</td><td>54.00</td><td>-9.55</td><td>44.57</td><td>-0.12</td><td>Average</td><td>225</td><td>0</td></tr><tr><td>4</td><td>5350.00</td><td>54.45</td><td>74.00</td><td>-19.55</td><td>54.57</td><td>-0.12</td><td>Peak</td><td>225</td><td>0</td></tr><tr><td>5</td><td>10420.00</td><td>54.83</td><td>68.20</td><td>-13.37</td><td>47.11</td><td>7.72</td><td>Peak</td><td>100</td><td>50</td></tr><tr><td>6</td><td>15630.00</td><td>41.52</td><td>54.00</td><td>-12.48</td><td>37.65</td><td>3.87</td><td>Average</td><td>100</td><td>10</td></tr><tr><td>7</td><td>15630.00</td><td>55.32</td><td>74.00</td><td>-18.68</td><td>51.45</td><td>3.87</td><td>Peak</td><td>100</td><td>10</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	52.97	54.00	-1.03	52.47	0.50	Average	225	0	2	5150.00	63.58	74.00	-10.42	63.08	0.50	Peak	225	0	3	5350.00	44.45	54.00	-9.55	44.57	-0.12	Average	225	0	4	5350.00	54.45	74.00	-19.55	54.57	-0.12	Peak	225	0	5	10420.00	54.83	68.20	-13.37	47.11	7.72	Peak	100	50	6	15630.00	41.52	54.00	-12.48	37.65	3.87	Average	100	10	7	15630.00	55.32	74.00	-18.68	51.45	3.87	Peak	100	10
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5150.00	52.97	54.00	-1.03	52.47	0.50	Average	225	0																																																																										
2	5150.00	63.58	74.00	-10.42	63.08	0.50	Peak	225	0																																																																										
3	5350.00	44.45	54.00	-9.55	44.57	-0.12	Average	225	0																																																																										
4	5350.00	54.45	74.00	-19.55	54.57	-0.12	Peak	225	0																																																																										
5	10420.00	54.83	68.20	-13.37	47.11	7.72	Peak	100	50																																																																										
6	15630.00	41.52	54.00	-12.48	37.65	3.87	Average	100	10																																																																										
7	15630.00	55.32	74.00	-18.68	51.45	3.87	Peak	100	10																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																			



Modulation	be EHT80	Test Freq. (MHz)	5210																																																																																
Polarization	Vertical																																																																																		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																			
Level (dBuV/m) UNII 1~2-PK UNII 1~2-AV <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>50.09</td><td>54.00</td><td>-3.91</td><td>49.59</td><td>0.50</td><td>Average</td><td>100</td><td>356</td></tr><tr><td>2</td><td>5150.00</td><td>60.65</td><td>74.00</td><td>-13.35</td><td>60.15</td><td>0.50</td><td>Peak</td><td>100</td><td>356</td></tr><tr><td>3</td><td>5350.00</td><td>44.37</td><td>54.00</td><td>-9.63</td><td>44.49</td><td>-0.12</td><td>Average</td><td>100</td><td>356</td></tr><tr><td>4</td><td>5350.00</td><td>54.11</td><td>74.00</td><td>-19.89</td><td>54.23</td><td>-0.12</td><td>Peak</td><td>100</td><td>356</td></tr><tr><td>5</td><td>10420.00</td><td>54.97</td><td>68.20</td><td>-13.23</td><td>47.25</td><td>7.72</td><td>Peak</td><td>100</td><td>20</td></tr><tr><td>6</td><td>15630.00</td><td>41.36</td><td>54.00</td><td>-12.64</td><td>37.49</td><td>3.87</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>7</td><td>15630.00</td><td>55.15</td><td>74.00</td><td>-18.85</td><td>51.28</td><td>3.87</td><td>Peak</td><td>100</td><td>60</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	50.09	54.00	-3.91	49.59	0.50	Average	100	356	2	5150.00	60.65	74.00	-13.35	60.15	0.50	Peak	100	356	3	5350.00	44.37	54.00	-9.63	44.49	-0.12	Average	100	356	4	5350.00	54.11	74.00	-19.89	54.23	-0.12	Peak	100	356	5	10420.00	54.97	68.20	-13.23	47.25	7.72	Peak	100	20	6	15630.00	41.36	54.00	-12.64	37.49	3.87	Average	100	60	7	15630.00	55.15	74.00	-18.85	51.28	3.87	Peak	100	60
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5150.00	50.09	54.00	-3.91	49.59	0.50	Average	100	356																																																																										
2	5150.00	60.65	74.00	-13.35	60.15	0.50	Peak	100	356																																																																										
3	5350.00	44.37	54.00	-9.63	44.49	-0.12	Average	100	356																																																																										
4	5350.00	54.11	74.00	-19.89	54.23	-0.12	Peak	100	356																																																																										
5	10420.00	54.97	68.20	-13.23	47.25	7.72	Peak	100	20																																																																										
6	15630.00	41.36	54.00	-12.64	37.49	3.87	Average	100	60																																																																										
7	15630.00	55.15	74.00	-18.85	51.28	3.87	Peak	100	60																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																			



Modulation	be EHT80	Test Freq. (MHz)	5290						
Polarization	Horizontal								
Test By :Allen Lee Temperature(°C):23 Humidity(%):65									
Level (dBUV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	45.21	54.00	-8.79	44.71	0.50	Average	231	356
2	5150.00	56.05	74.00	-17.95	55.55	0.50	Peak	231	356
3	5350.00	52.51	54.00	-1.49	52.63	-0.12	Average	231	356
4	5350.00	66.06	74.00	-7.94	66.18	-0.12	Peak	231	356
5	10580.00	55.05	68.20	-13.15	47.30	7.75	Peak	100	20
6	15870.00	41.76	54.00	-12.24	37.49	4.27	Average	100	60
7	15870.00	55.86	74.00	-18.14	51.59	4.27	Peak	100	60
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									



Modulation	be EHT80	Test Freq. (MHz)	5290																																																																																
Polarization	Vertical																																																																																		
Test By :Allen Lee Temperature(°C):23 Humidity(%):65																																																																																			
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>45.06</td><td>54.00</td><td>-8.94</td><td>44.56</td><td>0.50</td><td>Average</td><td>100</td><td>356</td></tr><tr><td>2</td><td>5150.00</td><td>55.75</td><td>74.00</td><td>-18.25</td><td>55.25</td><td>0.50</td><td>Peak</td><td>100</td><td>356</td></tr><tr><td>3</td><td>5350.00</td><td>49.37</td><td>54.00</td><td>-4.63</td><td>49.49</td><td>-0.12</td><td>Average</td><td>100</td><td>356</td></tr><tr><td>4</td><td>5350.00</td><td>63.33</td><td>74.00</td><td>-10.67</td><td>63.45</td><td>-0.12</td><td>Peak</td><td>100</td><td>356</td></tr><tr><td>5</td><td>10580.00</td><td>54.91</td><td>68.20</td><td>-13.29</td><td>47.16</td><td>7.75</td><td>Peak</td><td>100</td><td>60</td></tr><tr><td>6</td><td>15870.00</td><td>41.52</td><td>54.00</td><td>-12.48</td><td>37.25</td><td>4.27</td><td>Average</td><td>100</td><td>40</td></tr><tr><td>7</td><td>15870.00</td><td>55.73</td><td>74.00</td><td>-18.27</td><td>51.46</td><td>4.27</td><td>Peak</td><td>100</td><td>40</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	45.06	54.00	-8.94	44.56	0.50	Average	100	356	2	5150.00	55.75	74.00	-18.25	55.25	0.50	Peak	100	356	3	5350.00	49.37	54.00	-4.63	49.49	-0.12	Average	100	356	4	5350.00	63.33	74.00	-10.67	63.45	-0.12	Peak	100	356	5	10580.00	54.91	68.20	-13.29	47.16	7.75	Peak	100	60	6	15870.00	41.52	54.00	-12.48	37.25	4.27	Average	100	40	7	15870.00	55.73	74.00	-18.27	51.46	4.27	Peak	100	40
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5150.00	45.06	54.00	-8.94	44.56	0.50	Average	100	356																																																																										
2	5150.00	55.75	74.00	-18.25	55.25	0.50	Peak	100	356																																																																										
3	5350.00	49.37	54.00	-4.63	49.49	-0.12	Average	100	356																																																																										
4	5350.00	63.33	74.00	-10.67	63.45	-0.12	Peak	100	356																																																																										
5	10580.00	54.91	68.20	-13.29	47.16	7.75	Peak	100	60																																																																										
6	15870.00	41.52	54.00	-12.48	37.25	4.27	Average	100	40																																																																										
7	15870.00	55.73	74.00	-18.27	51.46	4.27	Peak	100	40																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																			



Modulation	be EHT80	Test Freq. (MHz)	5530																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):65																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>52.75</td><td>54.00</td><td>-1.25</td><td>52.51</td><td>0.24</td><td>Average</td><td>291</td><td>355</td></tr><tr><td>2</td><td>5460.00</td><td>64.89</td><td>74.00</td><td>-9.11</td><td>64.65</td><td>0.24</td><td>Peak</td><td>291</td><td>355</td></tr><tr><td>3</td><td>5470.00</td><td>67.03</td><td>68.20</td><td>-1.17</td><td>66.77</td><td>0.26</td><td>Peak</td><td>291</td><td>355</td></tr><tr><td>4</td><td>11060.00</td><td>43.17</td><td>54.00</td><td>-10.83</td><td>35.49</td><td>7.68</td><td>Average</td><td>100</td><td>5</td></tr><tr><td>5</td><td>11060.00</td><td>57.16</td><td>74.00</td><td>-16.84</td><td>49.48</td><td>7.68</td><td>Peak</td><td>100</td><td>5</td></tr><tr><td>6</td><td>16590.00</td><td>57.50</td><td>68.20</td><td>-10.70</td><td>51.23</td><td>6.27</td><td>Peak</td><td>100</td><td>20</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	52.75	54.00	-1.25	52.51	0.24	Average	291	355	2	5460.00	64.89	74.00	-9.11	64.65	0.24	Peak	291	355	3	5470.00	67.03	68.20	-1.17	66.77	0.26	Peak	291	355	4	11060.00	43.17	54.00	-10.83	35.49	7.68	Average	100	5	5	11060.00	57.16	74.00	-16.84	49.48	7.68	Peak	100	5	6	16590.00	57.50	68.20	-10.70	51.23	6.27	Peak	100	20
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5460.00	52.75	54.00	-1.25	52.51	0.24	Average	291	355																																																																
2	5460.00	64.89	74.00	-9.11	64.65	0.24	Peak	291	355																																																																
3	5470.00	67.03	68.20	-1.17	66.77	0.26	Peak	291	355																																																																
4	11060.00	43.17	54.00	-10.83	35.49	7.68	Average	100	5																																																																
5	11060.00	57.16	74.00	-16.84	49.48	7.68	Peak	100	5																																																																
6	16590.00	57.50	68.20	-10.70	51.23	6.27	Peak	100	20																																																																



Modulation	be EHT80	Test Freq. (MHz)	5530																																																																																										
Polarization	Vertical																																																																																												
Test By :Allen Lee Temperature(°C):23 Humidity(%):65																																																																																													
Level (dBuV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5460.00</td><td>47.33</td><td>54.00</td><td>-6.67</td><td>47.09</td><td>0.24</td><td>Average</td><td>187</td><td>356</td></tr><tr><td>2</td><td>5460.00</td><td>59.38</td><td>74.00</td><td>-14.62</td><td>59.14</td><td>0.24</td><td>Peak</td><td>187</td><td>356</td></tr><tr><td>3</td><td>5470.00</td><td>62.22</td><td>68.20</td><td>-5.98</td><td>61.96</td><td>0.26</td><td>Peak</td><td>187</td><td>356</td></tr><tr><td>4</td><td>11060.00</td><td>42.89</td><td>54.00</td><td>-11.11</td><td>35.21</td><td>7.68</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>5</td><td>11060.00</td><td>57.04</td><td>74.00</td><td>-16.96</td><td>49.36</td><td>7.68</td><td>Peak</td><td>100</td><td>20</td></tr><tr><td>6</td><td>16590.00</td><td>57.38</td><td>68.20</td><td>-10.82</td><td>51.11</td><td>6.27</td><td>Peak</td><td>100</td><td>10</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5460.00	47.33	54.00	-6.67	47.09	0.24	Average	187	356	2	5460.00	59.38	74.00	-14.62	59.14	0.24	Peak	187	356	3	5470.00	62.22	68.20	-5.98	61.96	0.26	Peak	187	356	4	11060.00	42.89	54.00	-11.11	35.21	7.68	Average	100	20	5	11060.00	57.04	74.00	-16.96	49.36	7.68	Peak	100	20	6	16590.00	57.38	68.20	-10.82	51.11	6.27	Peak	100	10
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	5460.00	47.33	54.00	-6.67	47.09	0.24	Average	187	356																																																																																				
2	5460.00	59.38	74.00	-14.62	59.14	0.24	Peak	187	356																																																																																				
3	5470.00	62.22	68.20	-5.98	61.96	0.26	Peak	187	356																																																																																				
4	11060.00	42.89	54.00	-11.11	35.21	7.68	Average	100	20																																																																																				
5	11060.00	57.04	74.00	-16.96	49.36	7.68	Peak	100	20																																																																																				
6	16590.00	57.38	68.20	-10.82	51.11	6.27	Peak	100	10																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													



Modulation	be EHT80	Test Freq. (MHz)	5610						
Polarization	Horizontal								
Test By :Allen Lee Temperature(°C):22 Humidity(%):63									
Level (dBUV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	51.76	54.00	-2.24	51.52	0.24	Average	323	356
2	5460.00	64.58	74.00	-9.42	64.34	0.24	Peak	323	356
3	5470.00	67.62	68.20	-0.58	67.36	0.26	Peak	323	356
4	5725.00	67.92	68.20	-0.28	67.30	0.62	Peak	323	356
5	11220.00	41.61	54.00	-12.39	34.58	7.03	Average	100	178
6	11220.00	55.24	74.00	-18.76	48.21	7.03	Peak	100	178
7	16830.00	59.66	68.20	-8.54	52.26	7.40	Peak	100	203
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									




Modulation	be EHT80	Test Freq. (MHz)	5610
Polarization	Vertical		
Test By :Allen Lee Temperature(°C):22 Humidity(%):63			
Level (dBuV/m) </			



Modulation	be EHT80	Test Freq. (MHz)	5690																																																																																										
Polarization	Horizontal																																																																																												
Test By :Allen Lee Temperature(°C):22 Humidity(%):63																																																																																													
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5280.00</td><td>59.56</td><td>68.20</td><td>-8.64</td><td>59.63</td><td>-0.07</td><td>Peak</td><td>200</td><td>354</td></tr><tr><td>2</td><td>5460.00</td><td>49.67</td><td>54.00</td><td>-4.33</td><td>49.43</td><td>0.24</td><td>Average</td><td>200</td><td>344</td></tr><tr><td>3</td><td>5460.00</td><td>63.48</td><td>74.00</td><td>-10.52</td><td>63.24</td><td>0.24</td><td>Peak</td><td>200</td><td>344</td></tr><tr><td>4</td><td>5470.00</td><td>64.84</td><td>68.20</td><td>-3.36</td><td>64.58</td><td>0.26</td><td>Peak</td><td>200</td><td>344</td></tr><tr><td>5</td><td>5850.00</td><td>67.98</td><td>68.20</td><td>-0.22</td><td>67.02</td><td>0.96</td><td>Peak</td><td>320</td><td>349</td></tr><tr><td>6</td><td>11380.00</td><td>42.06</td><td>54.00</td><td>-11.94</td><td>34.76</td><td>7.30</td><td>Average</td><td>100</td><td>126</td></tr><tr><td>7</td><td>11380.00</td><td>55.53</td><td>74.00</td><td>-18.47</td><td>48.23</td><td>7.30</td><td>Peak</td><td>100</td><td>126</td></tr><tr><td>8</td><td>17070.00</td><td>58.94</td><td>68.20</td><td>-9.26</td><td>52.13</td><td>6.81</td><td>Peak</td><td>100</td><td>222</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5280.00	59.56	68.20	-8.64	59.63	-0.07	Peak	200	354	2	5460.00	49.67	54.00	-4.33	49.43	0.24	Average	200	344	3	5460.00	63.48	74.00	-10.52	63.24	0.24	Peak	200	344	4	5470.00	64.84	68.20	-3.36	64.58	0.26	Peak	200	344	5	5850.00	67.98	68.20	-0.22	67.02	0.96	Peak	320	349	6	11380.00	42.06	54.00	-11.94	34.76	7.30	Average	100	126	7	11380.00	55.53	74.00	-18.47	48.23	7.30	Peak	100	126	8	17070.00	58.94	68.20	-9.26	52.13	6.81	Peak	100	222
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5280.00	59.56	68.20	-8.64	59.63	-0.07	Peak	200	354																																																																																				
2	5460.00	49.67	54.00	-4.33	49.43	0.24	Average	200	344																																																																																				
3	5460.00	63.48	74.00	-10.52	63.24	0.24	Peak	200	344																																																																																				
4	5470.00	64.84	68.20	-3.36	64.58	0.26	Peak	200	344																																																																																				
5	5850.00	67.98	68.20	-0.22	67.02	0.96	Peak	320	349																																																																																				
6	11380.00	42.06	54.00	-11.94	34.76	7.30	Average	100	126																																																																																				
7	11380.00	55.53	74.00	-18.47	48.23	7.30	Peak	100	126																																																																																				
8	17070.00	58.94	68.20	-9.26	52.13	6.81	Peak	100	222																																																																																				

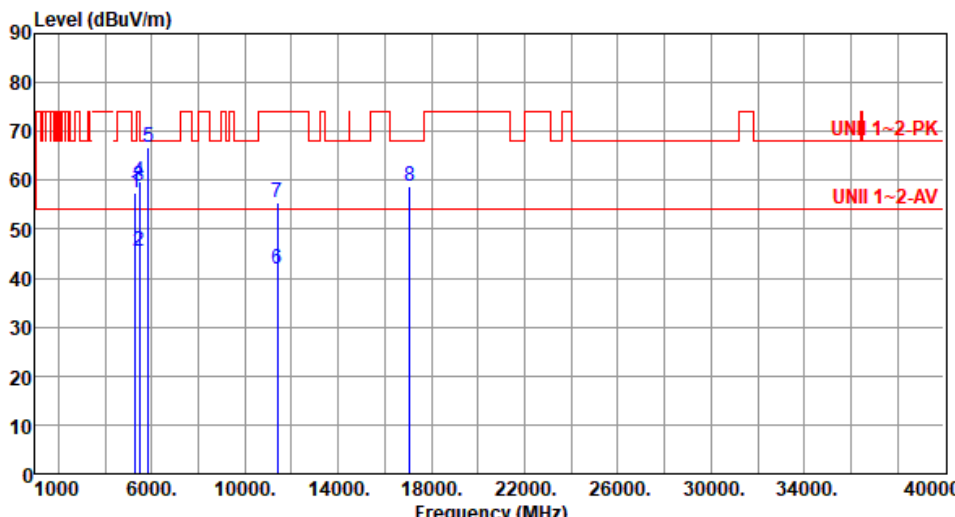


Modulation	be EHT80	Test Freq. (MHz)	5690																																																																																										
Polarization	Vertical																																																																																												
Test By :Allen Lee Temperature(°C):22 Humidity(%):63																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5280.00</td><td>57.50</td><td>68.20</td><td>-10.70</td><td>57.57</td><td>-0.07</td><td>Peak</td><td>210</td><td>326</td></tr><tr><td>2</td><td>5460.00</td><td>45.49</td><td>54.00</td><td>-8.51</td><td>45.25</td><td>0.24</td><td>Average</td><td>184</td><td>351</td></tr><tr><td>3</td><td>5460.00</td><td>58.90</td><td>74.00</td><td>-15.10</td><td>58.66</td><td>0.24</td><td>Peak</td><td>184</td><td>351</td></tr><tr><td>4</td><td>5470.00</td><td>59.62</td><td>68.20</td><td>-8.58</td><td>59.36</td><td>0.26</td><td>Peak</td><td>184</td><td>351</td></tr><tr><td>5</td><td>5850.00</td><td>66.92</td><td>68.20</td><td>-1.28</td><td>65.96</td><td>0.96</td><td>Peak</td><td>184</td><td>351</td></tr><tr><td>6</td><td>11380.00</td><td>41.81</td><td>54.00</td><td>-12.19</td><td>34.51</td><td>7.30</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>7</td><td>11380.00</td><td>55.61</td><td>74.00</td><td>-18.39</td><td>48.31</td><td>7.30</td><td>Peak</td><td>100</td><td>208</td></tr><tr><td>8</td><td>17070.00</td><td>58.75</td><td>68.20</td><td>-9.45</td><td>51.94</td><td>6.81</td><td>Peak</td><td>100</td><td>125</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5280.00	57.50	68.20	-10.70	57.57	-0.07	Peak	210	326	2	5460.00	45.49	54.00	-8.51	45.25	0.24	Average	184	351	3	5460.00	58.90	74.00	-15.10	58.66	0.24	Peak	184	351	4	5470.00	59.62	68.20	-8.58	59.36	0.26	Peak	184	351	5	5850.00	66.92	68.20	-1.28	65.96	0.96	Peak	184	351	6	11380.00	41.81	54.00	-12.19	34.51	7.30	Average	100	208	7	11380.00	55.61	74.00	-18.39	48.31	7.30	Peak	100	208	8	17070.00	58.75	68.20	-9.45	51.94	6.81	Peak	100	125
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5280.00	57.50	68.20	-10.70	57.57	-0.07	Peak	210	326																																																																																				
2	5460.00	45.49	54.00	-8.51	45.25	0.24	Average	184	351																																																																																				
3	5460.00	58.90	74.00	-15.10	58.66	0.24	Peak	184	351																																																																																				
4	5470.00	59.62	68.20	-8.58	59.36	0.26	Peak	184	351																																																																																				
5	5850.00	66.92	68.20	-1.28	65.96	0.96	Peak	184	351																																																																																				
6	11380.00	41.81	54.00	-12.19	34.51	7.30	Average	100	208																																																																																				
7	11380.00	55.61	74.00	-18.39	48.31	7.30	Peak	100	208																																																																																				
8	17070.00	58.75	68.20	-9.45	51.94	6.81	Peak	100	125																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													



Modulation	be EHT80	Test Freq. (MHz)	5775																																																																																																																																												
Polarization	Horizontal																																																																																																																																														
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																																																																															
Level (dBUV/m) UNII 3-PK UNII 3-AV Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5650.00</td><td>67.05</td><td>68.20</td><td>-1.15</td><td>66.77</td><td>0.28</td><td>Peak</td><td>323</td><td>356</td></tr><tr><td>2</td><td>5700.00</td><td>75.97</td><td>105.20</td><td>-29.23</td><td>75.46</td><td>0.51</td><td>Peak</td><td>323</td><td>356</td></tr><tr><td>3</td><td>5720.00</td><td>81.15</td><td>110.80</td><td>-29.65</td><td>80.56</td><td>0.59</td><td>Peak</td><td>323</td><td>356</td></tr><tr><td>4</td><td>5725.00</td><td>81.56</td><td>122.20</td><td>-40.64</td><td>80.94</td><td>0.62</td><td>Peak</td><td>323</td><td>356</td></tr><tr><td>5</td><td>5850.00</td><td>76.39</td><td>122.20</td><td>-45.81</td><td>75.43</td><td>0.96</td><td>Peak</td><td>323</td><td>356</td></tr><tr><td>6</td><td>5855.00</td><td>74.79</td><td>110.80</td><td>-36.01</td><td>73.81</td><td>0.98</td><td>Peak</td><td>323</td><td>356</td></tr><tr><td>7</td><td>5875.00</td><td>72.65</td><td>105.20</td><td>-32.55</td><td>71.59</td><td>1.06</td><td>Peak</td><td>323</td><td>356</td></tr><tr><td>8</td><td>5925.00</td><td>61.90</td><td>68.20</td><td>-6.30</td><td>60.73</td><td>1.17</td><td>Peak</td><td>323</td><td>356</td></tr><tr><td>9</td><td>11550.00</td><td>42.51</td><td>54.00</td><td>-11.49</td><td>35.12</td><td>7.39</td><td>Average</td><td>100</td><td>55</td></tr><tr><td>10</td><td>11550.00</td><td>54.95</td><td>74.00</td><td>-19.05</td><td>47.56</td><td>7.39</td><td>Peak</td><td>100</td><td>55</td></tr><tr><td>11</td><td>17325.00</td><td>58.12</td><td>68.20</td><td>-10.08</td><td>51.55</td><td>6.57</td><td>Peak</td><td>100</td><td>50</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5650.00	67.05	68.20	-1.15	66.77	0.28	Peak	323	356	2	5700.00	75.97	105.20	-29.23	75.46	0.51	Peak	323	356	3	5720.00	81.15	110.80	-29.65	80.56	0.59	Peak	323	356	4	5725.00	81.56	122.20	-40.64	80.94	0.62	Peak	323	356	5	5850.00	76.39	122.20	-45.81	75.43	0.96	Peak	323	356	6	5855.00	74.79	110.80	-36.01	73.81	0.98	Peak	323	356	7	5875.00	72.65	105.20	-32.55	71.59	1.06	Peak	323	356	8	5925.00	61.90	68.20	-6.30	60.73	1.17	Peak	323	356	9	11550.00	42.51	54.00	-11.49	35.12	7.39	Average	100	55	10	11550.00	54.95	74.00	-19.05	47.56	7.39	Peak	100	55	11	17325.00	58.12	68.20	-10.08	51.55	6.57	Peak	100	50
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																																																						
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																																																						
		dBuV/m			dBuV			cm	deg																																																																																																																																						
1	5650.00	67.05	68.20	-1.15	66.77	0.28	Peak	323	356																																																																																																																																						
2	5700.00	75.97	105.20	-29.23	75.46	0.51	Peak	323	356																																																																																																																																						
3	5720.00	81.15	110.80	-29.65	80.56	0.59	Peak	323	356																																																																																																																																						
4	5725.00	81.56	122.20	-40.64	80.94	0.62	Peak	323	356																																																																																																																																						
5	5850.00	76.39	122.20	-45.81	75.43	0.96	Peak	323	356																																																																																																																																						
6	5855.00	74.79	110.80	-36.01	73.81	0.98	Peak	323	356																																																																																																																																						
7	5875.00	72.65	105.20	-32.55	71.59	1.06	Peak	323	356																																																																																																																																						
8	5925.00	61.90	68.20	-6.30	60.73	1.17	Peak	323	356																																																																																																																																						
9	11550.00	42.51	54.00	-11.49	35.12	7.39	Average	100	55																																																																																																																																						
10	11550.00	54.95	74.00	-19.05	47.56	7.39	Peak	100	55																																																																																																																																						
11	17325.00	58.12	68.20	-10.08	51.55	6.57	Peak	100	50																																																																																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																																																																															

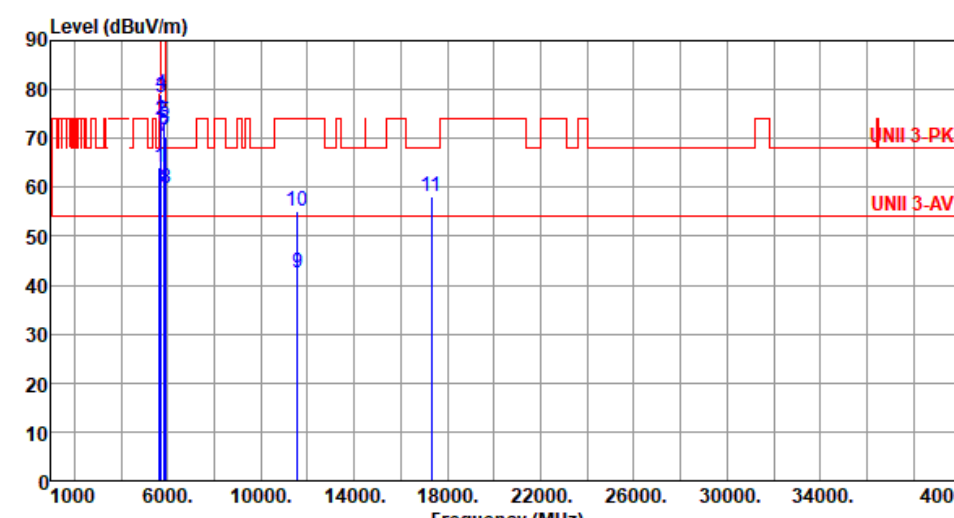

Modulation	be EHT80	Test Freq. (MHz)	5775						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):23 Humidity(%):65									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	64.18	68.20	-4.02	63.90	0.28	Peak	145	323
2	5700.00	73.76	105.20	-31.44	73.25	0.51	Peak	145	323
3	5720.00	78.25	110.80	-32.55	77.66	0.59	Peak	145	323
4	5725.00	79.07	122.20	-43.13	78.45	0.62	Peak	145	323
5	5850.00	73.51	122.20	-48.69	72.55	0.96	Peak	145	323
6	5855.00	71.63	110.80	-39.17	70.65	0.98	Peak	145	323
7	5875.00	70.44	105.20	-34.76	69.38	1.06	Peak	145	323
8	5925.00	59.72	68.20	-8.48	58.55	1.17	Peak	145	323
9	11550.00	42.61	54.00	-11.39	35.22	7.39	Average	100	60
10	11550.00	55.07	74.00	-18.93	47.68	7.39	Peak	100	60
11	17325.00	57.99	68.20	-10.21	51.42	6.57	Peak	100	30

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Unwanted Emissions (Above 1GHz) for be EHT160

Modulation	be EHT160	Test Freq. (MHz)	5250
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65			
Level (dBuV/m)			



Modulation	be EHT160	Test Freq. (MHz)	5250						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):23 Humidity(%):65									
Level (dBUV/m)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	51.61	54.00	-2.39	51.11	0.50	Average	100	357
2	5150.00	59.18	74.00	-14.82	58.68	0.50	Peak	100	357
3	5350.00	51.04	54.00	-2.96	51.16	-0.12	Average	100	357
4	5350.00	59.34	74.00	-14.66	59.46	-0.12	Peak	100	357
5	10500.00	54.29	68.20	-13.91	46.65	7.64	Peak	100	40
6	15750.00	41.68	54.00	-12.32	37.26	4.42	Average	100	20
7	15750.00	55.53	74.00	-18.47	51.11	4.42	Peak	100	20
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									



Modulation	be EHT160	Test Freq. (MHz)	5570
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65			
Level (dBuV/m)			



Modulation	be EHT160	Test Freq. (MHz)	5570																																																																																
Polarization	Vertical																																																																																		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																			
Level (dBUV/m) UNI 1~2-PK UNII 1~2-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5460.00</td><td>51.61</td><td>54.00</td><td>-2.39</td><td>51.37</td><td>0.24</td><td>Average</td><td>148</td><td>349</td></tr><tr><td>2</td><td>5460.00</td><td>62.41</td><td>74.00</td><td>-11.59</td><td>62.17</td><td>0.24</td><td>Peak</td><td>148</td><td>349</td></tr><tr><td>3</td><td>5470.00</td><td>62.85</td><td>68.20</td><td>-5.35</td><td>62.59</td><td>0.26</td><td>Peak</td><td>148</td><td>349</td></tr><tr><td>4</td><td>5725.00</td><td>61.64</td><td>68.20</td><td>-6.56</td><td>61.02</td><td>0.62</td><td>Peak</td><td>148</td><td>349</td></tr><tr><td>5</td><td>11140.00</td><td>41.85</td><td>54.00</td><td>-12.15</td><td>34.68</td><td>7.17</td><td>Average</td><td>100</td><td>158</td></tr><tr><td>6</td><td>11140.00</td><td>56.31</td><td>74.00</td><td>-17.69</td><td>49.14</td><td>7.17</td><td>Peak</td><td>100</td><td>158</td></tr><tr><td>7</td><td>16710.00</td><td>59.14</td><td>68.20</td><td>-9.06</td><td>52.13</td><td>7.01</td><td>Peak</td><td>100</td><td>236</td></tr></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	51.61	54.00	-2.39	51.37	0.24	Average	148	349	2	5460.00	62.41	74.00	-11.59	62.17	0.24	Peak	148	349	3	5470.00	62.85	68.20	-5.35	62.59	0.26	Peak	148	349	4	5725.00	61.64	68.20	-6.56	61.02	0.62	Peak	148	349	5	11140.00	41.85	54.00	-12.15	34.68	7.17	Average	100	158	6	11140.00	56.31	74.00	-17.69	49.14	7.17	Peak	100	158	7	16710.00	59.14	68.20	-9.06	52.13	7.01	Peak	100	236
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5460.00	51.61	54.00	-2.39	51.37	0.24	Average	148	349																																																																										
2	5460.00	62.41	74.00	-11.59	62.17	0.24	Peak	148	349																																																																										
3	5470.00	62.85	68.20	-5.35	62.59	0.26	Peak	148	349																																																																										
4	5725.00	61.64	68.20	-6.56	61.02	0.62	Peak	148	349																																																																										
5	11140.00	41.85	54.00	-12.15	34.68	7.17	Average	100	158																																																																										
6	11140.00	56.31	74.00	-17.69	49.14	7.17	Peak	100	158																																																																										
7	16710.00	59.14	68.20	-9.06	52.13	7.01	Peak	100	236																																																																										



Frequency: 5300 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	-2.94	-2.67	-2.83	-3.08
T20°C Vmin	-2.81	-2.94	-2.68	-3.06
T40°C Vnom	-0.61	-0.83	-0.38	-0.33
T30°C Vnom	-1.66	-1.06	-1.95	-1.48
T20°C Vnom	-2.72	-2.52	-2.75	-2.92
T10°C Vnom	0.15	0.28	0.05	0.44
T0°C Vnom	0.67	1.26	0.92	1.06
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 40		Tmin [°C]: 0	

Frequency: 5785 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	-3.15	-2.35	-2.78	-2.85
T20°C Vmin	-2.18	-2.83	-2.22	-2.08
T40°C Vnom	-0.23	-0.20	-0.10	-0.42
T30°C Vnom	-1.31	-1.36	-1.41	-1.28
T20°C Vnom	-2.49	-2.70	-1.95	-2.09
T10°C Vnom	0.30	0.76	0.42	0.91
T0°C Vnom	0.63	0.75	0.90	0.42
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 40		Tmin [°C]: 0	




Adapter mode

Modulation Mode	11a	Test Freq. (MHz)	5240
Power Phase	Line		

Test by : Sean Yu

Temperature: 26°C

Humidity: 61%

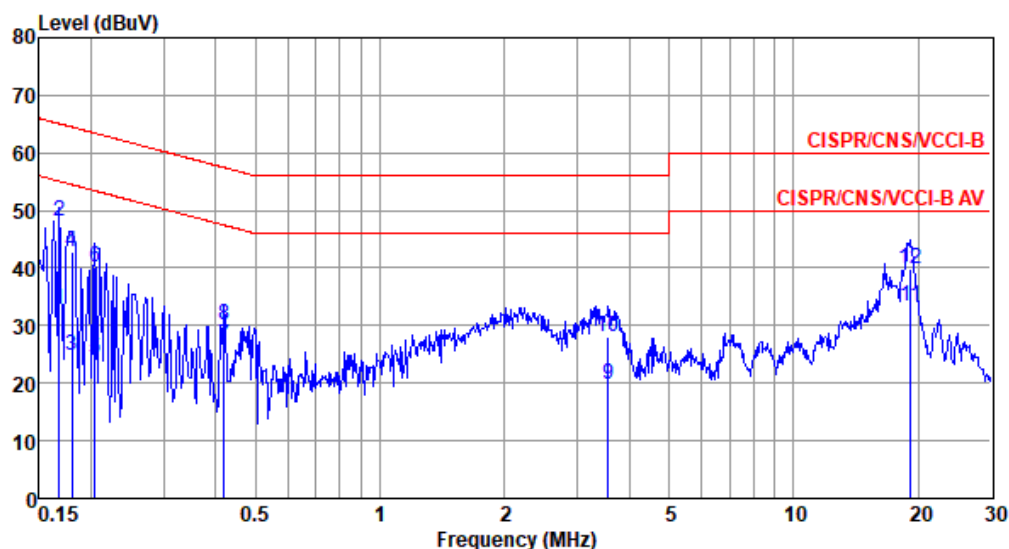

	Freq MHz	Level dBUA	Limit Line dBUA	Over Limit dB	Read Level dBUA	Factor dB	Cable loss dB	Aux dB	Remark
1	0.17	32.84	55.08	-22.24	22.88	9.65	0.08	0.23	Average
2	0.17	48.08	65.08	-17.00	38.12	9.65	0.08	0.23	QP
3	0.18	24.71	54.50	-29.79	14.74	9.65	0.08	0.24	Average
4	0.18	42.67	64.50	-21.83	32.70	9.65	0.08	0.24	QP
5	0.20	24.12	53.45	-29.33	14.13	9.65	0.08	0.26	Average
6	0.20	40.11	63.45	-23.34	30.12	9.65	0.08	0.26	QP
7	0.42	26.57	47.46	-20.89	16.52	9.64	0.09	0.32	Average
8	0.42	30.16	57.46	-27.30	20.11	9.64	0.09	0.32	QP
9	3.57	19.85	46.00	-26.15	9.50	9.67	0.21	0.47	Average
10	3.57	28.06	56.00	-27.94	17.71	9.67	0.21	0.47	QP
11	19.22	33.33	50.00	-16.67	22.47	9.68	0.55	0.63	Average
12	19.22	39.72	60.00	-20.28	28.86	9.68	0.55	0.63	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).




Modulation Mode	11a	Test Freq. (MHz)	5240
Power Phase	Neutral		

Test by : Sean Yu

Temperature: 26°C

Humidity: 61%

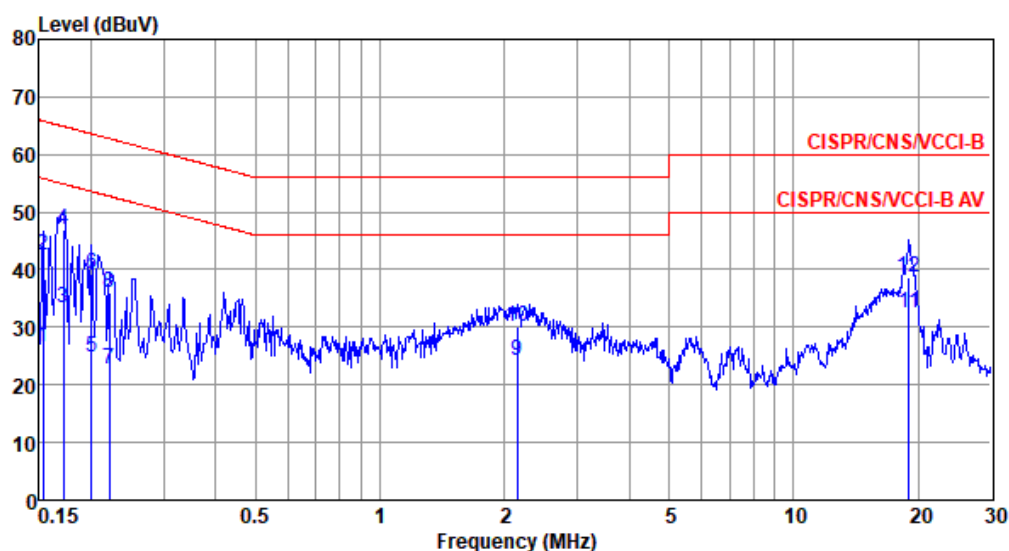

	Freq MHz	Level dBuA	Limit Line dBuA	Over Limit dB	Read Level dBuA	Factor dB	Cable loss dB	Aux dB	Remark
1	0.15	26.58	55.82	-29.24	16.70	9.66	0.08	0.14	Average
2	0.15	42.58	65.82	-23.24	32.70	9.66	0.08	0.14	QP
3	0.17	33.25	54.90	-21.65	23.34	9.66	0.08	0.17	Average
4	0.17	46.97	64.90	-17.93	37.06	9.66	0.08	0.17	QP
5	0.20	24.65	53.58	-28.93	14.72	9.65	0.08	0.20	Average
6	0.20	39.28	63.58	-24.30	29.35	9.65	0.08	0.20	QP
7	0.22	22.64	52.74	-30.10	12.70	9.65	0.08	0.21	Average
8	0.22	36.06	62.74	-26.68	26.12	9.65	0.08	0.21	QP
9	2.14	24.27	46.00	-21.73	14.00	9.66	0.18	0.43	Average
10	2.14	30.25	56.00	-25.75	19.98	9.66	0.18	0.43	QP
11	19.02	32.45	50.00	-17.55	21.45	9.82	0.55	0.63	Average
12	19.02	38.80	60.00	-21.20	27.80	9.82	0.55	0.63	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).


2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).

Modulation Mode	11a	Test Freq. (MHz)	5825
Power Phase	Line		

Test by : Sean Yu

Temperature: 26°C

Humidity: 61%

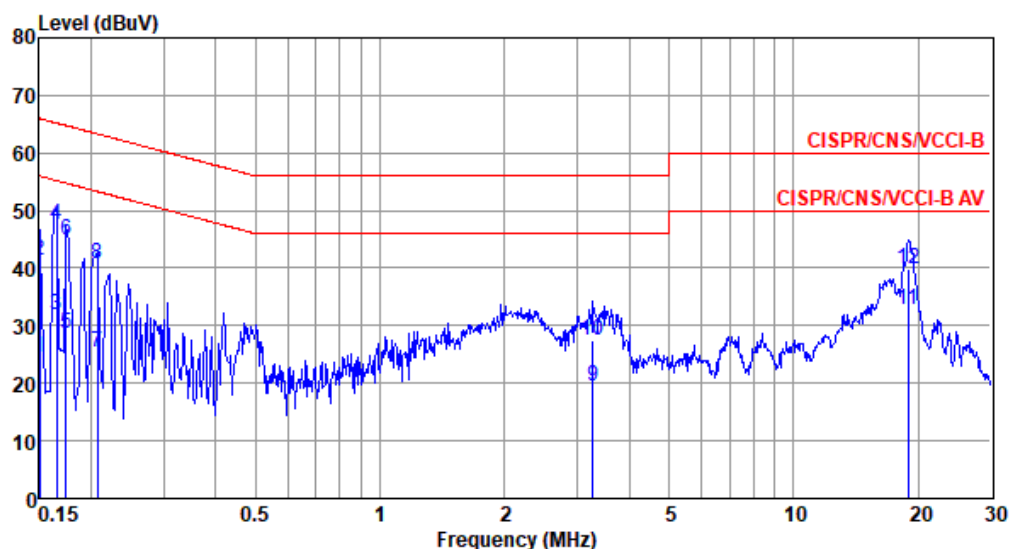

	Freq MHz	Level dBUA	Limit Line dBUA	Over Limit dB	Read Level dBUA	Factor dB	Cable loss dB	Aux dB	Remark
1	0.15	24.43	56.00	-31.57	14.49	9.65	0.08	0.21	Average
2	0.15	41.43	66.00	-24.57	31.49	9.65	0.08	0.21	QP
3	0.17	31.78	55.21	-23.43	21.82	9.65	0.08	0.23	Average
4	0.17	47.52	65.21	-17.69	37.56	9.65	0.08	0.23	QP
5	0.17	28.59	54.77	-26.18	18.62	9.65	0.08	0.24	Average
6	0.17	44.98	64.77	-19.79	35.01	9.65	0.08	0.24	QP
7	0.21	25.51	53.32	-27.81	15.52	9.65	0.08	0.26	Average
8	0.21	40.63	63.32	-22.69	30.64	9.65	0.08	0.26	QP
9	3.28	19.56	46.00	-26.44	9.21	9.67	0.21	0.47	Average
10	3.28	27.58	56.00	-28.42	17.23	9.67	0.21	0.47	QP
11	18.92	32.64	50.00	-17.36	21.80	9.68	0.54	0.62	Average
12	18.92	39.85	60.00	-20.15	29.01	9.68	0.54	0.62	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).




Modulation Mode	11a	Test Freq. (MHz)	5825
Power Phase	Neutral		

Test by : Sean Yu

Temperature: 26°C

Humidity: 61%

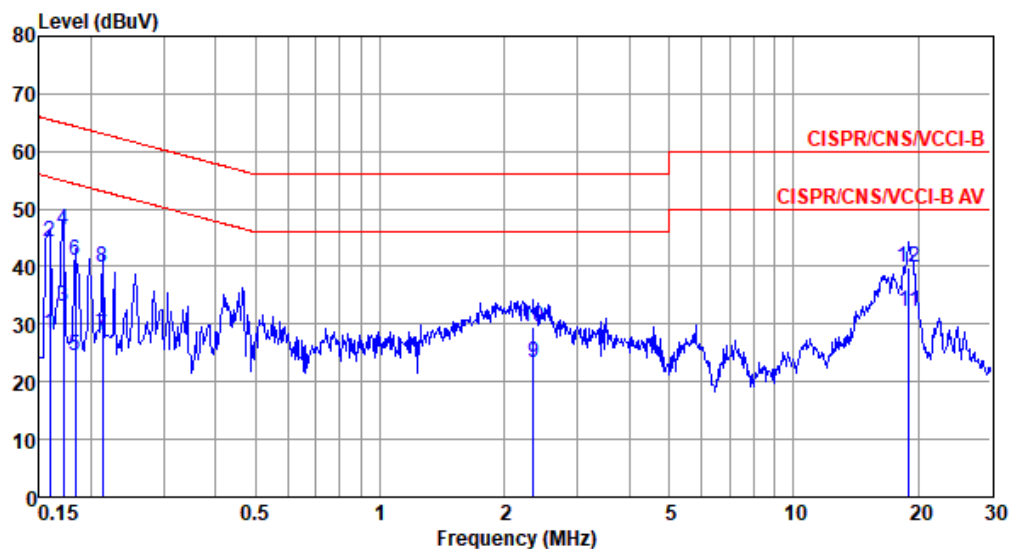

	Freq MHz	Level dBUA	Limit Line dBUA	Over Limit dB	Read Level dBUA	Factor dB	Cable loss dB	Aux dB	Remark
1	0.16	28.21	55.52	-27.31	18.32	9.66	0.08	0.15	Average
2	0.16	44.19	65.52	-21.33	34.30	9.66	0.08	0.15	QP
3	0.17	33.21	54.90	-21.69	23.30	9.66	0.08	0.17	Average
4	0.17	46.40	64.90	-18.50	36.49	9.66	0.08	0.17	QP
5	0.18	24.60	54.33	-29.73	14.69	9.65	0.08	0.18	Average
6	0.18	41.04	64.33	-23.29	31.13	9.65	0.08	0.18	QP
7	0.21	28.03	53.10	-25.07	18.09	9.65	0.08	0.21	Average
8	0.21	39.98	63.10	-23.12	30.04	9.65	0.08	0.21	QP
9	2.35	23.33	46.00	-22.67	13.06	9.66	0.18	0.43	Average
10	2.35	29.49	56.00	-26.51	19.22	9.66	0.18	0.43	QP
11	19.02	32.32	50.00	-17.68	21.32	9.82	0.55	0.63	Average
12	19.02	39.86	60.00	-20.14	28.86	9.82	0.55	0.63	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).




POE mode

Modulation Mode	11a	Test Freq. (MHz)	5240
Power Phase	Line		

Test by : Sean Yu

Temperature: 26°C

Humidity: 61%

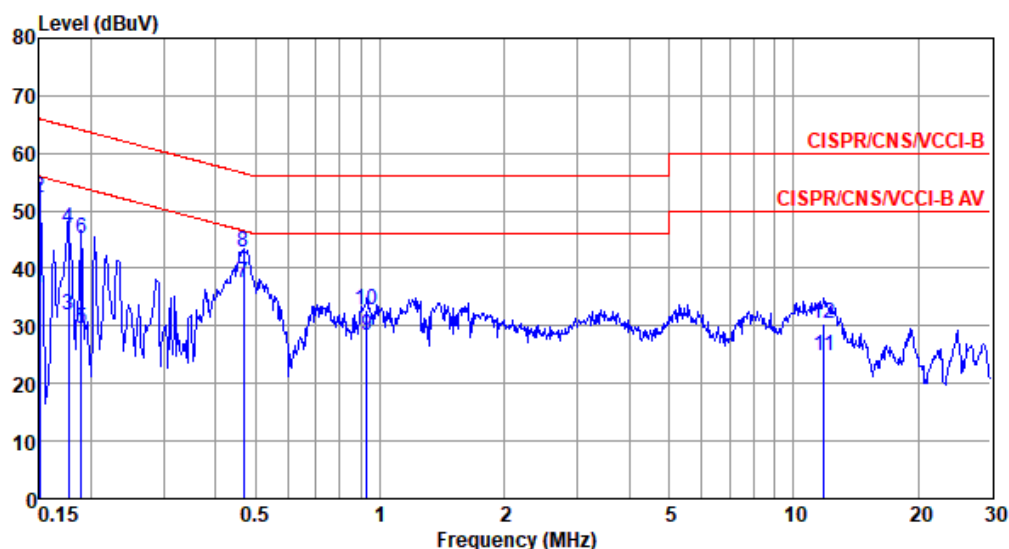

	Freq	Level	Limit	Over	Read	Factor	Cable	Aux	
	MHz	dBuA	Line	Limit	Level		loss		Remark
			dBuA	dB	dBuA	dB	dB	dB	
1	0.15	36.51	56.00	-19.49	26.57	9.65	0.08	0.21	Average
2	0.15	52.15	66.00	-13.85	42.21	9.65	0.08	0.21	QP
3	0.18	31.86	54.64	-22.78	21.89	9.65	0.08	0.24	Average
4	0.18	46.91	64.64	-17.73	36.94	9.65	0.08	0.24	QP
5	0.19	29.62	54.06	-24.44	19.64	9.65	0.08	0.25	Average
6	0.19	45.06	64.06	-19.00	35.08	9.65	0.08	0.25	QP
7	0.47	37.50	46.54	-9.04	27.44	9.64	0.09	0.33	Average
8	0.47	42.78	56.54	-13.76	32.72	9.64	0.09	0.33	QP
9	0.93	28.39	46.00	-17.61	18.25	9.65	0.10	0.39	Average
10	0.93	32.71	56.00	-23.29	22.57	9.65	0.10	0.39	QP
11	11.87	24.90	50.00	-25.10	14.33	9.70	0.36	0.51	Average
12	11.87	30.31	60.00	-29.69	19.74	9.70	0.36	0.51	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).


2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).

Modulation Mode	11a	Test Freq. (MHz)	5240
Power Phase	Neutral		

Test by : Sean Yu

Temperature: 26°C

Humidity: 61%

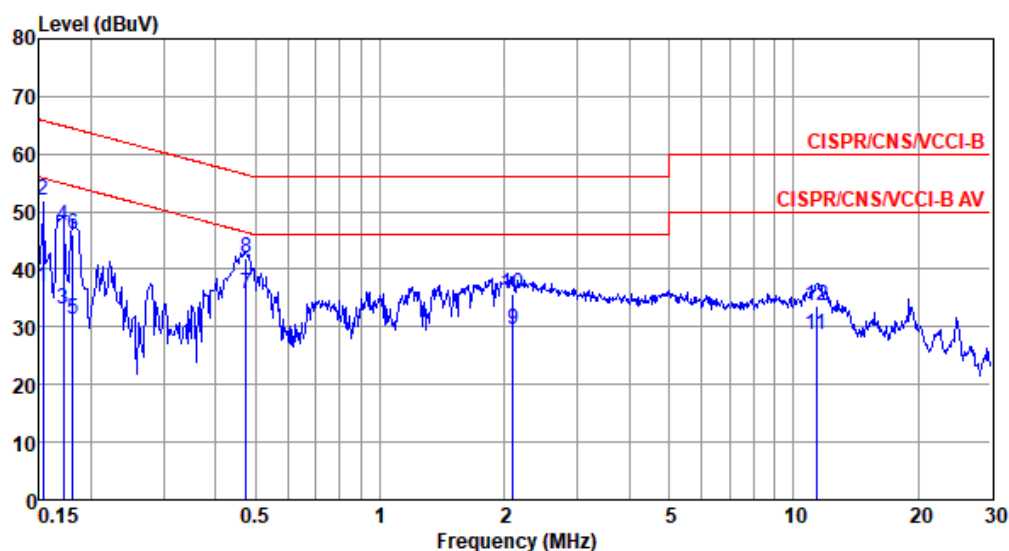

	Freq MHz	Level dBuA	Limit Line dBuA	Over Limit dB	Read Level dBuA	Factor dB	Cable loss dB	Aux dB	Remark
1	0.15	36.85	55.82	-18.97	26.97	9.66	0.08	0.14	Average
2	0.15	51.88	65.82	-13.94	42.00	9.66	0.08	0.14	QP
3	0.17	33.20	54.90	-21.70	23.29	9.66	0.08	0.17	Average
4	0.17	47.42	64.90	-17.48	37.51	9.66	0.08	0.17	QP
5	0.18	31.26	54.46	-23.20	21.35	9.65	0.08	0.18	Average
6	0.18	46.14	64.46	-18.32	36.23	9.65	0.08	0.18	QP
7	0.47	35.81	46.45	-10.64	25.80	9.64	0.09	0.28	Average
8	0.47	41.85	56.45	-14.60	31.84	9.64	0.09	0.28	QP
9	2.10	29.40	46.00	-16.60	19.15	9.66	0.17	0.42	Average
10	2.10	35.66	56.00	-20.34	25.41	9.66	0.17	0.42	QP
11	11.38	28.52	50.00	-21.48	17.87	9.76	0.34	0.55	Average
12	11.38	33.76	60.00	-26.24	23.11	9.76	0.34	0.55	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).


2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).

Modulation Mode	11a	Test Freq. (MHz)	5825
Power Phase	Line		

Test by : Sean Yu

Temperature: 26°C

Humidity: 61%

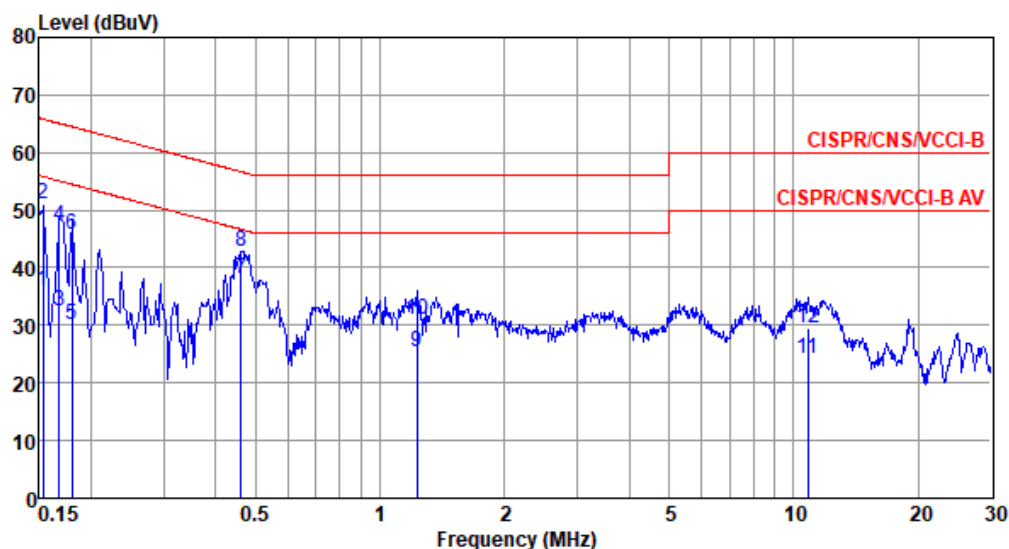

	Freq	Level	Limit	Over	Read	Factor	Cable	Aux	Remark
	MHz	dBuA	Line	Limit	Level	dB	loss	dB	
			dBuA	dB	dBuA		dB		
1	0.15	36.16	55.82	-19.66	26.22	9.65	0.08	0.21	Average
2	0.15	51.04	65.82	-14.78	41.10	9.65	0.08	0.21	QP
3	0.17	32.34	55.08	-22.74	22.38	9.65	0.08	0.23	Average
4	0.17	47.37	65.08	-17.71	37.41	9.65	0.08	0.23	QP
5	0.18	30.25	54.50	-24.25	20.28	9.65	0.08	0.24	Average
6	0.18	45.72	64.50	-18.78	35.75	9.65	0.08	0.24	QP
7	0.46	38.03	46.67	-8.64	27.97	9.64	0.09	0.33	Average
8	0.46	42.76	56.67	-13.91	32.70	9.64	0.09	0.33	QP
9	1.23	25.36	46.00	-20.64	15.18	9.65	0.12	0.41	Average
10	1.23	31.03	56.00	-24.97	20.85	9.65	0.12	0.41	QP
11	10.85	24.07	50.00	-25.93	13.53	9.71	0.33	0.50	Average
12	10.85	29.50	60.00	-30.50	18.96	9.71	0.33	0.50	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).




Modulation Mode	11a	Test Freq. (MHz)	5825
Power Phase	Neutral		

Test by : Sean Yu

Temperature: 26°C

Humidity: 61%

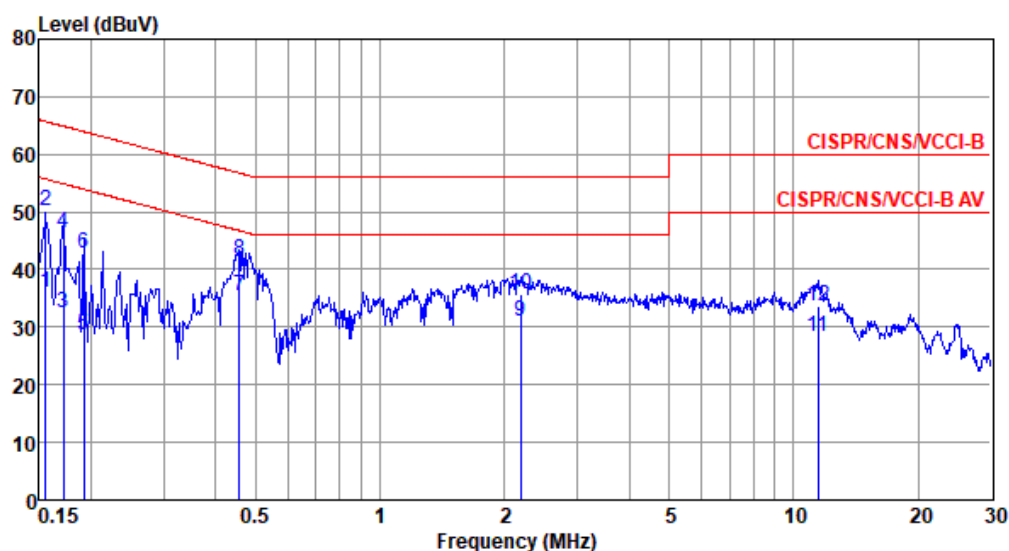

	Freq MHz	Level dBUA	Limit Line dBUA	Over Limit dB	Read Level dBUA	Factor dB	Cable loss dB	Aux dB	Remark
1	0.16	36.06	55.69	-19.63	26.17	9.66	0.08	0.15	Average
2	0.16	50.15	65.69	-15.54	40.26	9.66	0.08	0.15	QP
3	0.17	32.59	54.90	-22.31	22.68	9.66	0.08	0.17	Average
4	0.17	46.44	64.90	-18.46	36.53	9.66	0.08	0.17	QP
5	0.19	28.67	53.93	-25.26	18.75	9.65	0.08	0.19	Average
6	0.19	42.73	63.93	-21.20	32.81	9.65	0.08	0.19	QP
7	0.46	35.57	46.76	-11.19	25.57	9.64	0.09	0.27	Average
8	0.46	41.60	56.76	-15.16	31.60	9.64	0.09	0.27	QP
9	2.19	30.86	46.00	-15.14	20.59	9.66	0.18	0.43	Average
10	2.19	35.86	56.00	-20.14	25.59	9.66	0.18	0.43	QP
11	11.44	28.21	50.00	-21.79	17.56	9.76	0.34	0.55	Average
12	11.44	33.66	60.00	-26.34	23.01	9.76	0.34	0.55	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).