




Antenna Specification							
specifications							
				specification			
Working Frequency Range				2400-2500 MHz			
Gain				(-2.3dBi)Typical			
VSWR				≤3			
Polarization				Linear			
Azimuth Beamwidth				Omni-directional			
Impedance				50Ω			
Operation Temperature				(-40℃~+85℃)			

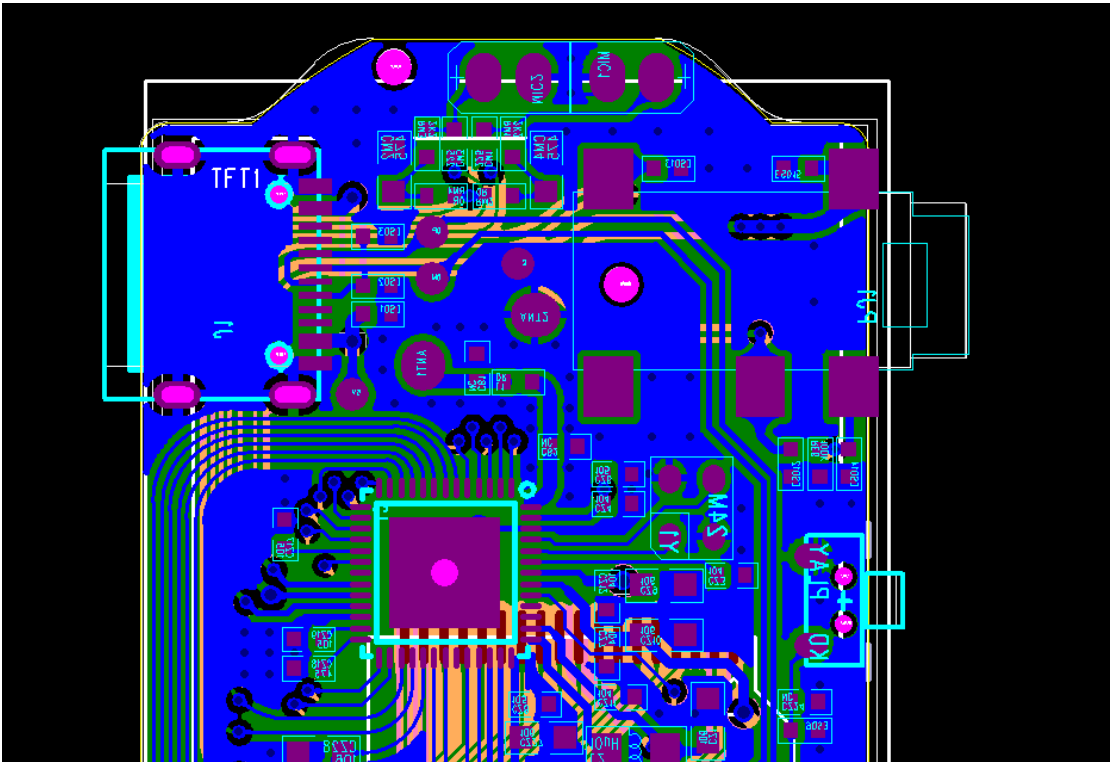

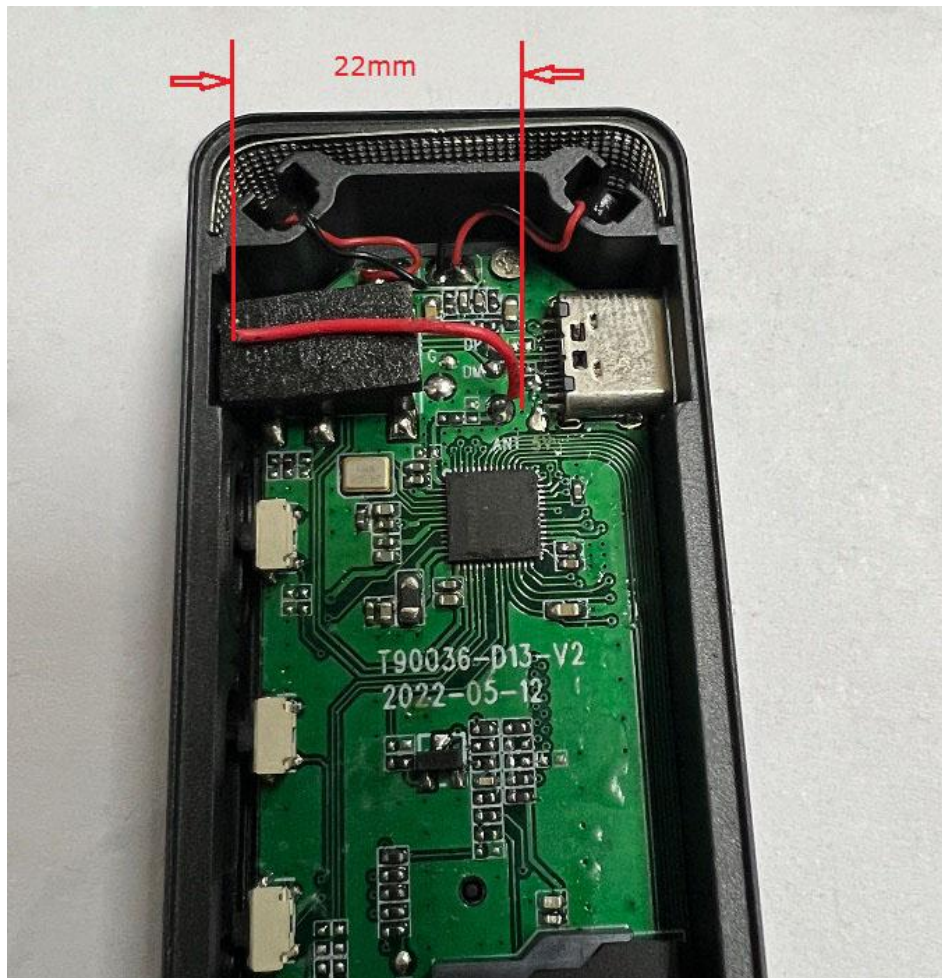


Passive Test For BT2.4			
Freq (MHz)	Effi (%)	Gain (dBi)	Directivity (dBi)
2400	27.38	-2.88	5.63
2450	32.67	-2.30	4.86
2500	32.96	-2.38	4.82



2400.00MHz - 2500.00MHz Gain

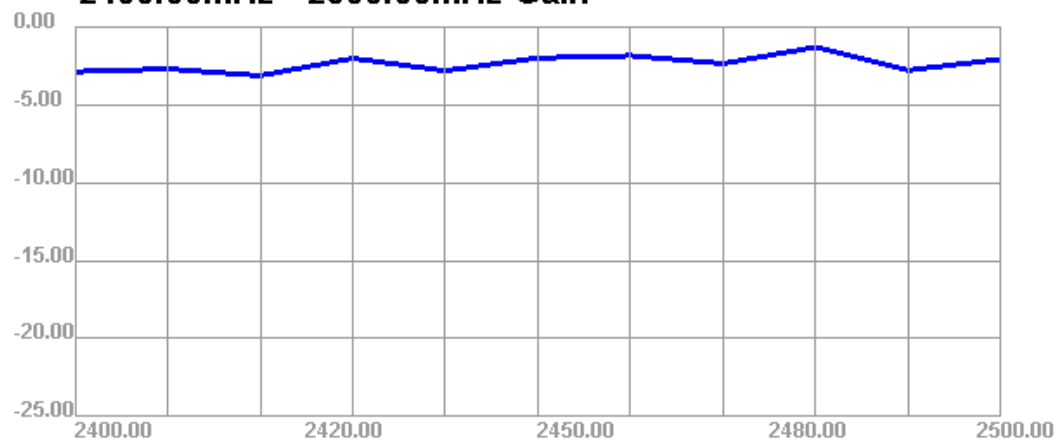


2400.00MHz - 2500.00MHz Efficiency

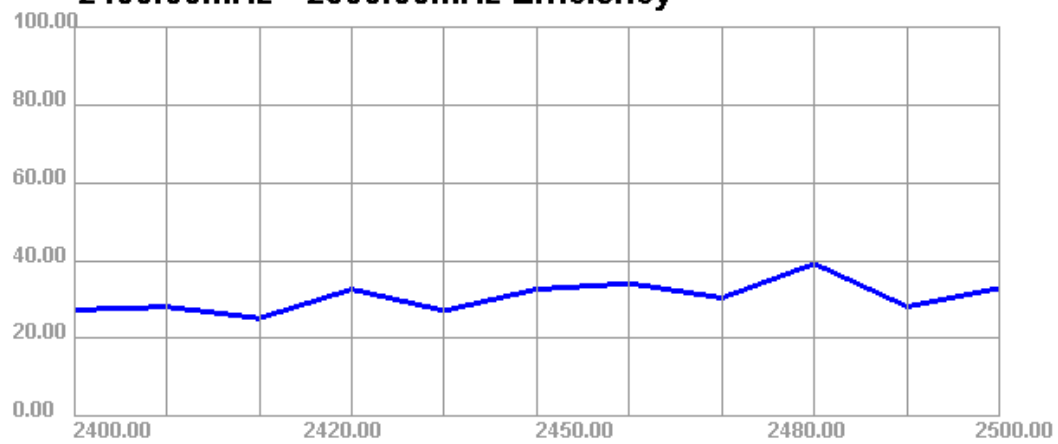


2400.000MHz




2400.000MHz H

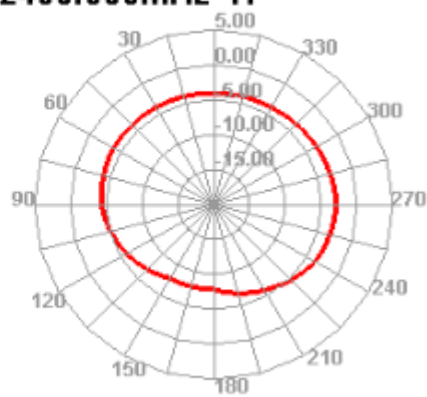



2400.000MHz E1

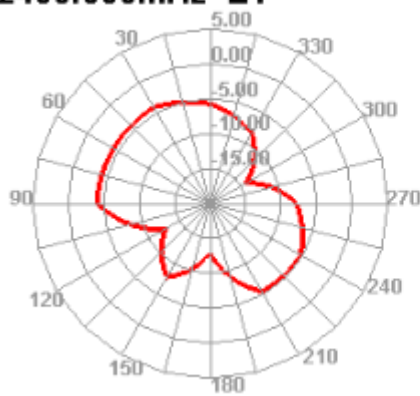


2400.000MHz E2

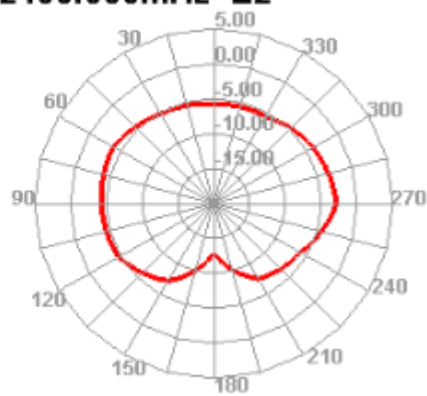


2450.000MHz




2450.000MHz H

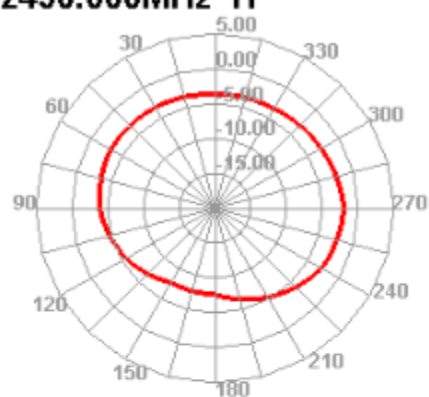



2450.000MHz E1

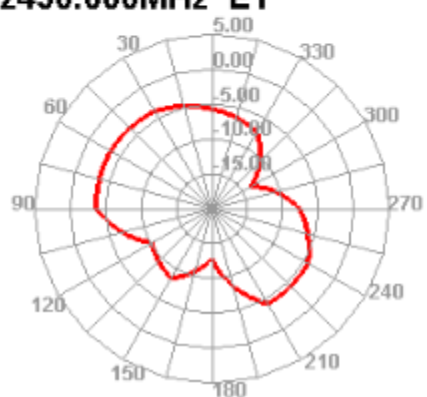


2450.000MHz E2

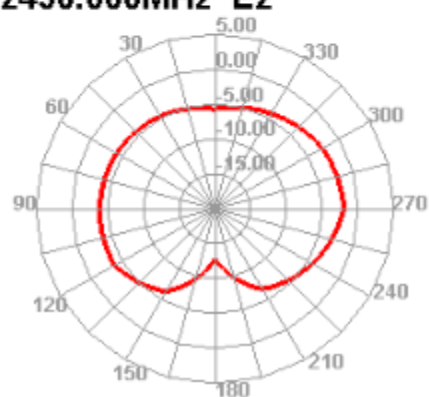


2500.000MHz



2500.000MHz H

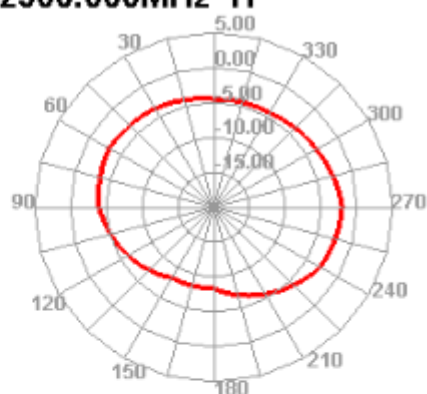

2500.000MHz E1

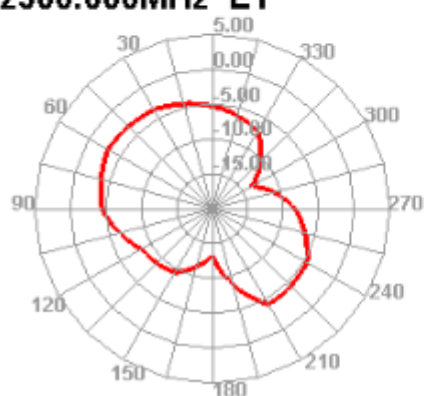

2500.000MHz E2

