

FCC CERTIFICATION TEST REPORT

Applicant:	TEMEISHENG KVG ELECTRONICS LIMITED
Address:	RM 803, CHEVALIER HOUSE, 45-51 CHATHAM ROAD SOUTH, TSIM SHA TSUI, KLN, HK
Manufacturer:	GUANGZHOU TEMEISHENG ELECTRONICS CO.,LTD.
Address:	NO. 2 NANXIAN ROAD, JIANGGAO, BAIYUN, GUANGZHOU
Product Description:	POWERED SPEAKER
Brand Name:	KVG
Tested Model:	KG15-200
FCC ID:	2A8QV202209KG15200
Report No.:	JCF220830004-002
Received Date:	Aug. 30, 2022
Tested Date:	Aug. 30, 2022 ~ Apr. 23, 2023
Issued Date:	Apr. 23, 2023
Test Standards:	FCC Rules and Regulations Part 15 Subpart C
Test Procedure :	ANSI C63.10:2013
Test Result:	Pass
Prepared By:	<p><u>Roger Li</u> <u>Roger Li/Engineer</u></p>
Reviewed By:	<p><u>Kennys Zhang</u> <u>Kennys Zhang/Engineer</u></p>
Approved By:	<p><u>Talent Zhang</u> <u>Talent Zhang/Engineer</u></p>
	 <p>Date: Apr. 23, 2023</p>

Note: The test results in this report apply exclusively to the tested model / sample. Without written approval of Guangzhou Jingce Testing Technology Co., Ltd. the test report shall not be reproduced except in full.

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Apr. 23, 2023	Original Report	/

TABLE OF CONTENTS

1. Test Report Declare	5
2. Summary of Test Results	6
3. Test Laboratory	6
4. Equipment Under Test	7
4.1. Description of EUT	7
4.2. Channel List	7
4.3. Test Channel Configuration	7
4.4. Test environment conditions	8
4.5. The Worse Case Power Setting Parameter	8
4.6. Description of Available Antennas	8
5. Description of Test Setup	8
5.1. Accessory	8
5.2. Support Equipment	8
5.3. Test Setup	8
5.4. Setup Diagram for Tests	8
6. Measurement Uncertainty	9
7. Measuring Instrument and Software Used	9
8. On Time and Duty Cycle	11
8.1. Block diagram of test setup	11
8.2. Limits	11
8.3. Procedure	11
8.4. Results	11
8.5. Original test data	12
9. 6 dB DTS Bandwidth	14
9.1. Block diagram of test setup	14
9.2. Limits	14
9.3. Test Procedure	14
9.4. Results	14
9.5. Original test data	15
10. Peak Conducted Output Power	17
10.1. Block diagram of test setup	17
10.2. Limits	17
10.3. Test Procedure	17
10.4. Results	17
10.5. Original test data	18
11. Power Spectral Density	20
11.1. Block diagram of test setup	20
11.2. Limits	20
11.3. Test Procedure	20
11.4. Results	20
11.5. Original test data	21
12. Conducted Bandedge and Spurious Emissions	23
12.1. Block diagram of test setup	23
12.2. Limits	23
12.3. Test Procedure	23
12.4. Results	23

12.5. Original test data	25
13. Radiated Emission	31
13.1. Block diagram of test setup	31
13.2. Limit	32
13.3. Test Procedure	34
13.4. Results	37
13.5. Original test data	37
14. AC Power Line Conducted Emissions	38
14.1. Block diagram of test setup	38
14.2. Limits	38
14.3. Test procedure	38
14.4. Test result	39
14.5. Original test data	39
15. Antenna Requirements	40
15.1. Limits	40
15.2. Result	40
APPENDIX A – Radiated Emission Below 1GHz Test Data	41
APPENDIX B – Radiated Emission Above 1GHz Test Data	47
APPENDIX C – AC Power Line Conducted Emission Test Data	57
	57

1. Test Report Declare

Applicant:	TEMEISHENG KVG ELECTRONICS LIMITED
Address:	RM 803, CHEVALIER HOUSE, 45-51 CHATHAM ROAD SOUTH, TSIM SHA TSUI, KLN, HK
Manufacturer:	GUANGZHOU TEMEISHENG ELECTRONICS CO., LTD.
Address:	NO. 2 NANXIAN ROAD, JIANGGAO, BAIYUN, GUANGZHOU
Product Name:	POWERED SPEAKER
Brand Name:	KVG
Model Name:	KG15-200
Difference Description:	NA

We Declare:

The equipment described above is tested by Guangzhou Jingce Testing Technology Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangzhou Jingce Testing Technology Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

2. Summary of Test Results

Summary of Test Results			
Clause	Test Items	FCC/ISED Rules	Test Results
1	6 dB Bandwidth and 99 % Occupied Bandwidth	FCC Part 15.247 (a) (2)	Pass
2	Peak Conducted Output Power	FCC Part 15.247 (b) (3)	Pass
3	Power Spectral Density	FCC Part 15.247 (e)	Pass
4	Conducted Bandedge and Spurious Emission	FCC Part 15.247 (d)	Pass
5	Radiated Bandedge and Spurious Emission	FCC Part 15.247 (d) FCC Part 15.209 FCC Part 15.205	Pass
6	Conducted Emission Test For AC Power Port	FCC Part 15.207	Pass
7	Antenna Requirement	FCC Part 15.203	Pass

3. Test Laboratory

Guangzhou Jingce Testing Technology Co., Ltd.

Add.: No.192, Kezhu Road, Huangpu District, Guangzhou, Guangdong, China

Association for Laboratory Accreditation(A2LA). Certificate Number: 6594.01

FCC Designation Number:CN1331. Test Firm Registration Number: 360543

IC Test Firm Registration Number: 28796

Conformity Assessment Body identifier: CN0138

4. Equipment Under Test

4.1. Description of EUT

EUT Name:	POWERED SPEAKER
Model Number:	KG15-200
EUT Function Description:	Please refers the usual's manual
Power Supply:	AC 200~240V 50Hz
Hardware Version:	NA
Software Version:	NA
Radio Specification:	Bluetooth V5.0
Operation Frequency:	2402 MHz - 2480 MHz
Modulation:	GFSK
Data Rate:	1Mbps
Antenna Type:	PCB Antenna, 3.38 dBi

Note 1: EUT is the ab. of equipment under test.

Note 2: The antenna gain is declared by the customer and the laboratory is not responsible for the accuracy of the antenna gain.

4.2. Channel List

Channel	Frequency (MHz)						
0	2402	11	2424	22	2446	33	2468
1	2404	12	2426	23	2448	34	2470
2	2406	13	2428	24	2450	35	2472
3	2408	14	2430	25	2452	36	2474
4	2410	15	2432	26	2454	37	2476
5	2412	16	2434	27	2456	38	2478
6	2414	17	2436	28	2458	39	2480
7	2416	18	2438	29	2460	/	/
8	2418	19	2440	30	2462	/	/
9	2420	20	2442	31	2464	/	/
10	2422	21	2444	32	2468	/	/

4.3. Test Channel Configuration

Tested mode, channel, information		
Mode	Channel	Frequency (MHz)
GFSK	LCH:CH0	2402
	MCH:CH19	2440
	HCH:CH39	2480

4.4. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25 °C
Humidity range:	40-75%
Pressure range:	86-106 kPa

4.5. The Worse Case Power Setting Parameter

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band				
Test Software		FrequencyTool_v0.2.8		
Modulation Type	Transmit Antenna Number	Test Software Setting Value		
		CH 00	CH 39	CH 78
GFSK	1	Default	Default	Default

4.6. Description of Available Antennas

Test Mode	Transmit and Receive Mode	Description
GFSK	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.

5. Description of Test Setup

5.1. Accessory

Description of Accessories	Manufacturer	Model Number	Description	Remark
N/A	N/A	N/A	N/A	N/A

5.2. Support Equipment

Equipment	Brand Name	Model Name	P/N
PC	Lenovo	T480	/
AC Cable	/	1.5m (Unshielded)	/

5.3. Test Setup

The EUT can work in Fixed Frequency mode.

5.4. Setup Diagram for Tests



6. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
AC Power Conduction emission	1.37 dB
All Radiated emissions	5.4dB
Conducted emissions	3.09 dB
Occupied Channel Bandwidth	1.1%
Conducted Output power	0.82dB
Power Spectral Density	0.82dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of $k = 2$.


7. Measuring Instrument and Software Used

TS Test System						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
<input checked="" type="checkbox"/>	Spectrum Analyzer	Keysight	N9030B	MY5632051 2	Jul. 25, 2022	Jul. 24, 2023
<input checked="" type="checkbox"/>	Vector Signal Generator	Keysight	N5182B	MY5730033 4	Nov. 24, 2022	Nov. 23, 2023
<input checked="" type="checkbox"/>	Signal Generator	Keysight	N5171B	MY5728063 9	Nov. 24, 2022	Nov. 23, 2023
<input checked="" type="checkbox"/>	DC POWER	Keysight	E342A	MY5902035 6	Jul. 25, 2022	Jul. 24, 2023
<input checked="" type="checkbox"/>	Incubator thermometer	GWS	EL-02JA	21107288	Nov. 03, 2022	Nov. 02, 2023
<input checked="" type="checkbox"/>	Control unit(Power sensor)	Tonscend	JS0806-2	/	Jul. 25, 2022	Jul. 24, 2023
<input checked="" type="checkbox"/>	Spectrum Analyzer	Keysight	N9020B	MY6011220 6	Nov. 24, 2022	Nov. 23, 2023
<input checked="" type="checkbox"/>	Control unit(Power sensor)	Tonscend	JS0806-2	21H806046 5	Nov. 25, 2022	Nov. 24, 2023
Software						
Used	Description	Manufacturer	Name		Version	
<input checked="" type="checkbox"/>	Test software	TS+	JS1120-3		V3.2.11	
RSE Test System						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
<input checked="" type="checkbox"/>	EMI Receiver	R&S	ESW	101685	Jul. 24, 2022	Jul. 23, 2023
<input checked="" type="checkbox"/>	Bilog Antenna	Schwarzbeck	VULB 9163	01361	Aug. 05, 2022	Aug. 04, 2023
<input checked="" type="checkbox"/>	Horn Antenna 1	Schwarzbeck	BBHA 9120 D	02411	May. 30, 2022	May. 29, 2023
<input checked="" type="checkbox"/>	Horn Antenna 2	ETS	3116C	00217677	Sep. 19, 2022	Sep. 18, 2023
<input checked="" type="checkbox"/>	Signal Pre-Amplifier	Tonscend	TAP01018050	AP21C8061 22	Aug. 08, 2022	Aug. 07, 2023
<input checked="" type="checkbox"/>	Signal Pre-Amplifier	Tonscend	TAP9K3G32	AP20K8061 04	Aug. 08, 2022	Aug. 07, 2023

<input checked="" type="checkbox"/>	Signal Pre-Amplifier	ETS	3116C-PA	00217677	Sep. 02, 2022	Sep. 01, 2023
<input checked="" type="checkbox"/>	Wideband radio communication tester	R&S	CMW500	163478	Jul. 25, 2022	Jul. 24, 2023
<input checked="" type="checkbox"/>	3m Fully-anechoic Chamber	ETS	RFD-100	/	Apr. 24, 2021	Apr. 23, 2024
Software						
Used	Description	Manufacturer	Name		Version	
<input checked="" type="checkbox"/>	Test software	TS+	TS+		V3.0.0.4	
Conducted Emission Test For AC Power Port						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
<input checked="" type="checkbox"/>	LISN	R&S	ENV216	102154	Jul. 24, 2022	Jul. 23, 2023
<input checked="" type="checkbox"/>	EMI Receiver	R&S	ESR3	102509	Jul. 24, 2022	Jul. 23, 2023
Software						
Used	Description	Manufacturer	Name		Version	
<input checked="" type="checkbox"/>	Test software	EZ	EZ-EMC		EMEC-3A1	
Other Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
<input checked="" type="checkbox"/>	Temperature & Humidity	Temperature	HTC-1	/	Nov. 25, 2022	Nov. 24, 2023

8. On Time and Duty Cycle

8.1. Block diagram of test setup

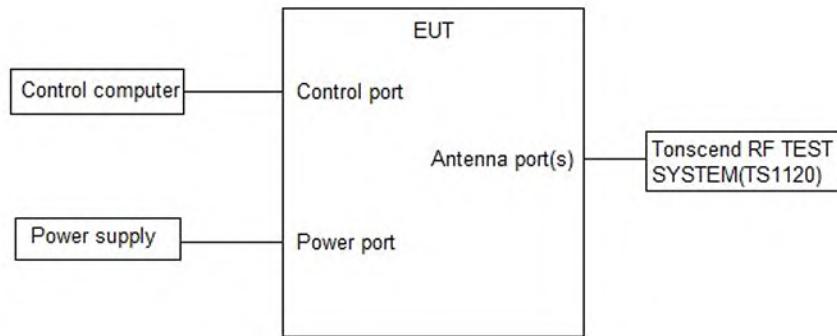

8.2. Limits

None; for reporting purposes only

8.3. Procedure

KDB 558074 Zero-Span Spectrum Analyzer Method

8.4. Results

Test Mode	Ant.	Freq. [MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]
BLE_1M	Ant1	2402	2.16	2.50	86.40	0.63
		2440	2.16	2.50	86.40	0.63
		2480	2.16	2.50	86.40	0.63

Note: Duty Cycle Correction Factor = $10\log(1/x)$.

Where: x is Duty Cycle(Linear)

Where: T is On Time (transmit duration)

If that calculated VBW is not available on the analyzer, then the next higher value should be used.

8.5. Original test data





9. 6 dB DTS Bandwidth

9.1. Block diagram of test setup

Same as section 8.1

9.2. Limits

CFR 47FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(a)(2)	6 dB Bandwidth	>= 500 kHz	2400-2483.5

9.3. Test Procedure

Connect the UUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 6 dB Bandwidth :100 kHz
VBW	For 6 dB Bandwidth : $\geq 3 \times$ RBW
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB/99 % relative to the maximum level measured in the fundamental emission.

9.4. Results

Test Mode	Ant.	Freq. [MHz]	DTS BW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
BLE_1M	Ant1	2402	0.652	2401.672	2402.324	0.5	PASS
		2440	0.648	2439.672	2440.320	0.5	PASS
		2480	0.656	2479.664	2480.320	0.5	PASS

9.5. Original test data

6 dB bandwidth:





10. Peak Conducted Output Power

10.1. Block diagram of test setup

Same as section 8.1

10.2. Limits

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(b)(3)	Peak Output Power	1 watt or 30 dBm	2400 - 2483.5

10.3. Test Procedure


- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Measure the maximum output power of EUT by spectrum analyzer with PK detector and RBW=2 MHz (above 20 dB bandwidth of measured signal), VBW=6 MHz

Note: The attenuator loss was inputted into spectrum analyzer as amplitude offset.

10.4. Results

Test Mode	Ant.	Freq [MHz]	Conducted Peak Power [dBm]	Conducted Limit [dBm]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
BLE_1M	Ant1	2402	-0.5	≤30	-0.5	≤36	PASS
		2440	-2.13	≤30	-2.13	≤36	PASS
		2480	-4.15	≤30	-4.15	≤36	PASS

10.5. Original test data

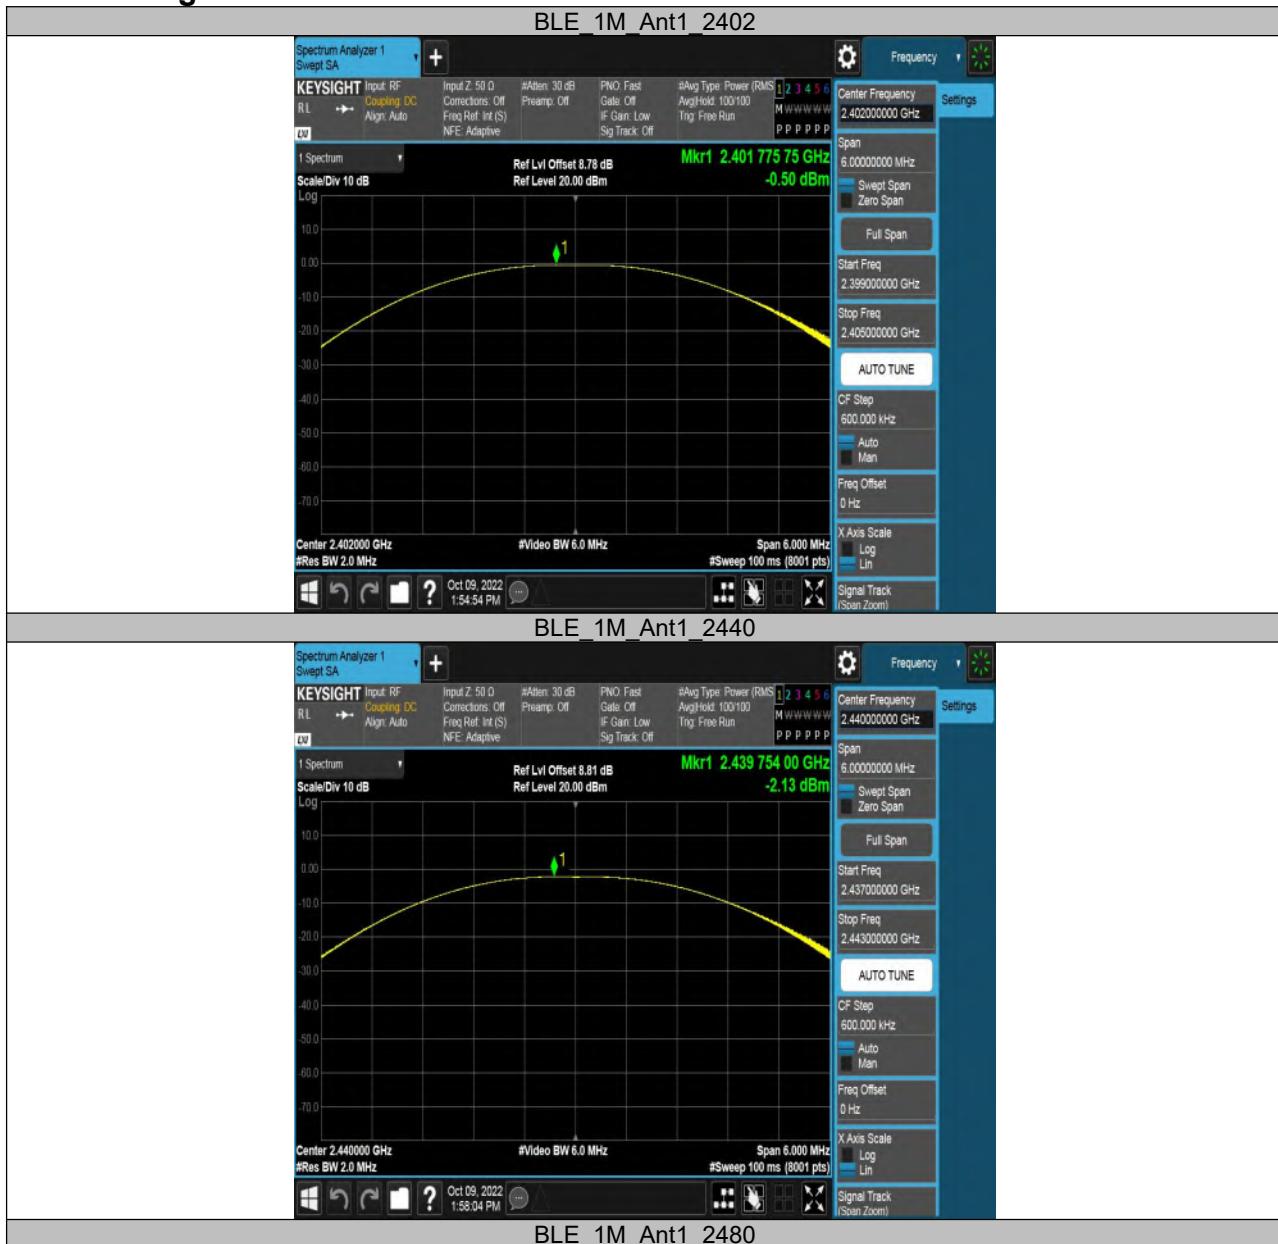



11. Power Spectral Density

11.1. Block diagram of test setup

Same as section 8.1

11.2. Limits

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC §15.247 (e)	Power Spectral Density	8 dBm in any 3 kHz band	2400 - 2483.5

11.3. Test Procedure

Connect the UUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	3 kHz ≤ RBW ≤ 100 kHz
VBW	≥3 × RBW
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.


Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

11.4. Results

Test Mode	Ant.	Freq. [MHz]	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-17.62	≤8.00	PASS
		2440	-19.26	≤8.00	PASS
		2480	-21.22	≤8.00	PASS

11.5. Original test data

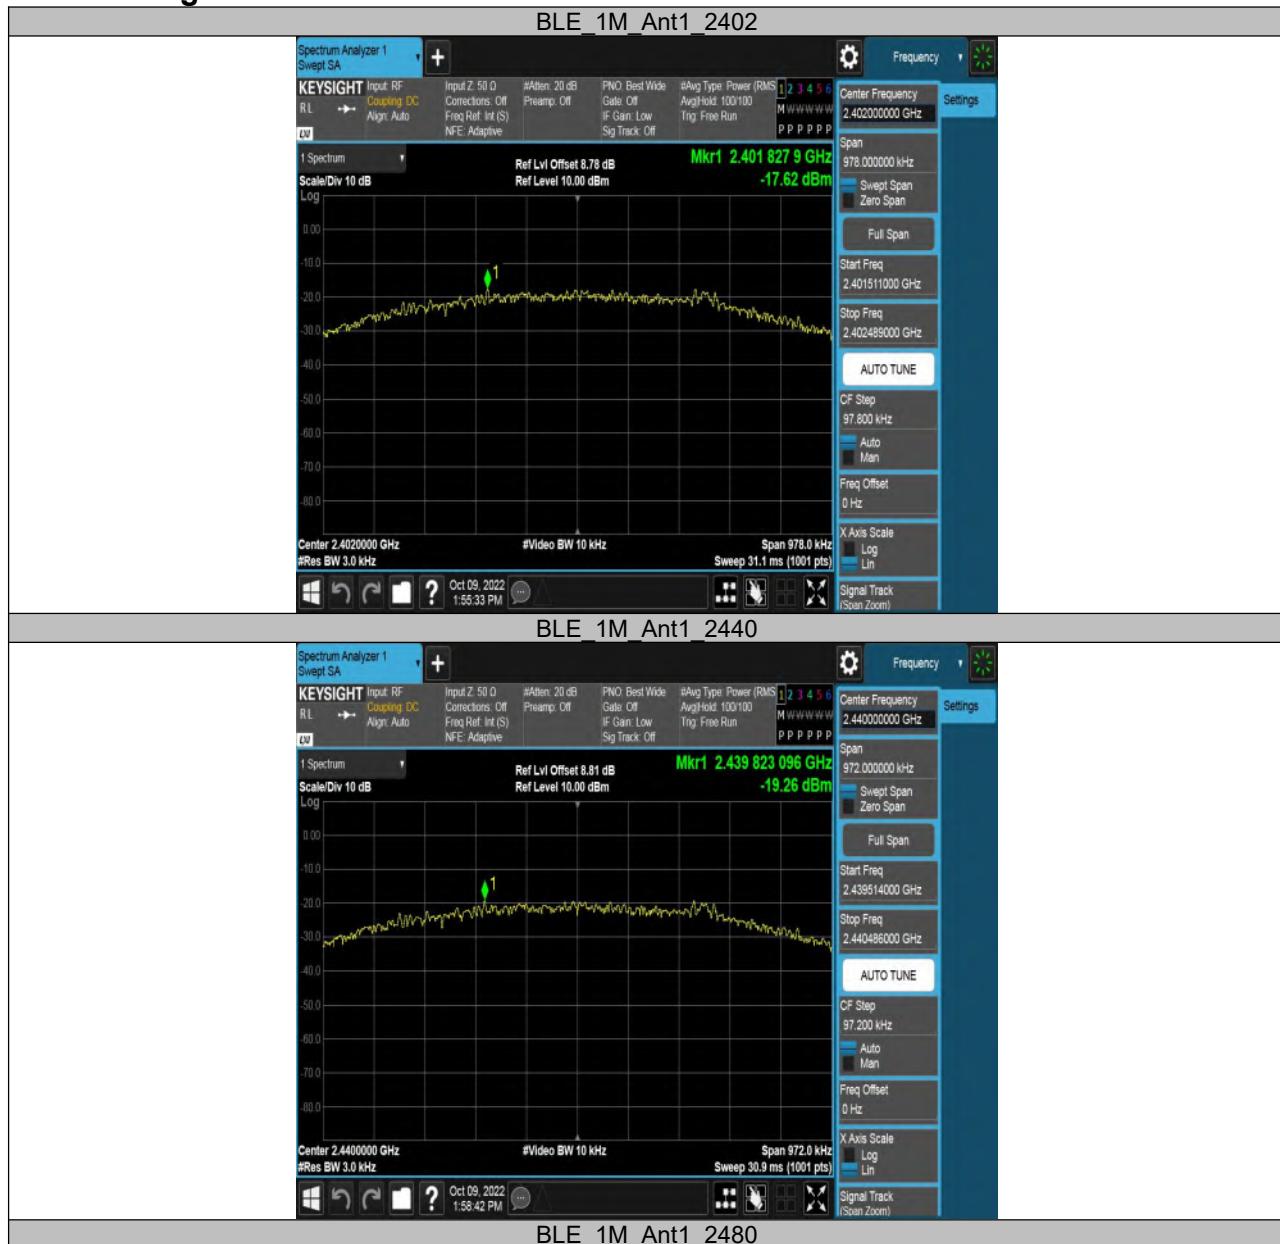



12. Conducted Bandedge and Spurious Emissions

12.1. Block diagram of test setup

Same as section 8.1

12.2. Limits

CFR 47 FCC Part15 (15.247) Subpart C		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d)	Conducted Band edge and Spurious Emissions	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

12.3. Test Procedure

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times$ RBW
Span	$\geq 1.5 \times$ DTS bandwidth
Trace	Max hold
Sweep time	Auto couple

Connect the UUT to the spectrum analyzer and use the following settings:

Use the peak marker function to determine the maximum peak power level to establish the reference level.

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times$ RBW
measurement points	\geq span/RBW
Trace	Max hold
Sweep time	Auto couple

Use the peak marker function to determine the maximum amplitude level.

12.4. Results

Band edge

Test Mode	Ant.	Ch Name	Freq. [MHz]	Ref Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
BLE_1M	Ant1	Low	2402	-1.26	-48.31	\leq -21.26	PASS
		High	2480	-4.66	-51.65	\leq -24.66	PASS

Spurious Emissions

Test Mode	Ant.	Freq. [MHz]	Freq Range [MHz]	Ref Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
BLE_1M	Ant1	2402	30~1000	-1.26	-54.77	≤-21.26	PASS
			1000~26500	-1.26	-35.33	≤-21.26	PASS
		2440	30~1000	-2.69	-56.76	≤-22.69	PASS
			1000~26500	-2.69	-37.87	≤-22.69	PASS
		2480	30~1000	-4.66	-56.78	≤-24.66	PASS
			1000~26500	-4.66	-44.78	≤-24.66	PASS


12.5. Original test data

Reference level






Band edge:

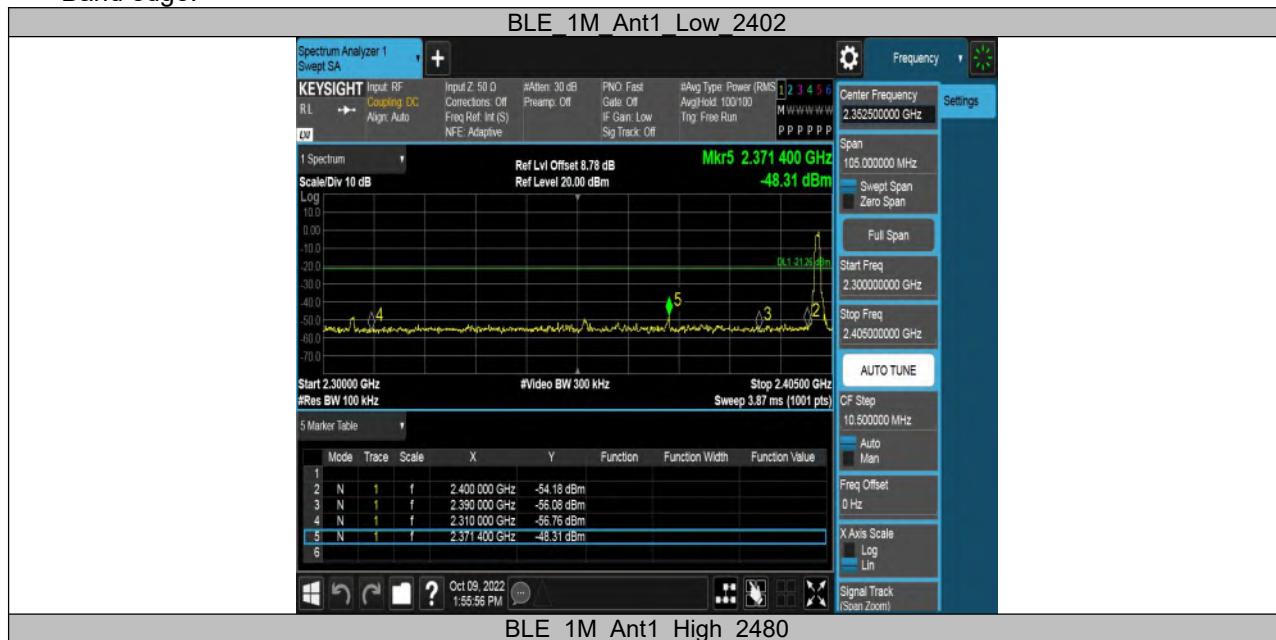



Spurious Emissions:

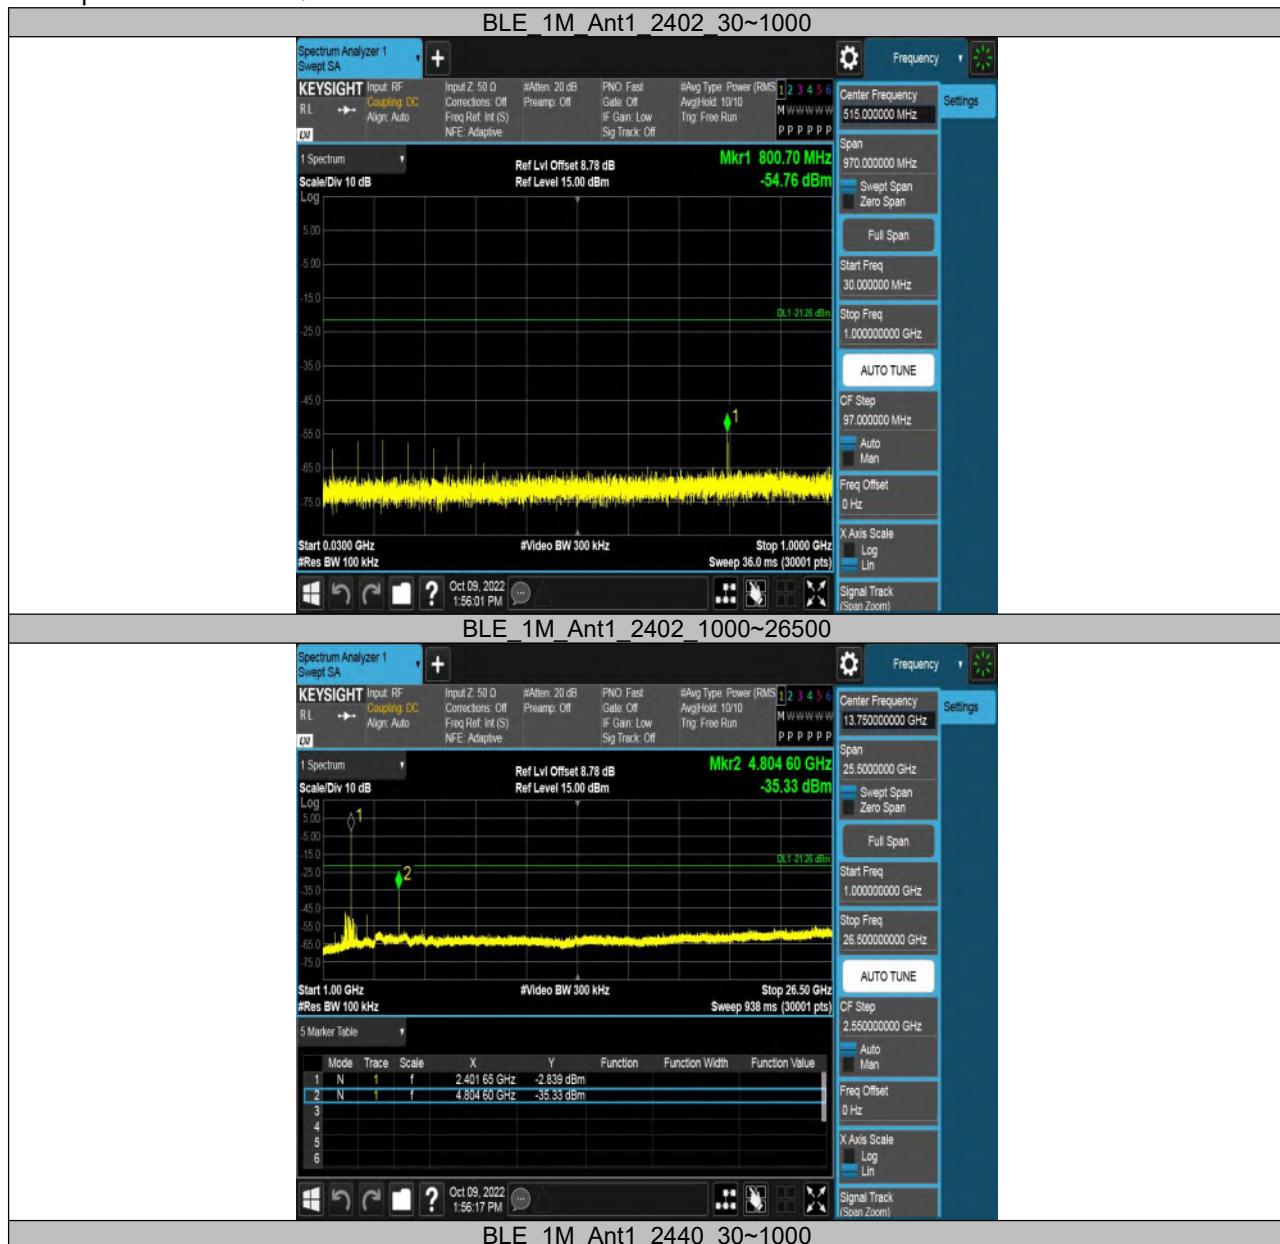







13. Radiated Emission

13.1. Block diagram of test setup


In 3 m Anechoic Chamber, test setup diagram for 9 kHz - 30 MHz:

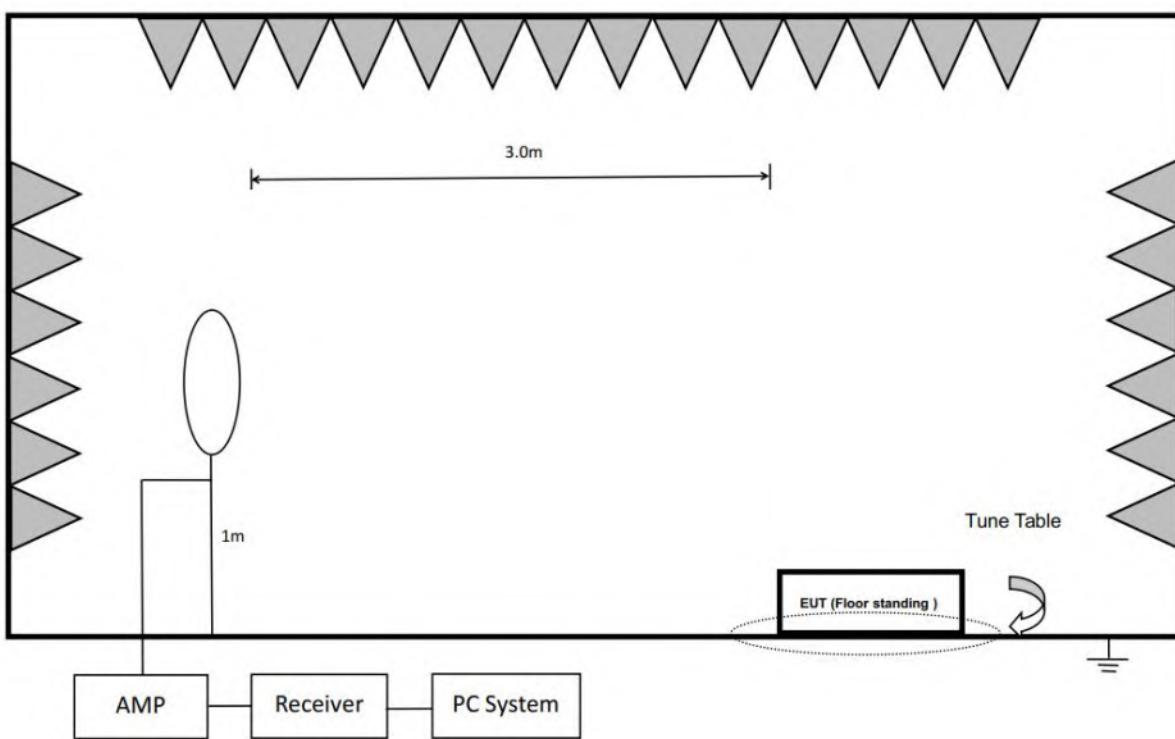

In 3 m Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

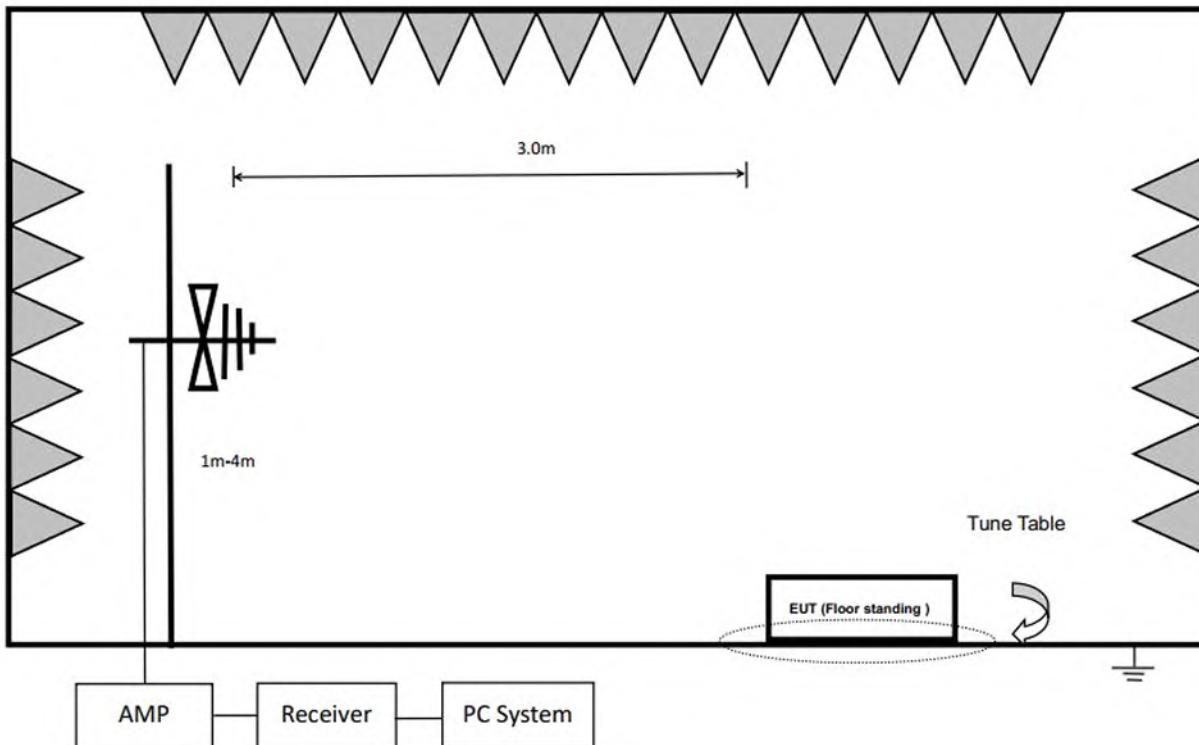

In 3 m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

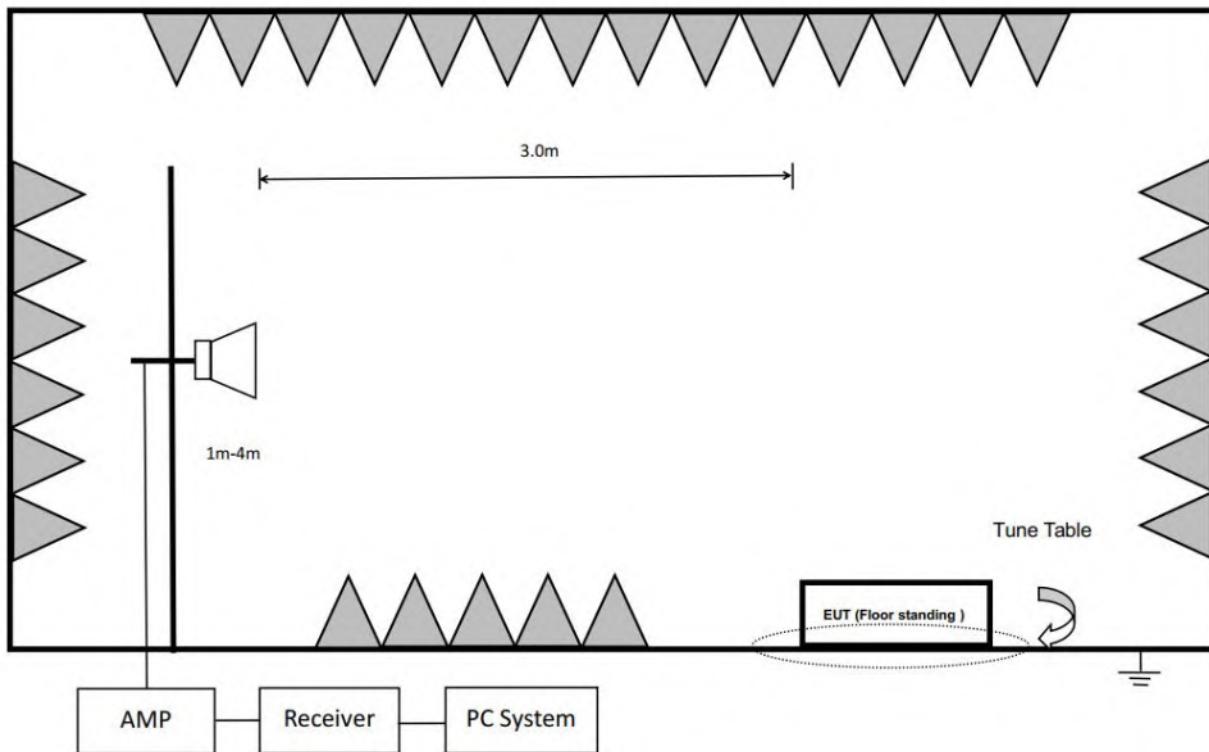

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP

13.2. Limit

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6

(2) FCC 15.209 Limit.

Frequency MHz	Distance Meters	Field Strengths Limit	
		μ V/m	dB(μ V)/m
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216~960	3	200	46.0
960~1000	3	500	54.0
Above 1000	3	74.0 dB(μ V)/m (Peak) 54.0 dB(μ V)/m (Average)	

Note: (1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.

About Restricted bands of operation please refer to FCC § 15.205(a),

13.3. Test Procedure

Below 30 MHz:

The setting of the spectrum Analyzer

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT and all cables shall be insulated, if required, from the ground plane by up to 12mm of insulating material.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of 1 meter height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore, sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.

Below 1 GHz and above 30 MHz:

The setting of the spectrum Analyzer

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT and all cables shall be insulated, if required, from the ground plane by up to 12mm of insulating material.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Above 1 GHz:

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.

2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

3. The EUT and all cables shall be insulated, if required, from the ground plane by up to 12mm of insulating material.

4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.

5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.

6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for AVG measurements. For the Duty Cycle please refer to clause 8.1.ON TIME AND DUTY CYCLE.

7. Restriction band: Investigated frequency range from 2310 MHz to 2410 MHz and 2470MHz to 2500 MHz.

All restriction band should comply with 15.209, other emission should be at least 20 dB below the fundamental.

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

Note 2: The EUT does not support simultaneous transmission.

Note 3: The EUT was fully exercised with external accessories during the test. In the case of multiple accessory external ports, an external accessory shall be connected to one of each type of port.

13.4. Results

Pass. (See below detailed test result)

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limits.

Note1: According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz, so the final test was performed with frequency range from 30 MHz to 26 GHz and recorded in below.

Note2: For emissions below 1 GHz, according exploratory test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in BLE 2402MHz mode.

Note3: For emissions above 1 GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.


13.5. Original test data

Below 1 GHz and above 30 MHz test data Refer to appendix A

Above 1 GHz test data Refer to appendix B

14. AC Power Line Conducted Emissions

14.1. Block diagram of test setup

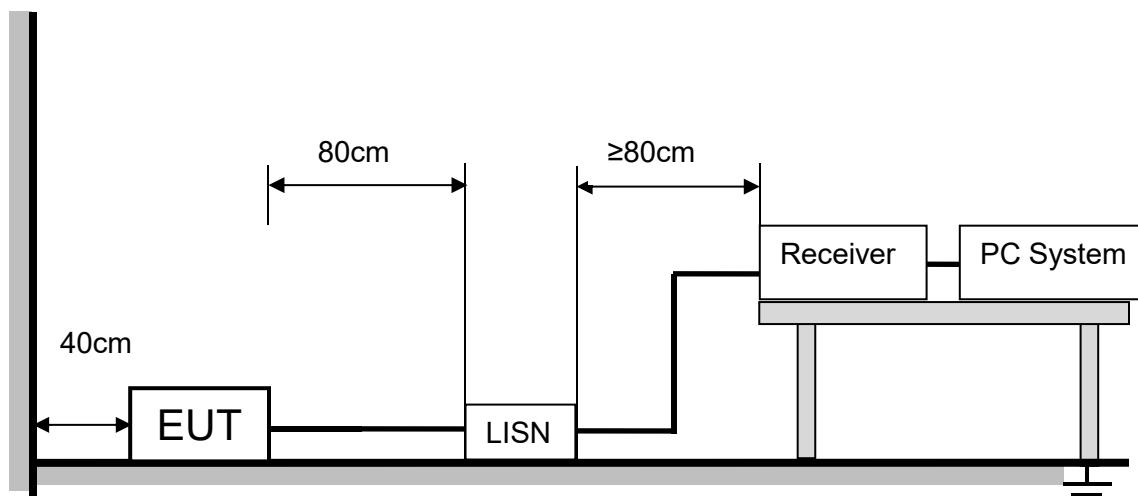

The EUT and all cables shall be insulated, if required, from the ground plane by up to 12mm of insulating material. The power line of the EUT is connected to the AC mains through an Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

14.2. Limits

Please refer to CFR 47 FCC § 15.207 (a)

Frequency (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

14.3. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.4 and test equipment as described in clause 10.2 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

14.4. Test result

Pass. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: Pre-test AC conducted emission at both voltage AC 230V/50Hz, recorded worse case.

14.5. Original test data

Refer to appendix C

15. Antenna Requirements

15.1. Limits

Please refer to FCC § 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC § 15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

15.2. Result

The antenna used for this product is PCB antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 3.38 dBi


APPENDIX A – Radiated Emission Below 1GHz Test Data

Test Report

Project Information			
EUT:	POWERED SPEAKER	Environment:	21.1°C 47%
Model:	KG15-200	SN:	
Mode:	1M_2402	Voltage:	230V/50Hz
Customer:		Engineer:	Walter Yuan
Remark:			
Test Standard:			

Start of Test: 2023-04-19 21:58:49

Test Graph

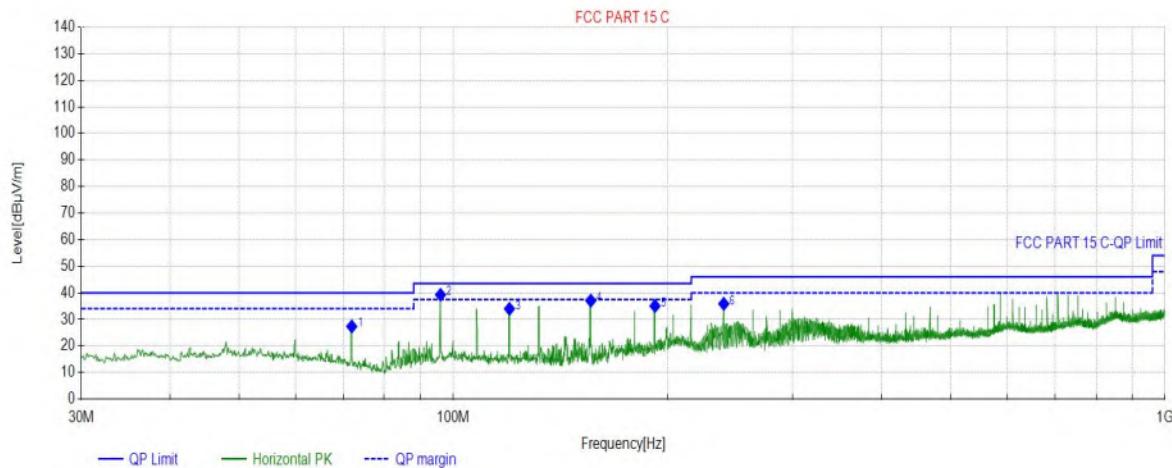


Final Data List								
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	72.0052	11.95	27.36	40.00	12.64	100	333	Horizontal
2	95.9666	13.99	39.26	43.50	4.24	100	333	Horizontal
3	119.928	12.66	33.99	43.50	9.51	100	124	Horizontal
4	156.015	11.81	37.07	43.50	6.43	100	333	Horizontal
5	192.006	14.24	35.04	43.50	8.46	100	165	Horizontal
6	239.929	16.10	35.86	46.00	10.14	100	180	Horizontal

Test Report

Project Information			
EUT:	POWERED SPEAKER	Environment:	21.1°C 47%
Model:	KG15-200	SN:	
Mode:	1M_2402	Voltage:	230V/50Hz
Customer:		Engineer:	Walter Yuan
Remark:			
Test Standard:			

Start of Test: 2023-04-19 21:59:33

Test Graph

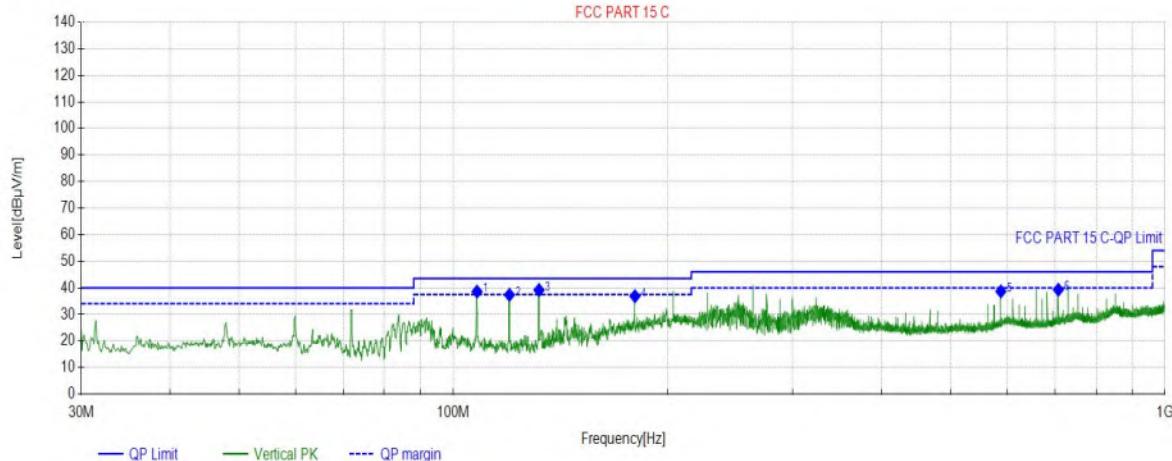


Final Data List								
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	107.995	14.36	38.59	43.50	4.91	100	299	Vertical
2	119.928	12.66	37.36	43.50	6.14	100	54	Vertical
3	131.957	11.74	39.17	43.50	4.33	100	194	Vertical
4	179.977	12.69	36.86	43.50	6.64	100	166	Vertical
5	587.999	24.40	38.65	46.00	7.35	100	92	Vertical
6	708.097	25.39	39.29	46.00	6.71	100	256	Vertical

Test Report

Project Information			
EUT:	POWERED SPEAKER	Environment:	21.1°C 47%
Model:	KG15-200	SN:	
Mode:	1M_2440	Voltage:	230V/50Hz
Customer:		Engineer:	Walter Yuan
Remark:			
Test Standard:			

Start of Test: 2023-04-19 22:01:00

Test Graph

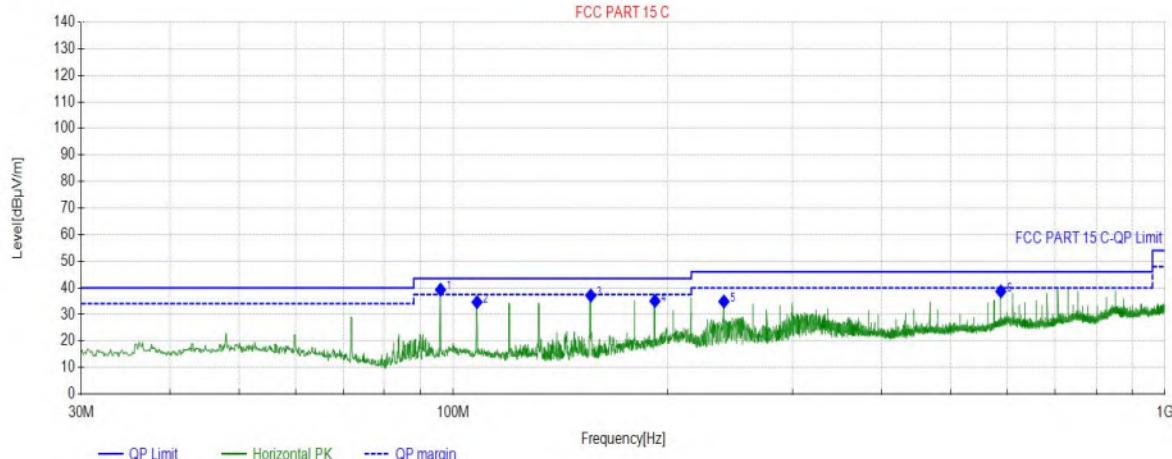


Final Data List								
NO.	Freq. [MHz]	Factor [dB]	QP Value [dB μ V/m]	QP Limit [dB μ V/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	95.9666	13.99	39.29	43.50	4.21	100	334	Horizontal
2	107.995	14.36	34.62	43.50	8.88	100	334	Horizontal
3	156.015	11.81	37.11	43.50	6.39	100	334	Horizontal
4	192.006	14.24	35.04	43.50	8.46	100	164	Horizontal
5	240.026	16.10	34.85	46.00	11.15	100	191	Horizontal
6	587.999	24.40	38.64	46.00	7.36	100	182	Horizontal

Test Report

Project Information			
EUT:	POWERED SPEAKER	Environment:	21.1°C 47%
Model:	KG15-200	SN:	
Mode:	1M_2440	Voltage:	230V/50Hz
Customer:		Engineer:	Walter Yuan
Remark:			
Test Standard:			

Start of Test: 2023-04-19 22:01:45

Test Graph

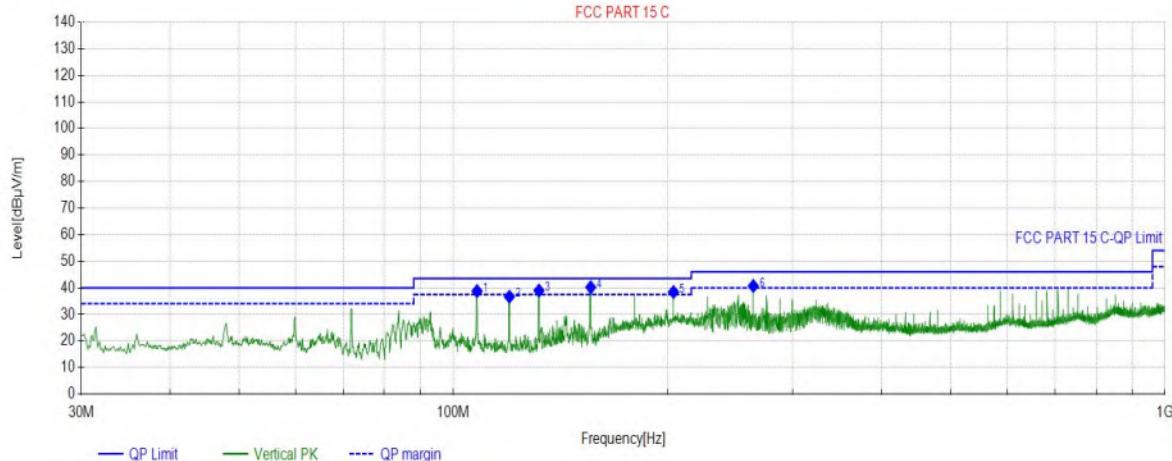


Final Data List								
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	107.995	14.36	38.79	43.50	4.71	100	360	Vertical
2	119.928	12.66	36.67	43.50	6.83	100	196	Vertical
3	131.957	11.74	39.01	43.50	4.49	100	233	Vertical
4	156.015	11.81	40.22	43.50	3.28	100	299	Vertical
5	203.938	14.94	38.44	43.50	5.06	100	275	Vertical
6	263.987	16.42	40.71	46.00	5.29	100	164	Vertical

Test Report

Project Information			
EUT:	POWERED SPEAKER	Environment:	21.1°C 47%
Model:	KG15-200	SN:	
Mode:	1M_2480	Voltage:	230V/50Hz
Customer:		Engineer:	Walter Yuan
Remark:			
Test Standard:			

Start of Test: 2023-04-19 22:04:13

Test Graph

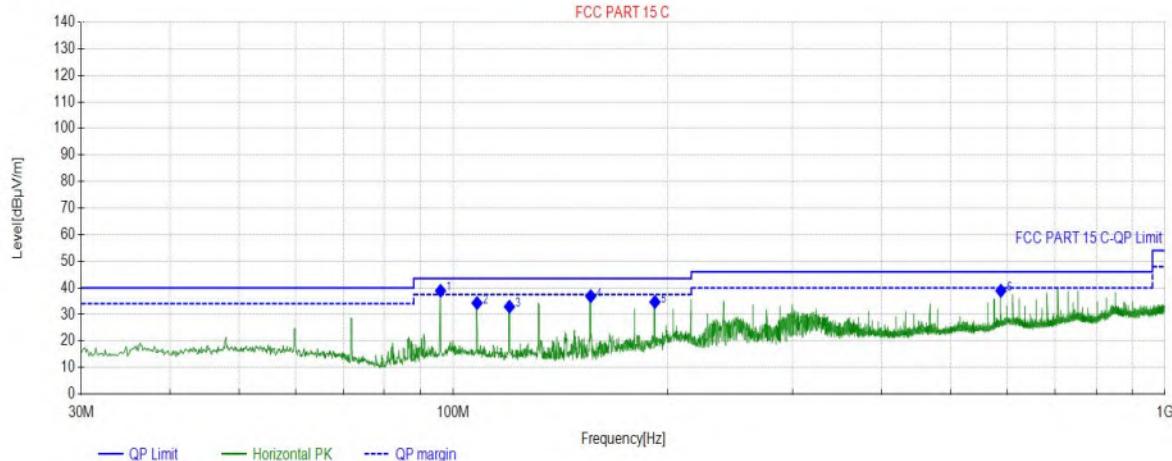


Final Data List								
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	95.9666	13.99	38.88	43.50	4.62	100	334	Horizontal
2	107.995	14.36	34.26	43.50	9.24	100	334	Horizontal
3	119.928	12.66	32.92	43.50	10.58	100	118	Horizontal
4	156.015	11.81	36.86	43.50	6.64	100	334	Horizontal
5	192.006	14.24	34.67	43.50	8.83	100	151	Horizontal
6	587.999	24.40	38.88	46.00	7.12	100	178	Horizontal

Test Report

Project Information			
EUT:	POWERED SPEAKER	Environment:	21.1°C 47%
Model:	KG15-200	SN:	
Mode:	1M_2480	Voltage:	230V/50Hz
Customer:		Engineer:	Walter Yuan
Remark:			
Test Standard:			

Start of Test: 2023-04-19 22:04:58

Test Graph

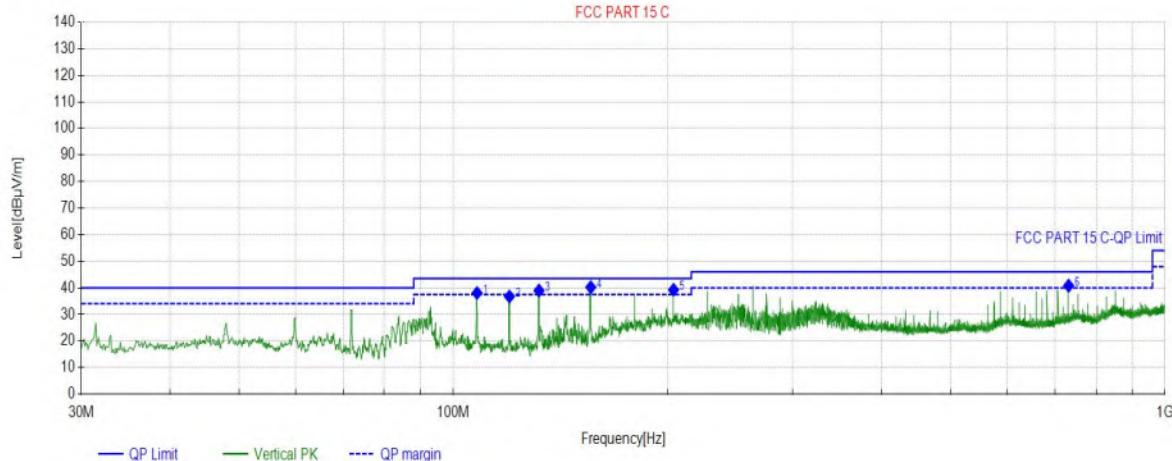

Final Data List								
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	107.995	14.36	38.06	43.50	5.44	100	360	Vertical
2	119.928	12.66	36.75	43.50	6.75	100	177	Vertical
3	131.957	11.74	38.98	43.50	4.52	100	221	Vertical
4	156.015	11.81	40.24	43.50	3.26	100	314	Vertical
5	203.938	14.94	39.27	43.50	4.23	100	262	Vertical
6	732.059	26.00	40.82	46.00	5.18	100	221	Vertical


APPENDIX B – Radiated Emission Above 1GHz Test Data

Test Report

Project Information			
Customer:		EUT:	POWERED SPEAKER
Model:	KG15-200	SN:	
Mode:	1M_2402	Voltage:	230V/50Hz
Environment:	21.1°C 47%	Engineer:	Walter Yuan
Remark:			
Test Standard:			

Start of Test: 2023-04-19 21:38:48

Test Graph

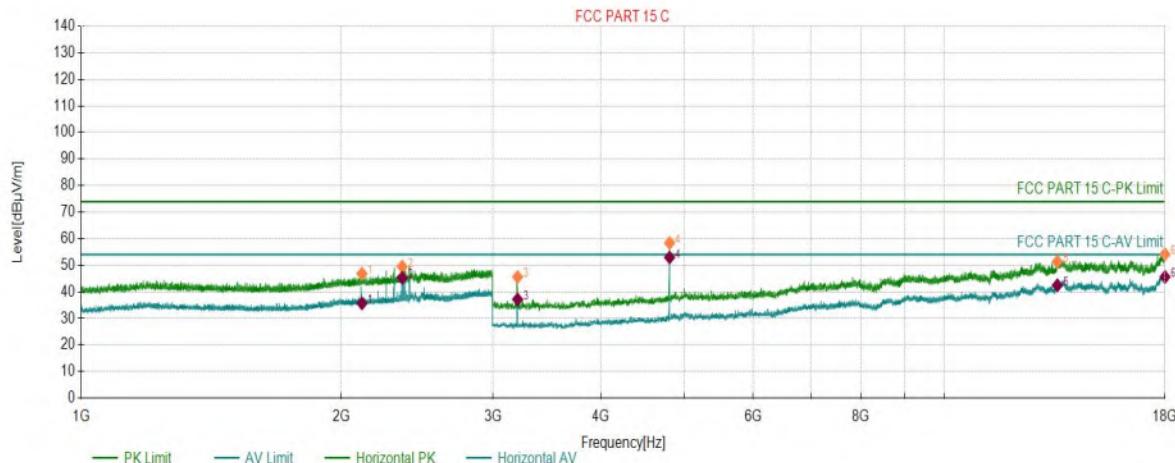

PK Final Data List								
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2114.5115	5.76	46.84	74.00	27.16	100	225	Horizontal
2	2353.9354	6.72	49.52	74.00	24.48	100	192	Horizontal
3	3202.5203	-16.04	45.60	74.00	28.40	100	81	Horizontal
4	4803.1803	-9.95	58.40	74.00	15.60	100	249	Horizontal
5	13507.0507	10.73	51.36	74.00	22.64	100	10	Horizontal
6	17998.4999	14.58	54.13	74.00	19.87	100	360	Horizontal


AV Final Data List								
NO.	Freq. [MHz]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2114.5115	5.76	35.66	54.00	18.34	100	225	Horizontal
2	2353.9354	6.72	45.27	54.00	8.73	100	192	Horizontal
3	3202.5203	-16.04	37.15	54.00	16.85	100	81	Horizontal
4	4803.1803	-9.95	52.97	54.00	1.03	100	249	Horizontal
5	13507.0507	10.73	42.45	54.00	11.55	100	10	Horizontal
6	17998.4999	14.58	45.60	54.00	8.40	100	360	Horizontal

Test Report

Project Information			
Customer:		EUT:	POWERED SPEAKER
Model:	KG15-200	SN:	
Mode:	1M_2402	Voltage:	230V/50Hz
Environment:	21.1°C 47%	Engineer:	Walter Yuan
Remark:			
Test Standard:			

Start of Test: 2023-04-19 21:40:07

Test Graph

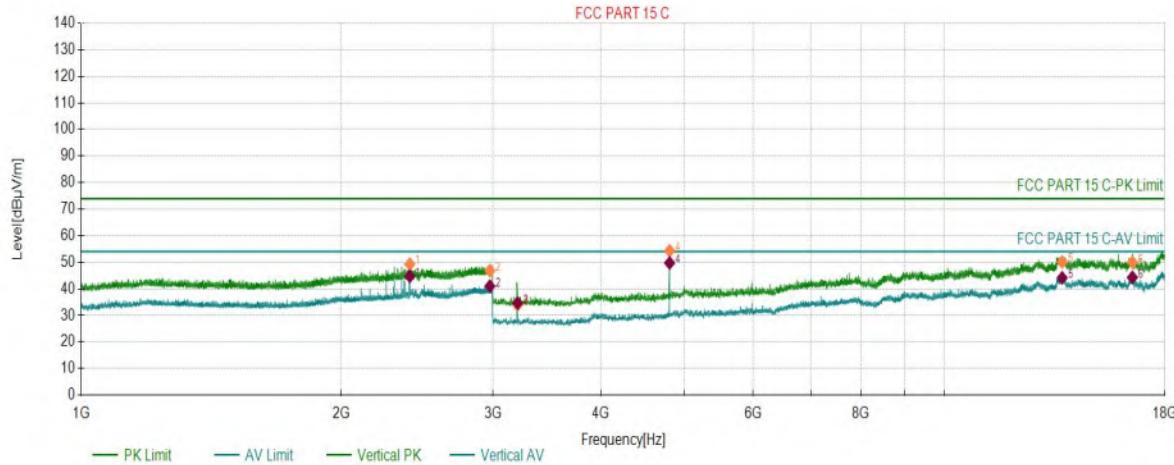

PK Final Data List									
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBµV/m]	PK Limit [dBµV/m]	PK Margin [dB]	Height [cm]	Angle [°]	Polarity	
1	2402.1402	7.43	49.28	74.00	24.72	100	218	Vertical	
2	2974.3974	9.12	46.81	74.00	27.19	100	120	Vertical	
3	3202.5203	-16.04	33.97	74.00	40.03	100	152	Vertical	
4	4803.1803	-9.95	54.33	74.00	19.67	100	237	Vertical	
5	13682.5683	11.38	50.09	74.00	23.91	100	96	Vertical	
6	16499.8500	11.90	49.94	74.00	24.06	100	119	Vertical	


AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	
1	2402.1402	7.43	44.75	54.00	9.25	100	218	Vertical	
2	2974.3974	9.12	41.00	54.00	13.00	100	120	Vertical	
3	3202.5203	-16.04	34.68	54.00	19.32	100	152	Vertical	
4	4803.1803	-9.95	49.76	54.00	4.24	100	237	Vertical	
5	13682.5683	11.38	44.15	54.00	9.85	100	96	Vertical	
6	16499.8500	11.90	44.30	54.00	9.70	100	119	Vertical	

Test Report

Project Information			
Customer:		EUT:	POWERED SPEAKER
Model:	KG15-200	SN:	
Mode:	1M_2440	Voltage:	230V/50Hz
Environment:	21.1°C 47%	Engineer:	Walter Yuan
Remark:			
Test Standard:			

Start of Test: 2023-04-19 21:44:59

Test Graph

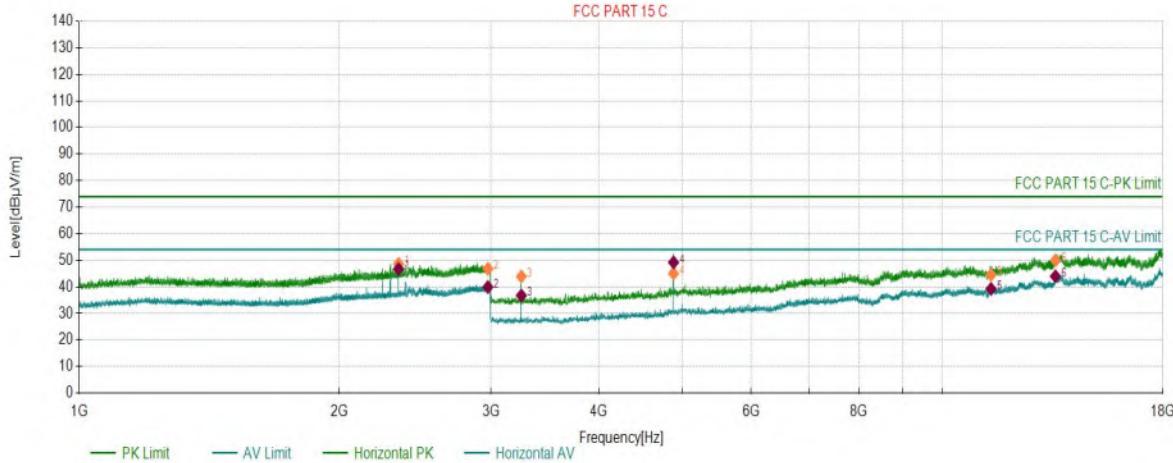

PK Final Data List								
NO.	Freq. [MHz]	Factor [dB]	PK Value [dB μ V/m]	PK Limit [dB μ V/m]	PK Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2343.9344	6.66	48.64	74.00	25.36	100	185	Horizontal
2	2974.3974	9.12	46.80	74.00	27.20	100	0	Horizontal
3	3252.0252	-15.97	43.93	74.00	30.07	100	72	Horizontal
4	4879.6880	-9.50	45.01	74.00	28.99	100	252	Horizontal
5	11378.3378	5.56	44.53	74.00	29.47	100	211	Horizontal
6	13511.5512	10.72	49.99	74.00	24.01	100	333	Horizontal


AV Final Data List								
NO.	Freq. [MHz]	Factor [dB]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2343.9344	6.66	46.70	54.00	7.30	100	185	Horizontal
2	2974.3974	9.12	39.93	54.00	14.07	100	0	Horizontal
3	3252.0252	-15.97	36.73	54.00	17.27	100	72	Horizontal
4	4879.6880	-9.50	49.21	54.00	4.79	100	252	Horizontal
5	11378.3378	5.56	39.22	54.00	14.78	100	211	Horizontal
6	13511.5512	10.72	43.96	54.00	10.04	100	333	Horizontal

Test Report

Project Information			
Customer:		EUT:	POWERED SPEAKER
Model:	KG15-200	SN:	
Mode:	1M_2440	Voltage:	230V/50Hz
Environment:	21.1°C 47%	Engineer:	Walter Yuan
Remark:			
Test Standard:			

Start of Test: 2023-04-19 21:46:17

Test Graph

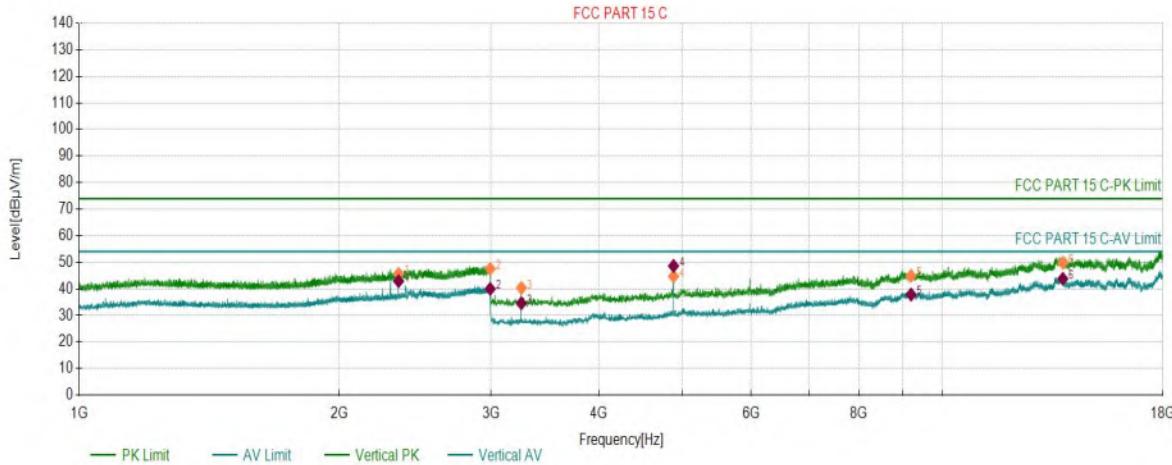

PK Final Data List								
NO.	Freq. [MHz]	Factor [dB]	PK Value [dB μ V/m]	PK Limit [dB μ V/m]	PK Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2343.9344	6.66	45.64	74.00	28.36	100	211	Vertical
2	2992.5993	9.22	47.53	74.00	26.47	100	19	Vertical
3	3252.0252	-15.97	40.33	74.00	33.67	100	152	Vertical
4	4879.6880	-9.50	44.72	74.00	29.28	100	102	Vertical
5	9192.6193	3.23	44.88	74.00	29.12	100	356	Vertical
6	13778.5779	10.71	49.81	74.00	24.19	100	353	Vertical


AV Final Data List								
NO.	Freq. [MHz]	Factor [dB]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2343.9344	6.66	42.89	54.00	11.11	100	211	Vertical
2	2992.5993	9.22	39.97	54.00	14.03	100	19	Vertical
3	3252.0252	-15.97	34.58	54.00	19.42	100	152	Vertical
4	4879.6880	-9.50	48.62	54.00	5.38	100	102	Vertical
5	9192.6193	3.23	37.87	54.00	16.13	100	356	Vertical
6	13778.5779	10.71	43.80	54.00	10.20	100	353	Vertical

Test Report

Project Information			
Customer:		EUT:	POWERED SPEAKER
Model:	KG15-200	SN:	
Mode:	1M_2480	Voltage:	230V/50Hz
Environment:	21.1°C 47%	Engineer:	Walter Yuan
Remark:			
Test Standard:			

Start of Test: 2023-04-19 21:48:40

Test Graph

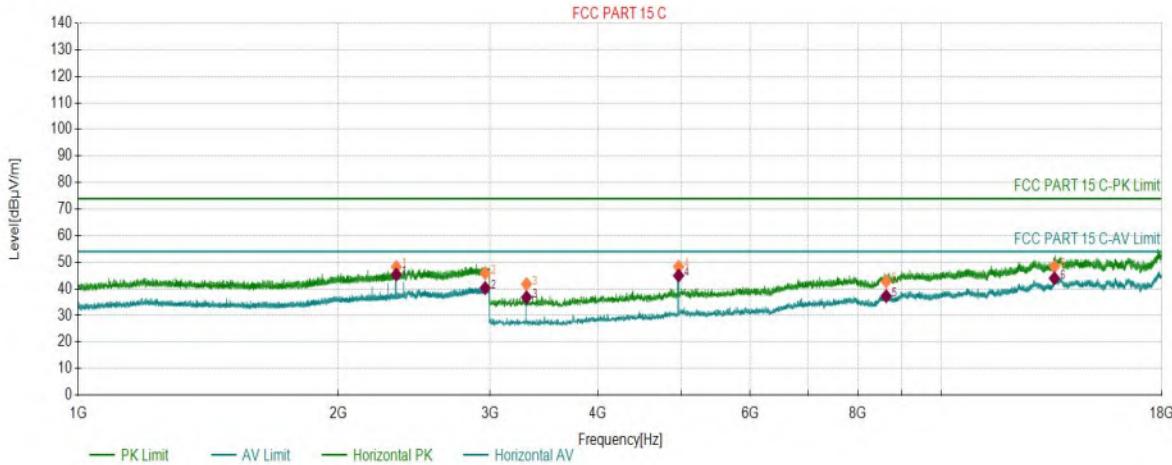

PK Final Data List								
NO.	Freq. [MHz]	Factor [dB]	PK Value [dB μ V/m]	PK Limit [dB μ V/m]	PK Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2336.1336	6.61	48.24	74.00	25.76	100	185	Horizontal
2	2960.5961	9.04	45.88	74.00	28.12	100	81	Horizontal
3	3306.0306	-15.88	41.79	74.00	32.21	100	54	Horizontal
4	4959.1959	-8.98	48.33	74.00	25.67	100	250	Horizontal
5	8625.5626	1.78	42.78	74.00	31.22	100	54	Horizontal
6	13508.5509	10.73	48.40	74.00	25.60	100	14	Horizontal


AV Final Data List								
NO.	Freq. [MHz]	Factor [dB]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2336.1336	6.61	45.38	54.00	8.62	100	185	Horizontal
2	2960.5961	9.04	40.31	54.00	13.69	100	81	Horizontal
3	3306.0306	-15.88	36.81	54.00	17.19	100	54	Horizontal
4	4959.1959	-8.98	45.00	54.00	9.00	100	250	Horizontal
5	8625.5626	1.78	37.25	54.00	16.75	100	54	Horizontal
6	13508.5509	10.73	43.98	54.00	10.02	100	14	Horizontal

Test Report

Project Information			
Customer:		EUT:	POWERED SPEAKER
Model:	KG15-200	SN:	
Mode:	1M_2480	Voltage:	230V/50Hz
Environment:	21.1°C 47%	Engineer:	Walter Yuan
Remark:			
Test Standard:			

Start of Test: 2023-04-19 21:49:59

Test Graph

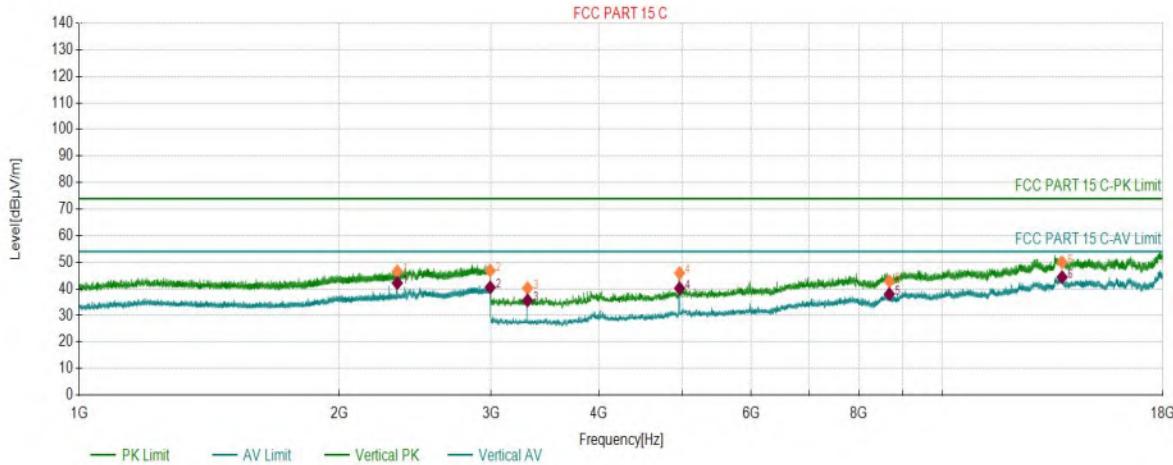

PK Final Data List								
NO.	Freq. [MHz]	Factor [dB]	PK Value [dB μ V/m]	PK Limit [dB μ V/m]	PK Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2335.9336	6.61	46.57	74.00	27.43	100	216	Vertical
2	2992.7993	9.22	46.90	74.00	27.10	100	148	Vertical
3	3306.0306	-15.88	40.26	74.00	33.74	100	154	Vertical
4	4959.1959	-8.98	45.94	74.00	28.06	100	96	Vertical
5	8676.5677	1.72	42.84	74.00	31.16	100	353	Vertical
6	13753.0753	10.98	49.98	74.00	24.02	100	356	Vertical

AV Final Data List								
NO.	Freq. [MHz]	Factor [dB]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2335.9336	6.61	42.19	54.00	11.81	100	216	Vertical
2	2992.7993	9.22	40.52	54.00	13.48	100	148	Vertical
3	3306.0306	-15.88	35.64	54.00	18.36	100	154	Vertical
4	4959.1959	-8.98	40.19	54.00	13.81	100	96	Vertical
5	8676.5677	1.72	38.02	54.00	15.98	100	353	Vertical
6	13753.0753	10.98	44.38	54.00	9.62	100	356	Vertical


Restriction Band Emission

Test Report

Project Information			
Customer:		EUT:	POWERED SPEAKER
Model:	KG15-200	SN:	
Mode:	1M_2402	Voltage:	230V/50Hz
Environment:	21.1°C 47%	Engineer:	Walter Yuan
Remark:			
Test Standard:			

Start of Test: 2023-04-19 21:41:47

Test Graph

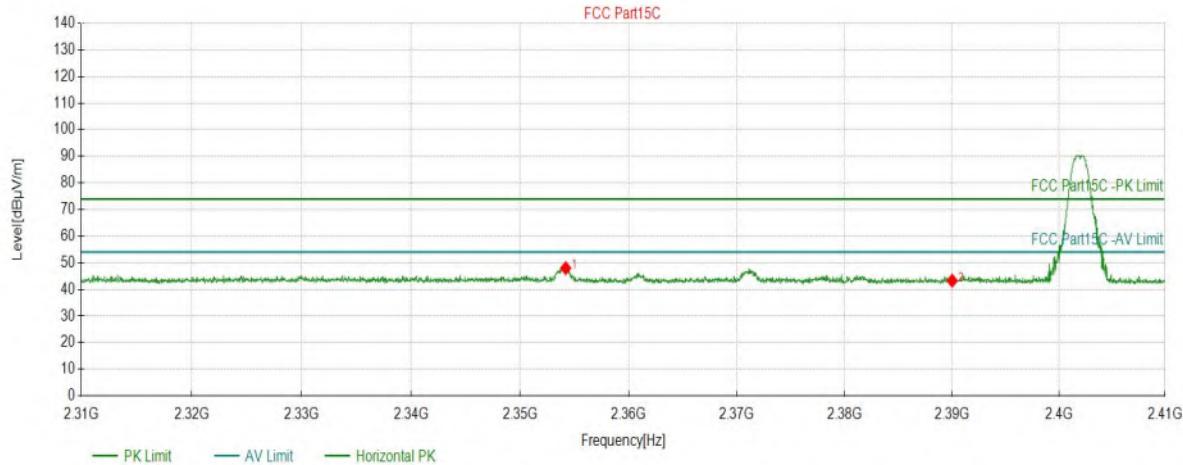

Suspected Data List


NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	2354.1814	47.97	5.96	74.00	26.03	150	208	PK	Horizont
2	2390.0267	43.26	5.94	74.00	30.74	150	339	PK	Horizont

Test Report

Project Information			
Customer:		EUT:	POWERED SPEAKER
Model:	KG15-200	SN:	
Mode:	1M_2402	Voltage:	230V/50Hz
Environment:	21.1°C 47%	Engineer:	Walter Yuan
Remark:			
Test Standard:			

Start of Test: 2023-04-19 21:42:39

Test Graph

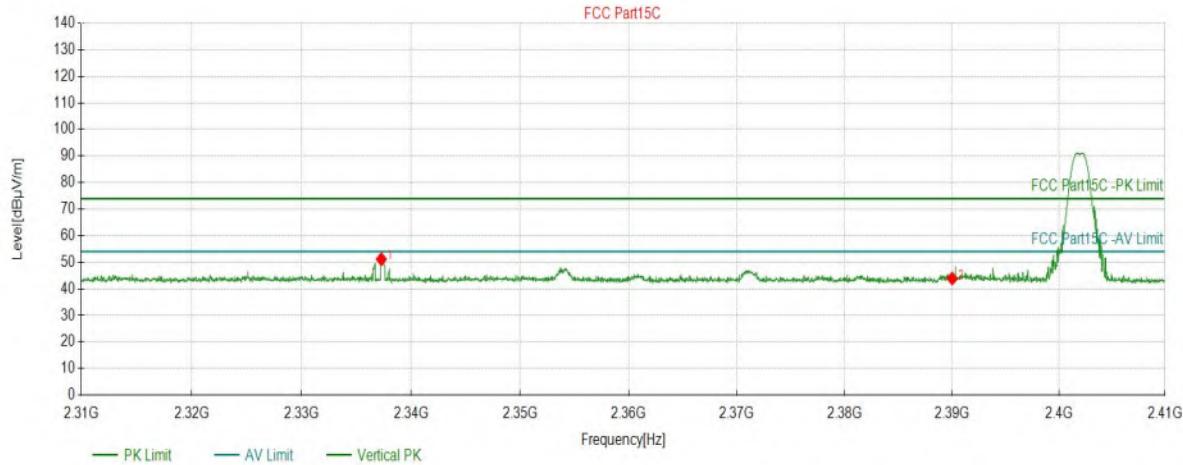

Suspected Data List


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	2337.2758	51.18	5.97	74.00	22.82	150	354	PK	Vertical
2	2390.0267	43.89	5.94	74.00	30.11	150	354	PK	Vertical

Test Report

Project Information			
Customer:		EUT:	POWERED SPEAKER
Model:	KG15-200	SN:	
Mode:	1M_2480	Voltage:	230V/50Hz
Environment:	21.1°C 47%	Engineer:	Walter Yuan
Remark:			
Test Standard:			

Start of Test: 2023-04-19 21:51:32

Test Graph

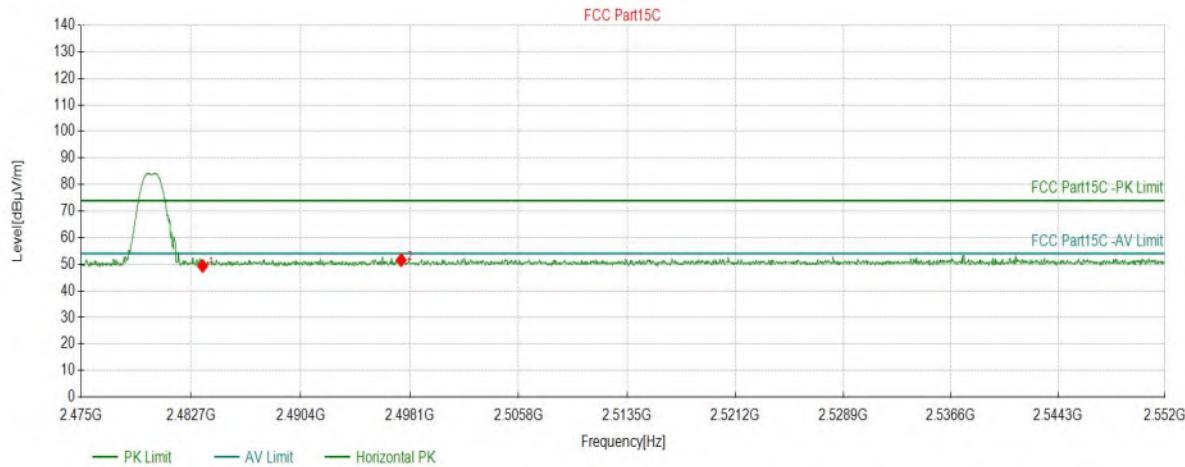

Suspected Data List


NO.	Freq. [MHz]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	2483.5128	49.37	6.37	74.00	24.63	150	164	PK	Horizont
2	2497.4952	51.56	6.45	74.00	22.44	150	246	PK	Horizont

Test Report

Project Information			
Customer:		EUT:	POWERED SPEAKER
Model:	KG15-200	SN:	
Mode:	1M_2480	Voltage:	230V/50Hz
Environment:	21.1°C 47%	Engineer:	Walter Yuan
Remark:			
Test Standard:			

Start of Test: 2023-04-19 21:52:16


Test Graph

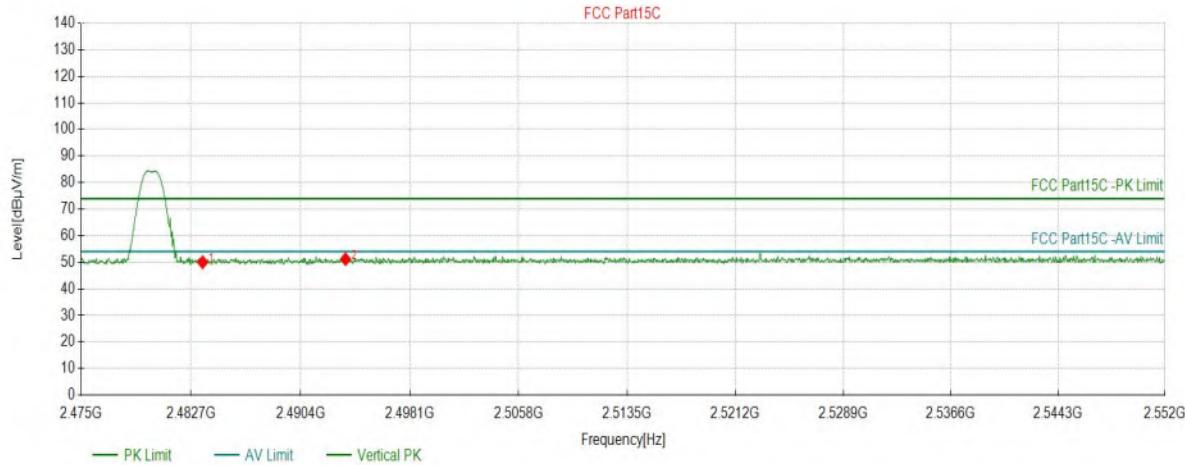

Suspected Data List


NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	2483.5128	50.02	6.37	74.00	23.98	150	243	PK	Vertical
2	2493.5663	51.18	6.43	74.00	22.82	150	288	PK	Vertical

APPENDIX C – AC Power Line Conducted Emission Test Data

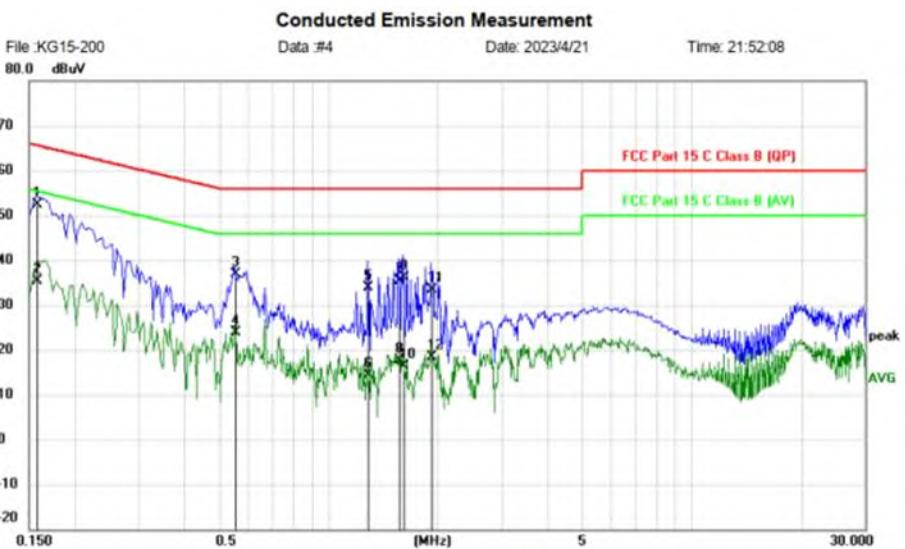

Site: Phase: **L1** Temperature: 26
 Limit: FCC Part 15 C Class B (QP) Power: AC 120V/60Hz Humidity: 60 %
 EUT: Powered Speaker
 M/N: KG15-200
 Mode: BLE Mode
 Note:

No. Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector	Comment
		dBuV	dB	dBuV	dB			
1 *	0.1580	42.81	9.64	52.45	65.57	-13.12	QP	
2	0.1580	25.75	9.64	35.39	55.57	-20.18	AVG	
3	0.5540	27.05	9.77	36.82	56.00	-19.18	QP	
4	0.5540	14.23	9.77	24.00	46.00	-22.00	AVG	
5	1.2860	24.05	9.77	33.82	56.00	-22.18	QP	
6	1.2860	4.61	9.77	14.38	46.00	-31.62	AVG	
7	1.5620	25.52	9.76	35.28	56.00	-20.72	QP	
8	1.5620	7.91	9.76	17.67	46.00	-28.33	AVG	
9	1.6060	26.41	9.76	36.17	56.00	-19.83	QP	
10	1.6060	6.70	9.76	16.46	46.00	-29.54	AVG	
11	1.9220	23.71	9.75	33.46	56.00	-22.54	QP	
12	1.9220	8.57	9.75	18.32	46.00	-27.68	AVG	

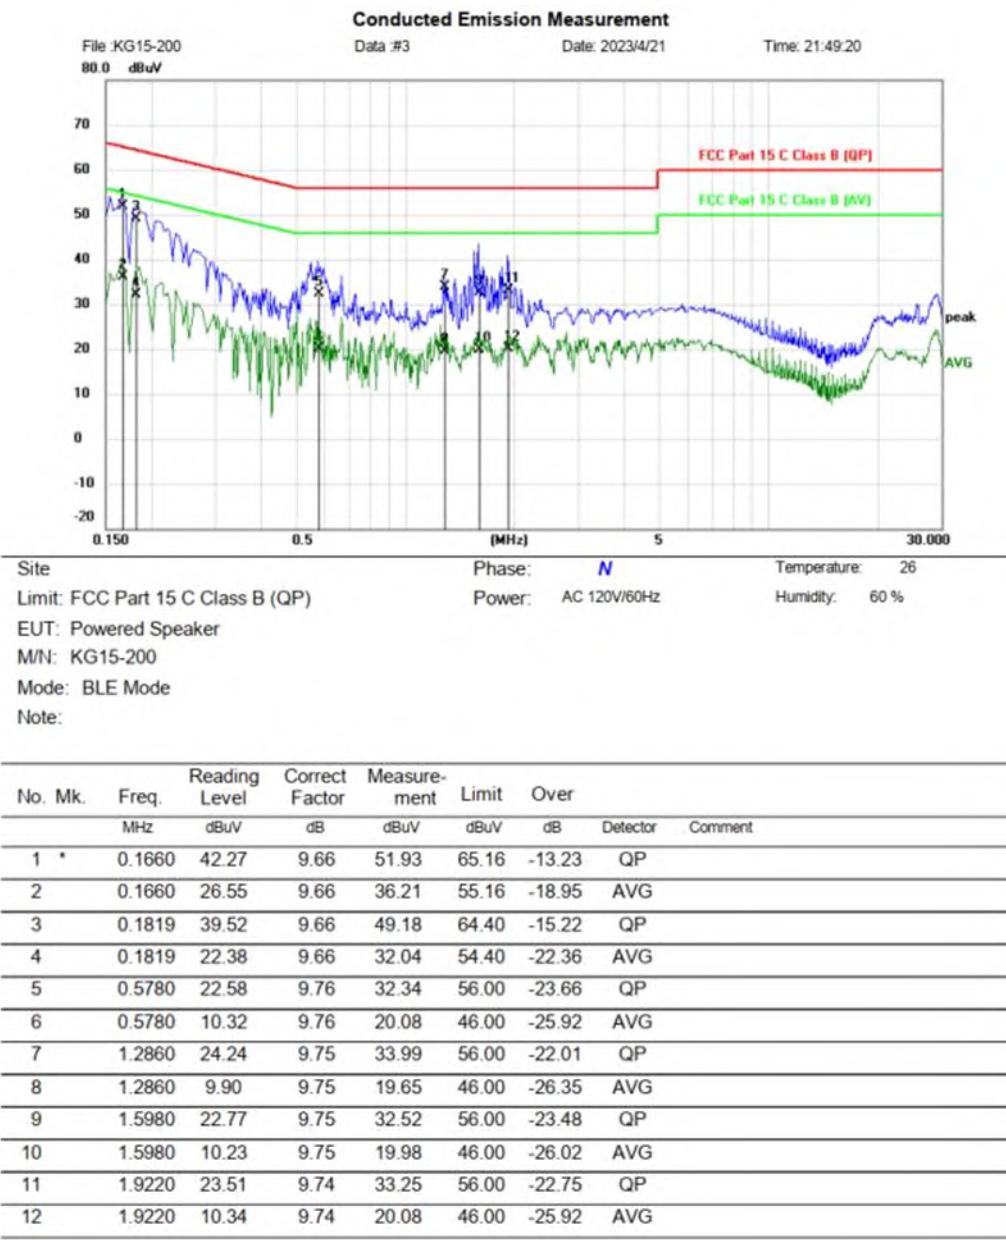

END OF REPORT