

FCC TEST REPORT

FCC ID: 2A8UJ-HYD2401200

Report Number..... : ZKT-241128L16947

Date of Test..... : Nov. 19, 2024 -- Dec. 23, 2024

Date of issue..... : Dec. 23, 2024

Total number of pages..... : 50

Test Result..... : PASS

Testing Laboratory..... : **Shenzhen ZKT Technology Co., Ltd.**

Address : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name : SHENZHEN GIANT LIGHTING CO., LTD

Address : 3/F, Building 1, No.9, Jiejiabao Road, Shuitian Community, Shiyan Street, Baoan District, Shenzhen, China

Manufacturer's name : SHENZHEN GIANT LIGHTING CO., LTD

Address : 3/F, Building 1, No.9, Jiejiabao Road, Shuitian Community, Shiyan Street, Baoan District, Shenzhen, China

Test specification:Standard..... : FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2013

Test procedure..... : /

Non-standard test method : N/A

Test Report Form No..... : TRF-EL-110_V0**Test Report Form(s) Originator**..... : ZKT Testing**Master TRF** : Dated: 2020-01-06

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name..... : Permanent Outdoor Eaves LightsTrademark :  HAOYIDAKEJI
好易达科技

Model/Type reference..... : HYD-2401200B


Ratings..... : DC24V from adapter

Testing procedure and testing location:


Testing Laboratory.....: **Shenzhen ZKT Technology Co., Ltd.**

Address.....: 1/F, No. 101, Building B, No. 6, Tangwei Community
Industrial Avenue, Fuhai Street, Bao'an District,
Shenzhen, China

Tested by (name + signature).....: Alen He



Reviewer (name + signature).....: Joe Liu



Approved (name + signature).....: Lake Xie



Table of Contents

	Page
1. VERSION	5
2. SUMMARY OF TEST RESULTS	6
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	10
3.5EQUIPMENTS LIST FOR ALL TEST ITEMS	11
4. EMC EMISSION TEST	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION Limits	12
4.1.2 TEST PROCEDURE	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	13
4.1.6 TEST RESULT	14
4.2 RADIATED EMISSION MEASUREMENT	16
4.2.1 RADIATED EMISSION LIMITS	16
4.2.2 TEST PROCEDURE	16
4.2.3 DEVIATION FROM TEST STANDARD	17
4.2.4 TEST SETUP	17
4.2.5 EUT OPERATING CONDITIONS	18
4.2.6 TEST RESULTS	19
5.RADIATED BAND EMISSIONMEASUREMENT	22
5.1 TEST REQUIREMENT:	22
5.2 TEST PROCEDURE	22
5.3 DEVIATION FROM TEST STANDARD	22
5.4 TEST SETUP	23
5.5 EUT OPERATING CONDITIONS	23
6.POWER SPECTRAL DENSITY TEST	24
6.1 APPLIED PROCEDURES / LIMIT	24
6.2 TEST PROCEDURE	24
6.3 DEVIATION FROM STANDARD	24
6.4 TEST SETUP	24
6.5 EUT OPERATION CONDITIONS	24
6.6 TEST RESULT	24
7. CHANNEL BANDWIDTH& 99% OCCUPY BANDWIDTH	25

7.1 APPLIED PROCEDURES / LIMIT	25
7.2 TEST PROCEDURE	25
7.3 DEVIATION FROM STANDARD	25
7.4 TEST SETUP	25
7.5 EUT OPERATION CONDITIONS	25
7.6 TEST RESULT	25
8. PEAK OUTPUT POWER TEST	26
8.1 APPLIED PROCEDURES/LIMIT	26
8.2 TEST PROCEDURE	26
8.3 DEVIATION FROM STANDARD	26
8.4 TEST SETUP	26
8.5 EUT OPERATION CONDITIONS	26
8.6 TEST RESULT	26
9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION	27
9.1 APPLICABLE STANDARD	27
9.2 TEST PROCEDURE	27
9.3 DEVIATION FROM STANDARD	27
9.4 TEST SETUP	27
9.5 EUT OPERATION CONDITIONS	27
9.6 TEST RESULTS	27
10. ANTENNA REQUIREMENT	28
11. TEST SETUP PHOTO	29
12. EUT CONSTRUCTIONAL DETAILS	31
APPENDIX	38
1. -6DB BANDWIDTH	38
2. 99% OCCUPIED BANDWIDTH	40
4. PEAK OUTPUT POWER	42
5. POWER SPECTRAL DENSITY	44
6. BANDEDGE	46
7. SPURIOUS EMISSION	48

1. VERSION

Report No.	Version	Description	Approved
ZKT-241128L16947-001	Rev.01	Initial issue of report	Dec. 23, 2024

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

Item	Method	Requirement	Result
Antenna requirement	/	47 CFR 15.203	Pass
Conducted Emission	ANSI C63.10-2013 section 6.2	47 CFR 15.207(a)	Pass
Occupied Bandwidth	ANSI C63.10-2013, section 11.8 KDB 558074 D01 Meas Guidance v05r02	47 CFR 15.247(a)(2)	Pass
Maximum Conducted Output Power	ANSI C63.10-2013, section 11.9.1 KDB 558074 D01 Meas Guidance v05r02	47 CFR 15.247(b)(3)	Pass
Power Spectral Density	ANSI C63.10-2013, section 11.10 KDB 558074 D01 Meas Guidance v05r02	47 CFR 15.247(e)	Pass
Emissions in non-restricted frequency bands	ANSI C63.10-2013 section 11.11 KDB 558074 D01 Meas Guidance v05r02	47 CFR 15.247(d), 15.209, 15.205	Pass
Band edge emissions (Radiated)	ANSI C63.10-2013 section 6.10 KDB 558074 D01 Meas Guidance v05r02	47 CFR 15.247(d), 15.209, 15.205	Pass
Emissions in frequency bands (below 1GHz)	ANSI C63.10-2013 section 6.6.4 KDB 558074 D01 Meas Guidance v05r02	47 CFR 15.247(d), 15.209, 15.205	Pass
Emissions in frequency bands (above 1GHz)	ANSI C63.10-2013 section 6.6.4 KDB 558074 D01 Meas Guidance v05r02	47 CFR 15.247(d), 15.209, 15.205	Pass

Note:1.N/A -this device(EUT) is not applicable to this testing item

2. RF-conducted test results including cable loss.

2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.

Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225

Designation Number: CN1299

IC Registered No.: 27033

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power conducted	$\pm 0.16\text{dB}$
3	Spurious emissions conducted	$\pm 0.21\text{dB}$
4	All emissions radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	Permanent Outdoor Eaves Lights
Model No.:	HYD-2401200B
Hardware Version:	V11
Software Version:	BT_TOOL_V1.0.8
Sample(s) Status:	Engineer sample
Channel numbers:	40
Channel separation:	2402MHz~2480MHz
Date rate:	1Mbps
Modulation technology:	GFSK
Antenna Type:	PCB antenna
Antenna gain:	0.0dBi
Power supply:	DC24V from adapter

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402	11	2422	21	2442	31	2462
2	2404	12	2424	22	2444	32	2464
3	2406	13	2426	23	2446	33	2466
4	2408	14	2428	24	2448	34	2468
5	2410	15	2430	25	2450	35	2470
6	2412	16	2432	26	2452	36	2472
7	2414	17	2434	27	2454	37	2474
8	2416	18	2436	28	2456	38	2476
9	2418	19	2438	29	2458	39	2478
10	2420	20	2440	30	2460	40	2480

Note:


In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency
The lowest channel	2402MHz
The middle channel	2440MHz
The Highest channel	2480MHz

3.2 DESCRIPTION OF TEST MODES


Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: During the test, the duty cycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:
Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

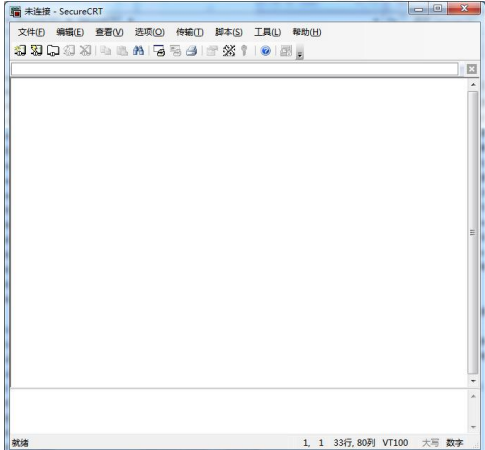
No	Title	Description
TM1	TX mode	Keep the EUT connect to AC power line and works in continuously transmitting mode with GFSK modulation at lowest, middle and highest channel.
☒ Special software is used. ☐ Through engineering command into the engineering mode. engineering command: <code>***#3646633#***</code> ☐ Other method:		
Special software: 		

3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Conducted Emission



Radiated Emission



Conducted Spurious



3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Adapter	Dongguan Rico Electronic Co.,Ltd	RKPO-UL2403000DP-6A INPUT:120V~50/60Hz OUTPUT:24V 3.0A 72W	/	SDOC
2					
3					
4					

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

3.5EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	N9020A	MY55370835	Oct. 18, 2024	Oct. 17, 2025
2	Spectrum Analyzer (1GHz-40GHz)	R&S	FSQ	100363	Oct. 18, 2024	Oct. 17, 2025
3	EMI Test Receiver (9kHz-7GHz)	R&S	ESCI7	101169	Oct. 18, 2024	Oct. 17, 2025
4	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	N/A	Oct. 18, 2024	Oct. 17, 2025
5	Horn Antenna (1GHz-18GHz)	Agilent	AH-118	071145	Oct. 18, 2024	Oct. 17, 2025
6	Loop Antenna	TESEQ	HLA6121	58357	Oct. 18, 2024	Oct. 17, 2025
7	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	060747	Oct. 18, 2024	Oct. 17, 2025
8	Amplifier (1GHz-26.5GHz)	Agilent	8449B	3008A00315	Oct. 18, 2024	Oct. 17, 2025
9	RF cables1	N/A	9kHz-30MHz	N/A	Oct. 18, 2024	Oct. 17, 2025
10	RF cables2	N/A	30MHz-1GHz	N/A	Oct. 18, 2024	Oct. 17, 2025
11	RF cables3	N/A	1GHz-40GHz	N/A	Oct. 18, 2024	Oct. 17, 2025
12	ESG Signal Generator	Agilent	E4421B	N/A	Oct. 18, 2024	Oct. 17, 2025
13	Signal Generator	Agilent	N5182A	N/A	Oct. 18, 2024	Oct. 17, 2025
14	Magnetic Field Probe Tester	Narda	ELT-400	0-0344	Oct. 18, 2024	Oct. 17, 2025
15	MWRF Power Meter Test system	MW	MW100-RPCB	N/A	Oct. 18, 2024	Oct. 17, 2025
16	D.C. Power Supply	LongWei	TPR-6405D	N/A	\	\
17	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	\	\
18	RF Software	MW	MTS8310	V2.0.0.0	\	\
19	Turntable	MF	MF-7802BS	N/A	\	\
20	Antenna tower	MF	MF-7802BS	N/A	\	\

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	Oct. 18, 2024	Oct. 17, 2025
2	LISN	CYBERTEK	EM5040A	E1850400149	Oct. 18, 2024	Oct. 17, 2025
3	Test Cable	N/A	C01	N/A	Oct. 18, 2024	Oct. 17, 2025
4	Test Cable	N/A	C02	N/A	Oct. 18, 2024	Oct. 17, 2025
5	EMI Test Receiver	R&S	ESCI3	101393	Oct. 18, 2024	Oct. 17, 2025
6	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	\	\

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.


4.1.2 TEST PROCEDURE

- The EUT was placed 0.1 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

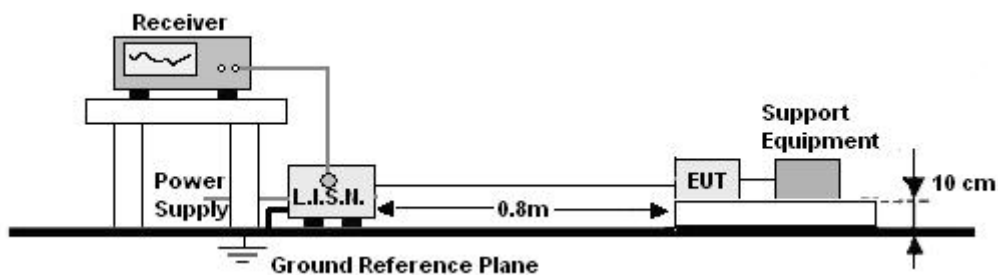


4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V , the worst voltage was AC 120V and the data recording in the report.

4.1.6 TEST RESULT

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	L
Test Voltage:	AC 120V/60Hz		

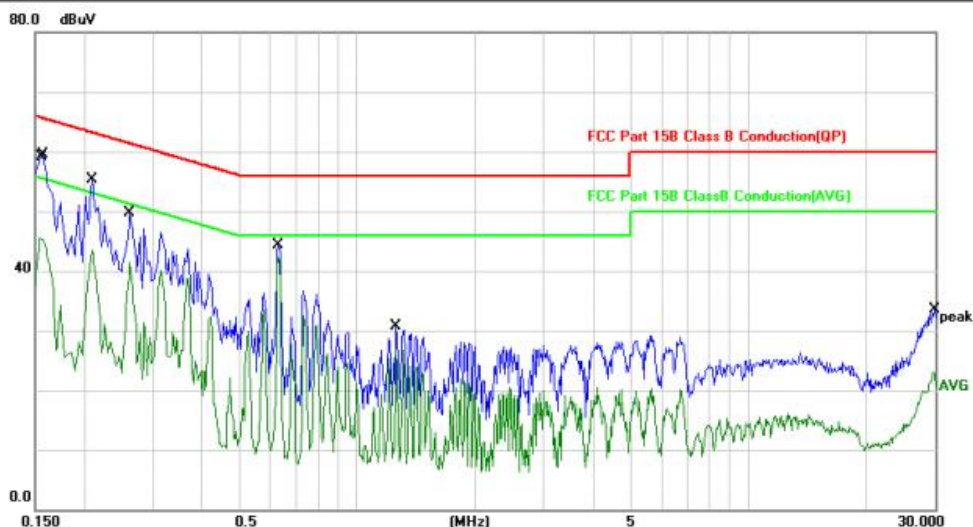


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1539	35.39	10.13	45.52	55.78	-10.26	AVG	
2		0.1580	49.29	10.13	59.42	65.56	-6.14	QP	
3		0.2100	45.23	10.12	55.35	63.20	-7.85	QP	
4		0.2100	33.46	10.12	43.58	53.20	-9.62	AVG	
5		0.2620	39.59	10.10	49.69	61.36	-11.67	QP	
6		0.2620	31.37	10.10	41.47	51.36	-9.89	AVG	
7		0.6300	34.29	10.09	44.38	56.00	-11.62	QP	
8	*	0.6300	32.23	10.09	42.32	46.00	-3.68	AVG	
9		1.2579	20.54	10.09	30.63	56.00	-25.37	QP	
10		1.2579	17.11	10.09	27.20	46.00	-18.80	AVG	
11		29.7620	11.94	11.07	23.01	50.00	-26.99	AVG	
12		29.8780	22.33	11.08	33.41	60.00	-26.59	QP	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	N
Test Voltage:	AC 120V/60Hz		

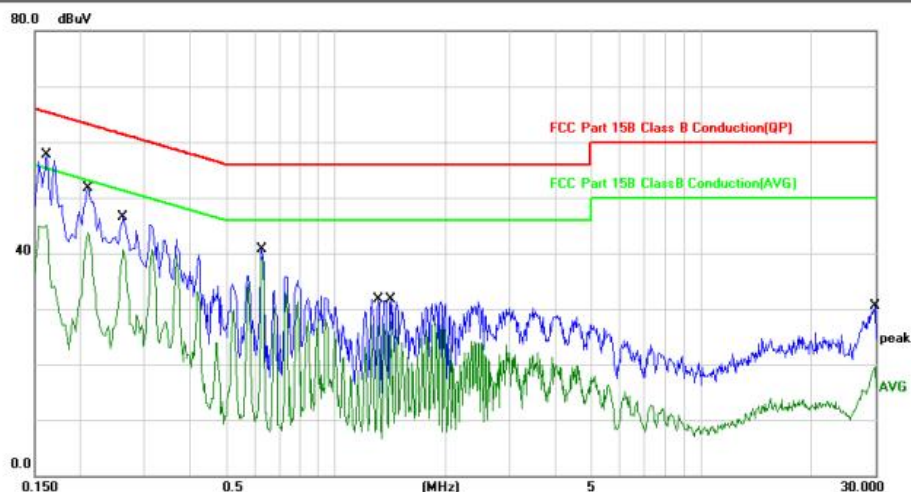

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1620	47.56	10.12	57.68	65.36	-7.68	QP	
2		0.1620	34.98	10.12	45.10	55.36	-10.26	AVG	
3		0.2100	41.51	10.12	51.63	63.20	-11.57	QP	
4		0.2100	33.60	10.12	43.72	53.20	-9.48	AVG	
5		0.2620	36.37	10.10	46.47	61.36	-14.89	QP	
6		0.2620	30.68	10.10	40.78	51.36	-10.58	AVG	
7		0.6300	30.55	10.09	40.64	56.00	-15.36	QP	
8	*	0.6300	29.30	10.09	39.39	46.00	-6.61	AVG	
9		1.3099	21.71	10.08	31.79	56.00	-24.21	QP	
10		1.4140	17.55	10.06	27.61	46.00	-18.39	AVG	
11		29.9980	19.32	11.09	30.41	60.00	-29.59	QP	
12		29.9980	8.37	11.09	19.46	50.00	-30.54	AVG	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor

4.2 RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

4.2.1 RADIATED EMISSION LIMITS

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of variable-height antenna tower.

- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different from above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change from table 0.8 metre to 1.5 metre (Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

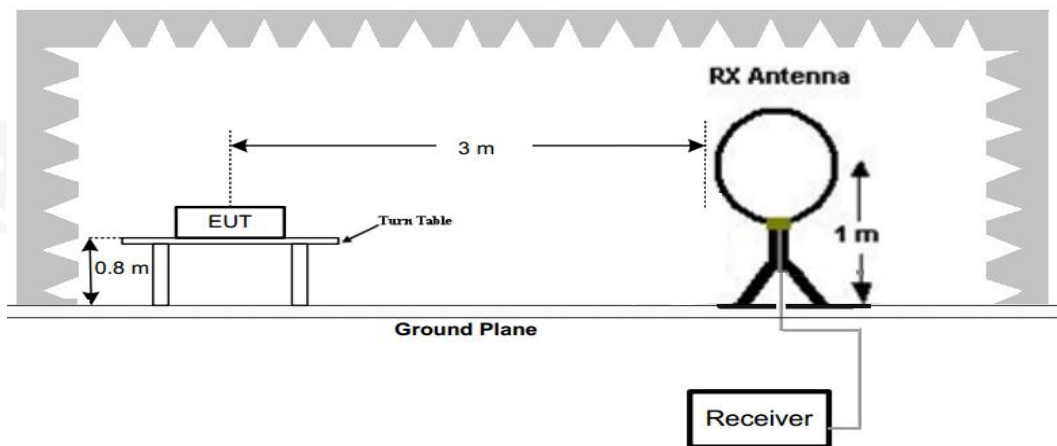

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

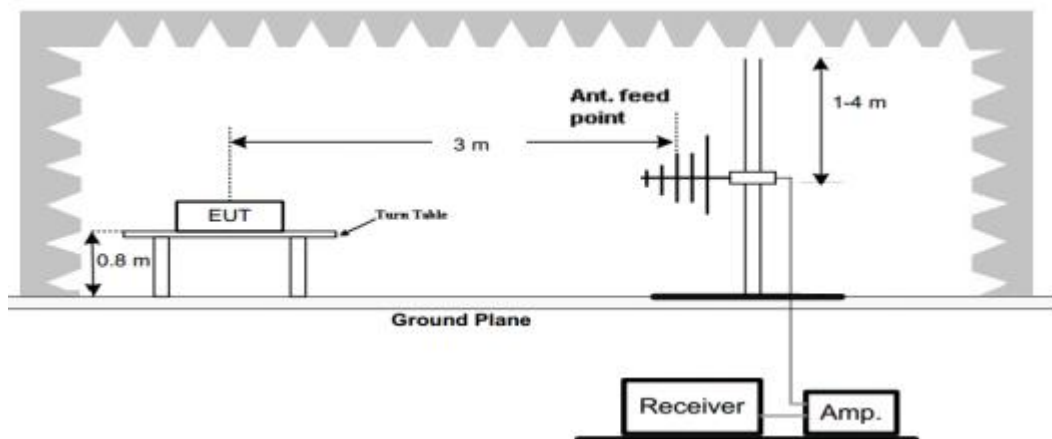

(C) Radiated Emission Test-Up Frequency Above 1GHz

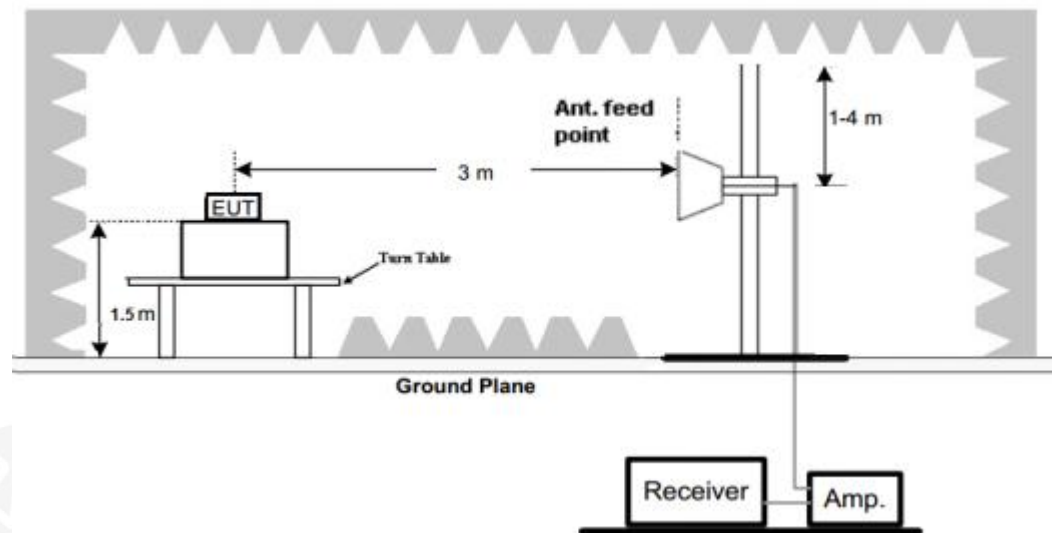

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


4.2.6 TEST RESULTS

Between 9KHz – 30MHz


The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.

Between 30MHz – 1GHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	AC120V 60Hz		

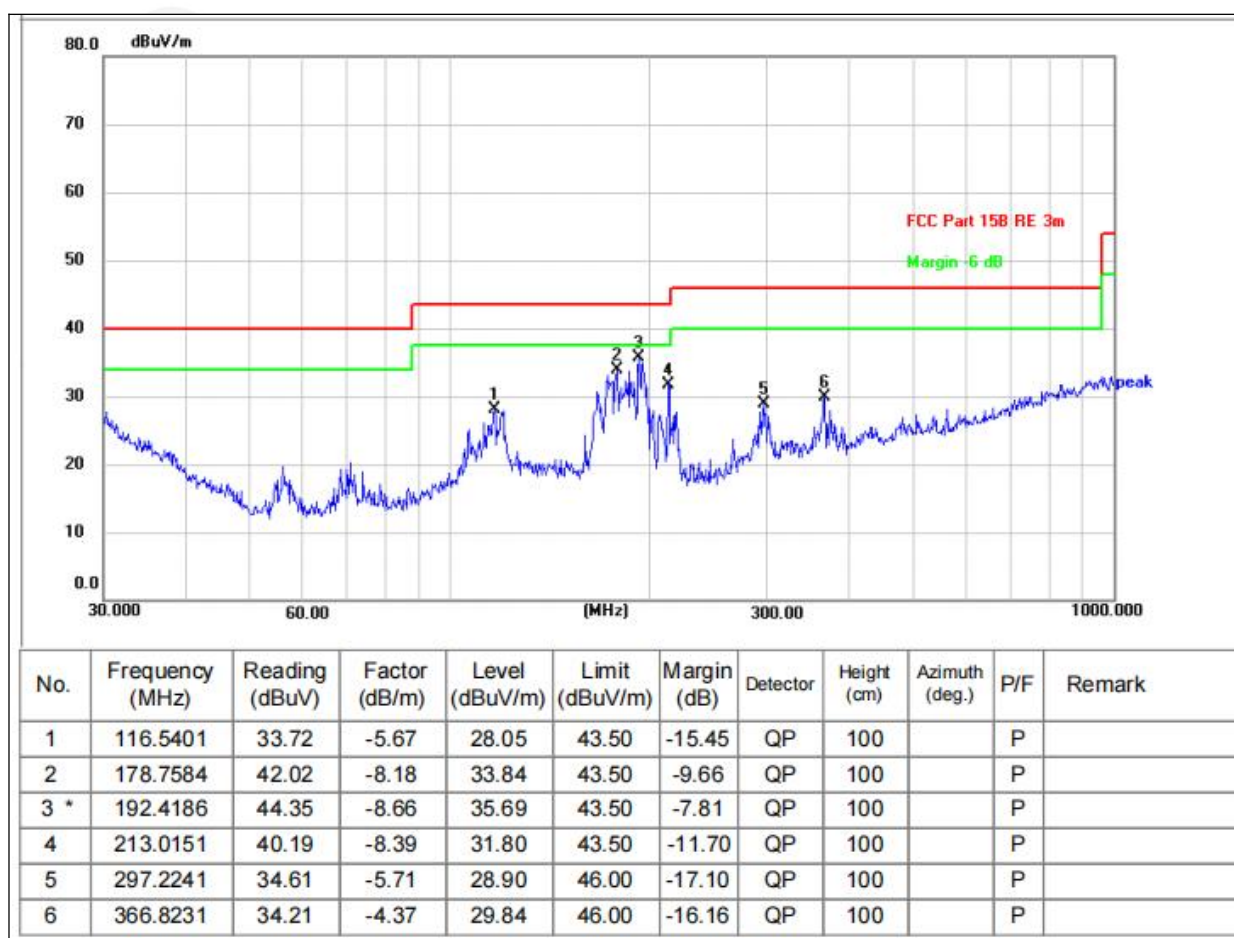

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	AC120V 60Hz		

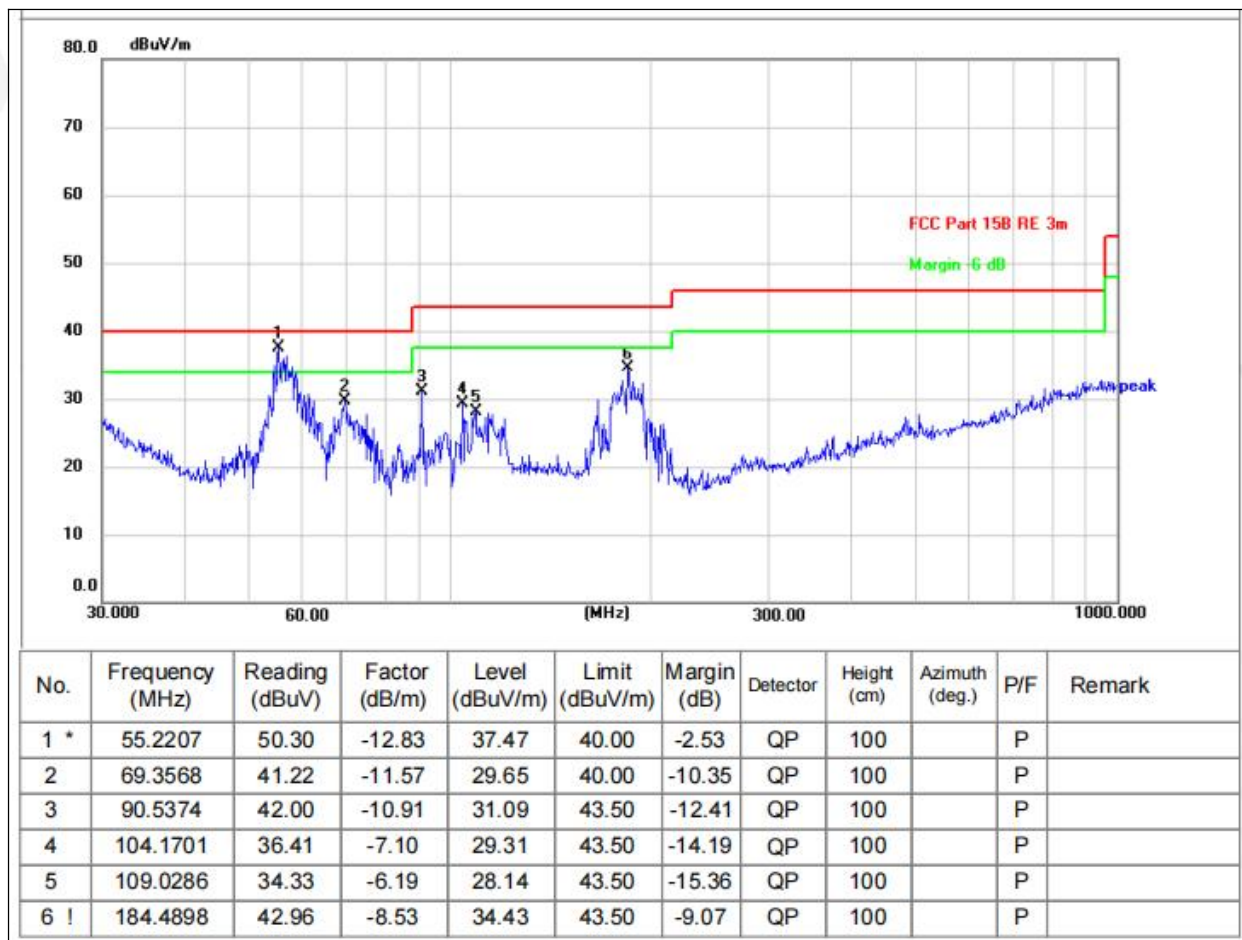

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.

1GHz~25GHz

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2402MHz									
V	4804.00	44.37	32.4	3.22	19.26	34.45	74.00	-39.55	PK
V	4804.00	42.35	32.4	3.22	19.26	32.43	54.00	-21.57	AV
V	7206.00	47.38	32.4	3.22	19.26	37.46	74.00	-36.54	PK
V	7206.00	44.04	32.4	3.22	19.26	34.12	54.00	-19.88	AV
V	9608.00	50.10	30.85	7.45	24.69	51.39	74.00	-22.61	PK
V	9608.00	36.72	30.85	7.45	24.69	38.01	54.00	-15.99	AV
H	4804.00	54.46	30.55	5.77	24.66	54.34	74.00	-19.66	PK
H	4804.00	40.81	30.55	5.77	24.66	40.69	54.00	-13.31	AV
H	7206.00	53.54	30.33	6.32	24.55	54.08	74.00	-19.92	PK
H	7206.00	39.62	30.33	6.32	24.55	40.16	54.00	-13.84	AV
H	9608.00	52.45	30.85	7.45	24.69	53.74	74.00	-20.26	PK
H	9608.00	38.26	30.85	7.45	24.69	39.55	54.00	-14.45	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2440MHz									
V	4880.00	45.59	32.4	3.22	19.26	35.67	74.00	-38.33	PK
V	4880.00	43.19	32.4	3.22	19.26	33.27	54.00	-20.73	AV
V	7320.00	46.78	32.4	3.22	19.26	36.86	74.00	-37.14	PK
V	7320.00	43.69	32.4	3.22	19.26	33.77	54.00	-20.23	AV
V	9760.00	51.33	30.85	7.45	24.69	52.62	74.00	-21.38	PK
V	9760.00	37.33	30.85	7.45	24.69	38.62	54.00	-15.38	AV
H	4880.00	56.61	30.55	5.77	24.66	56.49	74.00	-17.51	PK
H	4880.00	41.23	30.55	5.77	24.66	41.11	54.00	-12.89	AV
H	7320.00	53.95	30.33	6.32	24.55	54.49	74.00	-19.51	PK
H	7320.00	41.50	30.33	6.32	24.55	42.04	54.00	-11.96	AV
H	9760.00	51.28	30.85	7.45	24.69	52.57	74.00	-21.43	PK
H	9760.00	36.72	30.85	7.45	24.69	38.01	54.00	-15.99	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2480MHz									
V	4960.00	45.56	32.4	3.22	19.26	35.64	74.00	-38.36	PK
V	4960.00	44.67	32.4	3.22	19.26	34.75	54.00	-19.25	AV
V	7440.00	46.51	32.4	3.22	19.26	36.59	74.00	-37.41	PK
V	7440.00	44.91	32.4	3.22	19.26	34.99	54.00	-19.01	AV
V	9920.00	50.24	30.85	7.45	24.69	51.53	74.00	-22.47	PK
V	9920.00	38.21	30.85	7.45	24.69	39.50	54.00	-14.50	AV
H	4960.00	55.29	30.55	5.77	24.66	55.17	74.00	-18.83	PK
H	4960.00	39.49	30.55	5.77	24.66	39.37	54.00	-14.63	AV
H	7440.00	53.20	30.33	6.32	24.55	53.74	74.00	-20.26	PK
H	7440.00	40.69	30.33	6.32	24.55	41.23	54.00	-12.77	AV
H	9920.00	52.30	30.85	7.45	24.69	53.59	74.00	-20.41	PK
H	9920.00	36.55	30.85	7.45	24.69	37.84	54.00	-16.16	AV

5. RADIATED BAND EMISSION MEASUREMENT

5.1 TEST REQUIREMENT:

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above	Peak	1MHz	3MHz	Peak
	1GHz	Average	1MHz	3MHz	Average

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could bestopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dBmargin would be re-tested one by one using peak, quasi-peak or average method as specified and then reportedin a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

5.3 DEVIATION FROM TEST STANDARD

No deviation

5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

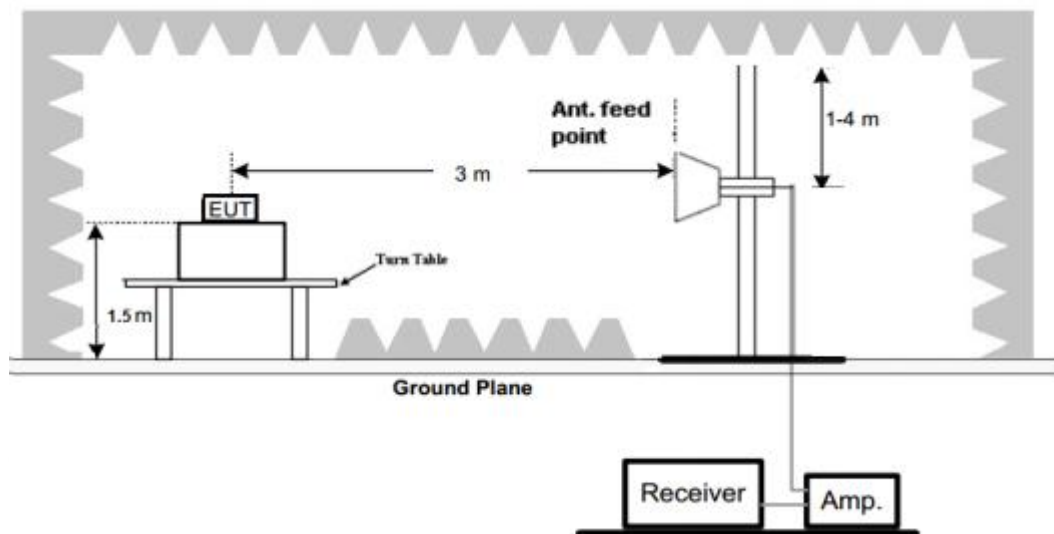

5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULT

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detect or Type	Result
Low Channel 2402MHz										
H	2310.00	53.52	30.22	4.7	23.98	51.98	74.00	-22.02	PK	PASS
H	2310.00	39.10	30.22	4.7	23.98	37.56	54.00	-16.44	AV	PASS
H	2390.00	53.29	30.22	4.85	23.98	51.90	74.00	-22.10	PK	PASS
H	2390.00	38.53	30.22	4.85	23.98	37.14	54.00	-16.86	AV	PASS
V	2310.00	52.77	30.22	4.7	23.98	51.23	74.00	-22.77	PK	PASS
V	2310.00	39.90	30.22	4.7	23.98	38.36	54.00	-15.64	AV	PASS
V	2390.00	51.78	30.22	4.85	23.98	50.39	74.00	-23.61	PK	PASS
V	2390.00	36.28	30.22	4.85	23.98	34.89	54.00	-19.11	AV	PASS
High Channel: 2480MHz										
H	2483.50	52.33	30.22	4.85	23.98	50.94	74.00	-23.06	PK	PASS
H	2483.50	38.36	30.22	4.85	23.98	36.97	54.00	-17.03	AV	PASS
H	2500.00	52.85	30.22	4.85	23.98	51.46	74.00	-22.54	PK	PASS
H	2500.00	37.29	30.22	4.85	23.98	35.90	54.00	-18.10	AV	PASS
V	2483.50	51.68	30.22	4.85	23.98	50.29	74.00	-23.71	PK	PASS
V	2483.50	39.20	30.22	4.85	23.98	37.81	54.00	-16.19	AV	PASS
V	2500.00	54.43	30.22	4.85	23.98	53.04	74.00	-20.96	PK	PASS
V	2500.00	38.72	30.22	4.85	23.98	37.33	54.00	-16.67	AV	PASS

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit

6. POWER SPECTRAL DENSITY TEST

Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB558074 D0115.247 Meas Guidance v 05r02

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8dBm/3kHz	2400-2483.5	PASS

6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

6.6 TEST RESULT

PLEASE REFER TO APPENDIX FOR DETAILS.

7. CHANNEL BANDWIDTH& 99% OCCUPY BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	KDB558074 D0115.247 Meas Guidance v05r02

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

7.2 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP**7.5 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.6 TEST RESULT

PLEASE REFER TO APPENDIX FOR DETAILS.

8. PEAK OUTPUT POWER TEST

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	KDB558074 D0115.247 Meas Guidance v05r02

8.1 APPLIED PROCEDURES/LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

8.2 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

8.6 TEST RESULT

PLEASE REFER TO APPENDIX FOR DETAILS.

9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidance v05r02

9.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in15.209(a).

9.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP



9.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

9.6 TEST RESULTS

PLEASE REFER TO APPENDIX FOR DETAILS.

10. ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna:	
The antenna is PCB antenna, the best case gain of the antennas are 0dBi, reference to the below photo for details 	

11. TEST SETUP PHOTO


Emissions in frequency bands (below 1GHz)



Emissions in frequency bands (above 1GHz)



Conducted Emission

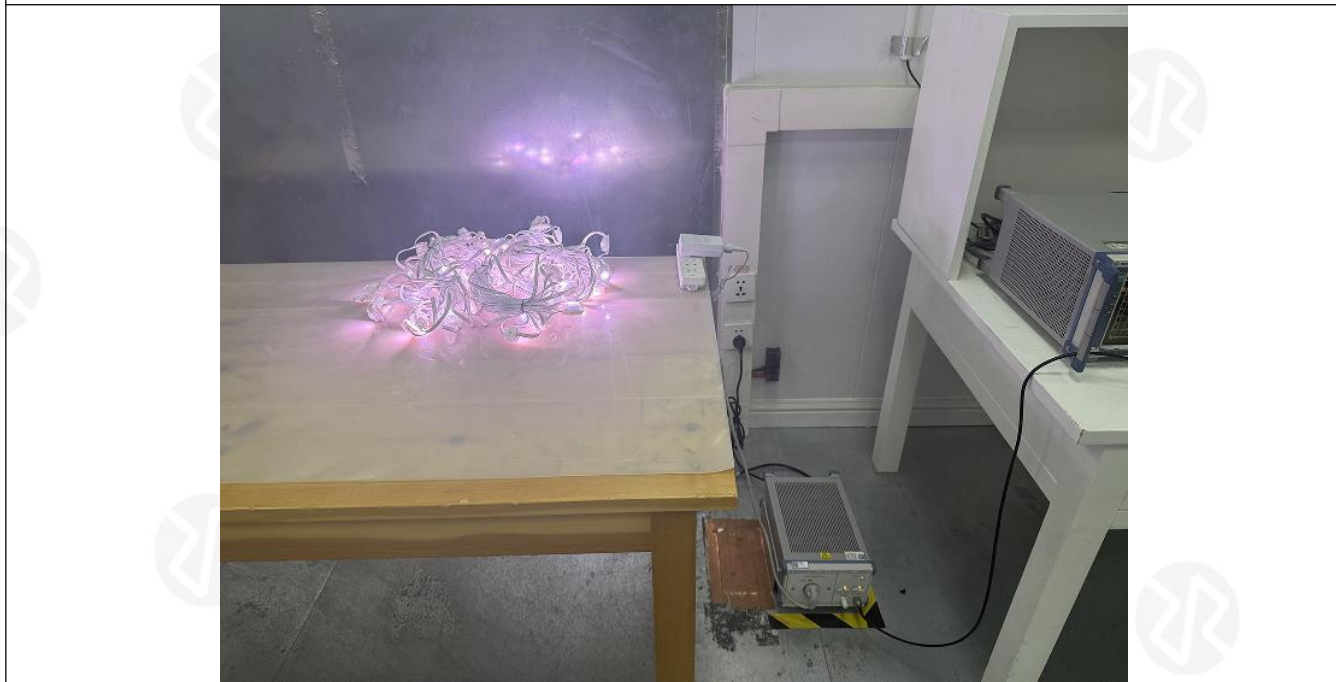


12. EUT CONSTRUCTIONAL DETAILS


External










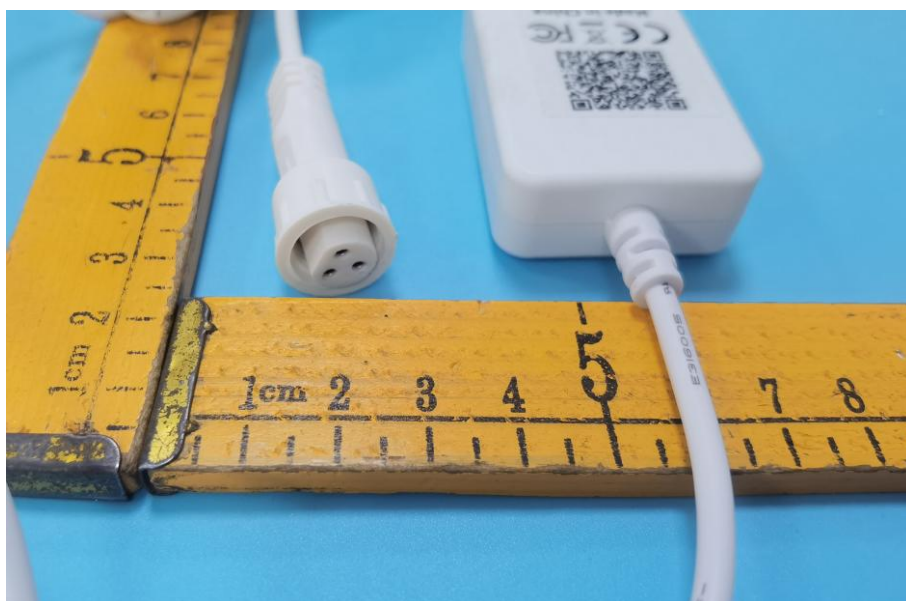

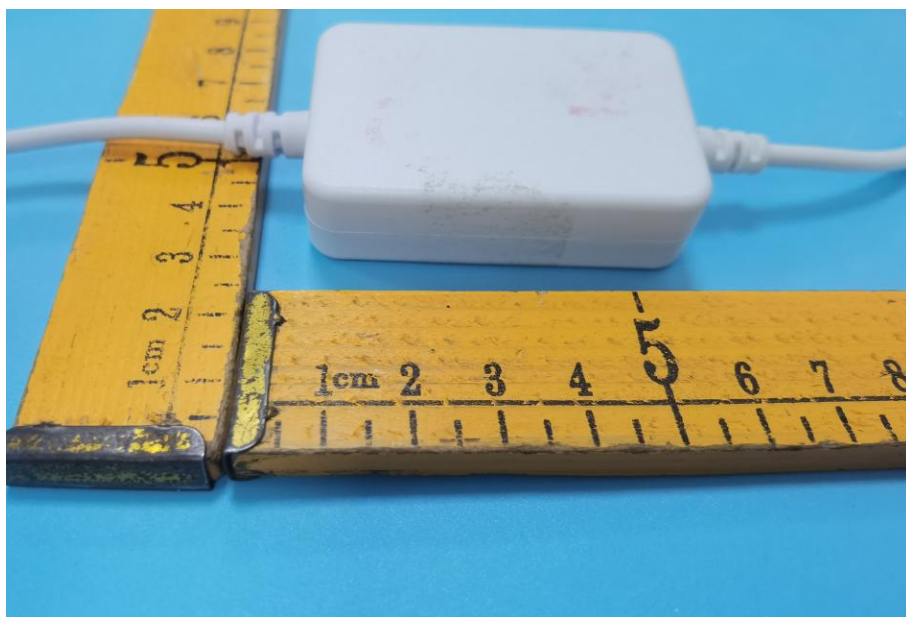

Internal

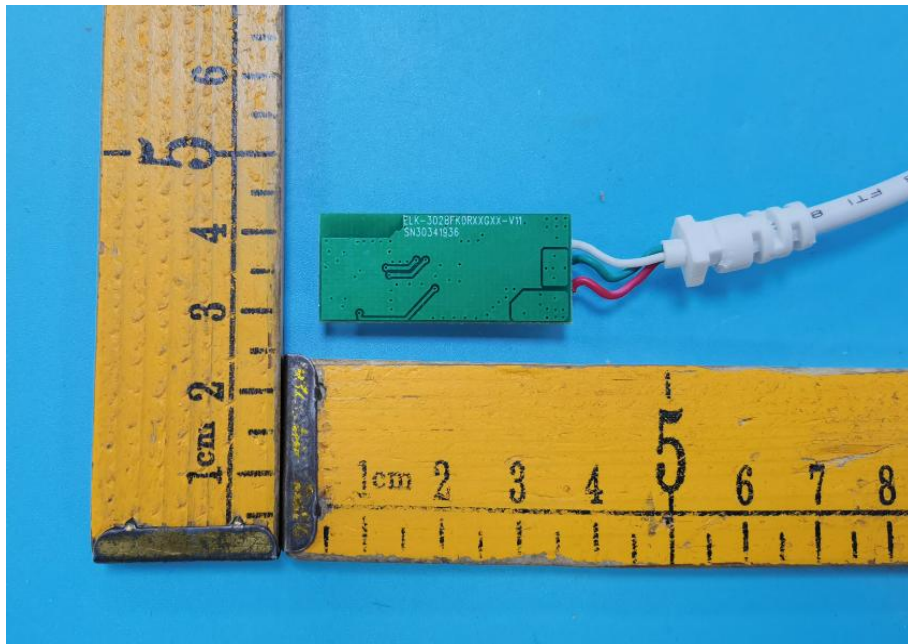
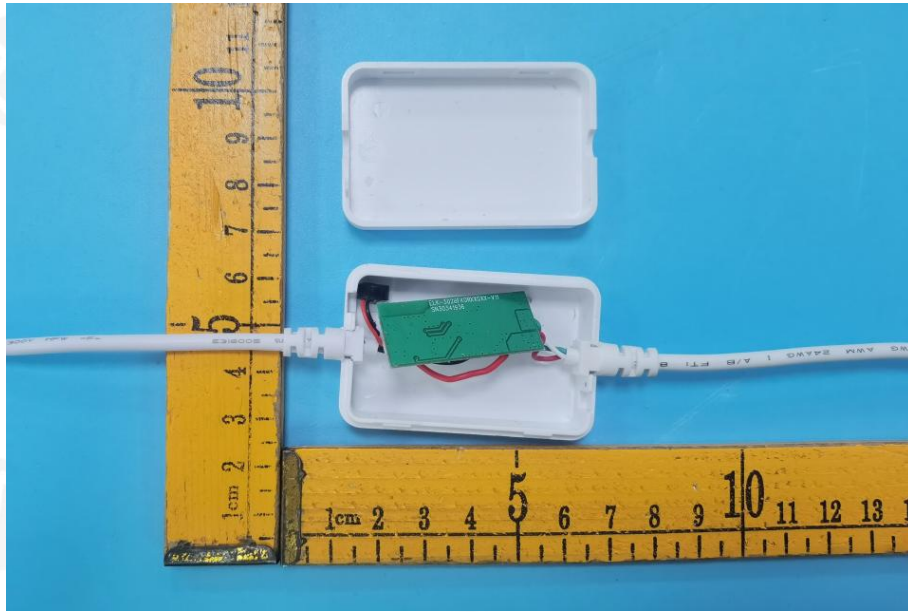


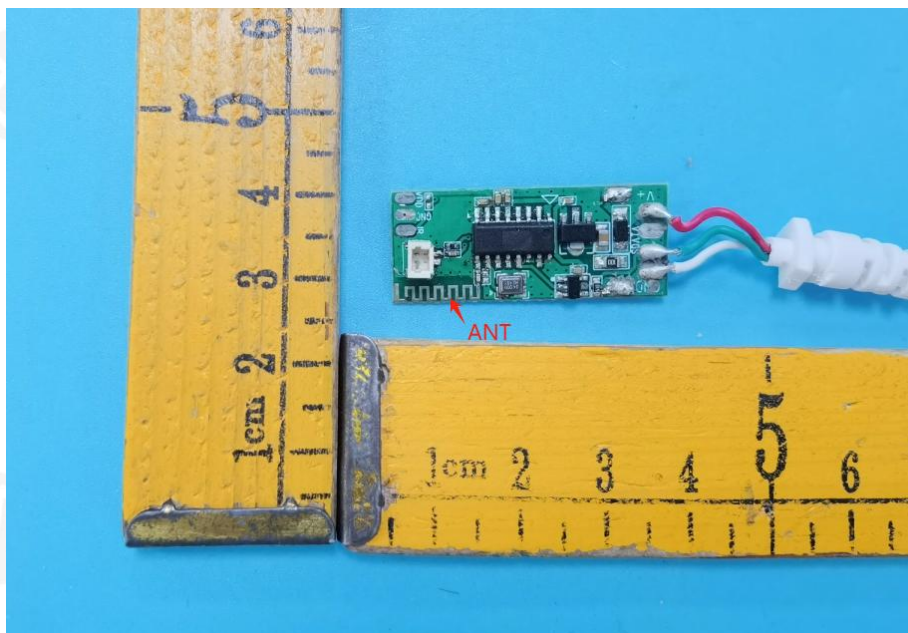


APPENDIX

1. -6DB BANDWIDTH



Condition	Antenna	Rate	Frequency (MHz)	-6dB BW(kHz)	limit(kHz)	Result
NVNT	ANT1	1Mbps	2402.00	720.63	500	Pass
NVNT	ANT1	1Mbps	2440.00	731.44	500	Pass
NVNT	ANT1	1Mbps	2480.00	732.27	500	Pass

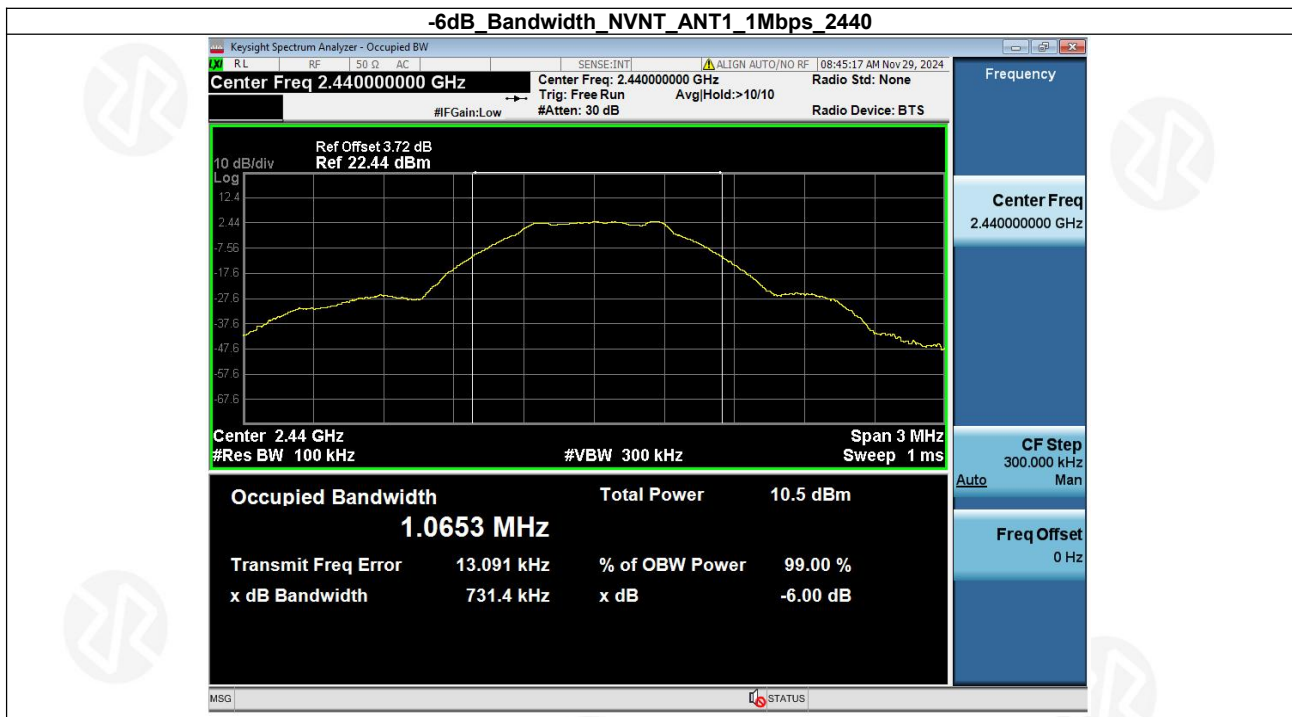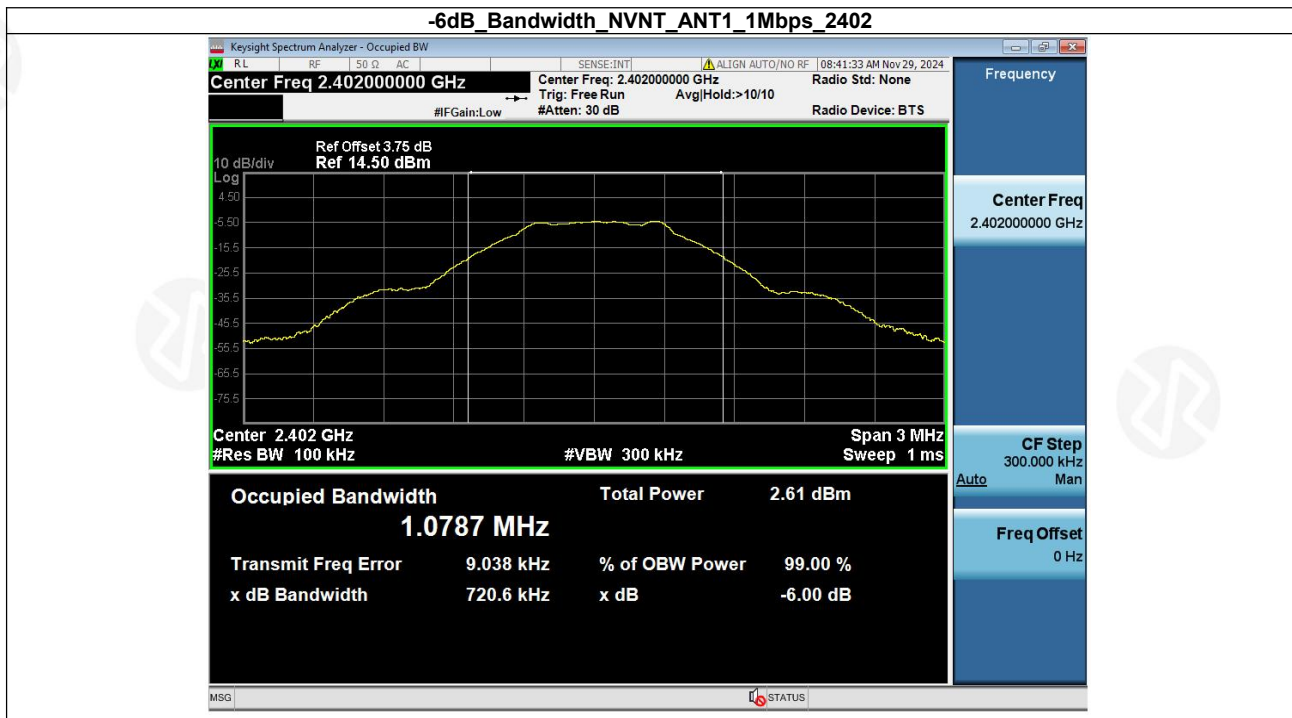


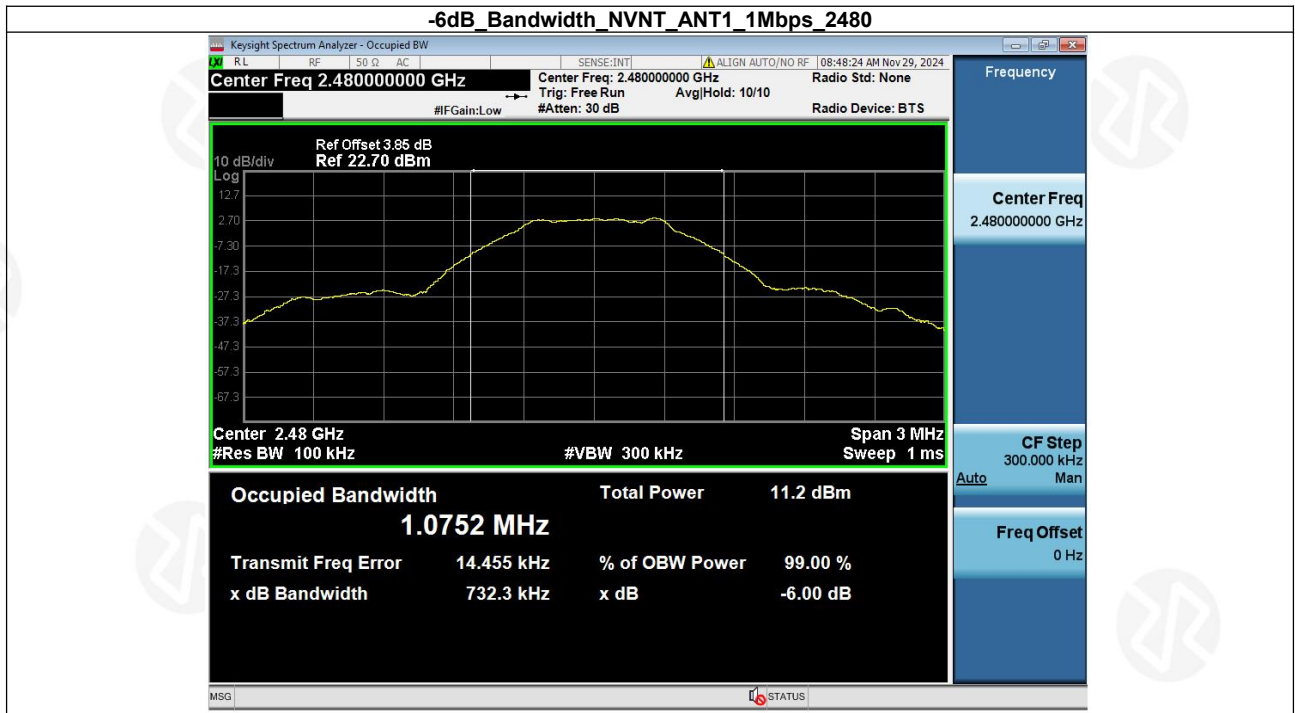

2. 99% OCCUPIED BANDWIDTH



Condition	Antenna	Rate	Frequency (MHz)	99% BW(MHz)
NVNT	ANT1	1Mbps	2402.00	1.078
NVNT	ANT1	1Mbps	2440.00	1.066
NVNT	ANT1	1Mbps	2480.00	1.077

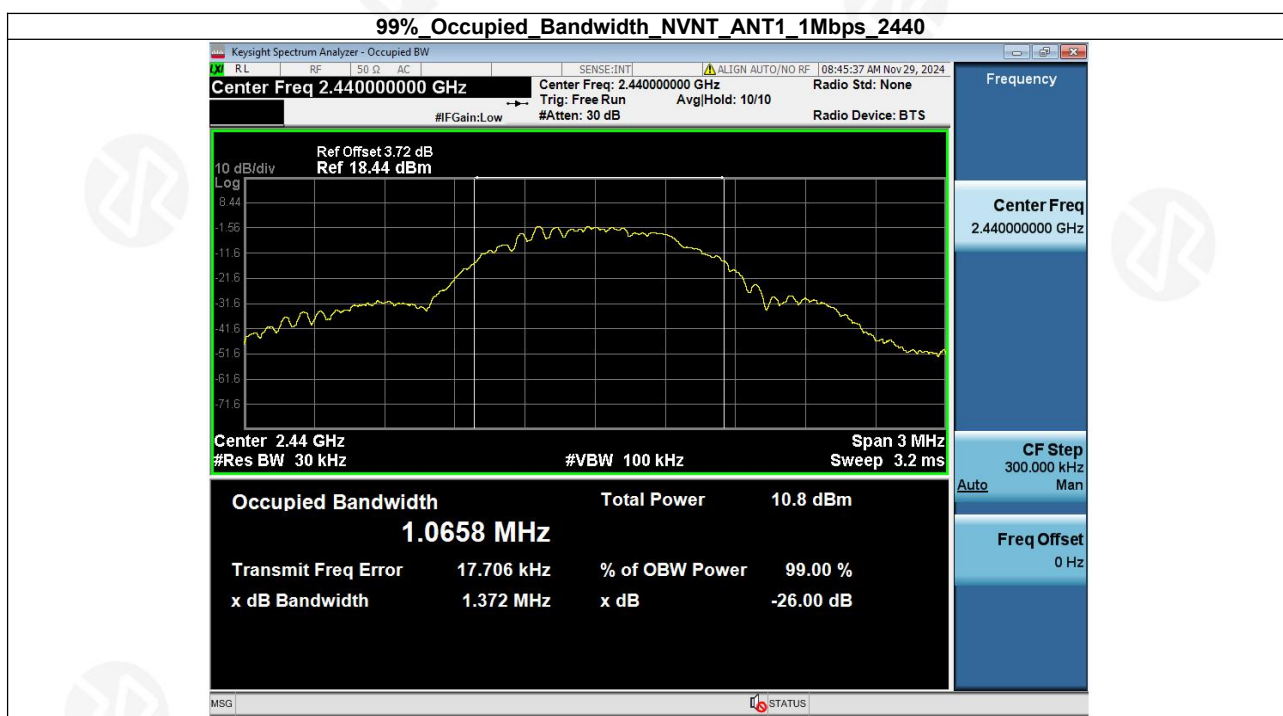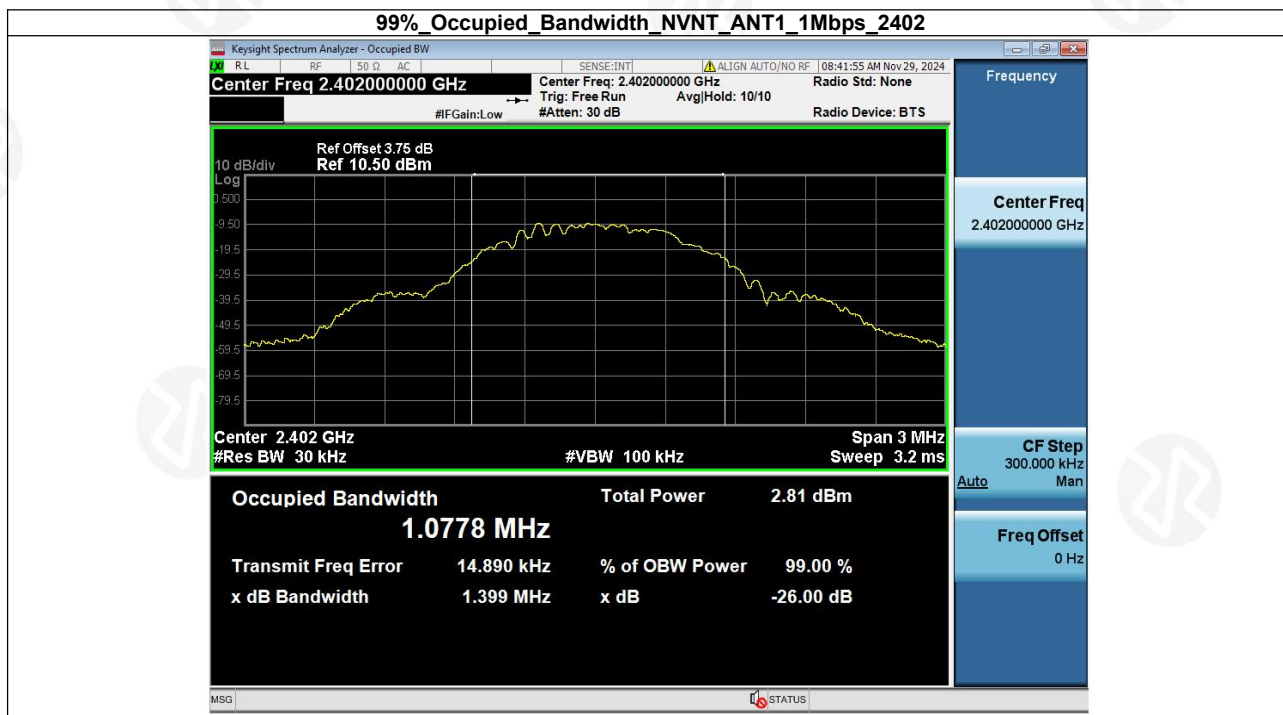


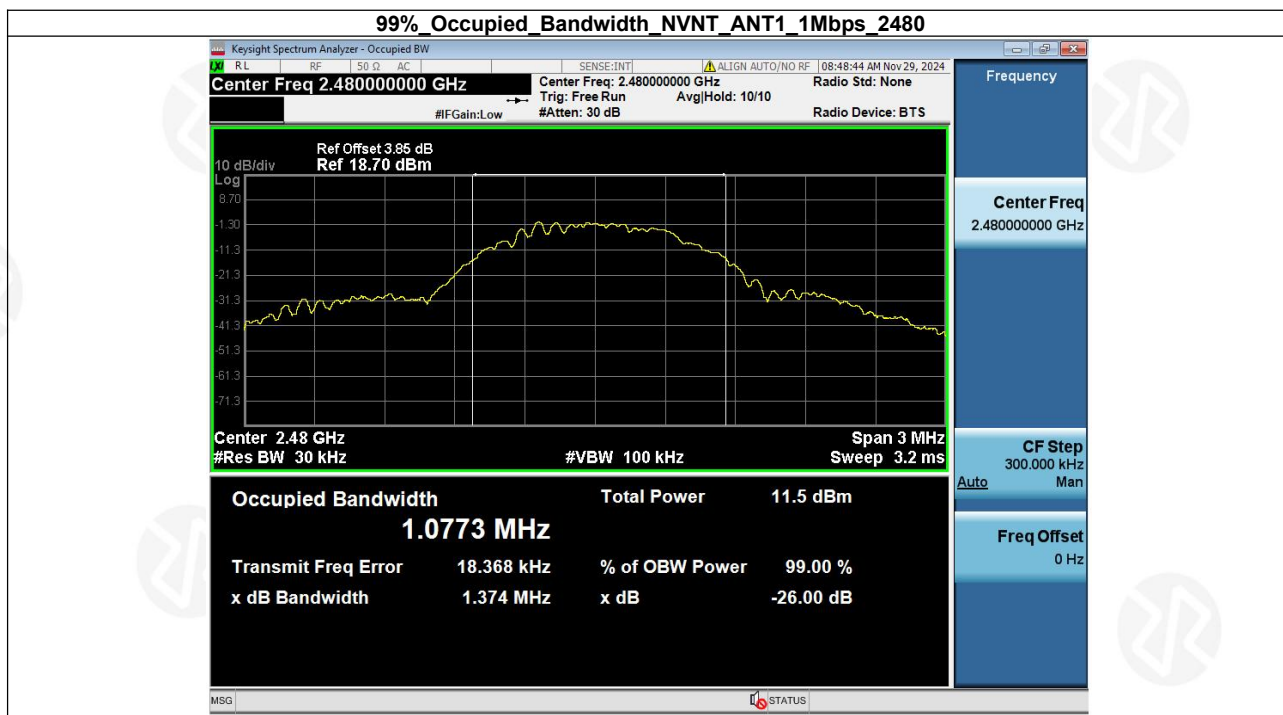

4. PEAK OUTPUT POWER

Condition	Antenna	Rate	Frequency (MHz)	Max. Conducted Power(dBm)	Max. Conducted Power(mW)	Limit(mW)	Result
NVNT	ANT1	1Mbps	2402.00	-3.52	0.44	1000	Pass
NVNT	ANT1	1Mbps	2440.00	2.19	1.66	1000	Pass
NVNT	ANT1	1Mbps	2480.00	2.77	1.89	1000	Pass

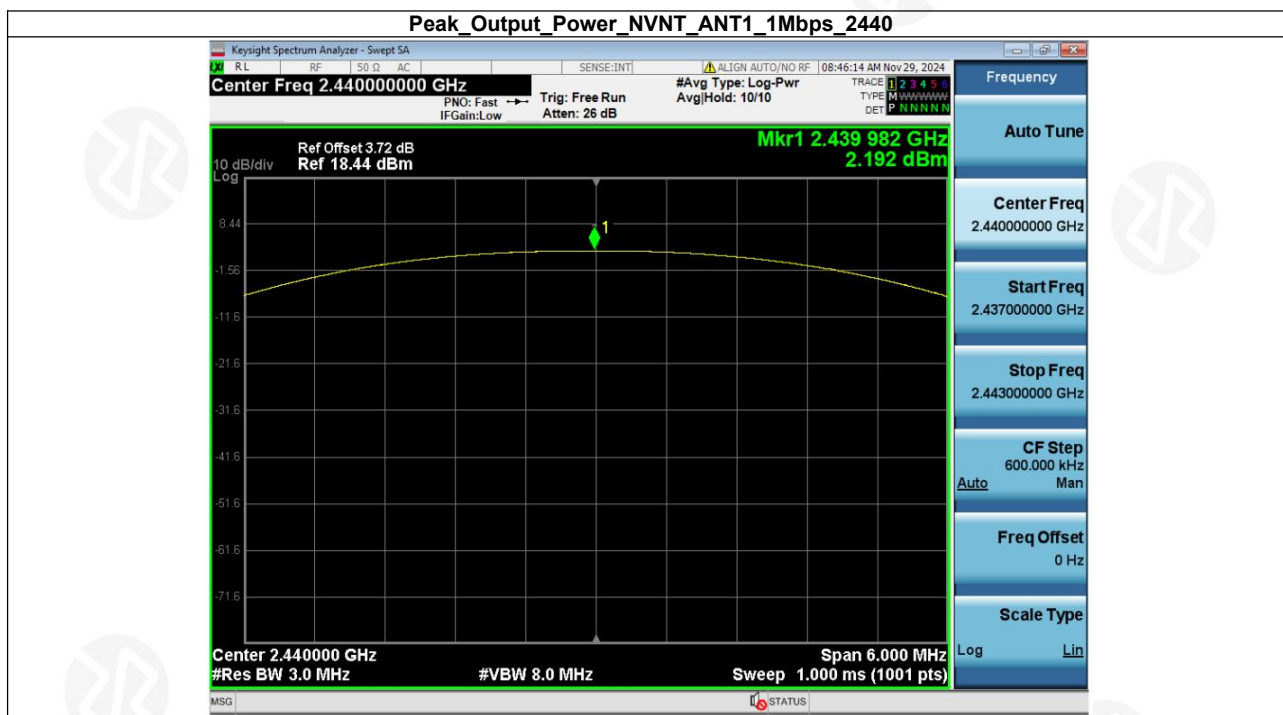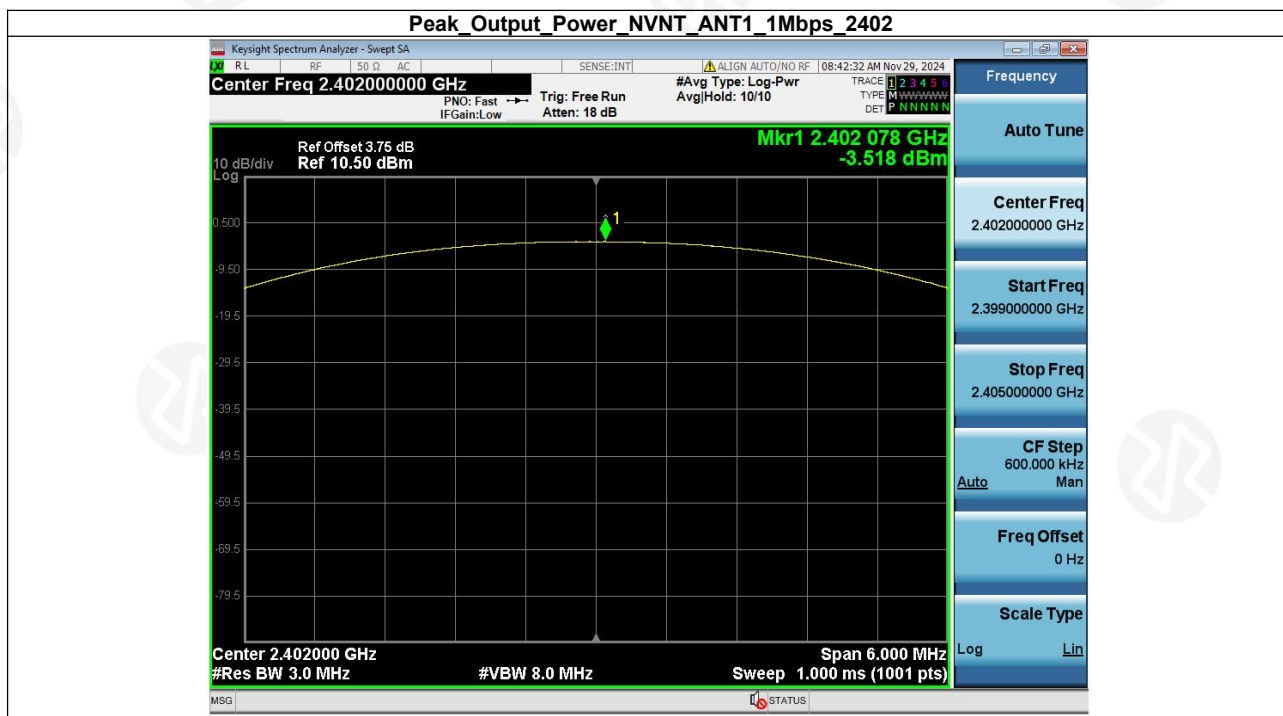

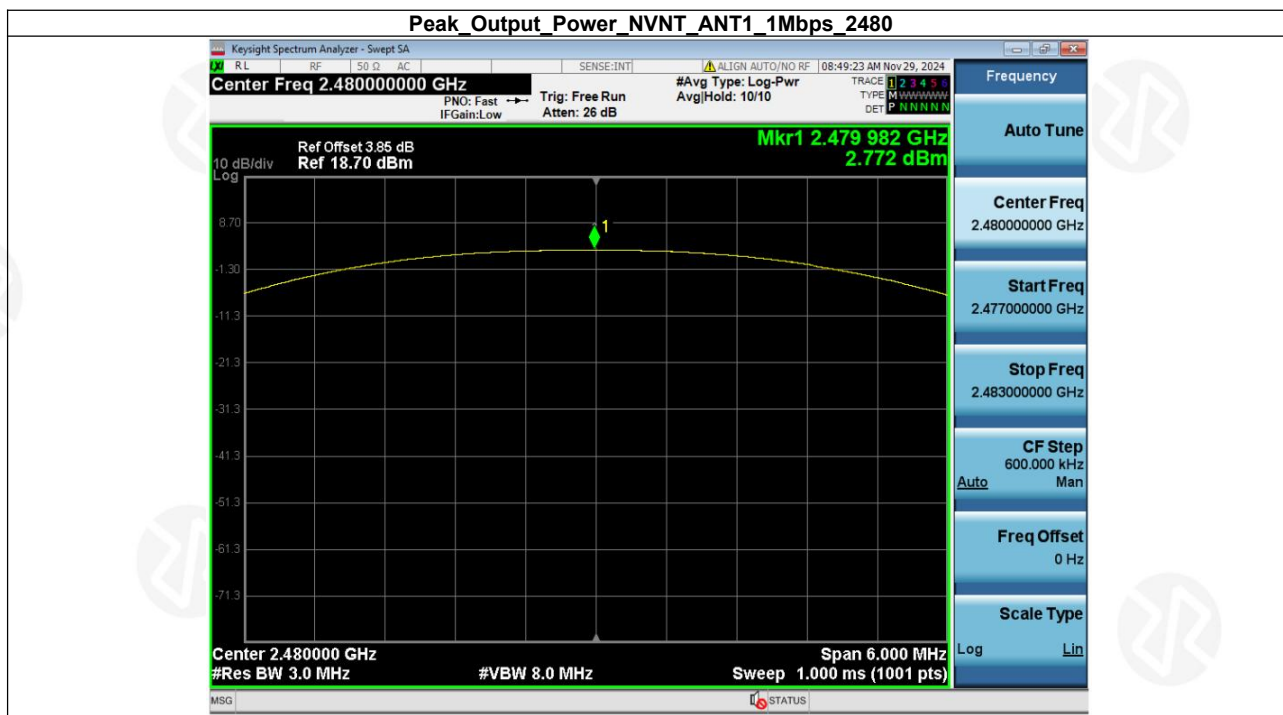

5. POWER SPECTRAL DENSITY


Condition	Antenna	Rate	Frequency (MHz)	Power Spectral Density(dBm/3kHz)	Limit(dBm/3kHz)	Result
NVNT	ANT1	1Mbps	2402.00	-20.29	8	Pass
NVNT	ANT1	1Mbps	2440.00	-12.34	8	Pass
NVNT	ANT1	1Mbps	2480.00	-11.59	8	Pass





6. BANDEGE


Condition	Antenna	Rate	TX_Frequency (MHz)	Max. Mark Frequency (MHz)	Spurious level(dBm)	limit(dBm)	Result
NVNT	ANT1	1Mbps	2402.00	2395.500	-58.566	-24.922	Pass
NVNT	ANT1	1Mbps	2480.00	2486.775	-53.197	-16.213	Pass

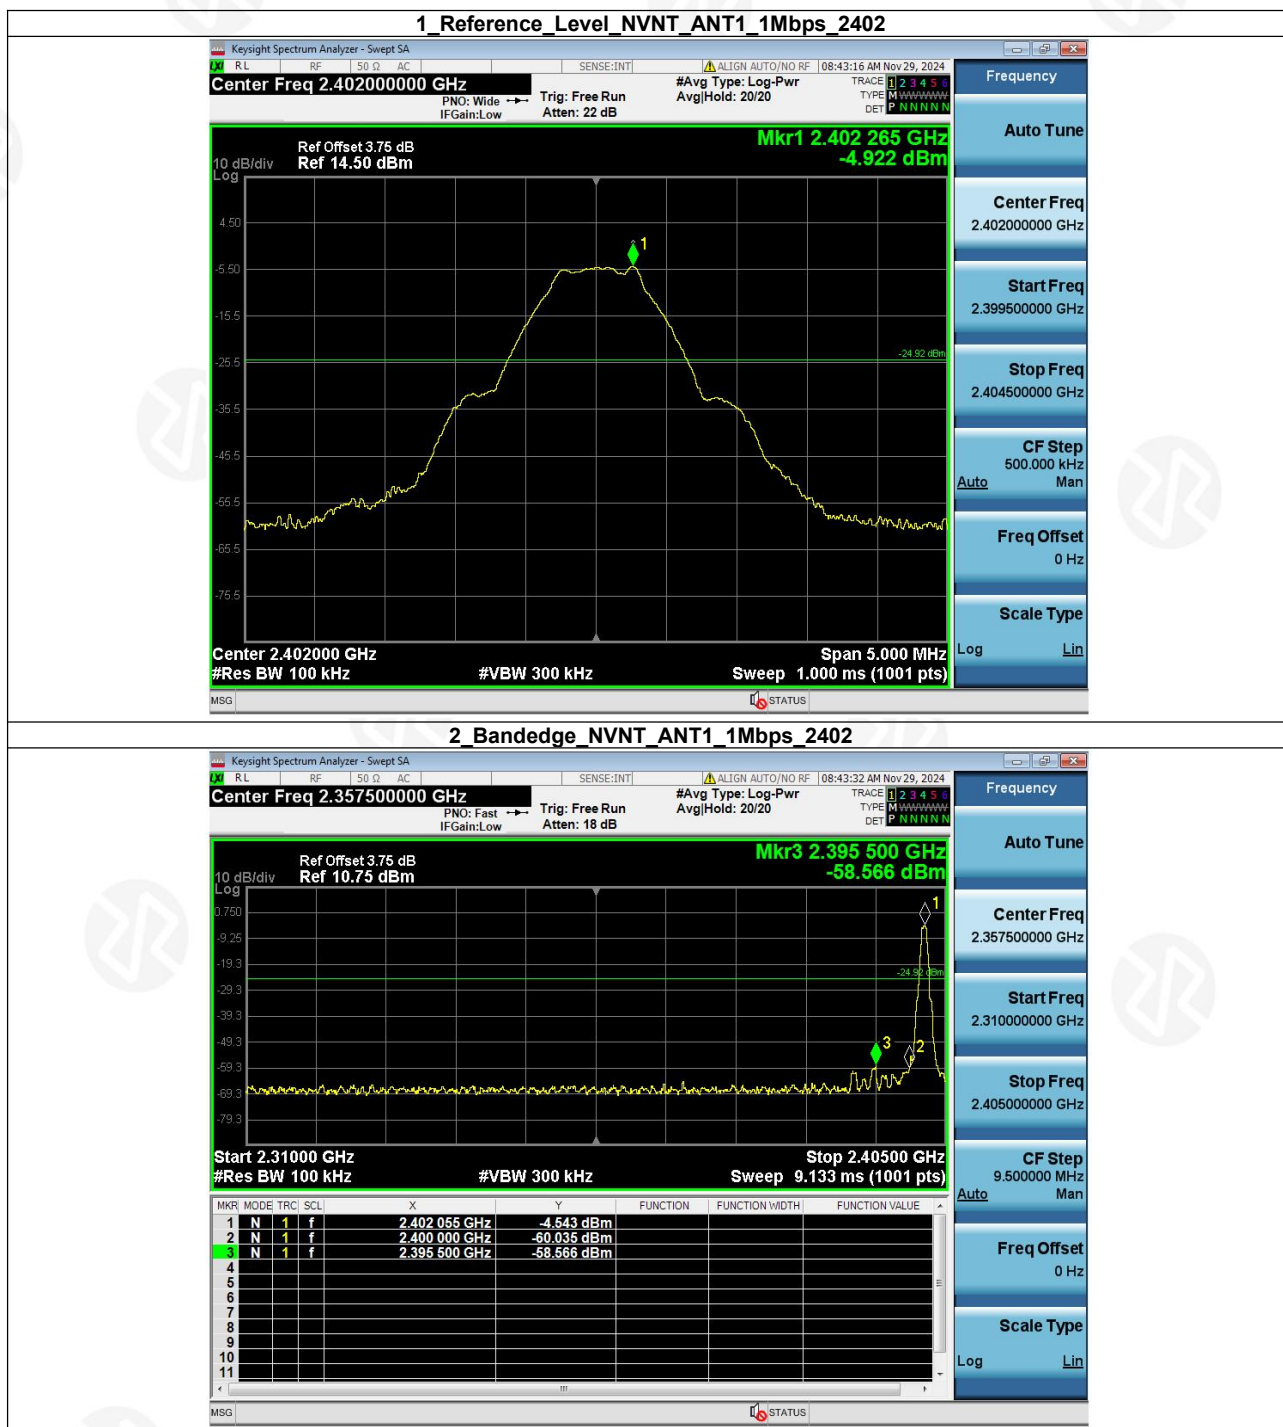

1 Reference_Level_NVNT_ANT1_1Mbps_2480



2_Bandedge_NVNT_ANT1_1Mbps_2480

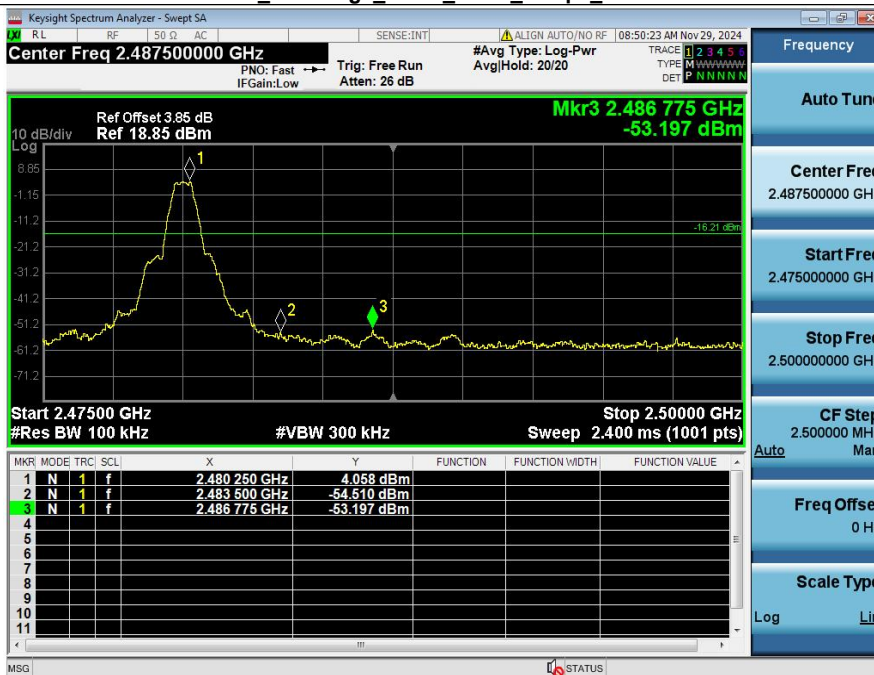


7. SPURIOUS EMISSION

Condition	Antenna	Rate	TX_Frequency(MHz)	Spurious MAX.Value(dBm)	Limit	Result
NVNT	ANT1	1Mbps	2402.00	-49.010	-24.922	Pass
NVNT	ANT1	1Mbps	2440.00	-43.855	-16.950	Pass
NVNT	ANT1	1Mbps	2480.00	-40.467	-16.213	Pass

1_Reference_Level_NVNT_ANT1_1Mbps_2402




2_Spurious_Emission_NVNT_ANT1_1Mbps_2402

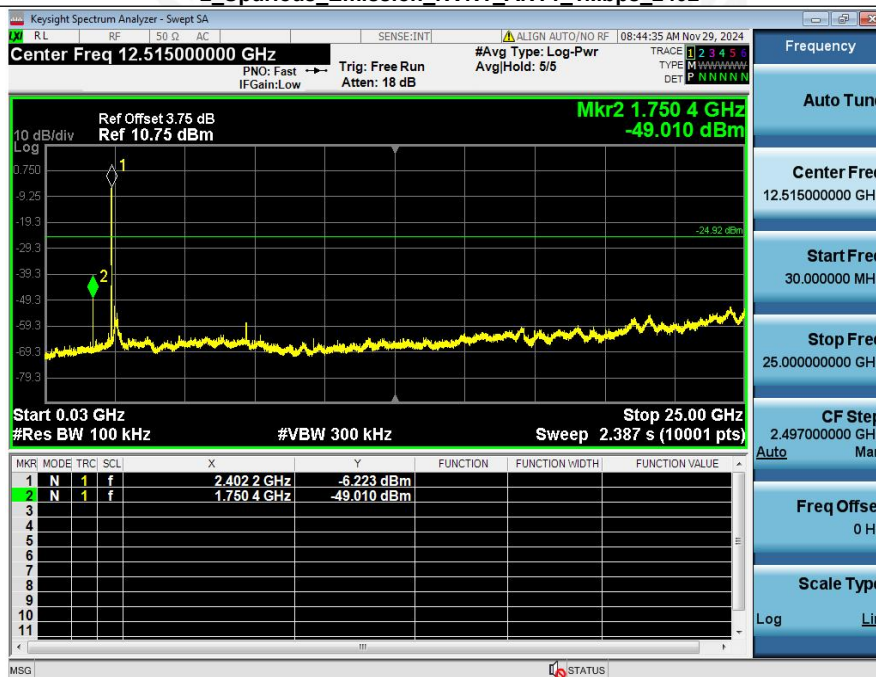

1 Reference_Level_NVNT_ANT1_1Mbps_2440




2 Spurious_Emission_NVNT_ANT1_1Mbps_2440

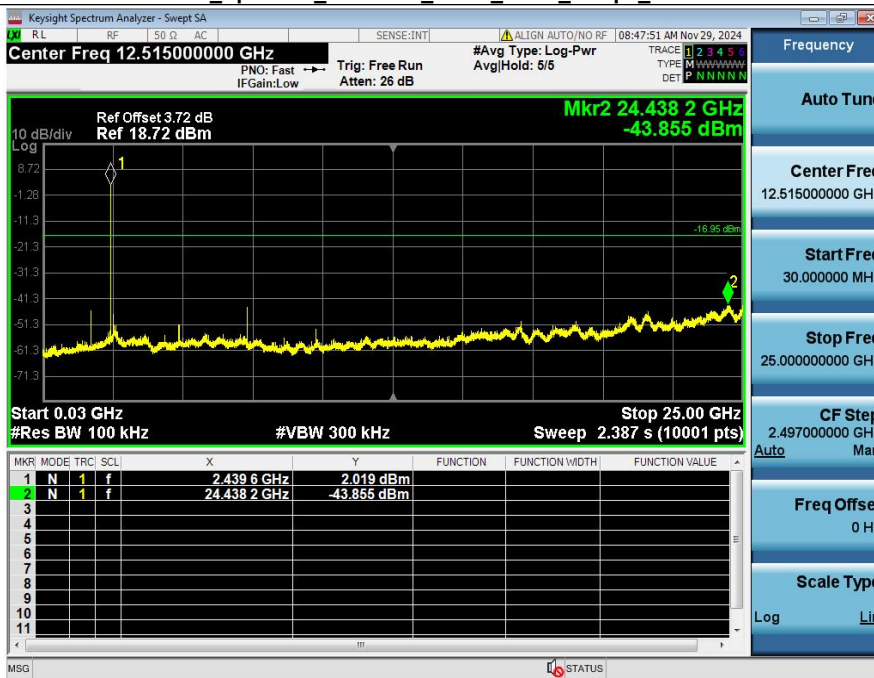

1 Reference_Level_NVNT_ANT1_1Mbps_2480



2 Spurious_Emission_NVNT_ANT1_1Mbps_2480

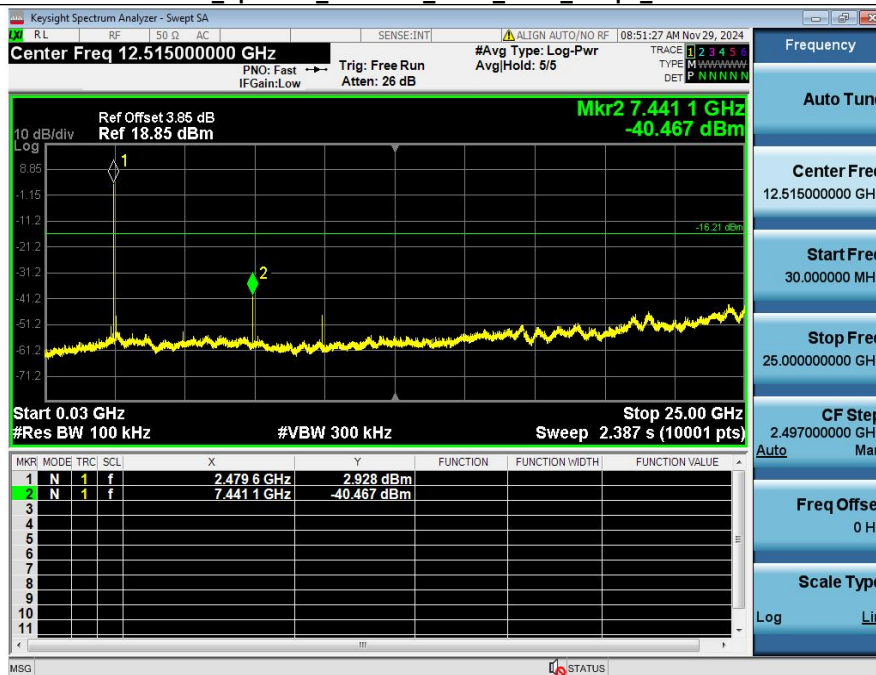

***** END OF REPORT *****