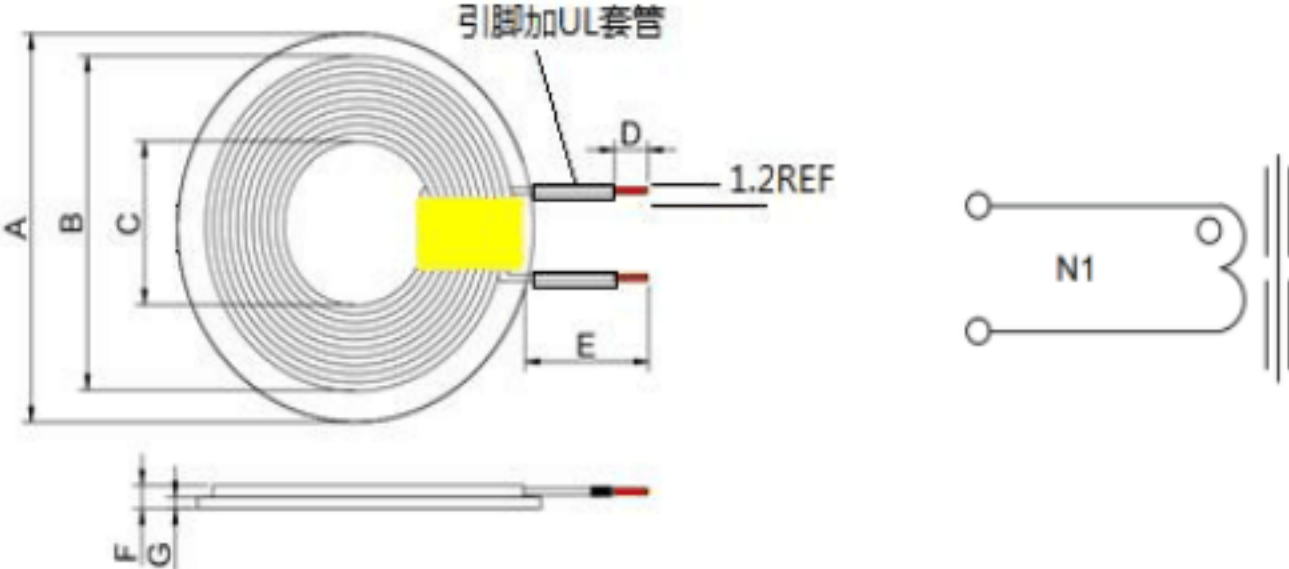


CUSTOMER	深圳市鼎盛邦电子有限公司	CUST P/N.	0				
ITEM	TX43(D18)	Description	RX4322(D22)-6.5uH				
PART NO.		DATE	2022年9月30日				
(1) DIMENSION(UNIT:mm)			A	42.5	±0.5	mm	
			B	40	±1	mm	
			C	22	±1	mm	
			D	2	±1	mm	
			E	30	±2	mm	
			F	1.2	Max	mm	
			G	0.3	±0.1	mm	
			NOTE: 1.磁片厚度为0.3mm±0.1mm双面背胶。2.线圈中间包高温胶纸宽5mm±1mm。 3.引脚需套UL套管长度25mm±2。3.背胶带撕胶把手。				
(2)ELECTRONIC SPECIFICATION: (AT 25℃)							
1.INDUCTANCE: (测试仪: VR1163 200KHz, 测试条件:100KHz /1V) L(1-2)=6.5uH ±10%							
2.DCResistance:(25℃) DCR(1-2)=120mΩ Max							
.3.焊接条件: 波峰焊峰值260℃ ±5℃ 3-5S							
NO	NAME	MATERIAL	SUPPLER			UL NO	CLASS
1	WIRE	QARSN	SHENGZHEN JINMA NEW MATERIALS TECHNOLOGY CO., LTD (or equivalent)			E514717	130℃
2	Magnetic disk	CP43*22*0.3	Jiangxi Zhonghenggong Porcelain Technology Co., LTD (or equivalent)			N/A	
3							
4							
5							
NO	START	FINISH	WIRE	COLOR	TURNS	INDUCTANCE	
N1	1	2	自粘线Φ0.08*24P 2P	N	10 REF	6.5 uH ±10%	