



FCC CERTIFICATION TEST REPORT

Applicant:	Guangzhou City Baiyun District Jianggao Feiyang Electric Appliance Factory
Address:	Feiyang industrial Zone, The Sixth Economy Co-Operative Society, Changgang Village, Jianggao Town, Baiyun District, Guangzhou
Manufacturer:	Guangzhou City Baiyun District Jianggao Feiyang Electric Appliance Factory
Address:	Feiyang industrial Zone, The Sixth Economy Co-Operative Society, Changgang Village, Jianggao Town, Baiyun District, Guangzhou
Product Description:	Bluetooth speaker
Brand Name:	FEIYANG
Tested Model:	FG206-11
FCC ID:	2A8VSFG206-11
Report No.:	JCF220826002-001
Received Date:	Aug. 26, 2022
Tested Date:	Aug. 26, 2022~Oct. 11, 2022
Issued Date:	Oct. 12, 2022
Test Standards:	FCC Rules and Regulations Part 15 Subpart C,
Test Procedure:	ANSI C63.10:2013
Test Result:	Pass
Prepared By:  <u>Roger/Engineer</u>	
Reviewed By:  <u>Jone Lv/Engineer</u>	
Approved By:  <u>Talent Zhang/Engineer</u>	



Note: The test results in this report apply exclusively to the tested model / sample. Without written approval of Guangzhou Jingce Testing Technology Co., Ltd. the test report shall not be reproduced except in full.

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Oct. 12, 2022	Original Report	/

Table of Contents

1. Test Report Declare	5
2. Summary of Test Results	6
3. Test Laboratory	6
4. Equipment Under Test	7
4.1. Description of EUT	7
4.2. Channel List	7
4.3. Packet Type Configuration	8
4.4. Test Channel Configuration	8
4.5. Test environment conditions	8
4.6. The Worse Case Power Setting Parameter	8
4.7. Description of Available Antennas	9
5. Description of Test Setup	9
5.1. Accessory	9
5.2. Support Equipment	9
5.3. Test Setup	9
5.4. Setup Diagram for Tests	9
6. Measurement Uncertainty	10
7. Measuring Instrument and Software Used	10
8. On Time and Duty Cycle	12
8.1. Block diagram of test setup	12
8.2. Limits	12
8.3. Results	12
8.4. Original test data	13
9. 20 dB Occupied Bandwidth	17
9.1. Block diagram of test setup	17
9.2. Limit	17
9.3. Test Procedure	17
9.4. Results	17
9.5. Original test data	18
10. Conducted Output Power	22
10.1. Block diagram of test setup	22
10.2. Limits	22
10.3. Test Procedure	22
10.4. Results	22
10.5. Original test data	23
11. Carrier Hopping Channel Separation	27
11.1. Block diagram of test setup	27
11.2. Limits	27
11.3. Test Procedure	27
11.4. Results	27
11.5. Original test data	28
12. Number of Hopping Frequency	30
12.1. Block diagram of test setup	30
12.2. Limits	30
12.3. Test Procedure	30
12.4. Results	30

12.5. Original test data	31
13. Time of Occupancy (Dwell Time)	33
13.1. Block diagram of test setup	33
13.2. Limits	33
13.3. Test Procedure	33
13.4. Results	34
13.5. Original test data	35
14. Conducted Spurious Emission	39
14.1. Block diagram of test setup	39
14.2. Limits	39
14.3. Test Procedure	39
14.4. Results	40
14.5. Original test data	41
15. Radiated Emission	52
15.1. Block diagram of test setup	52
15.2. Limit	53
15.3. Test Procedure	55
15.4. Results	58
15.5. Original test data	58
16. AC Power Line Conducted Emissions	59
16.1. Block diagram of test setup	59
16.2. Limits	59
16.3. Test procedure	59
16.4. Test result	60
16.5. Original test data	60
17. Antenna Requirements	61
17.1. Limits	61
17.2. Result	61
APPENDIX A – Radiated Emission Below 1GHz Test Data	62
APPENDIX B – Radiated Emission Above 1GHz Test Data	68
APPENDIX C – AC Power Line Conducted Emission Test Data	98

1. Test Report Declare

Applicant:	Guangzhou City Baiyun District Jianggao Feiyang Electric Appliance Factory
Address:	Feiyang industrial Zone, The Sixth Economy Co-Operative Society, Changgang Village, Jianggao Town, Baiyun District, Guangzhou
Manufacturer:	Guangzhou City Baiyun District Jianggao Feiyang Electric Appliance Factory
Address:	Feiyang industrial Zone, The Sixth Economy Co-Operative Society, Changgang Village, Jianggao Town, Baiyun District, Guangzhou
Product Name:	Bluetooth speaker
Brand Name:	FEIYANG
Model Name:	FG206-11, FG206-10
Difference Description:	There are two kinds of products from same factory in this report,though the appearance looks different,but the main PCB,software,hardware versions,electrical diagram and circuit schematics inside are the same.

We Declare:

The equipment described above is tested by Guangzhou Jingce Testing Technology Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained this test report and Guangzhou Jingce Testing Technology Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

2. Summary of Test Results

Summary of Test Results			
Clause	Test Items	FCC Rules	Test Result
1	20 dB Bandwidth	FCC 15.247 (a) (1)	Pass
2	Conducted Output Power	FCC 15.247 (b) (1)	Pass
3	Carrier Hopping Channel Separation	FCC 15.247 (a) (1)	Pass
4	Number of Hopping Frequency	15.247 (a) (1) III	Pass
5	Time of Occupancy (Dwell Time)	15.247 (a) (1) III	Pass
6	Conducted Band edge	FCC 15.247 (d)	Pass
7	Radiated Band edge and Spurious	FCC 15.247 (d) FCC 15.209 FCC 15.205	Pass
8	Conducted Emission Test For AC Power Port	FCC 15.207	Pass
9	Antenna Requirement	FCC 15.203	Pass

3. Test Laboratory

Guangzhou Jingce Testing Technology Co., Ltd.

Add.: No.192, Kezhu Road, Huangpu District, Guangzhou, Guangdong, China

Association for Laboratory Accreditation(A2LA). Certificate Number: 6594.01

FCC Designation Number:CN1331. Test Firm Registration Number: 360543

IC Test Firm Registration Number: 28796

Conformity Assessment Body identifier: CN0138

4. Equipment Under Test

4.1. Description of EUT

EUT Name:	Bluetooth speaker
Model Number:	FG206-11
EUT Function Description:	Please reference user's manual
Power Supply:	DC 12V from Battery AC 100~240V
Hardware Version:	NA
Software Version:	NA
Radio Specification:	Bluetooth V5.0
Operation Frequency:	2402 MHz - 2480 MHz
Modulation:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Data Rate:	1Mbps, 2Mbps, 3Mbps
Antenna Type:	PCB Antenna, 3.38 dBi

Note 1: EUT is the ab. of equipment under test.

Note 2: The antenna gain is declared by the customer and the laboratory is not responsible for the accuracy of the antenna gain.

4.2. Channel List

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	/	/

4.3. Packet Type Configuration

Test Mode	Packet Type	Setting(Packet Length)
GFSK	DH1	27
	DH3	183
	DH5	339
$\pi/4$ -DQPSK	2-DH1	54
	2-DH3	367
	2-DH5	679
8DPSK	3-DH1	83
	3-DH3	552
	3-DH5	1021

4.4. Test Channel Configuration

Tested mode, channel, information		
Mode	Channel	Frequency (MHz)
GFSK hopping on Tx mode	CH0 to CH78	2402 to 2480
$\pi/4$ -DQPSK hopping on Tx mode	CH0 to CH78	2402 to 2480
8DPSK hopping on Tx mode	CH0 to CH78	2402 to 2480
GFSK hopping off Tx mode	LCH: CH0	2402
	MCH: CH39	2441
	HCH: CH78	2480
$\pi/4$ -DQPSK hopping off Tx mode	LCH: CH0	2402
	MCH: CH39	2441
	HCH: CH78	2480
8DPSK hopping off Tx mode	LCH: CH0	2402
	MCH: CH39	2441
	HCH: CH78	2480

4.5. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25 °C
Humidity range:	40-75%
Pressure range:	86-106 kPa

4.6. The Worse Case Power Setting Parameter

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band				
Test Software		Frequency Tool_v0.2.8		
Modulation Type	Transmit Antenna Number	Test Software Setting Value		
		CH 0	CH 39	CH 78
GFSK	1	2	2	2
$\pi/4$ -DQPSK	1	2	2	2
8DPSK	1	2	2	2

4.7. Description of Available Antennas

Test Mode	Transmit and Receive Mode	Description
GFSK	☒ 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
$\pi/4$ -DQPSK	☒ 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
8DPSK	☒ 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.

5. Description of Test Setup

5.1. Accessory

Description of Accessories	Manufacturer	Model Number	Description	Remark
AC Line	Applicant	/	Unshielded	1.1m

5.2. Support Equipment

Equipment	Brand Name	Model Name	P/N
PC	Lenovo	T480	/

5.3. Test Setup

The EUT can work in Fixed Frequency mode.

5.4. Setup Diagram for Tests



6. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
AC Power Conduction emission	1.37 dB
All Radiated emissions	5.4dB
Conducted emissions	3.09 dB
Occupied Channel Bandwidth	1.1%
Conducted Output power	0.82dB
Power Spectral Density	0.82dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of k = 2.


7. Measuring Instrument and Software Used

TS Test System						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☒	Spectrum Analyzer	Keysight	N9030B	MY56320512	Jul.25,2022	Jul.24,2023
☒	Vector Signal Generator	Keysight	N5182B	MY57300334	Dec.03,2021	Dec.02,2022
☒	Signal Generator	Keysight	N5171B	MY57280639	Dec.03,2021	Dec.02,2022
☒	DC POWER	Keysight	E342A	MY59020356	Jul.25,2022	Jul.24,2023
☒	Incubator thermometer	GWS	EL-02JA	21107288	Nov.05,2021	Nov.04,2022
☒	Control unit(Power sensor)	Tonscend	JS0806-2	/	Jul.25,2022	Jul.24,2023
Software						
Used	Description	Manufacturer	Name		Version	
☒	Test software	TS+	JS1120-3		V3.2.11	
RSE Test System						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☒	EMI Receiver	R&S	ESW	101685	Jul.24,2022	Jul.23,2023
☒	Bilog Antenna	Schwarzbeck	VULB 9163	01416	Feb.22,2022	Feb.21,2023
☒	Horn Antenna 1	Schwarzbeck	BBHA 9120 D	02411	May.30,2022	May.29,2023
☒	Horn Antenna 2	ETS	3116C	00217677	Sep.19,2022	Sep.18,2023
☒	Signal Pre-Amplifier	Tonscend	TAP01018050	AP21C806122	Aug.08,2022	Aug.07,2023
☒	Signal Pre-Amplifier	Tonscend	TAP9K3G32	AP20K806104	Aug.08,2022	Aug.07,2023
☒	Signal Pre-Amplifier	ETS	3116C-PA	00217677	Sep.02,2022	Sep.01,2023

☒	Wideband radio communication tester	R&S	CMW500	163478	Jul.25,2022	Jul.24,2023
☒	3m Fully-anechoic Chamber	ETS	RFD-100	/	Apr.24,2021	Apr.23,2024
Software						
Used	Description	Manufacturer	Name		Version	
☒	Test software	TS+	TS+		V3.0.0.4	
Conducted Emission Test For AC Power Port						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☒	LISN	R&S	ENV216	102154	Jul.24,2022	Jul.23,2023
☒	EMI Receiver	R&S	ESR3	102509	Jul.24,2022	Jul.23,2023
Software						
Used	Description	Manufacturer	Name		Version	
☒	Test software	EZ	EZ-EMC		EMEC-3A1	
Other Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☒	Temperature & Humidity	Temperature	HTC-1	/	Jan.24,2022	Jan.23,2023

8. On Time and Duty Cycle

8.1. Block diagram of test setup

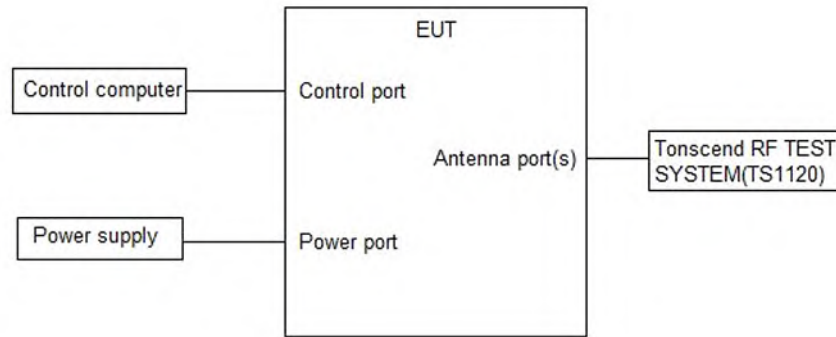

8.2. Limits

None; for reporting purposes only

8.3. Results

Test Mode	Ant.	Freq. (MHz)	ON Time (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Factor(dB)
DH5	Ant1	2402	2.90	3.75	77.33	1.12
		2441	2.89	3.75	77.07	1.13
		2480	2.89	3.75	77.07	1.13
2DH5	Ant1	2402	2.89	3.75	77.07	1.13
		2441	2.89	3.75	77.07	1.13
		2480	2.88	3.75	76.80	1.15
3DH5	Ant1	2402	2.89	3.75	77.07	1.13
		2441	2.89	3.75	77.07	1.13
		2480	2.89	3.75	77.07	1.13

Note: Duty Cycle Correction Factor=10log (1/x).

Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.

8.4. Original test data





2DH5 Ant1 2402



2DH5 Ant1 2441



2DH5 Ant1 2480



3DH5_Ant1_2402



3DH5_Ant1_2441



3DH5_Ant1_2480



9. 20 dB Occupied Bandwidth

9.1. Block diagram of test setup

Same as section 8.1

9.2. Limit

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (a) (1)	20 dB Occupied Bandwidth	N/A	2400-2483.5

9.3. Test Procedure

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 20 dB Occupied Bandwidth: 1 % to 5 % of the 20 dB bandwidth
VBW	For 20 dB Occupied Bandwidth: approximately 3×RBW
Span	approximately 2 to 3 times the 20 dB bandwidth
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB and 99 % relative to the maximum level measured in the fundamental emission.

9.4. Results

20 dB Occupied Bandwidth:

Test Mode	Ant.	Freq. (MHz)	20db EBW (MHz)	FL (MHz)	FH (MHz)
DH5	Ant1	2402	0.978	2401.502	2402.480
		2441	0.957	2440.505	2441.462
		2480	1.017	2479.490	2480.507
2DH5	Ant1	2402	1.269	2401.400	2402.669
		2441	1.311	2440.355	2441.666
		2480	1.290	2479.367	2480.657
3DH5	Ant1	2402	1.293	2401.352	2402.645
		2441	1.287	2440.352	2441.639
		2480	1.299	2479.340	2480.639

9.5. Original test data

20 dB Occupied Bandwidth:






2DH5_Ant1_2402



2DH5_Ant1_2441

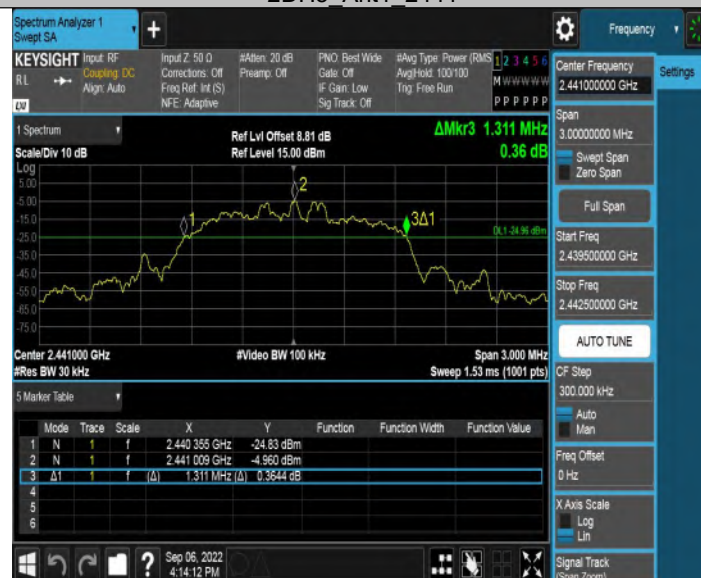

2DH5_Ant1_2480



3DH5_Ant1_2402



3DH5_Ant1_2441



3DH5_Ant1_2480



10. Conducted Output Power

10.1. Block diagram of test setup

Same as section 8.1

10.2. Limits

CFR 47 FCC Part15 (15.247) , Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (b) (1)	Peak Conducted Output Power	Hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel: 1 watt or 30dBm; Hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel : 125 mW or 21dBm	2400-2483.5

10.3. Test Procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.


(2) Measure the maximum output power of EUT by spectrum analyzer with PK detector and RBW=3 MHz (above 20 dB bandwidth of measured signal), VBW=8 MHz

Note: The attenuator loss was inputted into spectrum analyzer as amplitude offset.

10.4. Results

Test Mode	Ant.	Freq. (MHz)	Conducted Peak Power (dBm)	Conducted Limit (dBm)	Verdict
DH5	Ant1	2402	0.69	≤20.97	PASS
		2441	-1.65	≤20.97	PASS
		2480	-3.66	≤20.97	PASS
2DH5	Ant1	2402	0.66	≤20.97	PASS
		2441	-1.72	≤20.97	PASS
		2480	-3.68	≤20.97	PASS
3DH5	Ant1	2402	0.58	≤20.97	PASS
		2441	-1.74	≤20.97	PASS
		2480	-3.65	≤20.97	PASS

10.5. Original test data

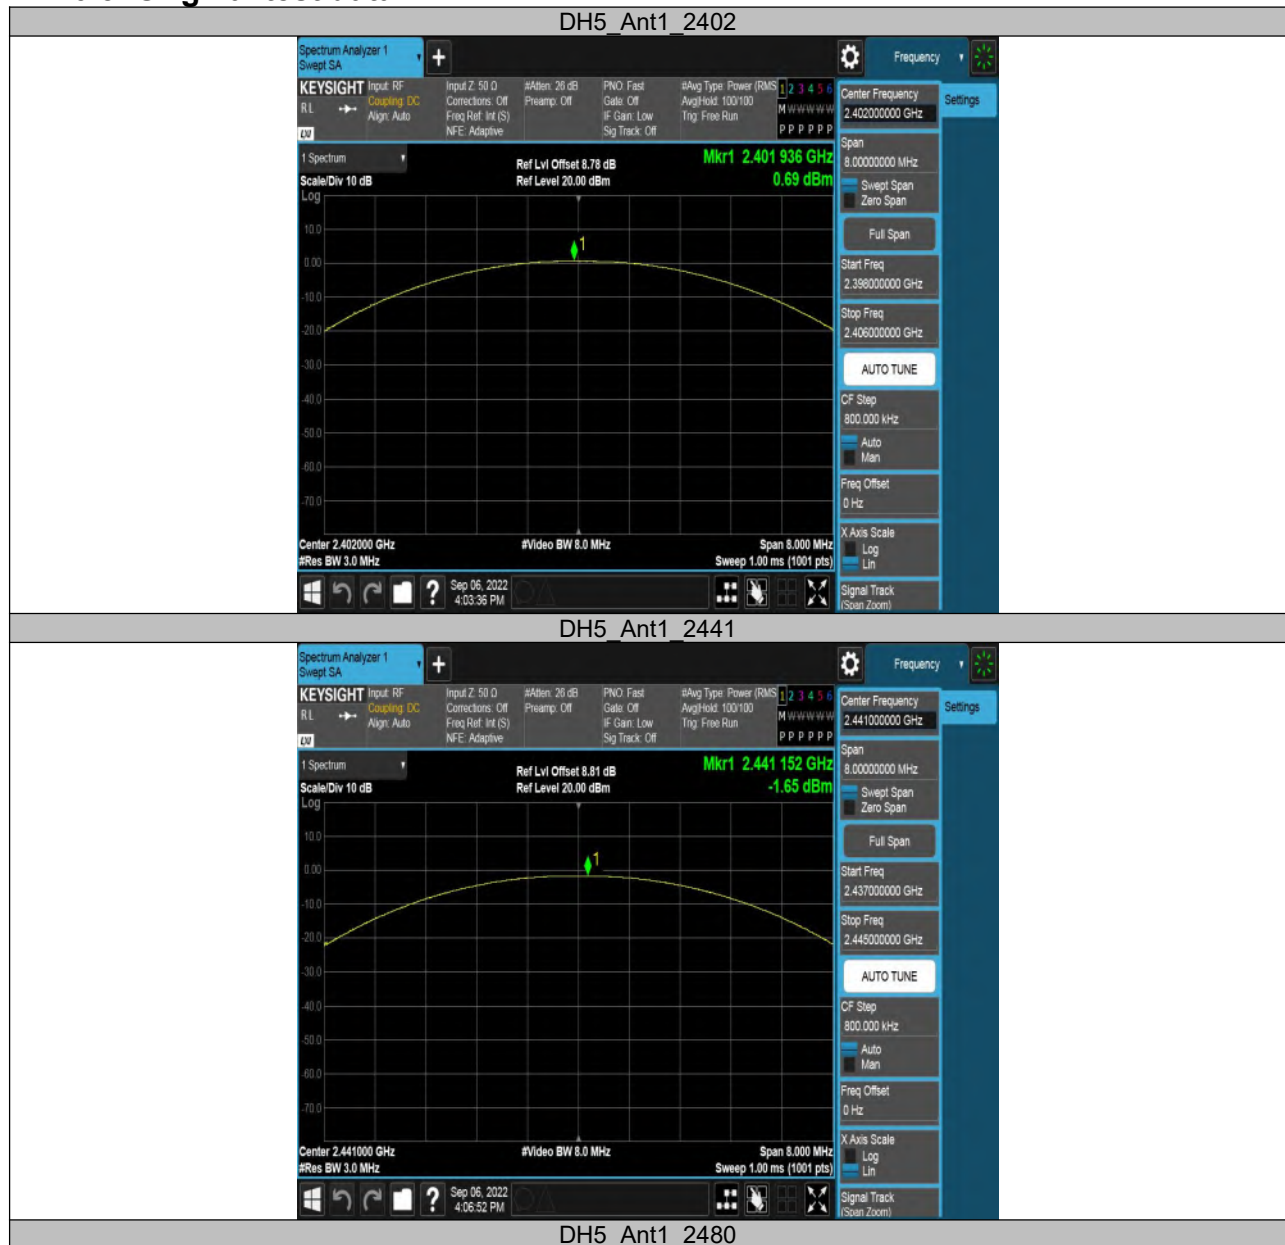




2DH5 Ant1 2402



2DH5 Ant1 2441



2DH5 Ant1 2480

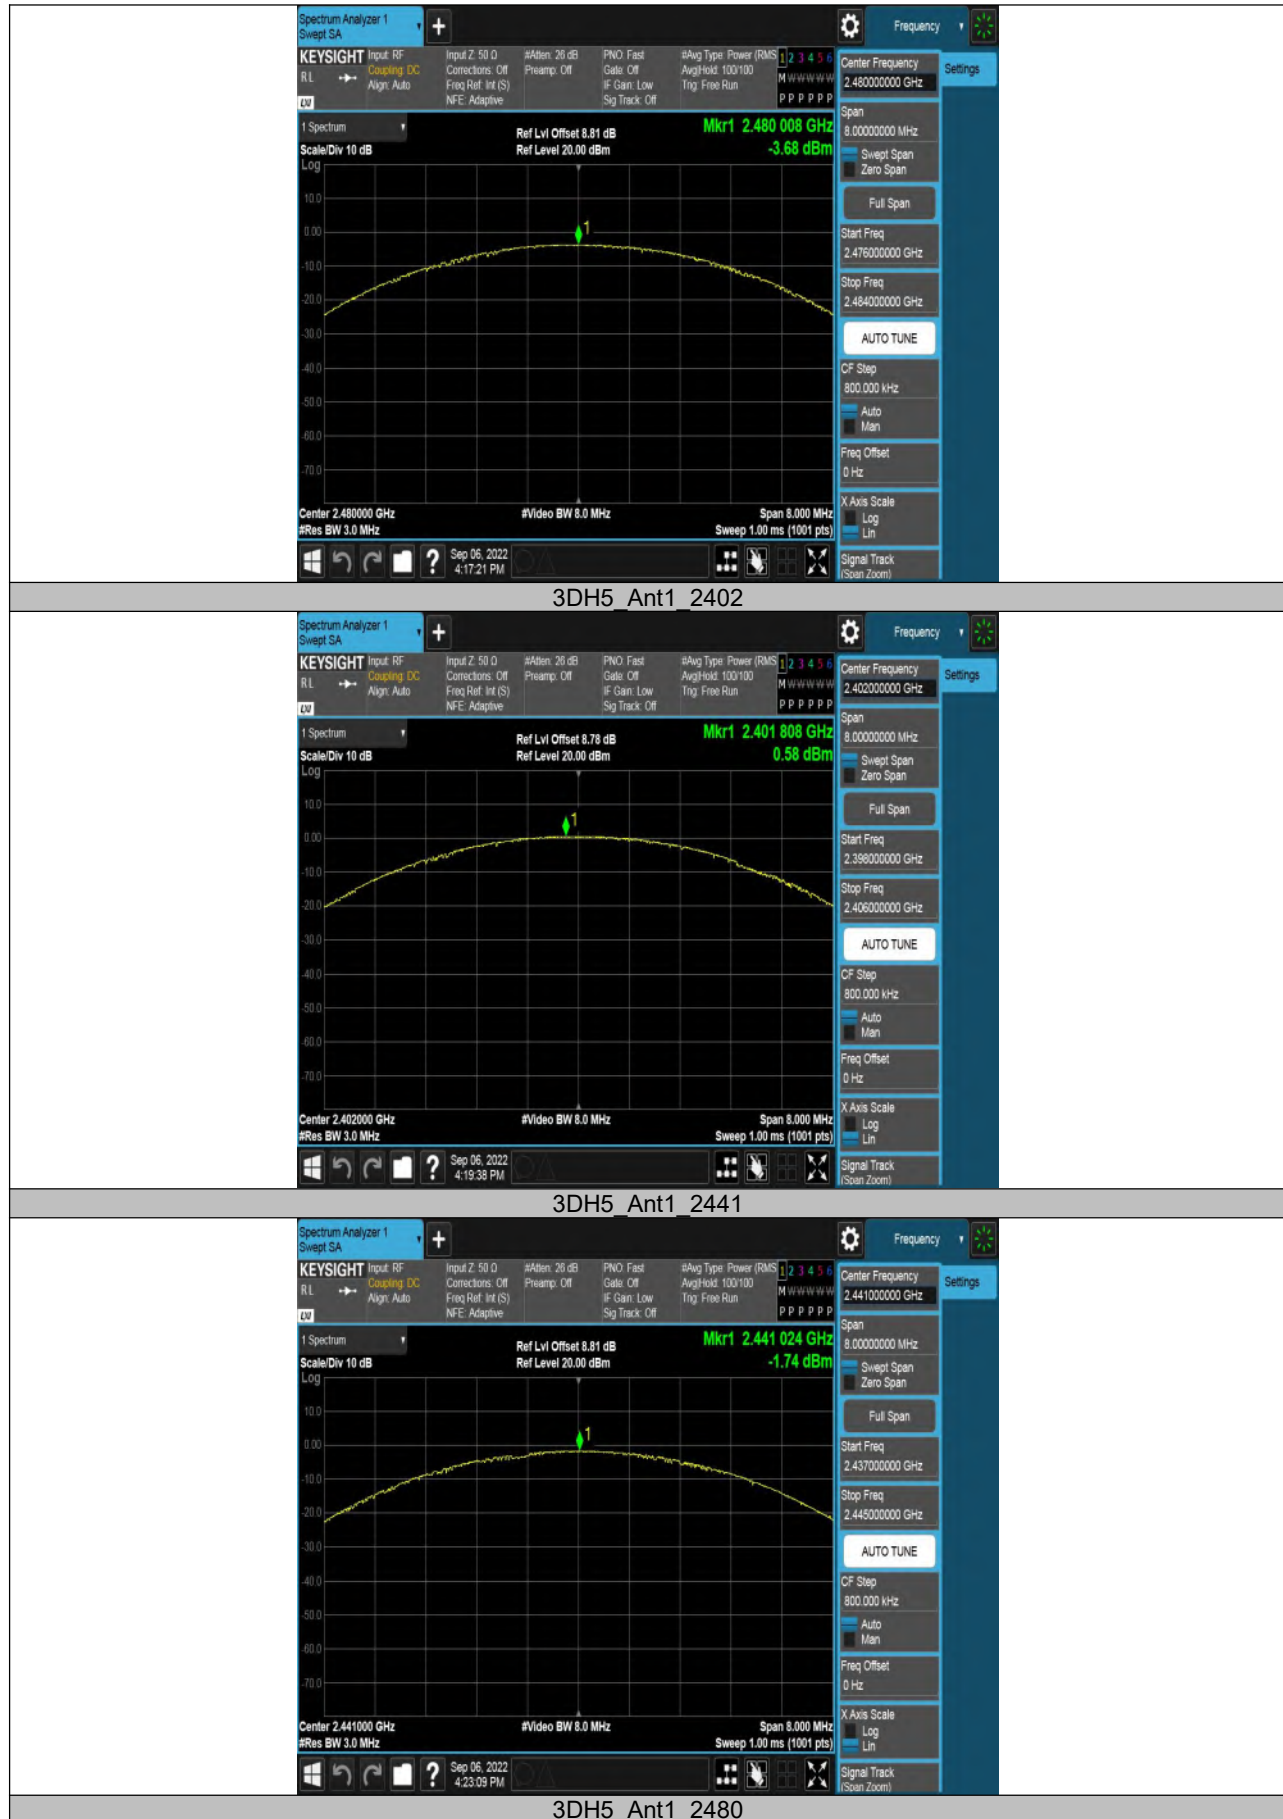



11. Carrier Hopping Channel Separation

11.1. Block diagram of test setup

Same as section 8.1

11.2. Limits

CFR 47 FCC Part15 (15.247) , Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (a) (1)	Carrier Hopping Channel Separation	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel.	2400-2483.5

11.3. Test Procedure

Connect the UUT to the spectrum Analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Span	wide enough to capture the peaks of two adjacent channels
Detector	Peak
RBW	Start with the RBW set to approximately 30 % of the channel spacing; adjust as necessary to best identify the center of each individual channel.
VBW	≥ RBW
Trace	Max hold
Sweep time	Auto couple

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Compliance of an EUT with the appropriate regulatory limit shall be determined.

A plot of the data shall be included in the test report.

11.4. Results

Test Mode	Ant.	Freq. (MHz)	Result (MHz)	Limit (MHz)	Verdict
DH5	Ant1	Hop	1.008	≥0.678	PASS
2DH5	Ant1	Hop	0.978	≥0.874	PASS
3DH5	Ant1	Hop	1.336	≥1.299	PASS

11.5. Original test data





12. Number of Hopping Frequency

12.1. Block diagram of test setup

Same as section 8.1

12.2. Limits

CFR 47 FCC Part15 (15.247), Subpart C		
Section	Test Item	Limit
CFR 47 15.247 (a) (1) III	Number of Hopping Frequency	at least 15 hopping channels

12.3. Test Procedure

Connect the EUT to the spectrum Analyzer and use the following settings:

Detector	Peak
RBW	To identify clearly the individual channels, set the RBW to less than 30 % of the channel spacing or the 20 dB bandwidth, whichever is smaller.
VBW	≥RBW
Span	The frequency band of operation
Trace	Max hold
Sweep time	Auto couple

Set EUT to transmit maximum output power and switch on frequency hopping function. then set enough count time (larger than 5000 times) to get all the hopping frequency channel displayed on the screen of spectrum analyzer.

Count the quantity of peaks to get the number of hopping channels.


FHSS Mode: 79 Channels observed.


AFHSS Mode: 20 Channels declared.

12.4. Results

Test Mode	Ant.	Freq. (MHz)	Result (Num)	Limit (Num)	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

12.5. Original test data

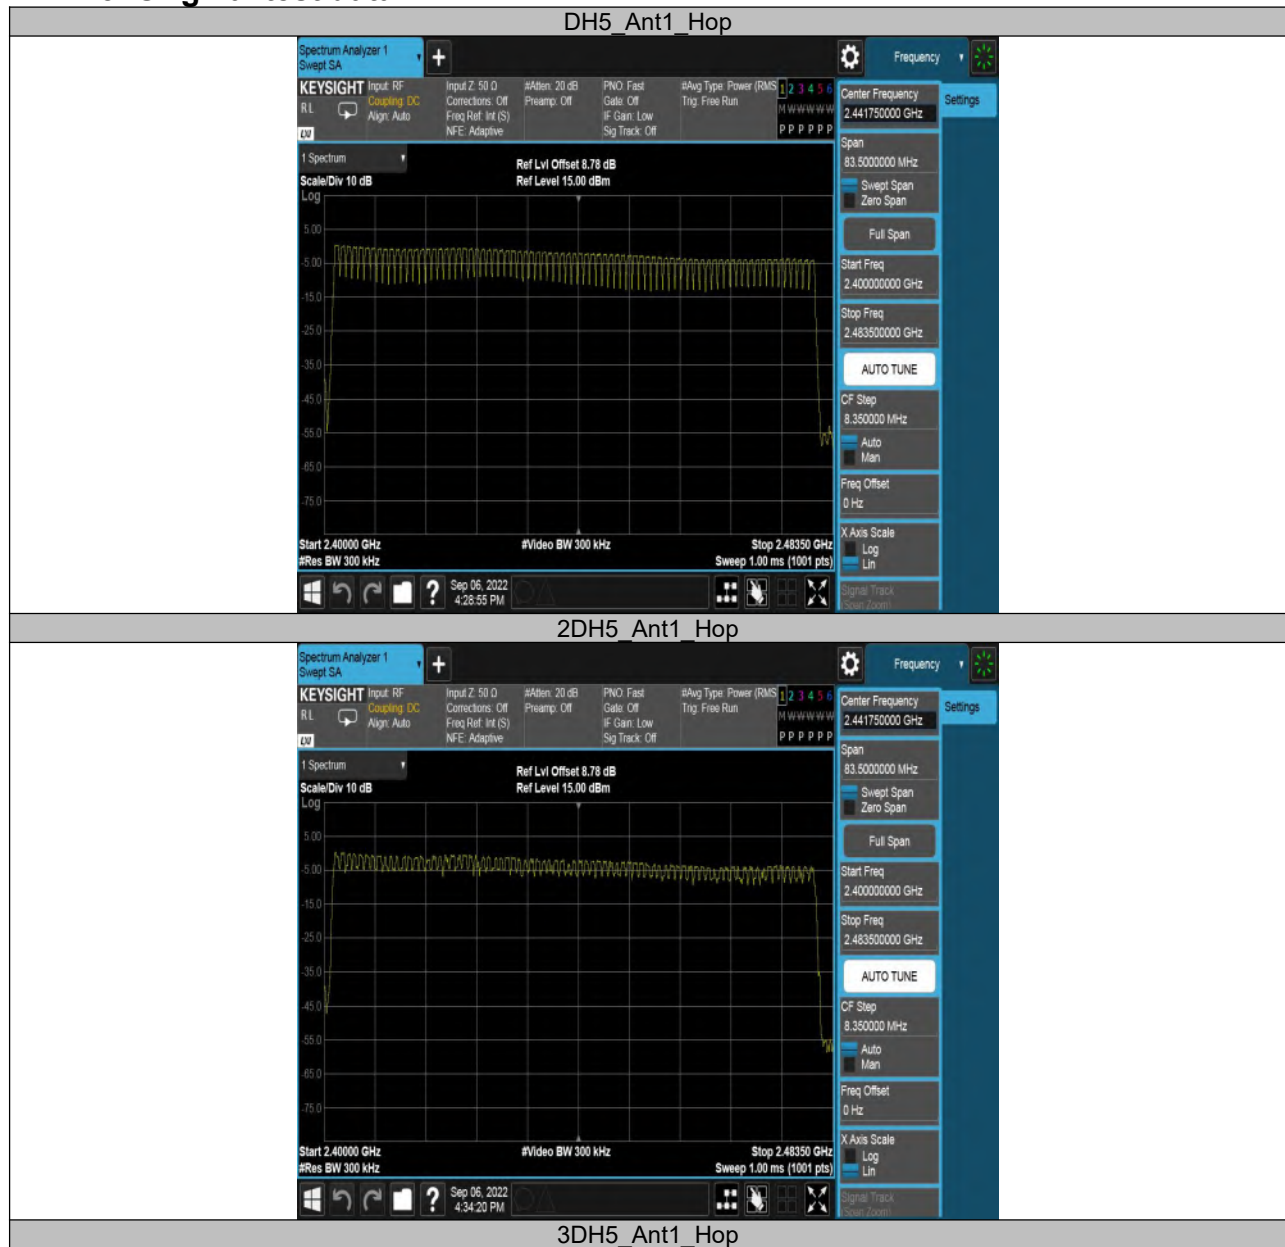

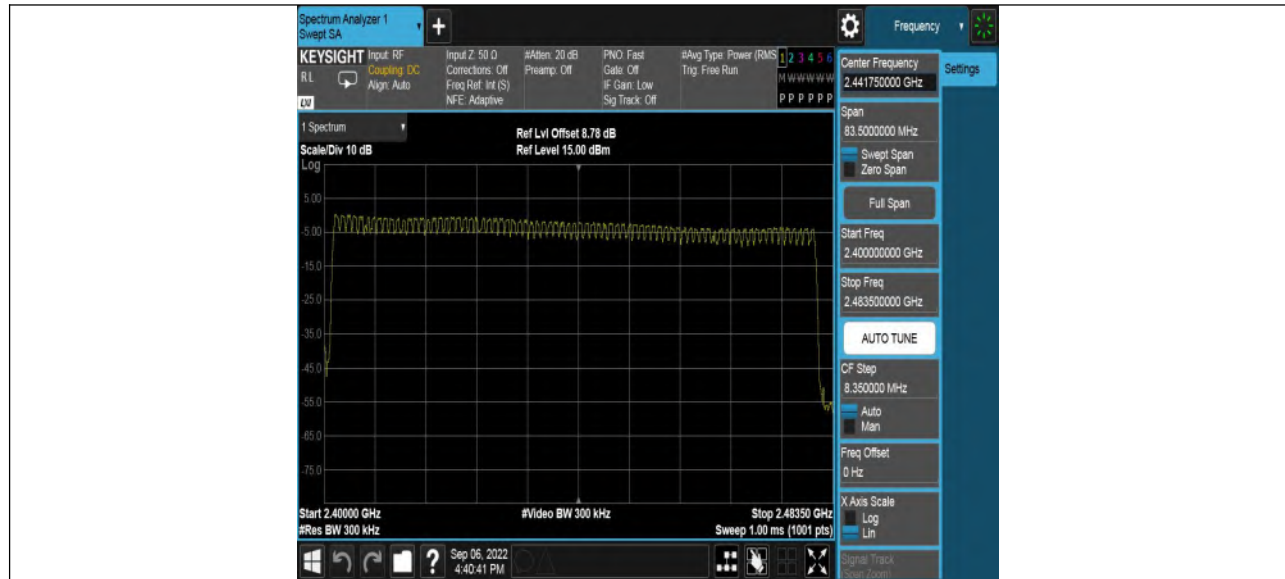

13. Time of Occupancy (Dwell Time)

13.1. Block diagram of test setup

Same as section 8.1

13.2. Limits

CFR 47 FCC Part15 (15.247), Subpart C		
Section	Test Item	Limit
CFR 47 15.247 (a) (1) III	Time of Occupancy (Dwell Time)	The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed.

13.3. Test Procedure

Connect the UUT to the spectrum Analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Average
RBW	1 MHz
VBW	≥ RBW
Span	zero span
Trace	Clear Write
Sweep time	As necessary to capture the entire dwell time per hopping channel

Connect the UUT to the spectrum Analyzer and use the following settings:

- The transmitter output (antenna port) was connected to the spectrum analyzer
- Set RBW of spectrum analyzer to 1 MHz and VBW to 3 MHz.
- Use a video trigger with the trigger level set to enable triggering only on full pulses.
- Sweep Time is more than once pulse time.
- Set the center frequency on any frequency would be measure and set the frequency span to zero span.

f. Measure the maximum time duration of one single pulse.

g. Set the EUT for DH5, DH3 and DH1 packet transmitting.

h. Measure the maximum time duration of one single pulse.

A Period Time = (channel number)*0.4

For FHSS Mode (79 Channel):

DH1 Time Slot: Reading * (1600/2)*31.6/(channel number)


DH3 Time Slot: Reading * (1600/4)*31.6/(channel number)


DH5 Time Slot: Reading * (1600/6)*31.6/(channel number)

13.4. Results

Test Mode	Ant.	Freq. (MHz)	Burst Width (ms)	Total Hops (Num)	Result (s)	Limit (s)	Verdict
DH1	Ant1	Hop	0.36	320	0.115	≤0.4	PASS
DH3	Ant1	Hop	1.62	160	0.259	≤0.4	PASS
DH5	Ant1	Hop	2.87	106.67	0.306	≤0.4	PASS
2DH1	Ant1	Hop	0.37	320	0.118	≤0.4	PASS
2DH3	Ant1	Hop	1.62	160	0.259	≤0.4	PASS
2DH5	Ant1	Hop	2.87	106.67	0.306	≤0.4	PASS
3DH1	Ant1	Hop	0.37	320	0.118	≤0.4	PASS
3DH3	Ant1	Hop	1.62	160	0.259	≤0.4	PASS
3DH5	Ant1	Hop	2.87	106.67	0.306	≤0.4	PASS

13.5. Original test data

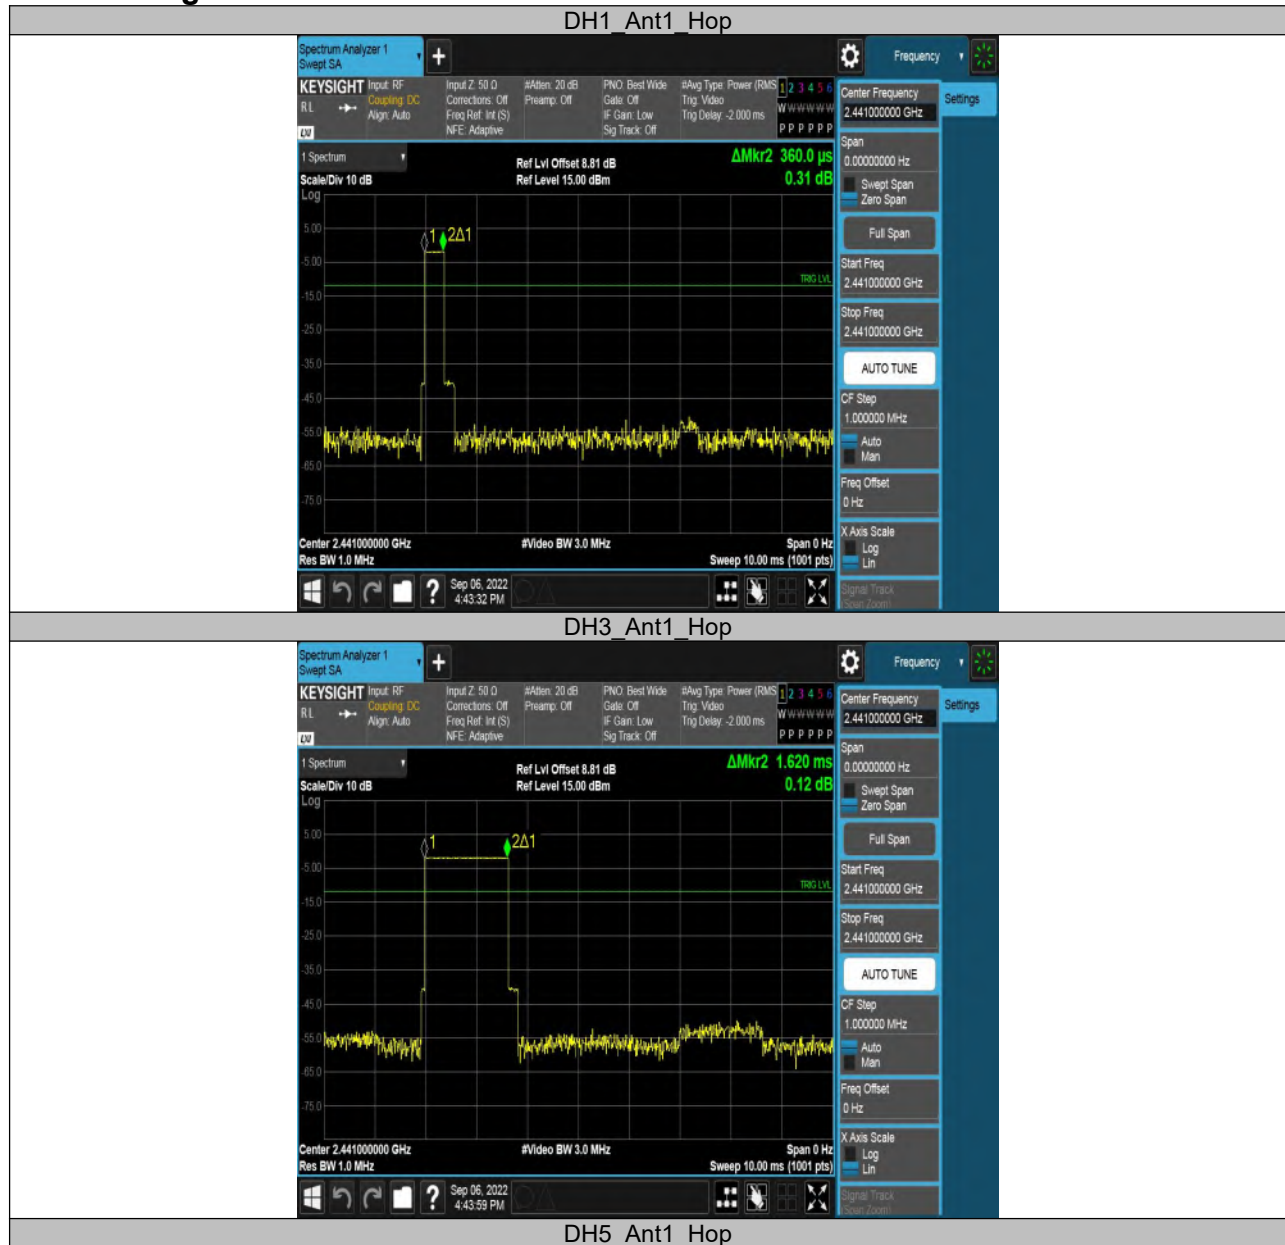

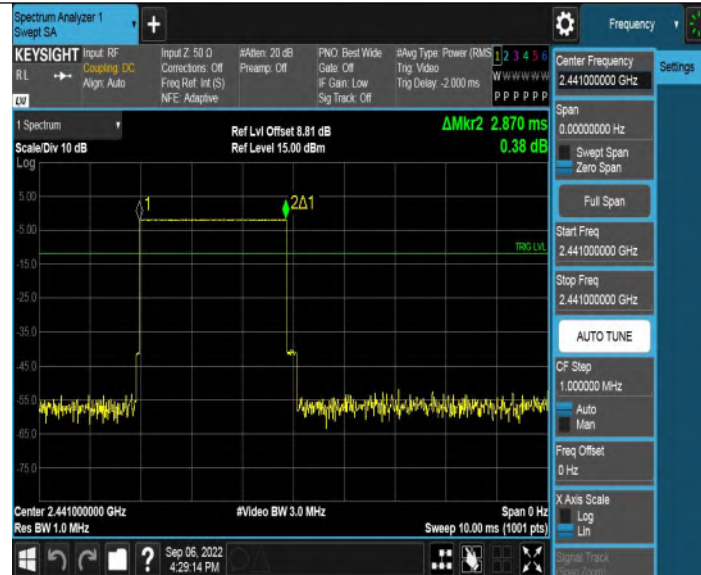

2DH1 Ant1 Hop



2DH3 Ant1 Hop



2DH5 Ant1 Hop



3DH1 Ant1 Hop



3DH3 Ant1 Hop



3DH5 Ant1 Hop



14. Conducted Spurious Emission

14.1. Block diagram of test setup

Same as section 8.1

14.2. Limits

CFR 47 FCC Part15 (15.247), Subpart C		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d)	Conducted Spurious Emission	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

14.3. Test Procedure

Please refer to the ANSI C63.10 section 6.10.

For Band edge use the following settings:

Detector	Peak
RBW	100 kHz
VBW	300 kHz
Span	wide enough to fully capture the emission being measured
Trace	Max hold
Sweep time	Auto couple.

For Spurious Emission use the following settings:

Detector	Peak
RBW	100 kHz
VBW	300 kHz
Span	wide enough to fully capture the emission being measured
Trace	Max hold
Sweep time	Auto couple.

Use the peak marker function to determine the maximum amplitude level.

14.4. Results

Band edge:

Test Mode	Ant.	Ch Name	Freq. (MHz)	Ref Level (dBm)	Result (dBm)	Limit (dBm)	Verdict
DH5	Ant1	Low	2402	0.55	-39.43	≤ -19.45	PASS
		High	2480	-3.95	-58.36	≤ -23.95	PASS
		Low	Hop_2402	0.08	-44.57	≤ -19.92	PASS
		High	Hop_2480	-3.75	-50.33	≤ -23.75	PASS
2DH5	Ant1	Low	2402	0.08	-39.99	≤ -19.92	PASS
		High	2480	-4.02	-60.2	≤ -24.02	PASS
		Low	Hop_2402	-0.18	-45.3	≤ -20.18	PASS
		High	Hop_2480	-3.91	-50.18	≤ -23.91	PASS
3DH5	Ant1	Low	2402	0.32	-39.97	≤ -19.68	PASS
		High	2480	-4.13	-59.06	≤ -24.13	PASS
		Low	Hop_2402	-0.04	-44.76	≤ -20.04	PASS
		High	Hop_2480	-3.80	-49.07	≤ -23.8	PASS


Spurious Emission:

Test Mode	Ant.	Freq. (MHz)	Freq Range (MHz)	Ref Level (dBm)	Result (dBm)	Limit (dBm)	Verdict
DH5	Ant1	2402	30~1000	0.55	-54.84	≤ -19.45	PASS
			1000~26500	0.55	-29.9	≤ -19.45	PASS
		2441	30~1000	-1.89	-53.77	≤ -21.89	PASS
			1000~26500	-1.89	-35.13	≤ -21.89	PASS
		2480	30~1000	-3.95	-54.39	≤ -23.95	PASS
			1000~26500	-3.95	-39.97	≤ -23.95	PASS
2DH5	Ant1	2402	30~1000	0.08	-52.78	≤ -19.92	PASS
			1000~26500	0.08	-35.55	≤ -19.92	PASS
		2441	30~1000	-1.95	-54.67	≤ -21.95	PASS
			1000~26500	-1.95	-40.62	≤ -21.95	PASS
		2480	30~1000	-4.02	-54.12	≤ -24.02	PASS
			1000~26500	-4.02	-44.11	≤ -24.02	PASS
3DH5	Ant1	2402	30~1000	0.32	-53.99	≤ -19.68	PASS
			1000~26500	0.32	-35.76	≤ -19.68	PASS
		2441	30~1000	-1.97	-53.85	≤ -21.97	PASS
			1000~26500	-1.97	-40.75	≤ -21.97	PASS
		2480	30~1000	-4.13	-53.84	≤ -24.13	PASS
			1000~26500	-4.13	-43.91	≤ -24.13	PASS

14.5. Original test data

Band edge:



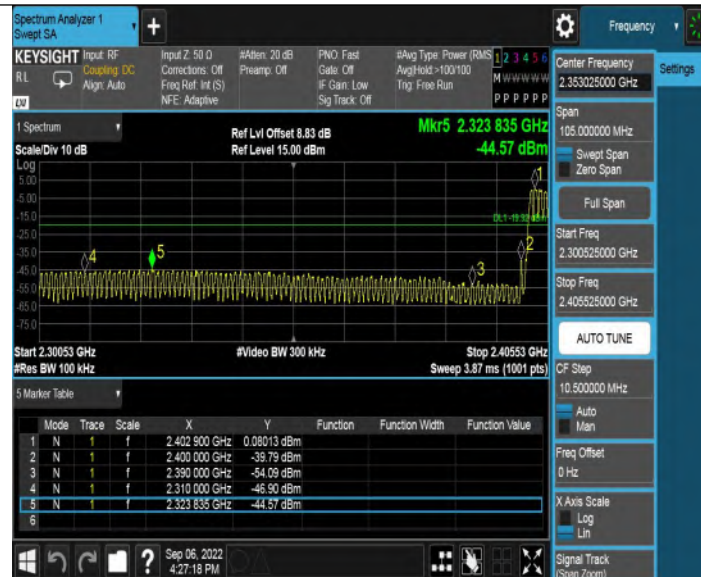

DH5 Ant1 High Hop 2480



2DH5 Ant1 Low 2402



2DH5 Ant1 High 2480




2DH5 Ant1 Low Hop 2402



2DH5 Ant1 High Hop 2480



3DH5 Ant1 Low 2402

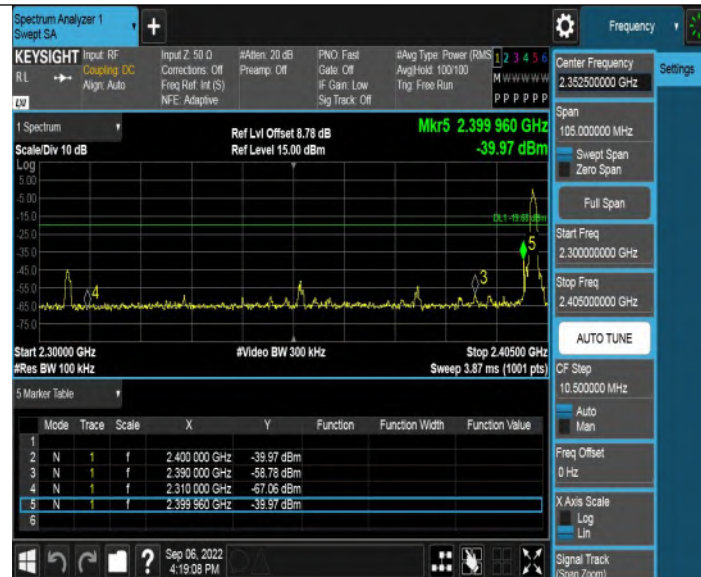

3DH5 Ant1 High 2480




3DH5 Ant1 Low Hop 2402



3DH5 Ant1 High Hop 2480



Spurious Emission:

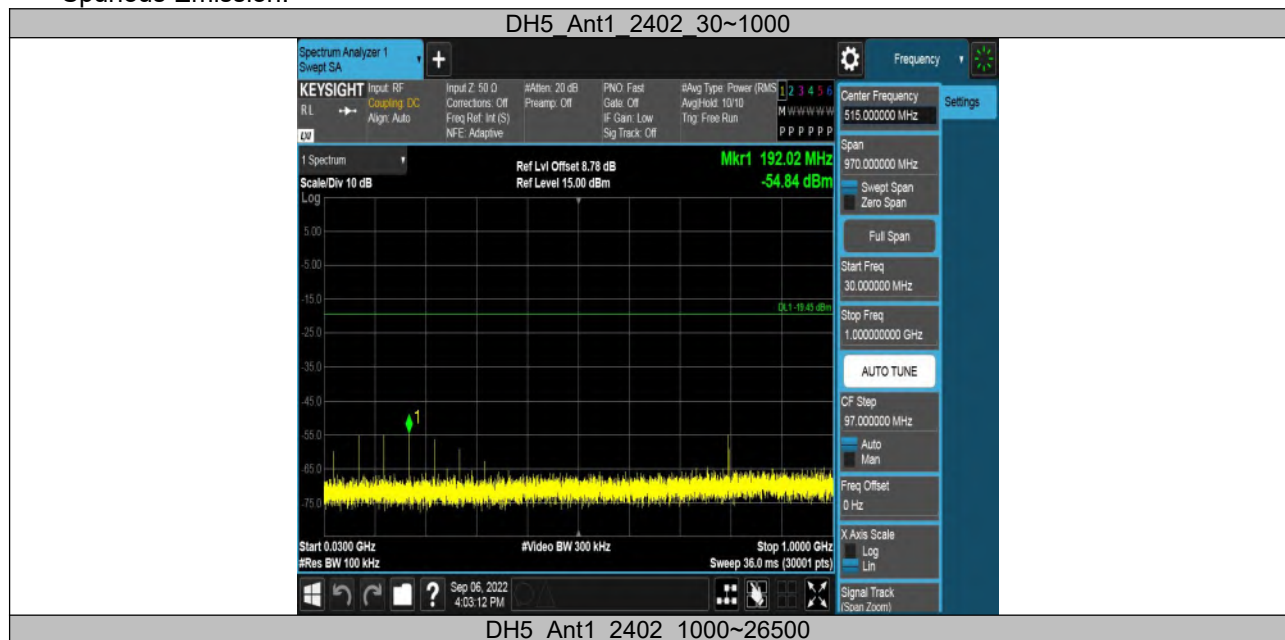



DH5_Ant1_2441_30~1000



DH5_Ant1_2441_1000~26500



DH5_Ant1_2480_30~1000





2DH5_Ant1_2441_30~1000



2DH5_Ant1_2441_1000~26500



2DH5_Ant1_2480_30~1000





3DH5_Ant1_2441_30~1000



3DH5_Ant1_2441_1000~26500




3DH5_Ant1_2480_30~1000




15. Radiated Emission

15.1. Block diagram of test setup


In 3m Anechoic Chamber, test setup diagram for 9kHz - 30MHz:

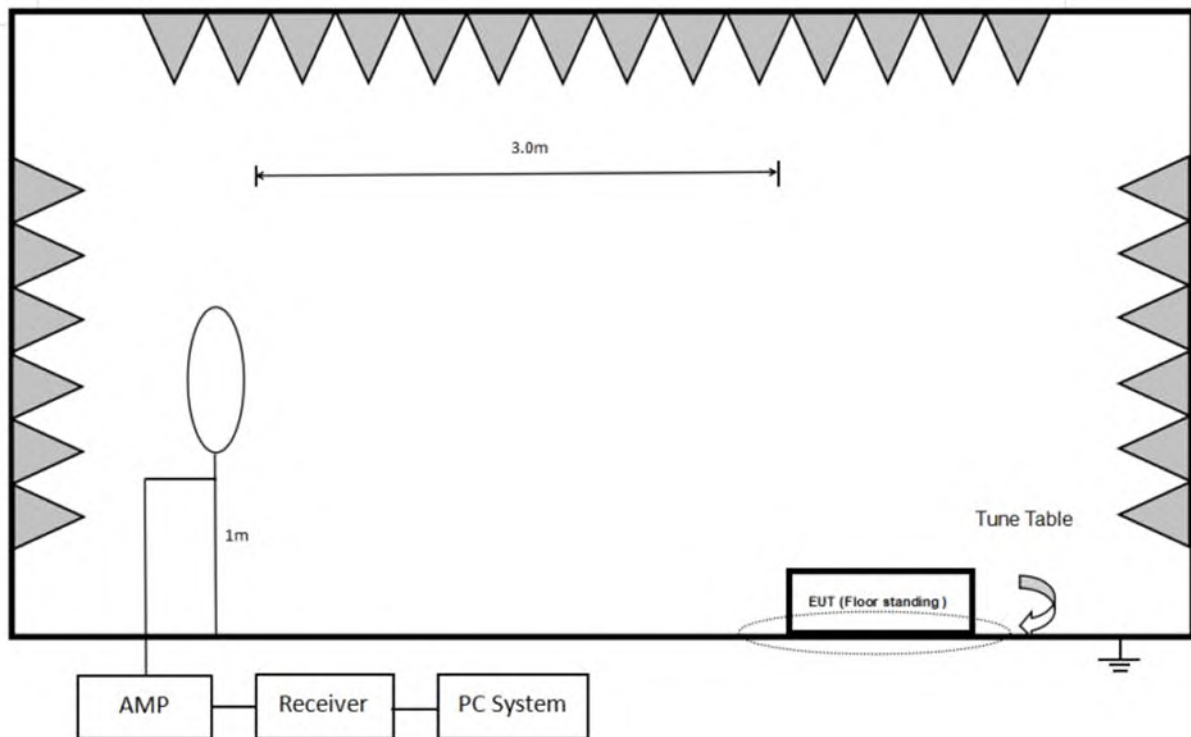

In 3m Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

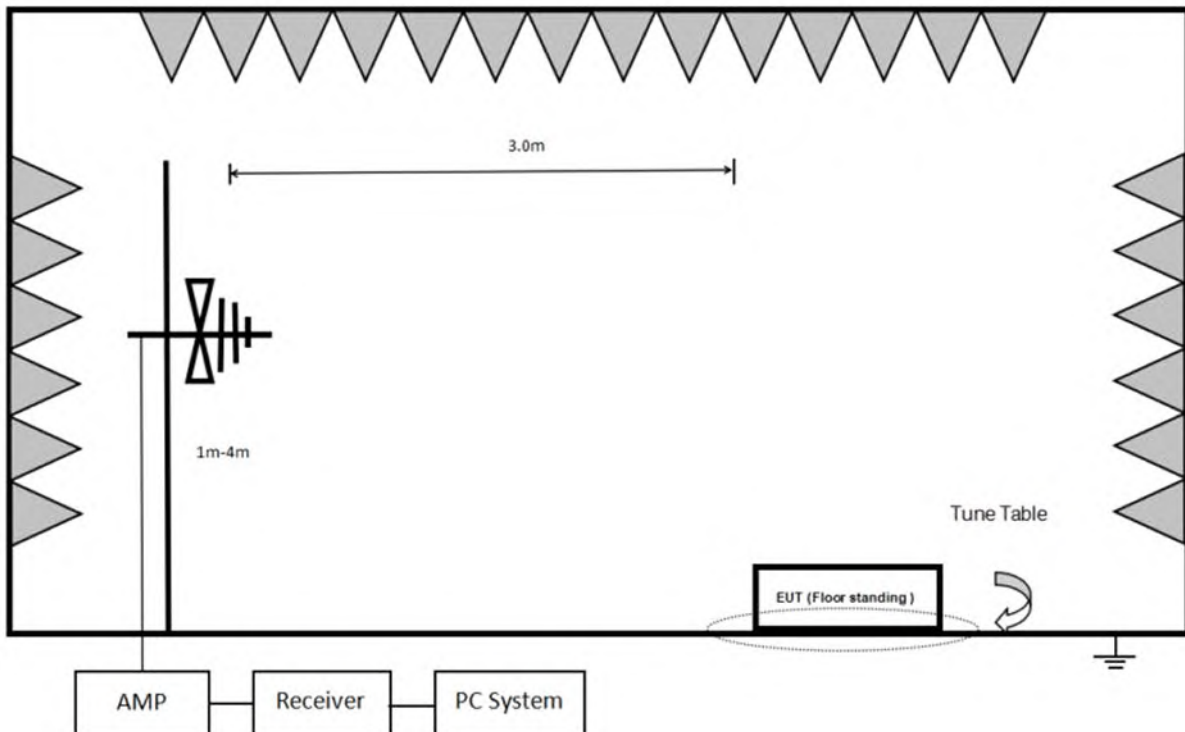

In 3m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

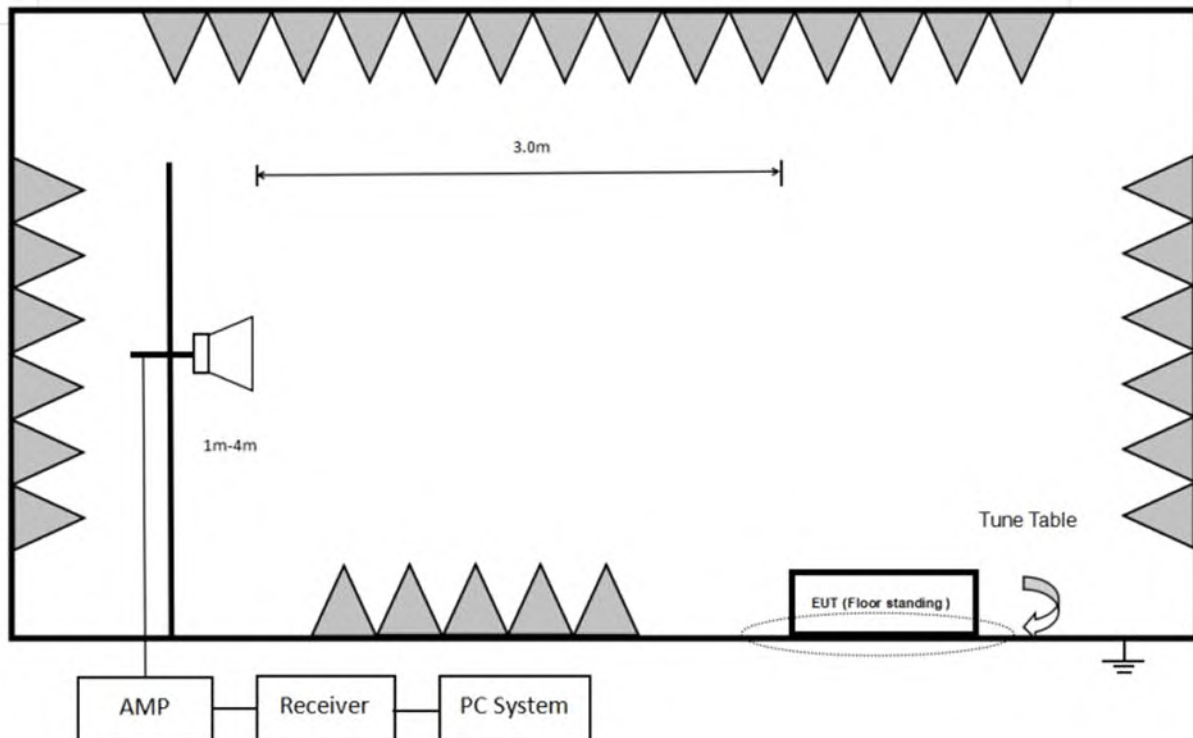

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

15.2. Limit

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6

(2) FCC 15.209 Limit.

Frequency MHz	Distance Meters	Field Strengths Limit	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	$2400/F(\text{kHz})$	$67.6-20\log(F)$
0.490 ~ 1.705	30	$24000/F(\text{kHz})$	$87.6-20\log(F)$
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216~960	3	200	46.0
960~1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.

About Restricted bands of operation please refer to FCC § 15.205 (a),

15.3. Test Procedure

Below 30 MHz:

The setting of the spectrum Analyzer

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT and all cables shall be insulated, if required, from the ground plane by up to 12mm of insulating material.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of 1 meter height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore, sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.

Below 1 GHz and above 30 MHz:

The setting of the spectrum Analyzer

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT and all cables shall be insulated, if required, from the ground plane by up to 12mm of insulating material.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Above 1 GHz:

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.

2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

3. The EUT and all cables shall be insulated, if required, from the ground plane by up to 12mm of insulating material.

4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.

5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.

6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for AVG measurements. For the Duty Cycle please refer to clause 7.1. On Time And Duty Cycle.

7. Restriction band: Investigated frequency range from 2310 MHz to 2410 MHz and 2470MHz to 2500 MHz.

All restriction band should comply with 15.209, other emission should be at least 20 dB below the fundamental.

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

Note 2: The EUT does not support simultaneous transmission.

Note 3: The EUT was fully exercised with external accessories during the test. In the case of multiple accessory external ports, an external accessory shall be connected to one of each type of port.

15.4. Results

Pass. (See below detailed test result)

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limits.

Note1: According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz, so the final test was performed with frequency range from 30 MHz to 26 GHz and recorded in below.

Note2: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in GFSK mode.

Note3: For emissions above 1 GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.


15.5. Original test data

Below 1 GHz and above 30 MHz test data Refer to appendix A

Above 1 GHz test data Refer to appendix B

16. AC Power Line Conducted Emissions

16.1. Block diagram of test setup

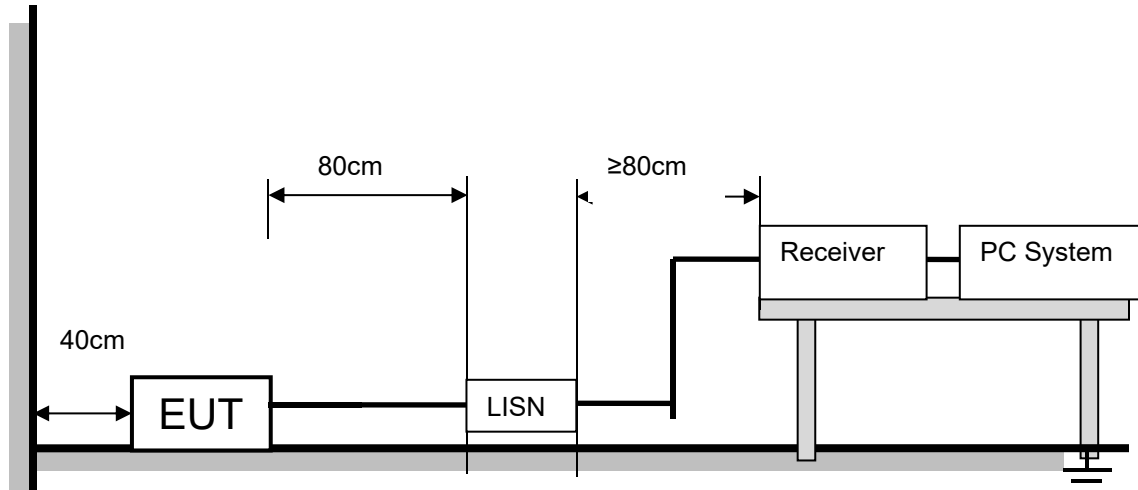

The EUT and all cables shall be insulated, if required, from the ground plane by up to 12mm of insulating material. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through an Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

16.2. Limits

Please refer to CFR 47 FCC § 15.207 (a).

Frequency (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

16.3. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.4 and test equipment as described in clause 10.2 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

16.4. Test result

Pass. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded worse case.

16.5. Original test data

Refer to appendix C

17. Antenna Requirements

17.1. Limits

Please refer to FCC § 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC § 15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

17.2. Result

The antenna used for this product is PCB antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 3.38 dBi


APPENDIX A – Radiated Emission Below 1GHz Test Data

Test Report

Project Information			
EUT:	Bluetooth speaker	Environment:	
Model:	FG206-11	SN:	
Mode:	DH5_2402	Voltage:	DC12V
Customer:		Engineer:	Roger
Remark:	Power set : 2		
Test Standard:			

Start of Test: 2022-10-10 15:24:50

Test Graph

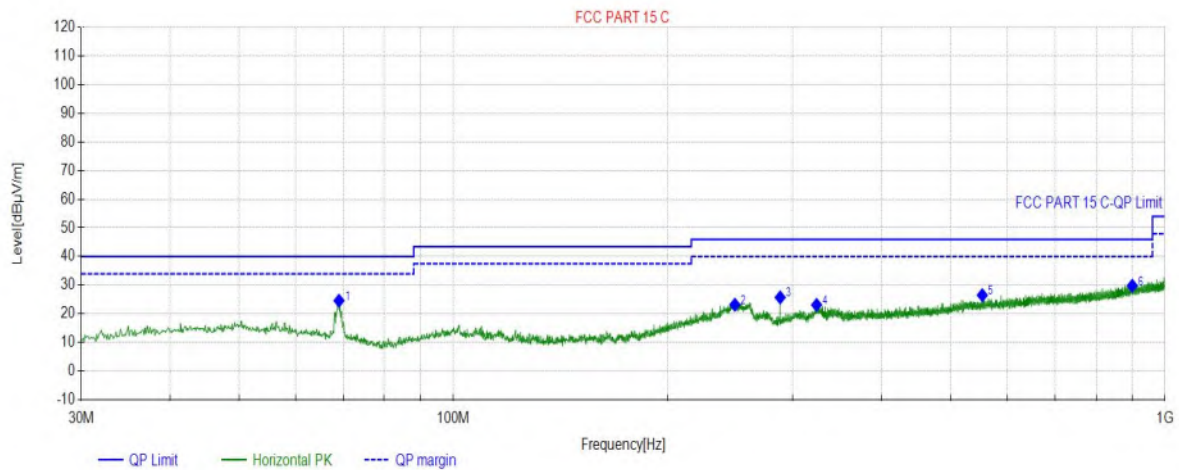


Final Data List								
NO.	Freq. (MHz)	Factor (dB)	QP Value (dBμV/m)	QP Limit (dBμV/m)	QP Margin (dB)	Height (cm)	Angle (°)	Polarity
1	69.0949	-25.01	24.61	40.00	15.39	100	2	Horizontal
2	248.6599	-21.16	23.19	46.00	22.81	100	269	Horizontal
3	287.9488	-20.34	25.73	46.00	20.27	100	23	Horizontal
4	323.9394	-19.44	23.14	46.00	22.86	100	246	Horizontal
5	553.6584	-13.54	26.53	46.00	19.47	100	179	Horizontal
6	899.4980	-7.60	29.84	46.00	16.16	100	358	Horizontal

Test Report

Project Information			
EUT:	Bluetooth speaker	Environment:	
Model:	FG206-11	SN:	
Mode:	DH5_2402	Voltage:	DC12V
Customer:		Engineer:	Roger
Remark:	Power set : 2		
Test Standard:			

Start of Test: 2022-10-10 15:25:35

Test Graph

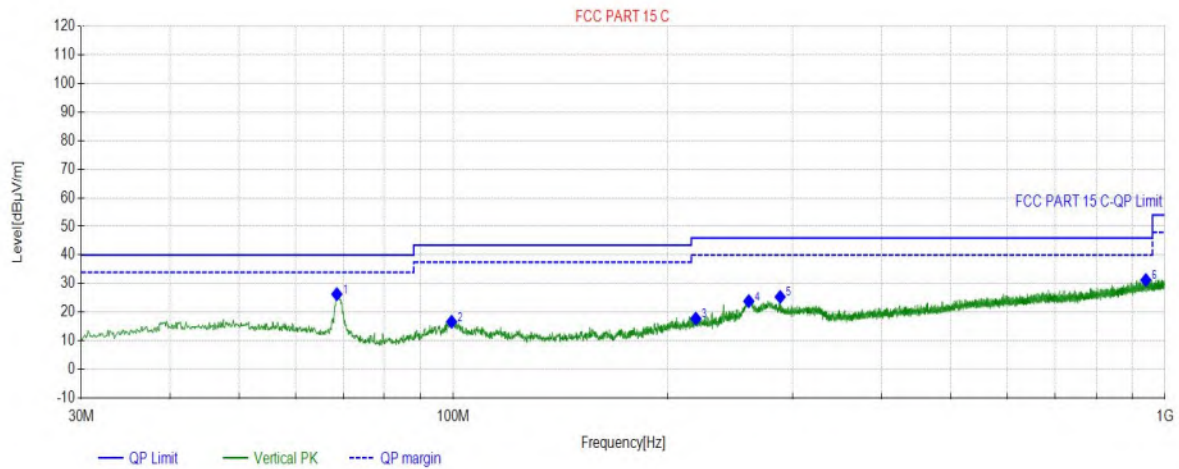

Final Data List


NO.	Freq. (MHz)	Factor (dB)	QP Value (dBμV/m)	QP Limit (dBμV/m)	QP Margin (dB)	Height (cm)	Angle (°)	Polarity
1	68.6099	-24.88	26.33	40.00	13.67	100	85	Vertical
2	99.4589	-22.87	16.68	43.50	26.82	100	128	Vertical
3	219.1689	-22.45	17.80	46.00	28.20	100	85	Vertical
4	260.1070	-21.13	23.88	46.00	22.12	100	177	Vertical
5	287.9488	-20.34	25.38	46.00	20.62	100	100	Vertical
6	939.8540	-7.14	31.26	46.00	14.74	100	334	Vertical

Test Report

Project Information			
EUT:	Bluetooth speaker	Environment:	
Model:	FG206-11	SN:	
Mode:	DH5_2441	Voltage:	DC12V
Customer:		Engineer:	Roger
Remark:	Power set : 2		
Test Standard:			

Start of Test: 2022-10-10 15:26:25

Test Graph

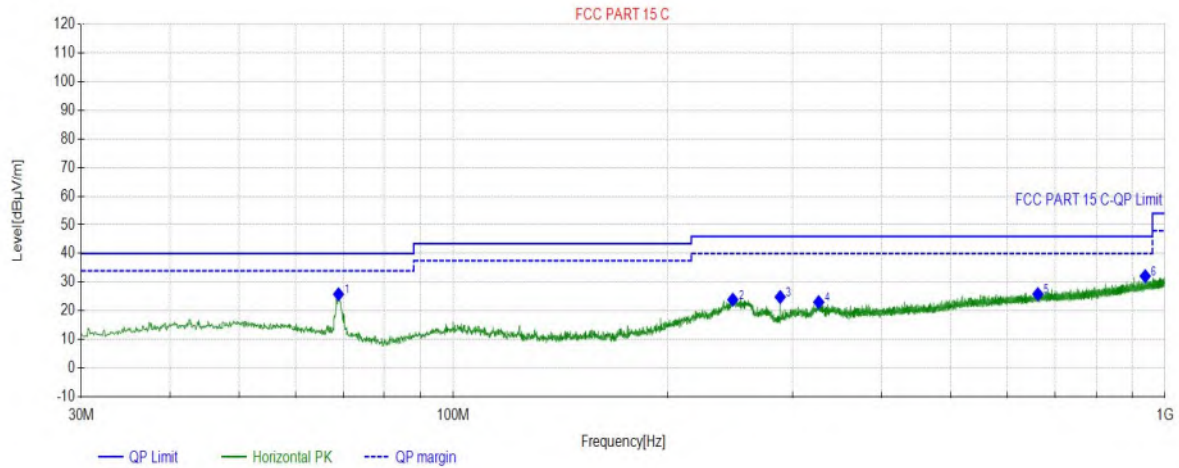

Final Data List


NO.	Freq. (MHz)	Factor (dB)	QP Value (dBμV/m)	QP Limit (dBμV/m)	QP Margin (dB)	Height (cm)	Angle (°)	Polarity
1	68.9979	-24.98	25.80	40.00	14.20	100	27	Horizontal
2	247.0107	-21.18	23.91	46.00	22.09	100	201	Horizontal
3	287.9488	-20.34	24.83	46.00	21.17	100	277	Horizontal
4	326.1706	-19.37	23.04	46.00	22.96	100	58	Horizontal
5	662.7943	-11.52	25.86	46.00	20.14	100	360	Horizontal
6	937.9138	-7.19	32.11	46.00	13.89	100	119	Horizontal

Test Report

Project Information			
EUT:	Bluetooth speaker	Environment:	
Model:	FG206-11	SN:	
Mode:	DH5_2441	Voltage:	DC12V
Customer:		Engineer:	Roger
Remark:	Power set : 2		
Test Standard:			

Start of Test: 2022-10-10 15:27:09

Test Graph

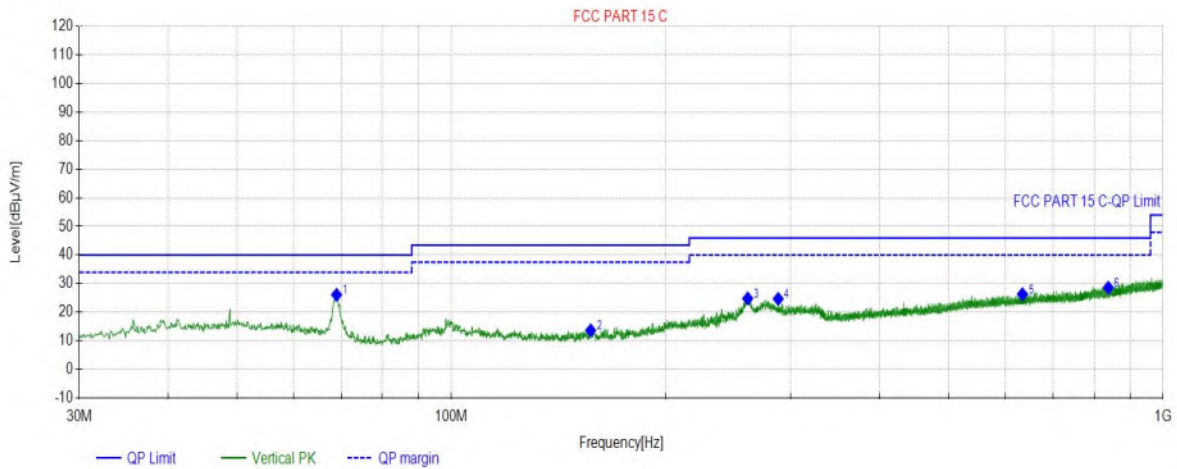

Final Data List


NO.	Freq. (MHz)	Factor (dB)	QP Value (dBμV/m)	QP Limit (dBμV/m)	QP Margin (dB)	Height (cm)	Angle (°)	Polarity
1	68.9979	-24.98	26.10	40.00	13.90	100	96	Vertical
2	156.9857	-25.49	13.68	43.50	29.82	100	16	Vertical
3	260.8831	-21.11	24.83	46.00	21.17	100	182	Vertical
4	287.9488	-20.34	24.69	46.00	21.31	100	144	Vertical
5	634.5645	-12.10	26.31	46.00	19.69	100	248	Vertical
6	837.6058	-9.07	28.60	46.00	17.40	100	301	Vertical

Test Report

Project Information			
EUT:	Bluetooth speaker	Environment:	
Model:	FG206-11	SN:	
Mode:	DH5_2480	Voltage:	DC12V
Customer:		Engineer:	Roger
Remark:	Power set : 2		
Test Standard:			

Start of Test: 2022-10-10 15:28:01

Test Graph

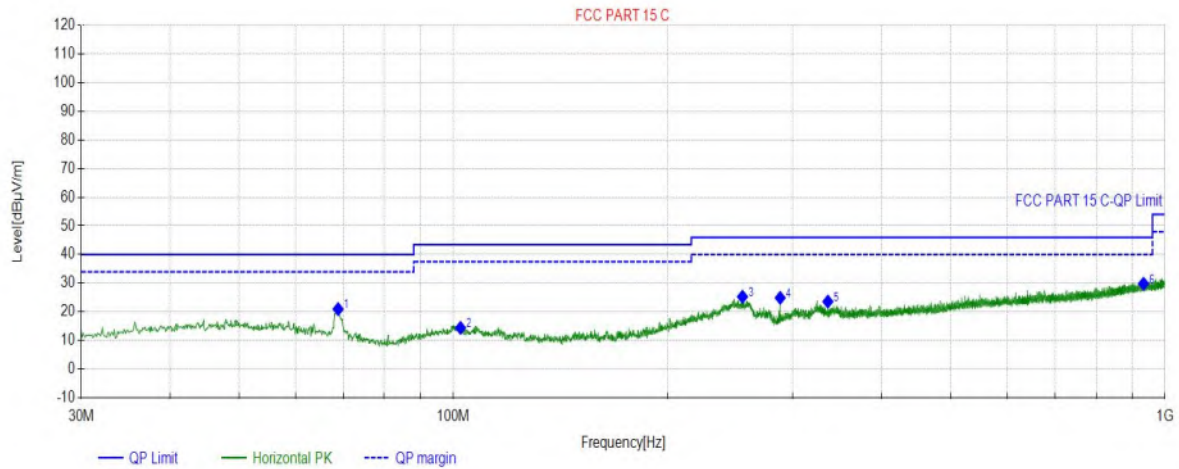

Final Data List


NO.	Freq. (MHz)	Factor (dB)	QP Value (dBμV/m)	QP Limit (dBμV/m)	QP Margin (dB)	Height (cm)	Angle (°)	Polarity
1	68.9009	-24.96	20.97	40.00	19.03	100	26	Horizontal
2	102.3692	-22.95	14.42	43.50	29.08	100	161	Horizontal
3	254.8685	-21.14	25.29	46.00	20.71	100	269	Horizontal
4	287.9488	-20.34	24.89	46.00	21.11	100	64	Horizontal
5	335.9686	-19.07	23.59	46.00	22.41	100	26	Horizontal
6	932.8693	-7.32	29.83	46.00	16.17	100	55	Horizontal

Test Report

Project Information			
EUT:	Bluetooth speaker	Environment:	
Model:	FG206-11	SN:	
Mode:	DH5_2480	Voltage:	DC12V
Customer:		Engineer:	Roger
Remark:	Power set : 2		
Test Standard:			

Start of Test: 2022-10-10 15:28:45

Test Graph

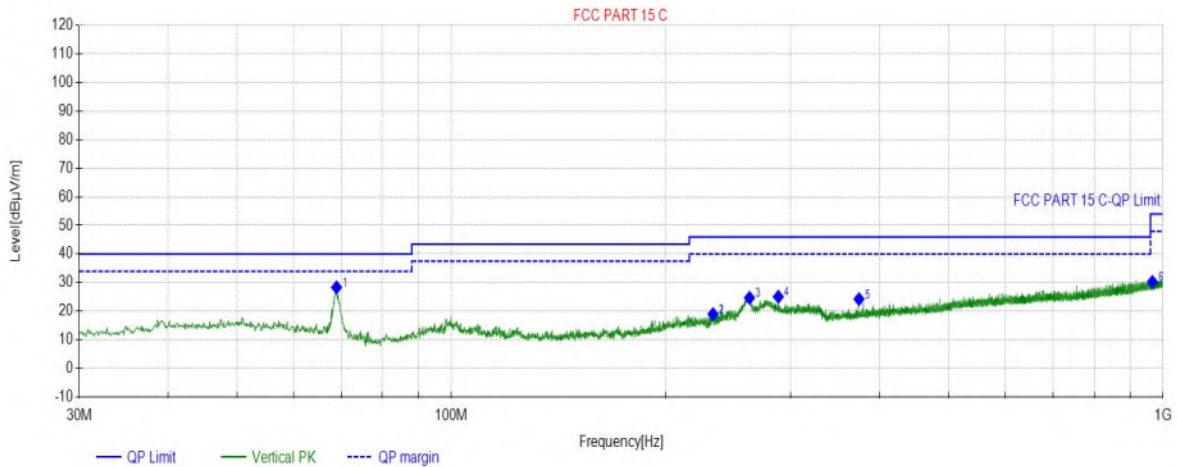

Final Data List

NO.	Freq. (MHz)	Factor (dB)	QP Value (dBμV/m)	QP Limit (dBμV/m)	QP Margin (dB)	Height (cm)	Angle (°)	Polarity
1	68.9979	-24.98	28.36	40.00	11.64	100	41	Vertical
2	233.2353	-21.64	19.00	46.00	27.00	100	333	Vertical
3	262.4352	-21.06	24.70	46.00	21.30	100	196	Vertical
4	288.0458	-20.33	25.08	46.00	20.92	100	138	Vertical
5	373.9964	-17.92	24.26	46.00	21.74	100	333	Vertical
6	966.3376	-6.45	30.29	54.00	23.71	100	180	Vertical


APPENDIX B – Radiated Emission Above 1GHz Test Data

Test Report

Project Information			
Customer:		EUT:	Bluetooth speaker
Model:	FG206-11	SN:	
Mode:	DH5_2402	Voltage:	DC12V
Environment:		Engineer:	Roger
Remark:	Power set : 2		
Test Standard:			

Start of Test: 2022-10-10 11:08:09

Test Graph

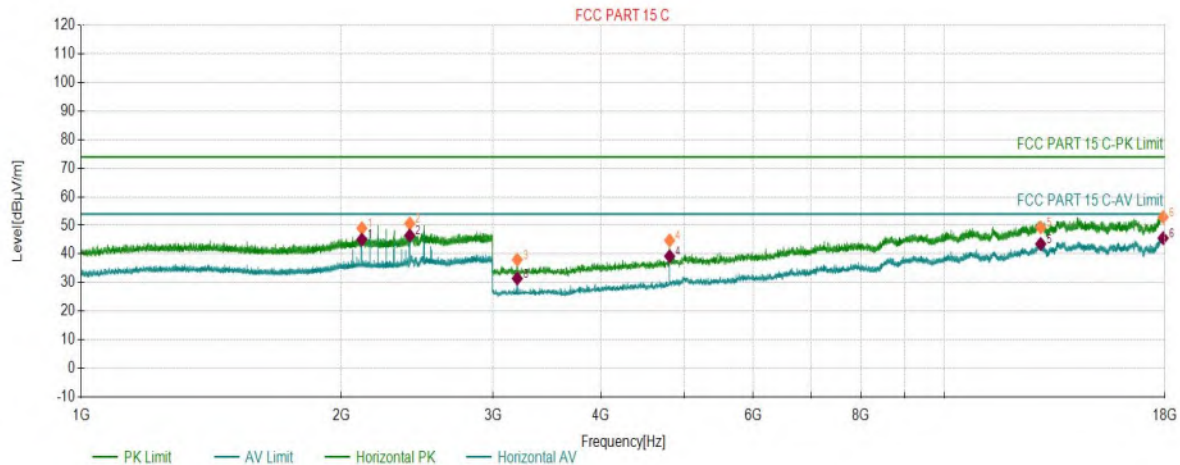

PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2114.1114	6.21	49.03	74.00	24.97	150	267	Horizontal
2	2402.1402	7.13	50.67	74.00	23.33	150	292	Horizontal
3	3199.5200	-16.04	38.03	74.00	35.97	150	15	Horizontal
4	4803.1803	-10.14	44.77	74.00	29.23	150	262	Horizontal
5	12921.9922	9.51	49.26	74.00	24.74	150	218	Horizontal
6	17908.4908	14.81	52.91	74.00	21.09	150	182	Horizontal

AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2114.1114	6.21	45.10	54.00	8.90	150	267	Horizontal
2	2402.1402	7.13	46.48	54.00	7.52	150	292	Horizontal
3	3199.5200	-16.04	31.48	54.00	22.52	150	15	Horizontal
4	4803.1803	-10.14	39.26	54.00	14.74	150	262	Horizontal
5	12921.9922	9.51	43.54	54.00	10.46	150	218	Horizontal
6	17908.4908	14.81	45.54	54.00	8.46	150	182	Horizontal

Test Report

Project Information			
Customer:		EUT:	Bluetooth speaker
Model:	FG206-11	SN:	
Mode:	DH5_2402	Voltage:	DC12V
Environment:		Engineer:	Roger
Remark:	Power set : 2		
Test Standard:			

Start of Test: 2022-10-10 11:09:53

Test Graph

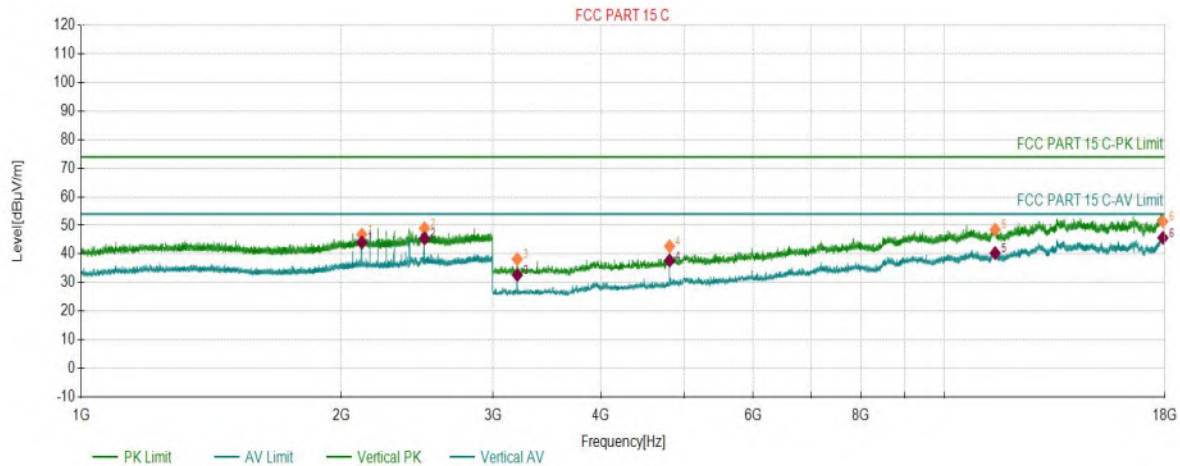

PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2114.1114	6.21	46.83	74.00	27.17	150	253	Vertical
2	2497.9498	7.21	48.98	74.00	25.02	150	279	Vertical
3	3199.5200	-16.04	38.24	74.00	35.76	150	258	Vertical
4	4803.1803	-10.14	42.71	74.00	31.29	150	217	Vertical
5	11441.3441	5.78	48.55	74.00	25.45	150	126	Vertical
6	17897.9898	14.84	51.42	74.00	22.58	150	92	Vertical

AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2114.1114	6.21	44.04	54.00	9.96	150	253	Vertical
2	2497.9498	7.21	45.45	54.00	8.55	150	279	Vertical
3	3199.5200	-16.04	32.69	54.00	21.31	150	258	Vertical
4	4803.1803	-10.14	37.76	54.00	16.24	150	217	Vertical
5	11441.3441	5.78	40.34	54.00	13.66	150	126	Vertical
6	17897.9898	14.84	45.67	54.00	8.33	150	92	Vertical

Test Report

Project Information			
Customer:		EUT:	Bluetooth speaker
Model:	FG206-11	SN:	
Mode:	DH5_2441	Voltage:	DC12V
Environment:		Engineer:	Roger
Remark:	Power set : 2		
Test Standard:			

Start of Test: 2022-10-10 11:16:22

Test Graph

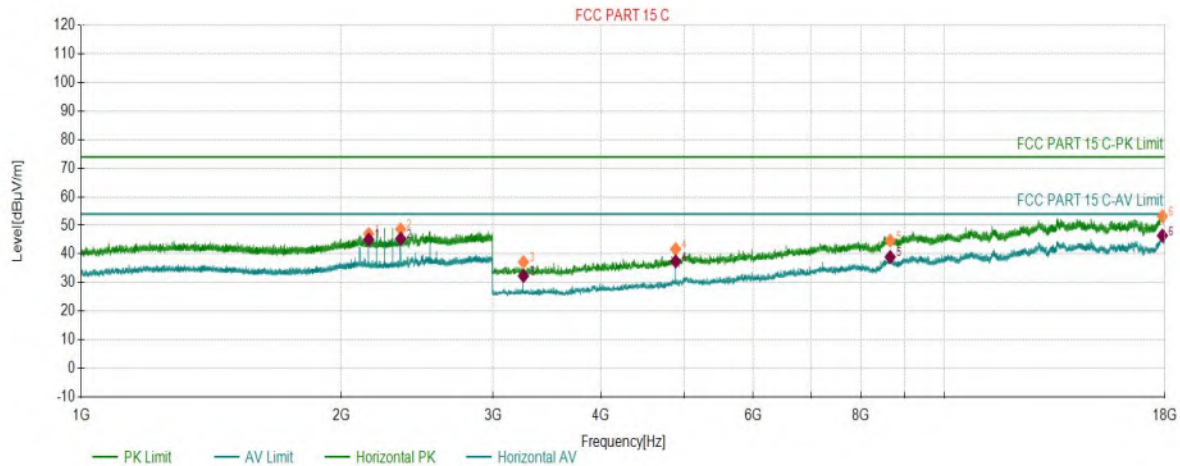

PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2153.1153	6.12	47.07	74.00	26.93	150	241	Horizontal
2	2344.9345	6.39	48.65	74.00	25.35	150	286	Horizontal
3	3253.5254	-15.99	37.21	74.00	36.79	150	187	Horizontal
4	4881.1881	-9.49	41.74	74.00	32.26	150	187	Horizontal
5	8649.5650	2.13	44.68	74.00	29.32	150	321	Horizontal
6	17875.4875	14.67	53.24	74.00	20.76	150	40	Horizontal

AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2153.1153	6.12	45.09	54.00	8.91	150	241	Horizontal
2	2344.9345	6.39	45.37	54.00	8.63	150	286	Horizontal
3	3253.5254	-15.99	32.33	54.00	21.67	150	187	Horizontal
4	4881.1881	-9.49	37.43	54.00	16.57	150	187	Horizontal
5	8649.5650	2.13	38.97	54.00	15.03	150	321	Horizontal
6	17875.4875	14.67	46.45	54.00	7.55	150	40	Horizontal

Test Report

Project Information			
Customer:		EUT:	Bluetooth speaker
Model:	FG206-11	SN:	
Mode:	DH5_2441	Voltage:	DC12V
Environment:		Engineer:	Roger
Remark:	Power set : 2		
Test Standard:			

Start of Test: 2022-10-10 11:18:05

Test Graph

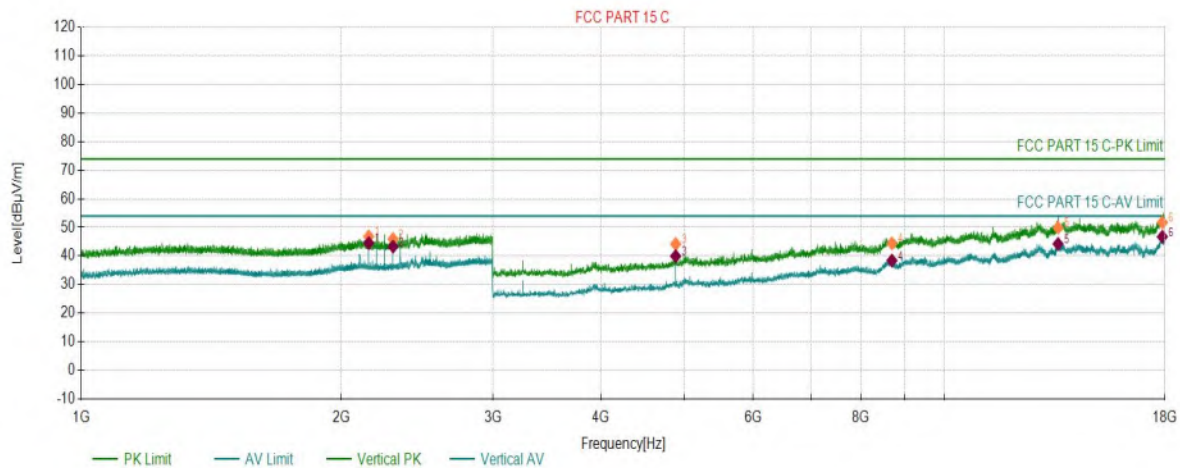

PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2153.1153	6.12	46.86	74.00	27.14	150	248	Vertical
2	2297.1297	6.14	45.97	74.00	28.03	150	198	Vertical
3	4881.1881	-9.49	44.21	74.00	29.79	150	242	Vertical
4	8690.0690	2.05	44.41	74.00	29.59	150	12	Vertical
5	13532.5533	10.56	49.94	74.00	24.06	150	146	Vertical
6	17872.4872	14.65	51.76	74.00	22.24	150	183	Vertical

AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2153.1153	6.12	44.54	54.00	9.46	150	248	Vertical
2	2297.1297	6.14	43.32	54.00	10.68	150	198	Vertical
3	4881.1881	-9.49	39.97	54.00	14.03	150	242	Vertical
4	8690.0690	2.05	38.42	54.00	15.58	150	12	Vertical
5	13532.5533	10.56	44.24	54.00	9.76	150	146	Vertical
6	17872.4872	14.65	46.75	54.00	7.25	150	183	Vertical

Test Report

Project Information			
Customer:		EUT:	Bluetooth speaker
Model:	FG206-11	SN:	
Mode:	DH5_2480	Voltage:	DC12V
Environment:		Engineer:	Roger
Remark:	Power set : 2		
Test Standard:			

Start of Test: 2022-10-10 11:24:25

Test Graph

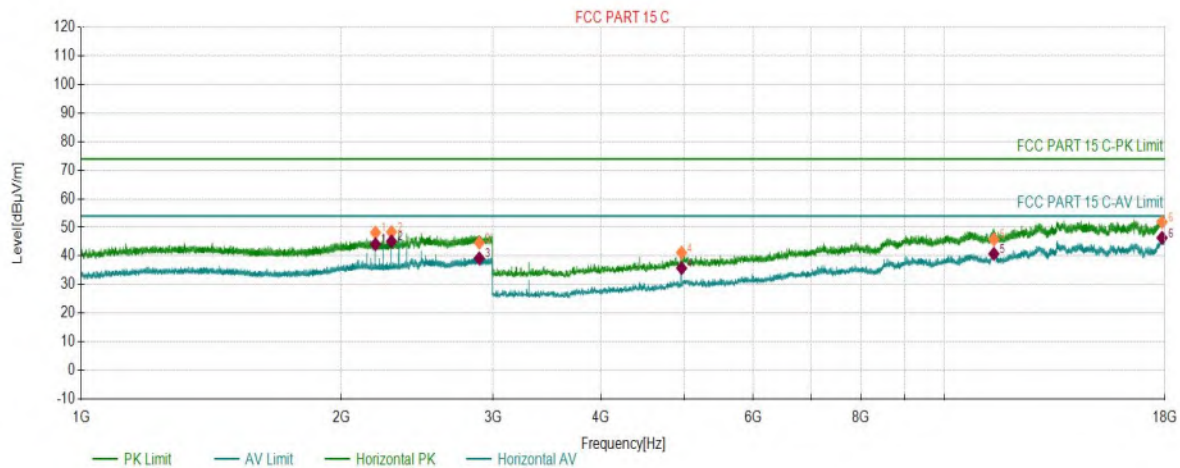

PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2192.1192	6.02	48.22	74.00	25.78	150	247	Horizontal
2	2287.9288	6.12	48.41	74.00	25.59	150	278	Horizontal
3	2891.3891	8.33	44.65	74.00	29.35	150	335	Horizontal
4	4959.1959	-8.84	41.21	74.00	32.79	150	21	Horizontal
5	11403.8404	6.04	45.83	74.00	28.17	150	0	Horizontal
6	17857.4857	14.54	51.88	74.00	22.12	150	212	Horizontal

AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2192.1192	6.02	44.13	54.00	9.87	150	247	Horizontal
2	2287.9288	6.12	45.12	54.00	8.88	150	278	Horizontal
3	2891.3891	8.33	39.21	54.00	14.79	150	335	Horizontal
4	4959.1959	-8.84	35.77	54.00	18.23	150	21	Horizontal
5	11403.8404	6.04	40.79	54.00	13.21	150	0	Horizontal
6	17857.4857	14.54	46.39	54.00	7.61	150	212	Horizontal

Test Report

Project Information			
Customer:		EUT:	Bluetooth speaker
Model:	FG206-11	SN:	
Mode:	DH5_2480	Voltage:	DC12V
Environment:		Engineer:	Roger
Remark:	Power set : 2		
Test Standard:			

Start of Test: 2022-10-10 11:26:09

Test Graph

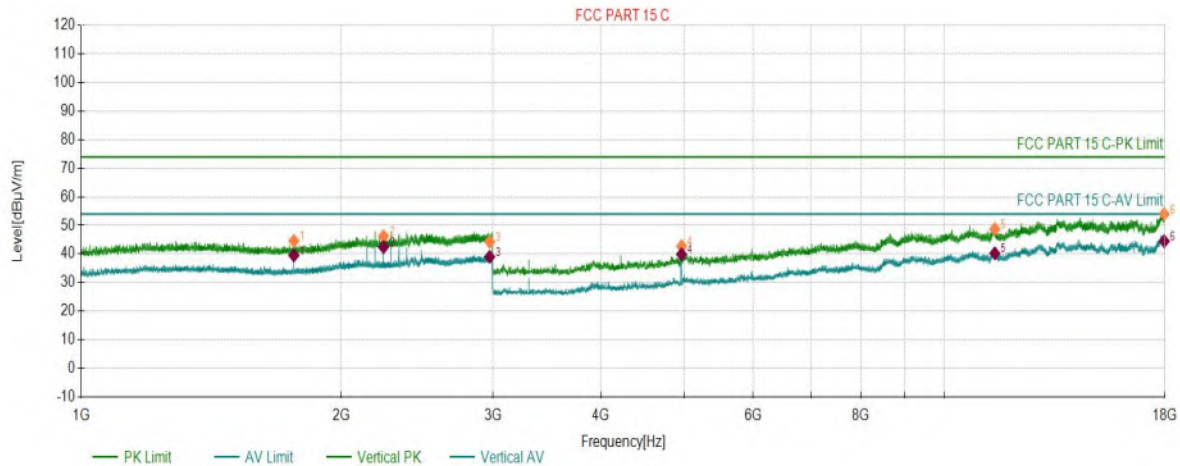

PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1763.2763	3.31	44.62	74.00	29.38	150	328	Vertical
2	2239.9240	6.06	46.19	74.00	27.81	150	230	Vertical
3	2972.7973	8.72	44.28	74.00	29.72	150	110	Vertical
4	4959.1959	-8.84	42.74	74.00	31.26	150	2	Vertical
5	11432.3432	5.84	48.75	74.00	25.25	150	58	Vertical
6	17960.9961	14.56	54.01	74.00	19.99	150	294	Vertical

AV Final Data List

NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1763.2763	3.31	39.53	54.00	14.47	150	328	Vertical
2	2239.9240	6.06	42.45	54.00	11.55	150	230	Vertical
3	2972.7973	8.72	39.04	54.00	14.96	150	110	Vertical
4	4959.1959	-8.84	39.91	54.00	14.09	150	2	Vertical
5	11432.3432	5.84	40.27	54.00	13.73	150	58	Vertical
6	17960.9961	14.56	44.49	54.00	9.51	150	294	Vertical

Test Report

Project Information			
Customer:		EUT:	Bluetooth speaker
Model:	FG206-11	SN:	
Mode:	2DH5_2402	Voltage:	DC12V
Environment:		Engineer:	Roger
Remark:	Power set : 2		
Test Standard:			

Start of Test: 2022-10-10 11:29:53

Test Graph



PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2209.9210	6.01	47.19	74.00	26.81	150	244	Horizontal
2	2402.1402	7.13	47.82	74.00	26.18	150	235	Horizontal
3	3199.5200	-16.04	37.33	74.00	36.67	150	178	Horizontal
4	4803.1803	-10.14	42.15	74.00	31.85	150	262	Horizontal
5	9054.6055	2.39	44.56	74.00	29.44	150	318	Horizontal
6	17888.9889	14.77	51.95	74.00	22.05	150	184	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2209.9210	6.01	44.80	54.00	9.20	150	244	Horizontal
2	2402.1402	7.13	45.50	54.00	8.50	150	235	Horizontal
3	3199.5200	-16.04	31.19	54.00	22.81	150	178	Horizontal
4	4803.1803	-10.14	37.10	54.00	16.90	150	262	Horizontal
5	9054.6055	2.39	38.81	54.00	15.19	150	318	Horizontal
6	17888.9889	14.77	46.96	54.00	7.04	150	184	Horizontal

Test Report

Project Information			
Customer:		EUT:	Bluetooth speaker
Model:	FG206-11	SN:	
Mode:	2DH5_2402	Voltage:	DC12V
Environment:		Engineer:	Roger
Remark:	Power set : 2		
Test Standard:			

Start of Test: 2022-10-10 11:31:36

Test Graph



PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2258.1258	6.08	46.42	74.00	27.58	150	60	Vertical
2	2891.1891	8.33	45.64	74.00	28.36	150	141	Vertical
3	3199.5200	-16.04	36.97	74.00	37.03	150	182	Vertical
4	4803.1803	-10.14	42.58	74.00	31.42	150	339	Vertical
5	11456.3456	5.67	46.52	74.00	27.48	150	71	Vertical
6	17777.9778	13.87	50.07	74.00	23.93	150	108	Vertical

AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2258.1258	6.08	43.27	54.00	10.73	150	60	Vertical
2	2891.1891	8.33	39.39	54.00	14.61	150	141	Vertical
3	3199.5200	-16.04	31.07	54.00	22.93	150	182	Vertical
4	4803.1803	-10.14	36.87	54.00	17.13	150	339	Vertical
5	11456.3456	5.67	40.86	54.00	13.14	150	71	Vertical
6	17777.9778	13.87	44.09	54.00	9.91	150	108	Vertical

Test Report

Project Information			
Customer:		EUT:	Bluetooth speaker
Model:	FG206-11	SN:	
Mode:	2DH5_2441	Voltage:	DC12V
Environment:		Engineer:	Roger
Remark:	Power set : 2		
Test Standard:			

Start of Test: 2022-10-10 11:38:55

Test Graph

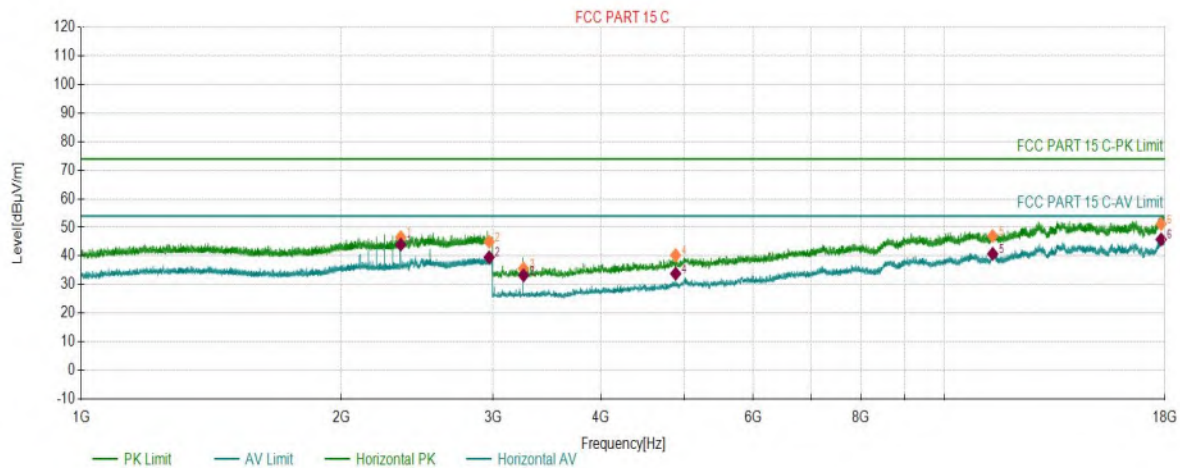

PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2344.9345	6.39	46.59	74.00	27.41	150	282	Horizontal
2	2968.3968	8.70	45.02	74.00	28.98	150	270	Horizontal
3	3253.5254	-15.99	35.65	74.00	38.35	150	182	Horizontal
4	4881.1881	-9.49	40.30	74.00	33.70	150	176	Horizontal
5	11367.8368	5.61	47.02	74.00	26.98	150	26	Horizontal
6	17815.4815	14.24	51.24	74.00	22.76	150	227	Horizontal

AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2344.9345	6.39	44.01	54.00	9.99	150	282	Horizontal
2	2968.3968	8.70	39.57	54.00	14.43	150	270	Horizontal
3	3253.5254	-15.99	33.25	54.00	20.75	150	182	Horizontal
4	4881.1881	-9.49	33.85	54.00	20.15	150	176	Horizontal
5	11367.8368	5.61	40.77	54.00	13.23	150	26	Horizontal
6	17815.4815	14.24	45.80	54.00	8.20	150	227	Horizontal

Test Report

Project Information			
Customer:		EUT:	Bluetooth speaker
Model:	FG206-11	SN:	
Mode:	2DH5_2441	Voltage:	DC12V
Environment:		Engineer:	Roger
Remark:	Power set : 2		
Test Standard:			

Start of Test: 2022-10-10 11:40:39

Test Graph

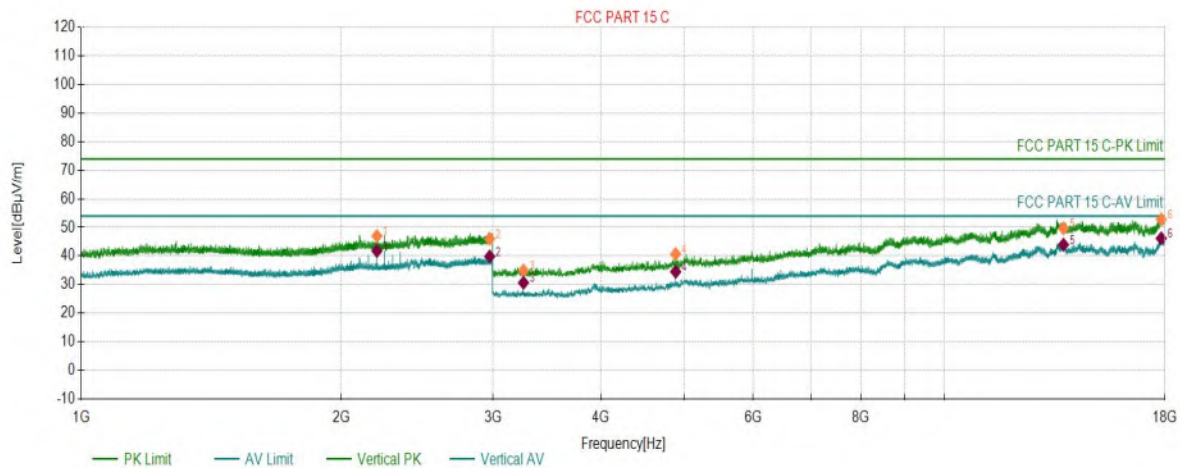

PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2200.7201	6.00	47.03	74.00	26.97	150	257	Vertical
2	2972.5973	8.72	46.04	74.00	27.96	150	170	Vertical
3	3253.5254	-15.99	34.92	74.00	39.08	150	93	Vertical
4	4881.1881	-9.49	40.73	74.00	33.27	150	240	Vertical
5	13729.0729	10.96	49.67	74.00	24.33	150	68	Vertical
6	17819.9820	14.27	52.78	74.00	21.22	150	190	Vertical

AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2200.7201	6.00	41.80	54.00	12.20	150	257	Vertical
2	2972.5973	8.72	39.86	54.00	14.14	150	170	Vertical
3	3253.5254	-15.99	30.68	54.00	23.32	150	93	Vertical
4	4881.1881	-9.49	34.52	54.00	19.48	150	240	Vertical
5	13729.0729	10.96	43.97	54.00	10.03	150	68	Vertical
6	17819.9820	14.27	46.19	54.00	7.81	150	190	Vertical

Test Report

Project Information			
Customer:		EUT:	Bluetooth speaker
Model:	FG206-11	SN:	
Mode:	2DH5_2480	Voltage:	DC12V
Environment:		Engineer:	Roger
Remark:	Power set : 2		
Test Standard:			

Start of Test: 2022-10-10 11:43:26

Test Graph

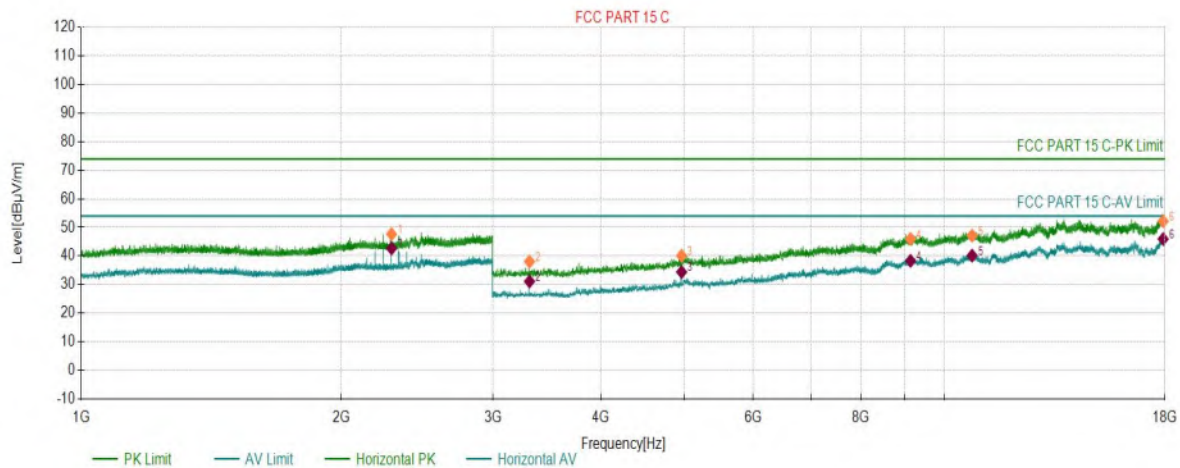

PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2288.3288	6.12	47.65	74.00	26.35	150	281	Horizontal
2	3306.0306	-15.93	38.07	74.00	35.93	150	184	Horizontal
3	4959.1959	-8.84	40.13	74.00	33.87	150	16	Horizontal
4	9131.1131	2.52	45.96	74.00	28.04	150	327	Horizontal
5	10760.2760	5.46	47.14	74.00	26.86	150	53	Horizontal
6	17908.4908	14.81	52.17	74.00	21.83	150	23	Horizontal

AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2288.3288	6.12	42.67	54.00	11.33	150	281	Horizontal
2	3306.0306	-15.93	31.14	54.00	22.86	150	184	Horizontal
3	4959.1959	-8.84	34.44	54.00	19.56	150	16	Horizontal
4	9131.1131	2.52	38.32	54.00	15.68	150	327	Horizontal
5	10760.2760	5.46	40.16	54.00	13.84	150	53	Horizontal
6	17908.4908	14.81	45.97	54.00	8.03	150	23	Horizontal

Test Report

Project Information			
Customer:		EUT:	Bluetooth speaker
Model:	FG206-11	SN:	
Mode:	2DH5_2480	Voltage:	DC12V
Environment:		Engineer:	Roger
Remark:	Power set : 2		
Test Standard:			

Start of Test: 2022-10-10 11:45:11

Test Graph

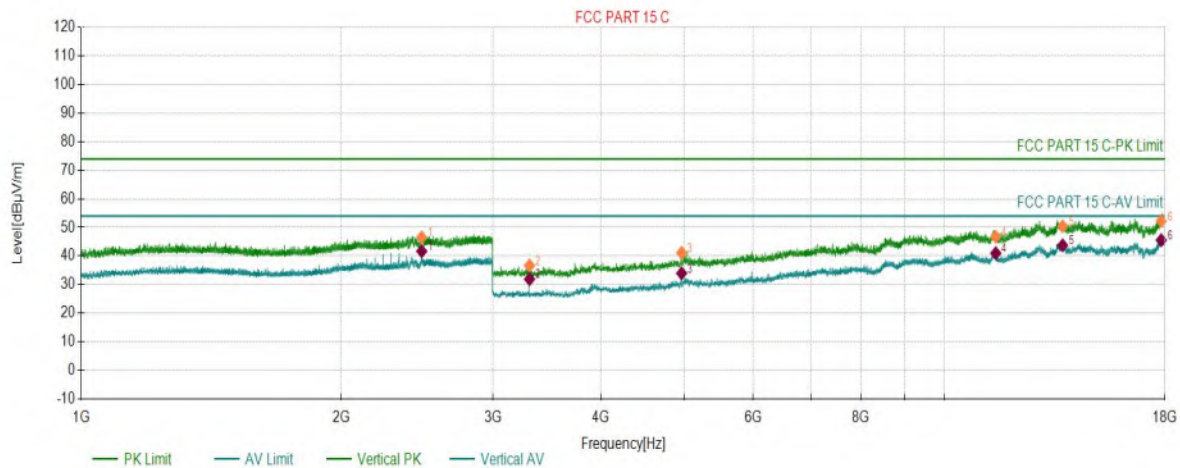

PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2480.1480	7.68	46.49	74.00	27.51	150	273	Vertical
2	3306.0306	-15.93	36.69	74.00	37.31	150	90	Vertical
3	4959.1959	-8.84	41.15	74.00	32.85	150	239	Vertical
4	11462.3462	5.63	46.74	74.00	27.26	150	228	Vertical
5	13699.0699	11.36	50.41	74.00	23.59	150	277	Vertical
6	17818.4818	14.26	52.23	74.00	21.77	150	84	Vertical

AV Final Data List

NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2480.1480	7.68	41.70	54.00	12.30	150	273	Vertical
2	3306.0306	-15.93	31.94	54.00	22.06	150	90	Vertical
3	4959.1959	-8.84	33.97	54.00	20.03	150	239	Vertical
4	11462.3462	5.63	41.00	54.00	13.00	150	228	Vertical
5	13699.0699	11.36	43.74	54.00	10.26	150	277	Vertical
6	17818.4818	14.26	45.56	54.00	8.44	150	84	Vertical

Test Report

Project Information			
Customer:		EUT:	Bluetooth speaker
Model:	FG206-11	SN:	
Mode:	3DH5_2402	Voltage:	DC12V
Environment:		Engineer:	Roger
Remark:	Power set : 2		
Test Standard:			

Start of Test: 2022-10-10 11:54:45

Test Graph



PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2161.9162	6.10	46.27	74.00	27.73	150	248	Horizontal
2	2305.9306	6.17	47.01	74.00	26.99	150	265	Horizontal
3	3199.5200	-16.04	37.06	74.00	36.94	150	183	Horizontal
4	4803.1803	-10.14	40.60	74.00	33.40	150	177	Horizontal
5	8904.5905	1.51	44.31	74.00	29.69	150	289	Horizontal
6	17876.9877	14.68	52.67	74.00	21.33	150	226	Horizontal

AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2161.9162	6.10	44.09	54.00	9.91	150	248	Horizontal
2	2305.9306	6.17	44.15	54.00	9.85	150	265	Horizontal
3	3199.5200	-16.04	32.53	54.00	21.47	150	183	Horizontal
4	4803.1803	-10.14	35.30	54.00	18.70	150	177	Horizontal
5	8904.5905	1.51	38.07	54.00	15.93	150	289	Horizontal
6	17876.9877	14.68	46.30	54.00	7.70	150	226	Horizontal

Test Report

Project Information			
Customer:		EUT:	Bluetooth speaker
Model:	FG206-11	SN:	
Mode:	3DH5_2402	Voltage:	DC12V
Environment:		Engineer:	Roger
Remark:	Power set : 2		
Test Standard:			

Start of Test: 2022-10-10 11:56:28

Test Graph

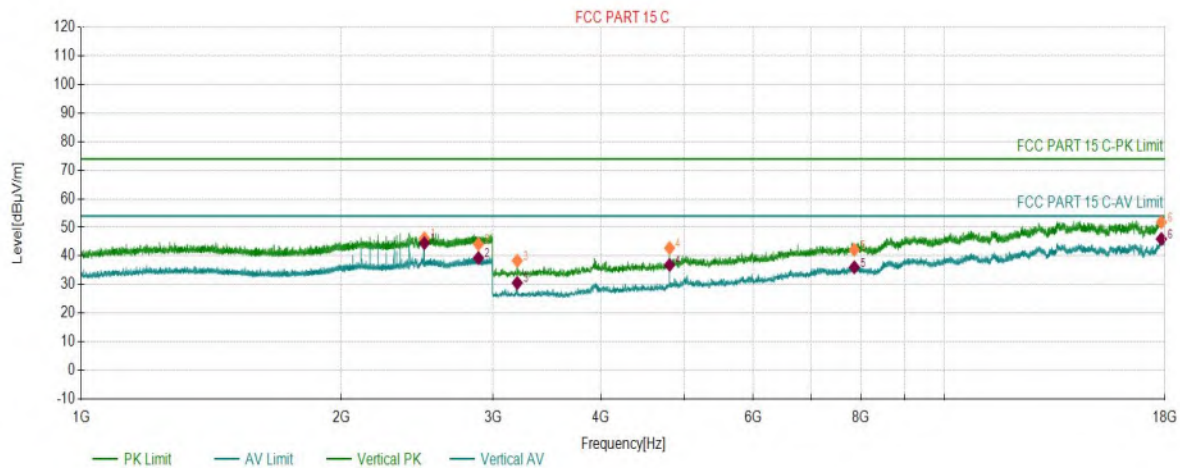

PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2497.7498	7.18	46.19	74.00	27.81	150	273	Vertical
2	2884.5885	8.31	44.16	74.00	29.84	150	215	Vertical
3	3199.5200	-16.04	38.34	74.00	35.66	150	198	Vertical
4	4803.1803	-10.14	42.80	74.00	31.20	150	281	Vertical
5	7860.4860	-0.38	42.17	74.00	31.83	150	306	Vertical
6	17825.9826	14.32	51.83	74.00	22.17	150	12	Vertical

AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2497.7498	7.18	44.50	54.00	9.50	150	273	Vertical
2	2884.5885	8.31	39.31	54.00	14.69	150	215	Vertical
3	3199.5200	-16.04	30.60	54.00	23.40	150	198	Vertical
4	4803.1803	-10.14	36.89	54.00	17.11	150	281	Vertical
5	7860.4860	-0.38	36.08	54.00	17.92	150	306	Vertical
6	17825.9826	14.32	45.97	54.00	8.03	150	12	Vertical

Test Report

Project Information			
Customer:		EUT:	Bluetooth speaker
Model:	FG206-11	SN:	
Mode:	3DH5_2441	Voltage:	DC12V
Environment:		Engineer:	Roger
Remark:	Power set : 2		
Test Standard:			

Start of Test: 2022-10-10 14:00:47

Test Graph

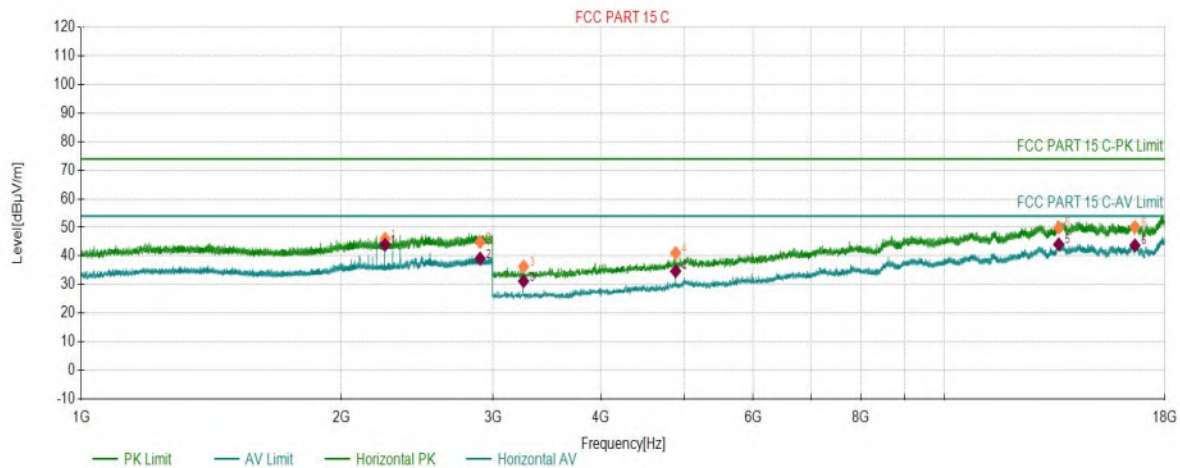

PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2249.1249	6.07	46.04	74.00	27.96	150	248	Horizontal
2	2897.3897	8.34	44.89	74.00	29.11	150	360	Horizontal
3	3253.5254	-15.99	36.32	74.00	37.68	150	188	Horizontal
4	4881.1881	-9.49	41.07	74.00	32.93	150	226	Horizontal
5	13556.5557	10.50	49.96	74.00	24.04	150	214	Horizontal
6	16613.8614	11.10	50.18	74.00	23.82	150	37	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2249.1249	6.07	43.96	54.00	10.04	150	248	Horizontal
2	2897.3897	8.34	39.11	54.00	14.89	150	360	Horizontal
3	3253.5254	-15.99	31.23	54.00	22.77	150	188	Horizontal
4	4881.1881	-9.49	34.72	54.00	19.28	150	226	Horizontal
5	13556.5557	10.50	44.09	54.00	9.91	150	214	Horizontal
6	16613.8614	11.10	43.74	54.00	10.26	150	37	Horizontal

Test Report

Project Information			
Customer:		EUT:	Bluetooth speaker
Model:	FG206-11	SN:	
Mode:	3DH5_2441	Voltage:	DC12V
Environment:		Engineer:	Roger
Remark:	Power set : 2		
Test Standard:			

Start of Test: 2022-10-10 14:02:31

Test Graph



PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2249.1249	6.07	45.89	74.00	28.11	150	193	Vertical
2	2532.3532	7.69	45.11	74.00	28.89	150	289	Vertical
3	3253.5254	-15.99	34.87	74.00	39.13	150	188	Vertical
4	4881.1881	-9.49	43.84	74.00	30.16	150	258	Vertical
5	10548.7549	4.72	44.72	74.00	29.28	150	358	Vertical
6	17876.9877	14.68	51.21	74.00	22.79	150	355	Vertical

AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2249.1249	6.07	43.56	54.00	10.44	150	193	Vertical
2	2532.3532	7.69	38.71	54.00	15.29	150	289	Vertical
3	3253.5254	-15.99	29.63	54.00	24.37	150	188	Vertical
4	4881.1881	-9.49	39.13	54.00	14.87	150	258	Vertical
5	10548.7549	4.72	39.72	54.00	14.28	150	358	Vertical
6	17876.9877	14.68	45.97	54.00	8.03	150	355	Vertical

Test Report

Project Information			
Customer:		EUT:	Bluetooth speaker
Model:	FG206-11	SN:	
Mode:	3DH5_2480	Voltage:	DC12V
Environment:		Engineer:	Roger
Remark:	Power set : 2		
Test Standard:			

Start of Test: 2022-10-10 14:07:09

Test Graph

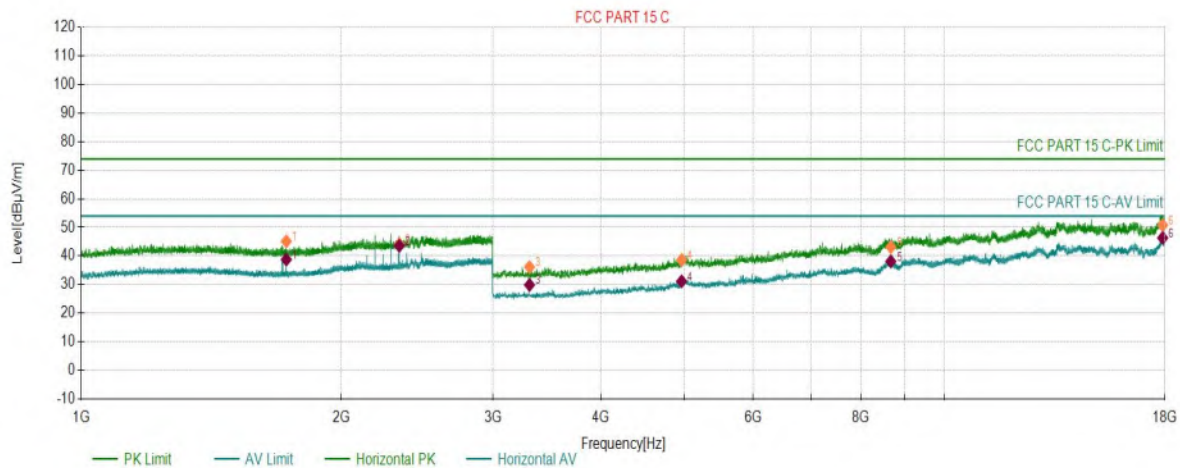

PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1728.2728	3.27	45.16	74.00	28.84	150	251	Horizontal
2	2335.9336	6.34	44.18	74.00	29.82	150	289	Horizontal
3	3306.0306	-15.93	36.17	74.00	37.83	150	15	Horizontal
4	4959.1959	-8.84	38.65	74.00	35.35	150	345	Horizontal
5	8664.5665	2.10	43.17	74.00	30.83	150	345	Horizontal
6	17888.9889	14.77	50.80	74.00	23.20	150	27	Horizontal

AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1728.2728	3.27	38.81	54.00	15.19	150	251	Horizontal
2	2335.9336	6.34	43.58	54.00	10.42	150	289	Horizontal
3	3306.0306	-15.93	29.92	54.00	24.08	150	15	Horizontal
4	4959.1959	-8.84	31.17	54.00	22.83	150	345	Horizontal
5	8664.5665	2.10	38.14	54.00	15.86	150	345	Horizontal
6	17888.9889	14.77	46.35	54.00	7.65	150	27	Horizontal

Test Report

Project Information			
Customer:		EUT:	Bluetooth speaker
Model:	FG206-11	SN:	
Mode:	3DH5_2480	Voltage:	DC12V
Environment:		Engineer:	Roger
Remark:	Power set : 2		
Test Standard:			

Start of Test: 2022-10-10 14:08:44

Test Graph

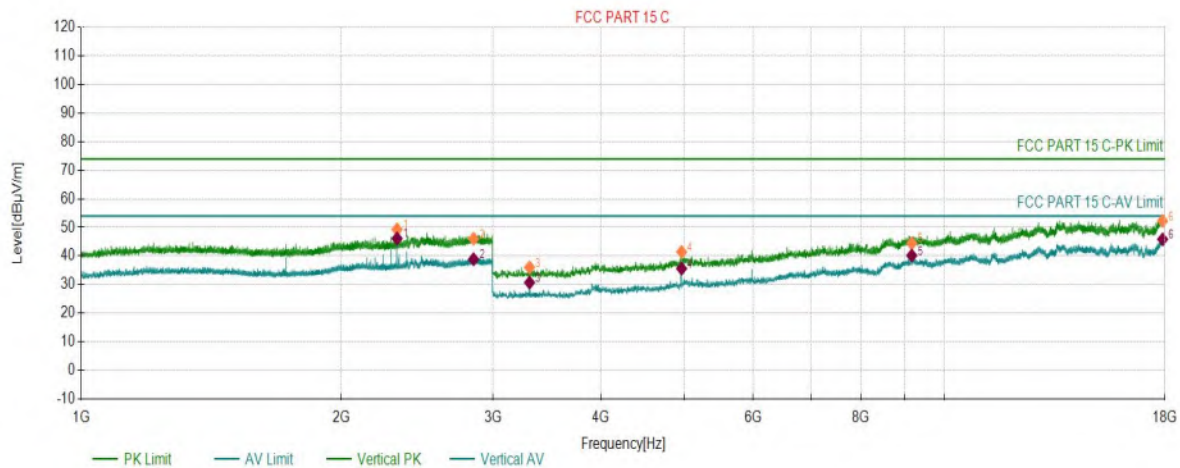

PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2322.1322	6.26	49.31	74.00	24.69	150	258	Vertical
2	2847.5848	8.21	46.04	74.00	27.96	150	295	Vertical
3	3306.0306	-15.93	36.06	74.00	37.94	150	181	Vertical
4	4959.1959	-8.84	41.44	74.00	32.56	150	217	Vertical
5	9161.1161	2.96	44.44	74.00	29.56	150	331	Vertical
6	17882.9883	14.73	52.28	74.00	21.72	150	0	Vertical

AV Final Data List

NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2322.1322	6.26	46.16	54.00	7.84	150	258	Vertical
2	2847.5848	8.21	38.88	54.00	15.12	150	295	Vertical
3	3306.0306	-15.93	30.73	54.00	23.27	150	181	Vertical
4	4959.1959	-8.84	35.62	54.00	18.38	150	217	Vertical
5	9161.1161	2.96	40.19	54.00	13.81	150	331	Vertical
6	17882.9883	14.73	45.87	54.00	8.13	150	0	Vertical


Restriction Band Emission

Test Report

Project Information			
Customer:		EUT:	Bluetooth speaker
Model:	FG206-11	SN:	
Mode:	DH5_2402	Voltage:	DC12V
Environment:		Engineer:	Roger
Remark:	Power set : 2		
Test Standard:			

Start of Test: 2022-10-10 11:13:42

Test Graph

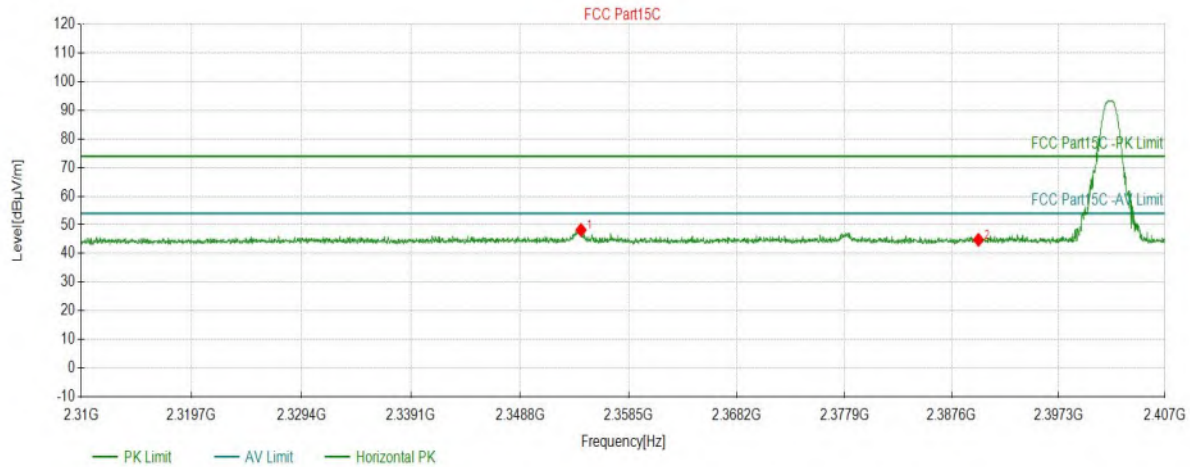

Suspected Data List


NO.	Freq. (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2354.2467	48.24	6.39	74.00	25.76	150	286	PK	Horizont
2	2390.0193	44.78	6.47	74.00	29.22	150	113	PK	Horizont

Test Report

Project Information			
Customer:		EUT:	Bluetooth speaker
Model:	FG206-11	SN:	
Mode:	DH5_2402	Voltage:	DC12V
Environment:		Engineer:	Roger
Remark:	Power set : 2		
Test Standard:			

Start of Test: 2022-10-10 11:14:34

Test Graph

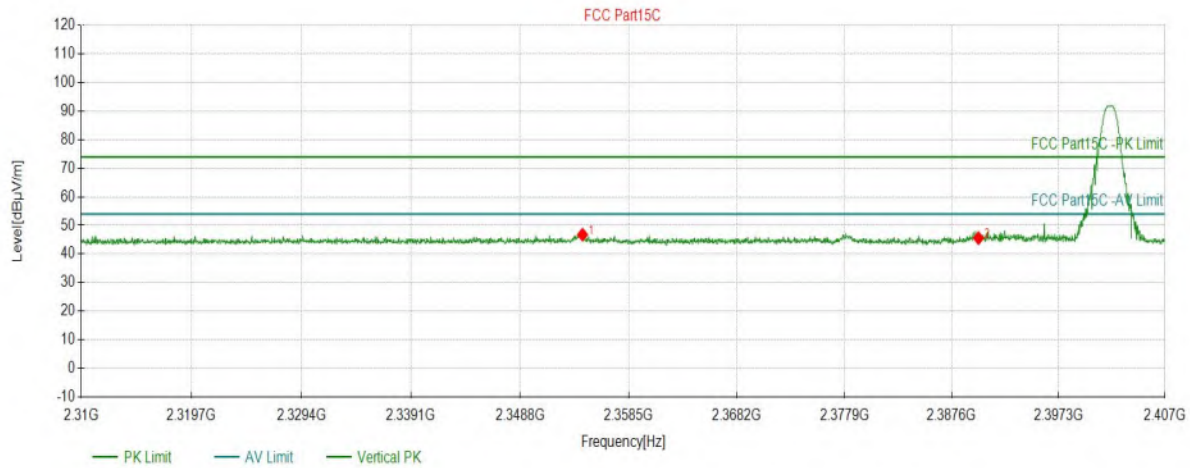

Suspected Data List


NO.	Freq. (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2354.3761	46.79	6.39	74.00	27.21	150	118	PK	Vertical
2	2390.0193	45.58	6.47	74.00	28.42	150	107	PK	Vertical

Test Report

Project Information			
Customer:		EUT:	Bluetooth speaker
Model:	FG206-11	SN:	
Mode:	DH5_2480	Voltage:	DC12V
Environment:		Engineer:	Roger
Remark:	Power set : 2		
Test Standard:			

Start of Test: 2022-10-10 11:21:29

Test Graph

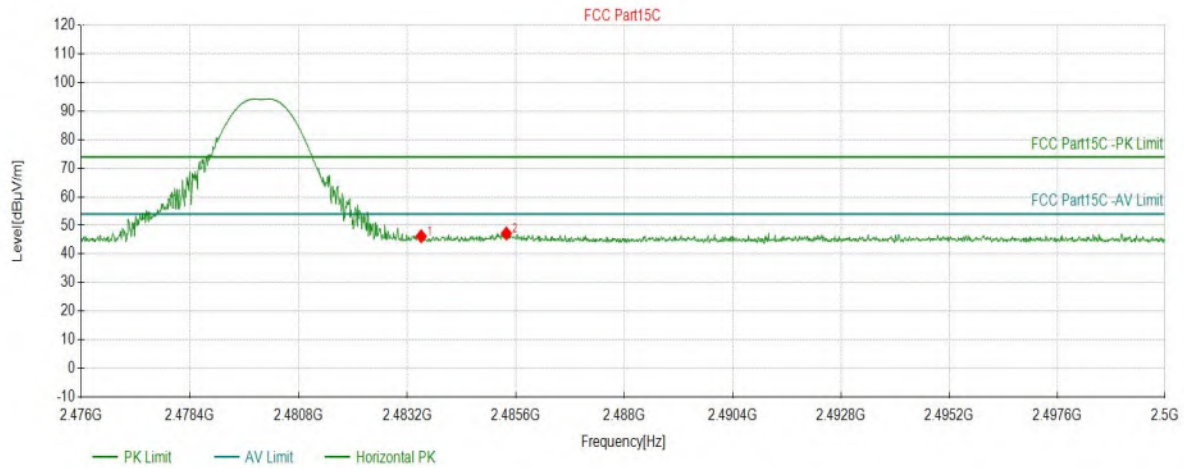

Suspected Data List


NO.	Freq. (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5038	46.22	7.09	74.00	27.78	150	360	PK	Horizont
2	2485.3887	47.21	7.10	74.00	26.79	150	266	PK	Horizont

Test Report

Project Information			
Customer:		EUT:	Bluetooth speaker
Model:	FG206-11	SN:	
Mode:	DH5_2480	Voltage:	DC12V
Environment:		Engineer:	Roger
Remark:	Power set : 2		
Test Standard:			

Start of Test: 2022-10-10 11:22:28

Test Graph

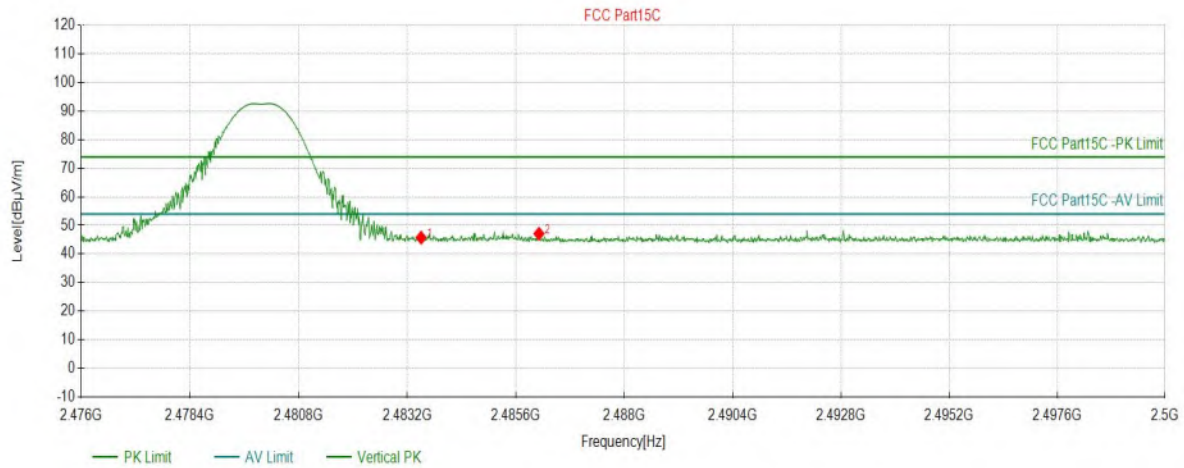

Suspected Data List


NO.	Freq. (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5038	45.73	7.09	74.00	28.27	150	276	PK	Vertical
2	2486.1091	47.10	7.11	74.00	26.90	150	142	PK	Vertical

Test Report

Project Information			
Customer:		EUT:	Bluetooth speaker
Model:	FG206-11	SN:	
Mode:	2DH5_2402	Voltage:	DC12V
Environment:		Engineer:	Roger
Remark:	Power set : 2		
Test Standard:			

Start of Test: 2022-10-10 11:35:42

Test Graph

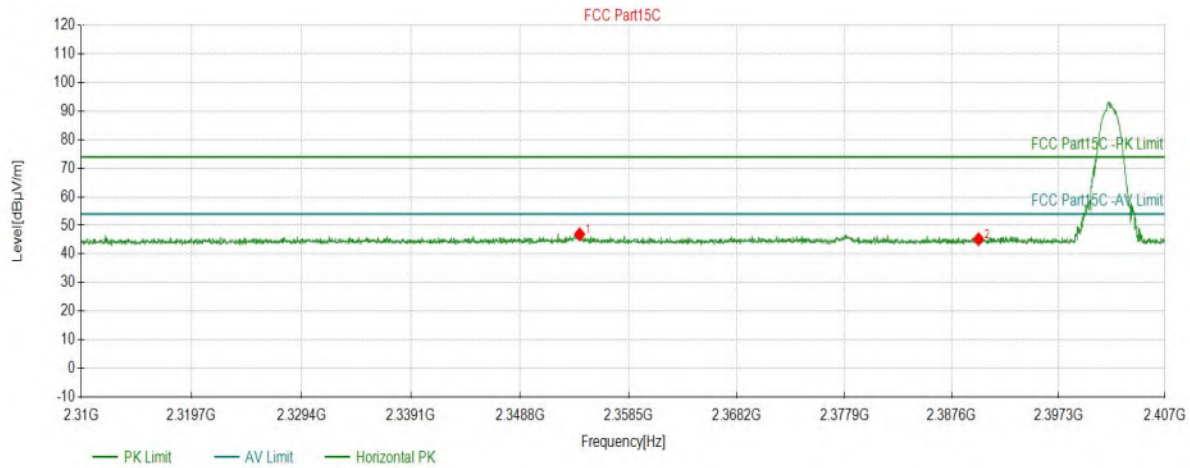

Suspected Data List


NO.	Freq. (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2354.1174	46.91	6.39	74.00	27.09	150	250	PK	Horizont
2	2390.0193	45.20	6.47	74.00	28.80	150	359	PK	Horizont

Test Report

Project Information			
Customer:		EUT:	Bluetooth speaker
Model:	FG206-11	SN:	
Mode:	2DH5_2402	Voltage:	DC12V
Environment:		Engineer:	Roger
Remark:	Power set : 2		
Test Standard:			

Start of Test: 2022-10-10 11:36:35

Test Graph

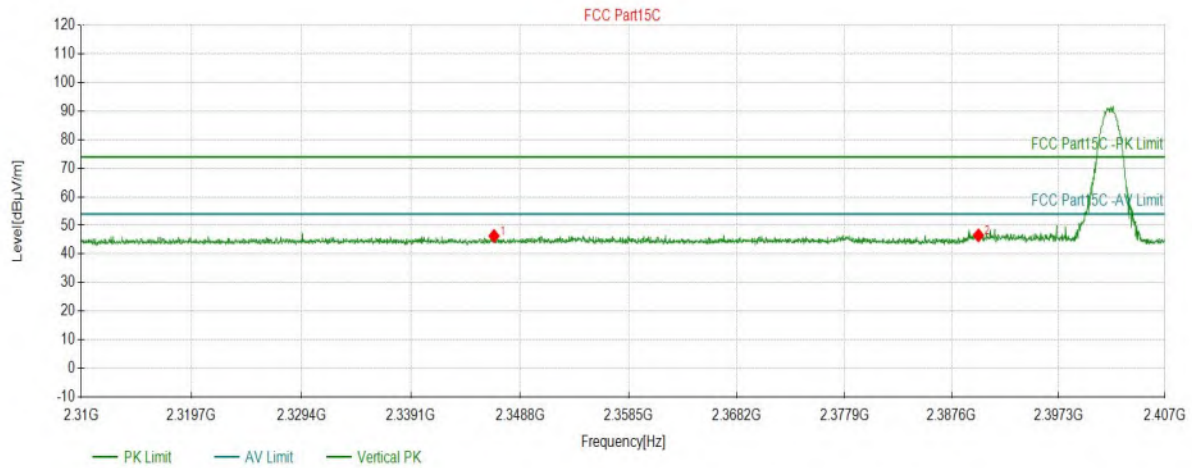

Suspected Data List


NO.	Freq. (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2346.4842	46.31	6.37	74.00	27.69	150	344	PK	Vertical
2	2390.0193	46.54	6.47	74.00	27.46	150	70	PK	Vertical

Test Report

Project Information			
Customer:		EUT:	Bluetooth speaker
Model:	FG206-11	SN:	
Mode:	2DH5_2480	Voltage:	DC12V
Environment:		Engineer:	Roger
Remark:	Power set : 2		
Test Standard:			

Start of Test: 2022-10-10 11:47:19

Test Graph

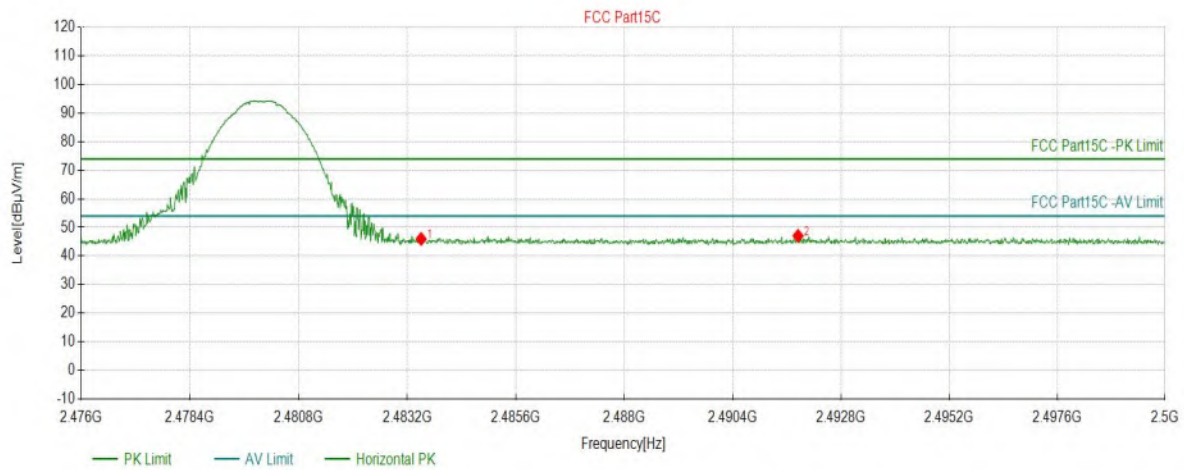

Suspected Data List


NO.	Freq. (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5038	45.99	7.09	74.00	28.01	150	196	PK	Horizont
2	2491.8479	47.07	7.15	74.00	26.93	150	261	PK	Horizont

Test Report

Project Information			
Customer:		EUT:	Bluetooth speaker
Model:	FG206-11	SN:	
Mode:	2DH5_2480	Voltage:	DC12V
Environment:		Engineer:	Roger
Remark:	Power set : 2		
Test Standard:			

Start of Test: 2022-10-10 11:48:19

Test Graph

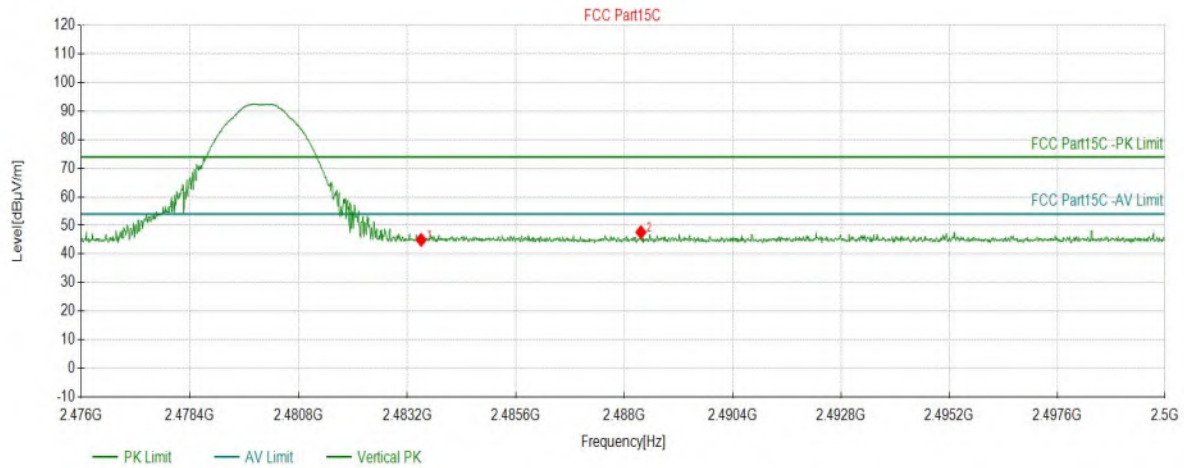

Suspected Data List


NO.	Freq. (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5038	44.95	7.09	74.00	29.05	150	114	PK	Vertical
2	2488.3662	47.65	7.13	74.00	26.35	150	224	PK	Vertical

Test Report

Project Information			
Customer:		EUT:	Bluetooth speaker
Model:	FG206-11	SN:	
Mode:	3DH5_2402	Voltage:	DC12V
Environment:		Engineer:	Roger
Remark:	Power set : 2		
Test Standard:			

Start of Test: 2022-10-10 11:52:49

Test Graph

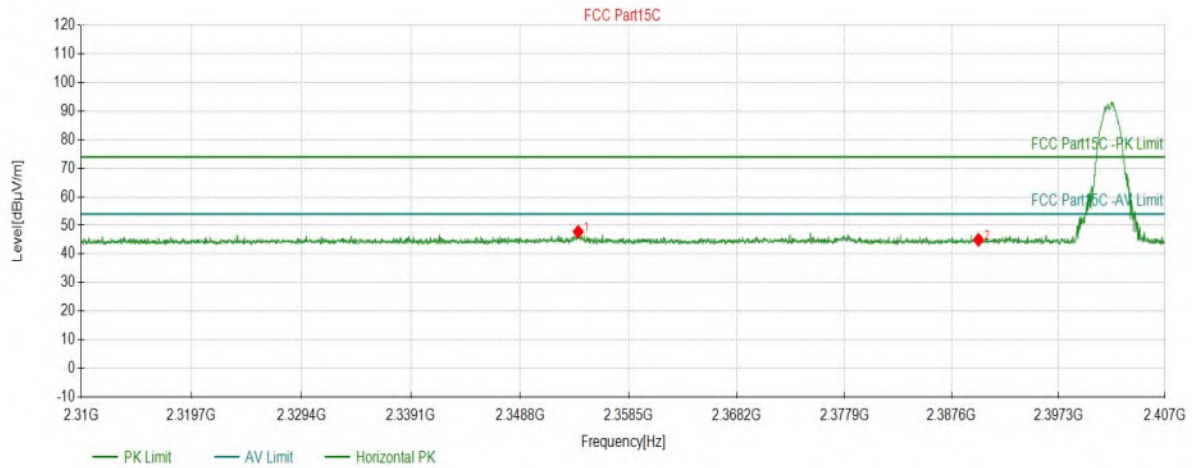

Suspected Data List


NO.	Freq. (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2353.9880	47.81	6.39	74.00	26.19	150	276	PK	Horizont
2	2390.0193	44.97	6.47	74.00	29.03	150	18	PK	Horizont

Test Report

Project Information			
Customer:		EUT:	Bluetooth speaker
Model:	FG206-11	SN:	
Mode:	3DH5_2402	Voltage:	DC12V
Environment:		Engineer:	Roger
Remark:	Power set : 2		
Test Standard:			

Start of Test: 2022-10-10 11:53:42

Test Graph

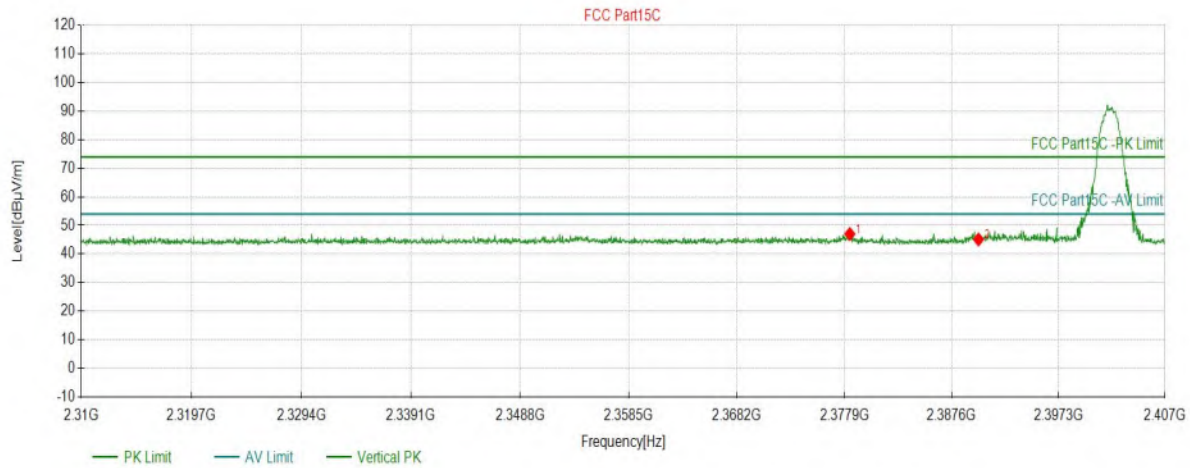

Suspected Data List


NO.	Freq. (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2378.3755	47.02	6.44	74.00	26.98	150	272	PK	Vertical
2	2390.0193	45.10	6.47	74.00	28.90	150	50	PK	Vertical

Test Report

Project Information			
Customer:		EUT:	Bluetooth speaker
Model:	FG206-11	SN:	
Mode:	3DH5_2480	Voltage:	DC12V
Environment:		Engineer:	Roger
Remark:	Power set : 2		
Test Standard:			

Start of Test: 2022-10-10 14:05:11

Test Graph

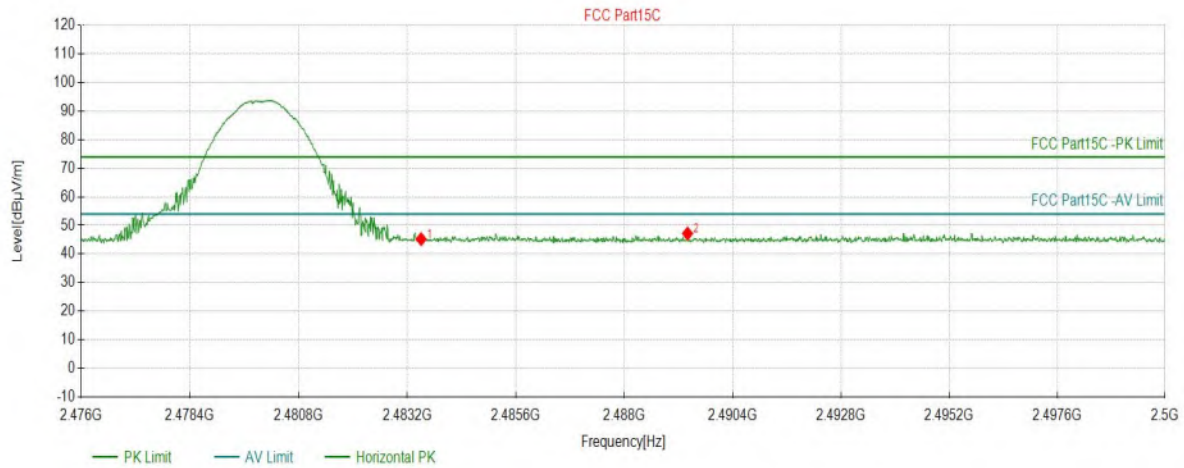

Suspected Data List


NO.	Freq. (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5038	45.21	7.09	74.00	28.79	150	35	PK	Horizont
2	2489.3987	47.18	7.13	74.00	26.82	150	151	PK	Horizont

Test Report

Project Information			
Customer:		EUT:	Bluetooth speaker
Model:	FG206-11	SN:	
Mode:	3DH5_2480	Voltage:	DC12V
Environment:		Engineer:	Roger
Remark:	Power set : 2		
Test Standard:			

Start of Test: 2022-10-10 14:06:02

Test Graph

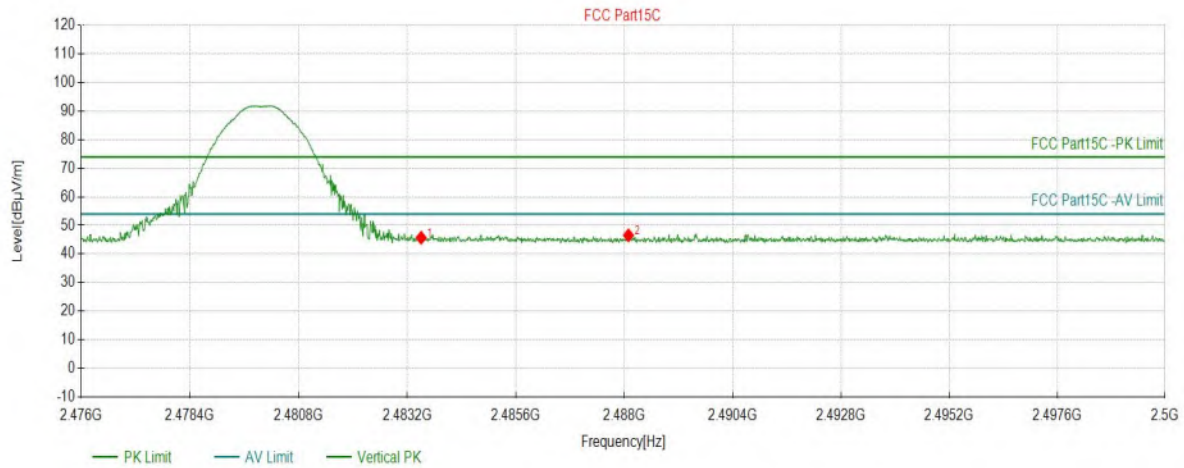

Suspected Data List

NO.	Freq. (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5038	45.71	7.09	74.00	28.29	150	80	PK	Vertical
2	2488.0900	46.54	7.12	74.00	27.46	150	190	PK	Vertical

APPENDIX C – AC Power Line Conducted Emission Test Data

Conducted Emission Measurement


File :FG206-11

Data :#8

Date: 2022/10/11

Time: 10:55:10

80.0 dBuV

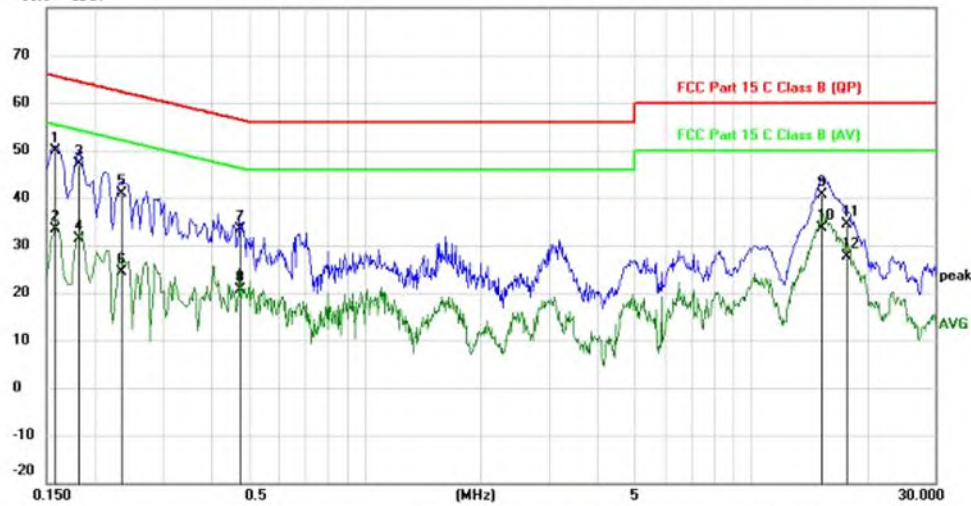

Site

Phase: **L1**

Temperature: 26

Limit: FCC Part 15 C Class B (QP)

Power: AC 120V/60Hz

Humidity: 60 %

EUT: Bluetooth speaker

M/N: FG206-11

Mode: BT

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1580	40.35	9.59	49.94	65.57	-15.63	QP	
2		0.1580	23.72	9.59	33.31	55.57	-22.26	AVG	
3		0.1819	37.55	9.59	47.14	64.40	-17.26	QP	
4		0.1819	21.71	9.59	31.30	54.40	-23.10	AVG	
5		0.2340	31.37	9.59	40.96	62.31	-21.35	QP	
6		0.2340	14.79	9.59	24.38	52.31	-27.93	AVG	
7		0.4740	23.66	9.60	33.26	56.44	-23.18	QP	
8		0.4740	11.07	9.60	20.67	46.44	-25.77	AVG	
9		15.2900	30.60	9.99	40.59	60.00	-19.41	QP	
10		15.2900	23.52	9.99	33.51	50.00	-16.49	AVG	
11		17.6580	24.40	9.95	34.35	60.00	-25.65	QP	
12		17.6580	17.65	9.95	27.60	50.00	-22.40	AVG	


Conducted Emission Measurement

File :FG206-11
80.0 dBuV

Data :#7

Date: 2022/10/11

Time: 10:51:40

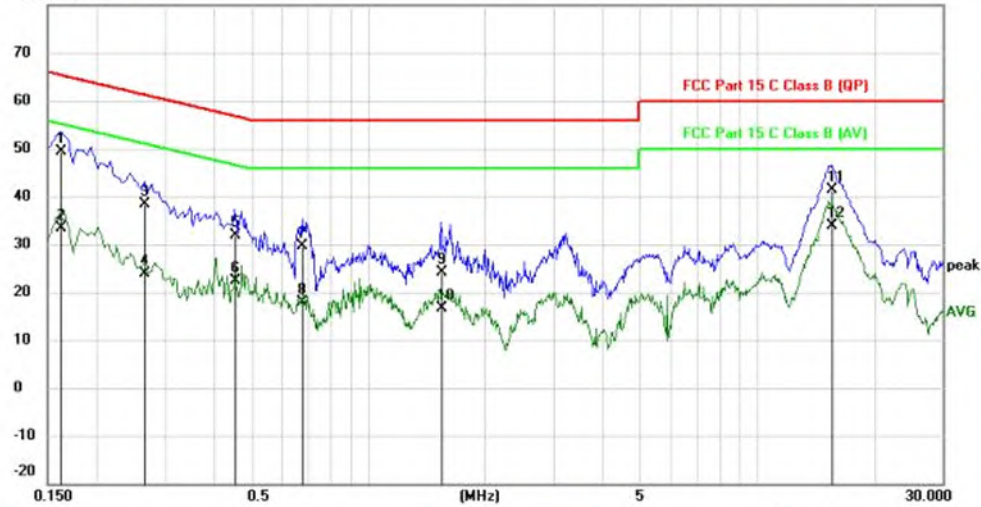

Site

Phase: **N**

Temperature: 26

Limit: FCC Part 15 C Class B (QP)

Power: AC 120V/60Hz

Humidity: 60 %

EUT: Bluetooth speaker

M/N: FG206-11

Mode: BT

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1620	39.67	9.59	49.26	65.36	-16.10	QP	
2		0.1620	23.85	9.59	33.44	55.36	-21.92	AVG	
3		0.2660	28.80	9.59	38.39	61.24	-22.85	QP	
4		0.2660	14.19	9.59	23.78	51.24	-27.46	AVG	
5		0.4540	22.34	9.60	31.94	56.80	-24.86	QP	
6		0.4540	12.88	9.60	22.48	46.80	-24.32	AVG	
7		0.6780	19.91	9.60	29.51	56.00	-26.49	QP	
8		0.6780	8.31	9.60	17.91	46.00	-28.09	AVG	
9		1.5420	14.54	9.61	24.15	56.00	-31.85	QP	
10		1.5420	6.91	9.61	16.52	46.00	-29.48	AVG	
11		15.5620	31.35	9.99	41.34	60.00	-18.66	QP	
12	*	15.5620	23.94	9.99	33.93	50.00	-16.07	AVG	

END OF REPORT