

TEST REPORT

Reference No...... : WTD24D09217336W001
FCC ID : 2A8WB-ALXC29
Applicant..... : Shenzhen Mindray Animal Medical Technology Co.,Ltd.
Address..... : Room 702, Tower 4, YESUN Intelligent Community III, No.1301-88
Guangang Road, Shenzhen, China
Manufacturer : Shenzhen Mindray Animal Medical Technology Co.,Ltd.
Address..... : Room 702, Tower 4, YESUN Intelligent Community III, No.1301-88
Guangang Road, Shenzhen, China
Product..... : Veterinary Digital Detector and Imaging System
Model(s) : VetiPad M1 Plus, VetiPad M1
Standards..... : FCC 47CFR Part 15.247
Date of Receipt sample : 2024-10-11
Date of Test : 2024-10-11 to 2024-10-17
Date of Issue..... : 2024-10-29
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group Co., Ltd.

Address: No. 77, Houjie Section, Guantai Road, Houjie Town, Dongguan City, Guangdong, China

Tel: +86-769-2267 6998

Fax: +86-769-2267 6828

Compiled by:

Estel Qian

Estel Qian / Project Engineer

Approved by:



Deval Qin / Designated Reviewer

2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS.....	2
3 REVISION HISTORY.....	3
4 GENERAL INFORMATION.....	4
4.1 GENERAL DESCRIPTION OF E.U.T.....	4
4.2 DETAILS OF E.U.T.....	4
4.3 CHANNEL LIST.....	4
4.4 TEST FACILITY	5
4.5 SUBCONTRACTED.....	5
4.6 ABNORMALITIES FROM STANDARD CONDITIONS	5
4.7 TEST MODE	6
5 TEST SUMMARY.....	7
6 EQUIPMENT USED DURING TEST.....	8
6.1 EQUIPMENTS LIST	8
6.2 MEASUREMENT UNCERTAINTY	9
6.3 TEST EQUIPMENT CALIBRATION	9
7 CONDUCTED EMISSION.....	10
7.1 E.U.T. OPERATION.....	10
7.2 EUT SETUP	10
7.3 MEASUREMENT DESCRIPTION	10
7.4 CONDUCTED EMISSION TEST RESULT	11
8 RADIATED EMISSIONS.....	15
8.1 EUT OPERATION.....	15
8.2 TEST SETUP	16
8.3 SPECTRUM ANALYZER SETUP	17
8.4 TEST PROCEDURE.....	18
8.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	18
8.6 SUMMARY OF TEST RESULTS.....	19
9 PHOTOGRAPHS OF TEST SETUP AND EUT.....	25

3 Revision History

Test Report No.	Date of Receipt Sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTD24D09217336W001	2024-10-11	2024-10-11 to 2024-10-17	2024-10-29	Original	-	Valid

4 General Information

4.1 General Description of E.U.T.

Product:	Veterinary Digital Detector and Imaging System
Model(s):	VetiPad M1 Plus, VetiPad M1
Test Sample No.:	1-1/2, 1-2/2
Model Description:	N/A
Wi-Fi Specification:	802.11b/g/n 20/n 40
Hardware Version:	04
Software Version:	22.0

4.2 Details of E.U.T.

Operation Frequency:	802.11b/g/n HT20: 2412~2462MHz 802.11n HT40: 2422~2452MHz
Max. RF output power:	Ant 0: 13.76dBm Ant 1: 13.17dBm Total: 16.45dBm
Type of Modulation:	802.11b: DQPSK, DBPSK, CCK 802.11g/n: OFDM, 64QAM, 16QAM, QPSK, BPSK
Antenna installation:	FPC antenna
Antenna Gain:	Ant 0: 1.93 dBi Ant 1: 1.93 dBi

Note:

#: The antenna gain is provided by the applicant, and the applicant should be responsible for its authenticity, WALTEK lab has not verified the authenticity of its information.

Ratings:	DC 15V 2.0A
Battery:	DC 11.1V 3800mAh

4.3 Channel List

Wi-Fi

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	-	-

4.4 Test Facility

The test facility has a test site registered with the following organizations:

ISED CAB identifier: CN0013. Test Firm Registration No.: 7760A.

Waltek Testing Group Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration number 7760A, October 15, 2016.

FCC Designation No.: CN1201. Test Firm Registration No.: 523476.

Waltek Testing Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration number 523476, September 10, 2019.

4.5 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

☐ Yes ☒ No

If Yes, list the related test items and lab information:

Test Lab: N/A

Lab address: N/A

Test items: N/A

4.6 Abnormalities from Standard Conditions

None.

4.7 Test Mode

Test Items	Mode	Data Rate	Channel	TX/RX
Conducted Emissions	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
Transmitter Spurious Emissions	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX

Note: Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product.

5 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.247(d) 15.205(a) 15.209(a)	PASS
Conducted Emissions	15.207(a)	PASS
Note: Pass=Compliance; NC=Not Compliance; NT=Not Tested; N/A=Not Applicable		

6 Equipment Used during Test

6.1 Equipments List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date	Calibration Due Date
Conducted Emissions 1#						
1	EMI Test Receiver	R&S	ESCI	100947	2024-07-18	2025-07-17
2	LISN	R&S	ENV216	100115	2024-07-18	2025-07-17
3	Cable	Top	TYPE16(3.5M)	-	2024-07-18	2025-07-17
3m Semi-anechoic Chamber for Radiation Emissions 1#						
1	Spectrum Analyzer	R&S	FSP30	100091	2024-04-22	2025-04-21
2	Amplifier	Agilent	8447D	2944A10178	2024-07-18	2025-07-17
3	Tri-log Broadband Antenna	SCHWARZBECK	VULB9163	336	2024-07-21	2025-07-20
4	Coaxial Cable	Top	TYPE16(13M)	-	2024-04-22	2025-04-21
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120D	667	2024-01-23	2025-01-22
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2024-07-18	2025-07-17
7	Broadband Preamplifier	COMPLIANCE	PAP-1G18	2004	2024-07-18	2025-07-17
8	Coaxial Cable	Top	ZT26-NJ-NJ-8M/FA	-	2024-04-22	2025-04-21
9	Microwave Amplifier	SCHWARZBECK	BBV 9721	100472	2024-07-18	2025-07-17
10	Coaxial Cable	Top	ZT40-2.92J-2.92J-2.0M	17100919	2024-04-22	2025-04-21
3m Semi-anechoic Chamber for Radiation Emissions 2#						
1	Test Receiver	R&S	ESCI	101296	2024-04-22	2025-04-21
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2023-11-04	2024-11-03
3	Active Loop Antenna	Com-Power	AL-130R	10160007	2024-04-27	2025-04-26
4	Amplifier	ANRITSU	MH648A	M43381	2024-04-22	2025-04-21
5	Cable	HUBER+SUHNER	CBL2	525178	2024-04-22	2025-04-21

Test Software:

Test Item	Software name	Software version
Conduction disturbance Radiated Emission(3m)	EZ-EMC	EZ-EMC(RA-03A1-1)

6.2 Measurement Uncertainty

Parameter	Uncertainty
Conducted Emission	$\pm 3.64\text{dB}$ (AC mains 150KHz~30MHz)
Radiated Spurious Emissions	$\pm 5.08\text{dB}$ (Bilog antenna 30M~1000MHz)
	$\pm 5.47\text{ dB}$ (Horn antenna 1000M~25000MHz)
Radio Frequency	$\pm 1 \times 10^{-7}\text{Hz}$
RF Power	$\pm 0.42\text{ dB}$
RF Power Density	$\pm 0.7\text{dB}$
Conducted Spurious Emissions	$\pm 2.76\text{ dB}$ (9kHz~26500MHz)
Confidence interval: 95%. Confidence factor: k=2	

6.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R. China.

7 Conducted Emission

Test Requirement: 47CFR FCC Part15 Subpart C §15.207

Test Method: ANSI C63.10:2013

Test Result: PASS

Frequency Range: 150kHz to 30MHz

Limit:

Frequency (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5.0	56	46
5.0 to 30	60	50

*Decreases with the logarithm of the frequency.

7.1 E.U.T. Operation

Operating Environment:

Temperature: 27.9 °C

Humidity: 44.1 % RH


Atmospheric Pressure: 101.2kPa

EUT Operation:

The test was performed in Transmitting mode, the worst test data were shown in the report.

7.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

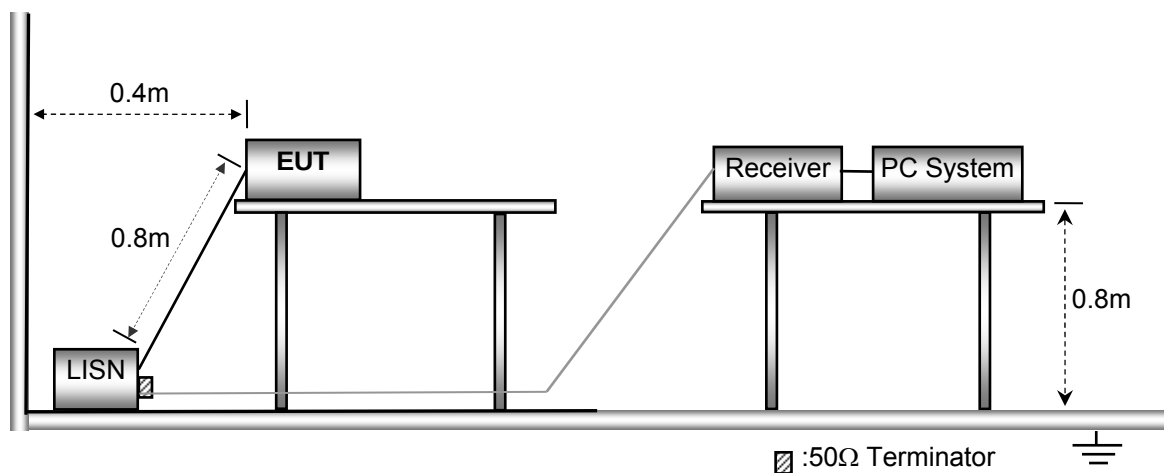

7.3 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

7.4 Conducted Emission Test Result


Remark: only the worst data (High channel mode) were reported

Model : VetiPad M1

Live line:

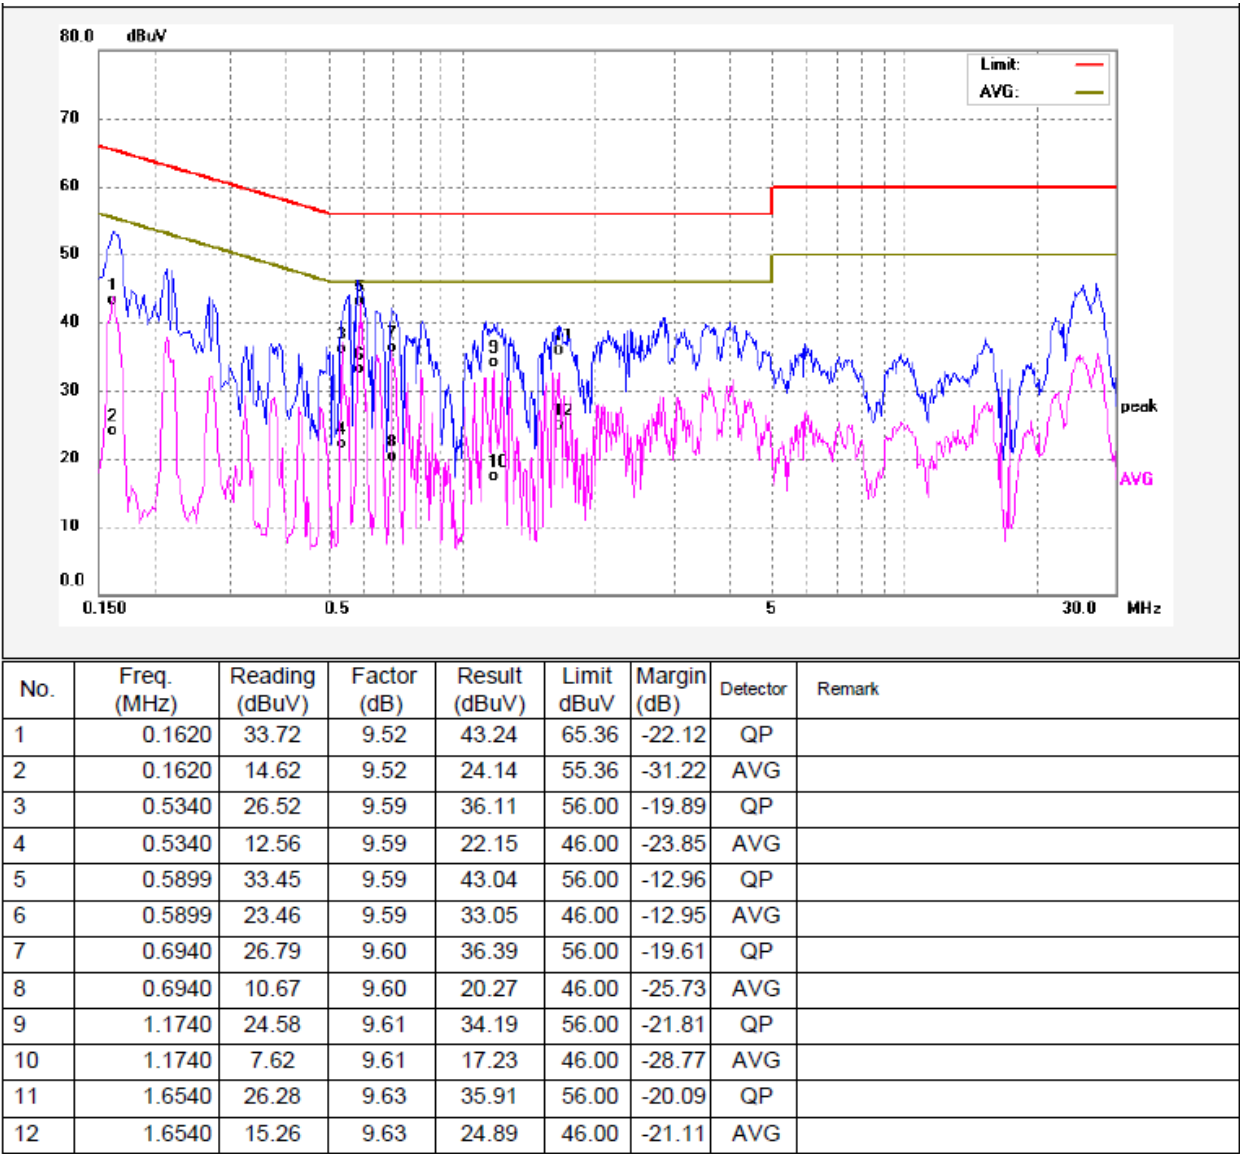


Neutral line:

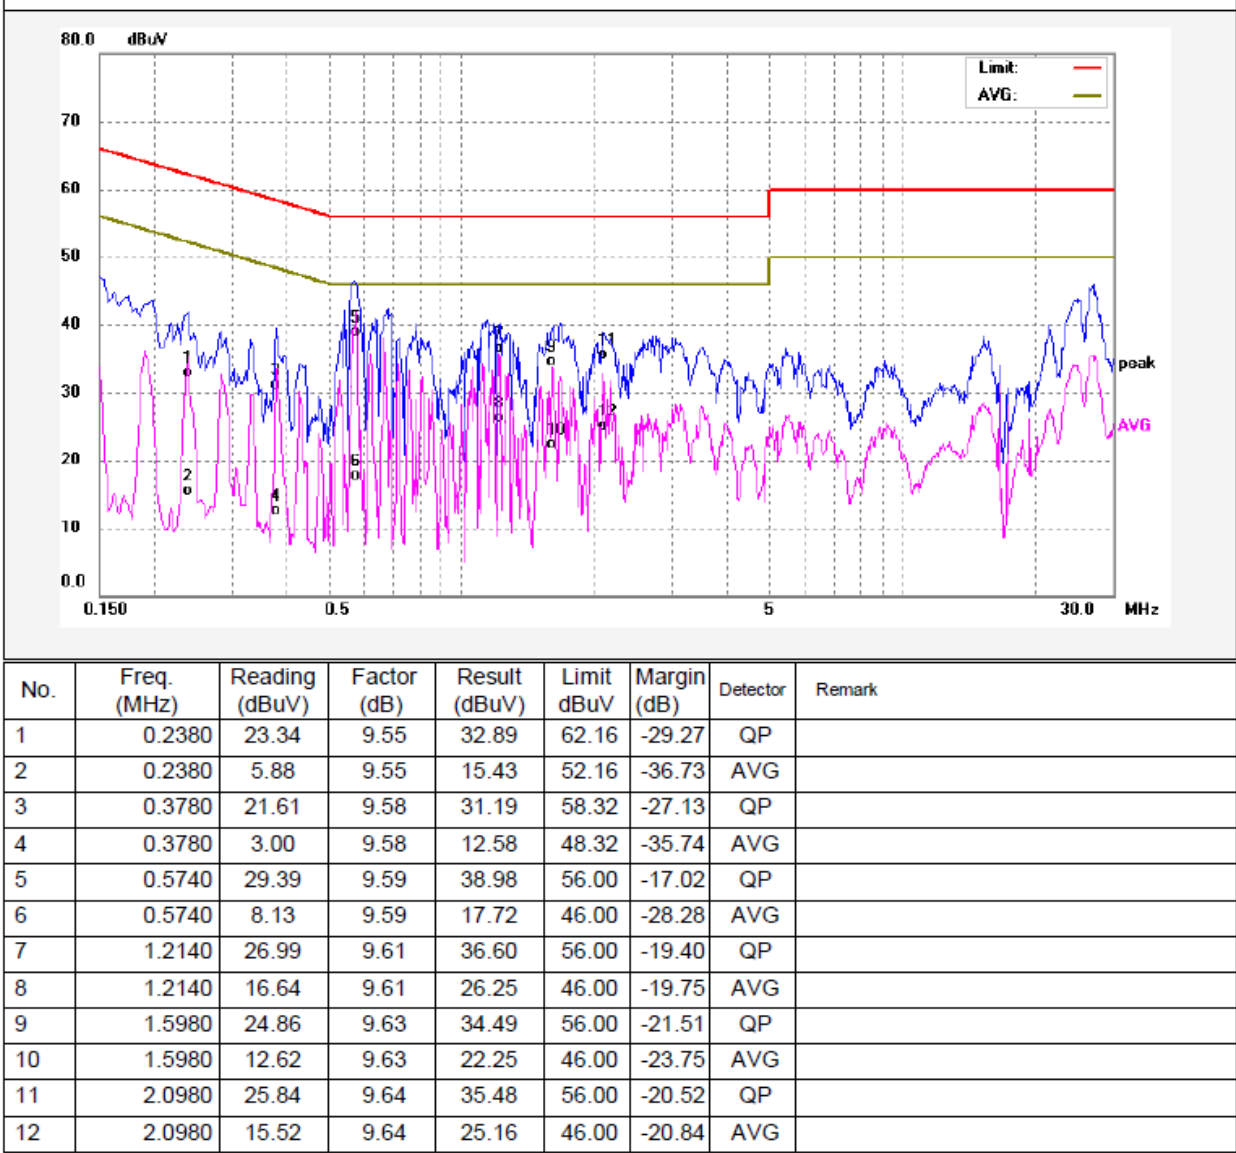


Model : VetiPad M1 Plus

Live line:

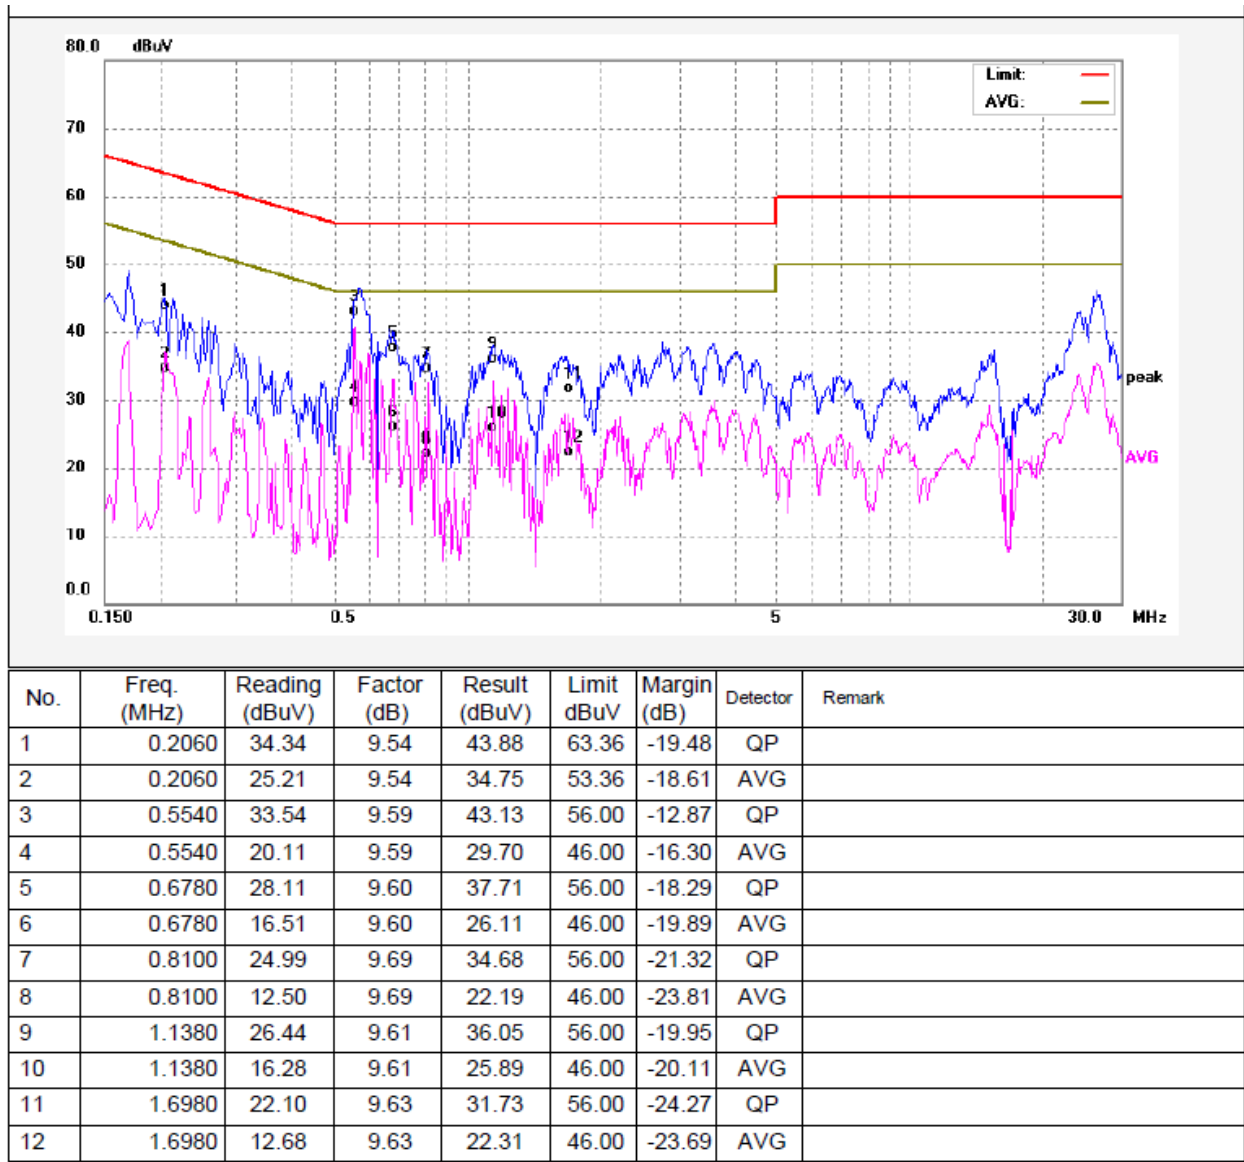

Neutral line:

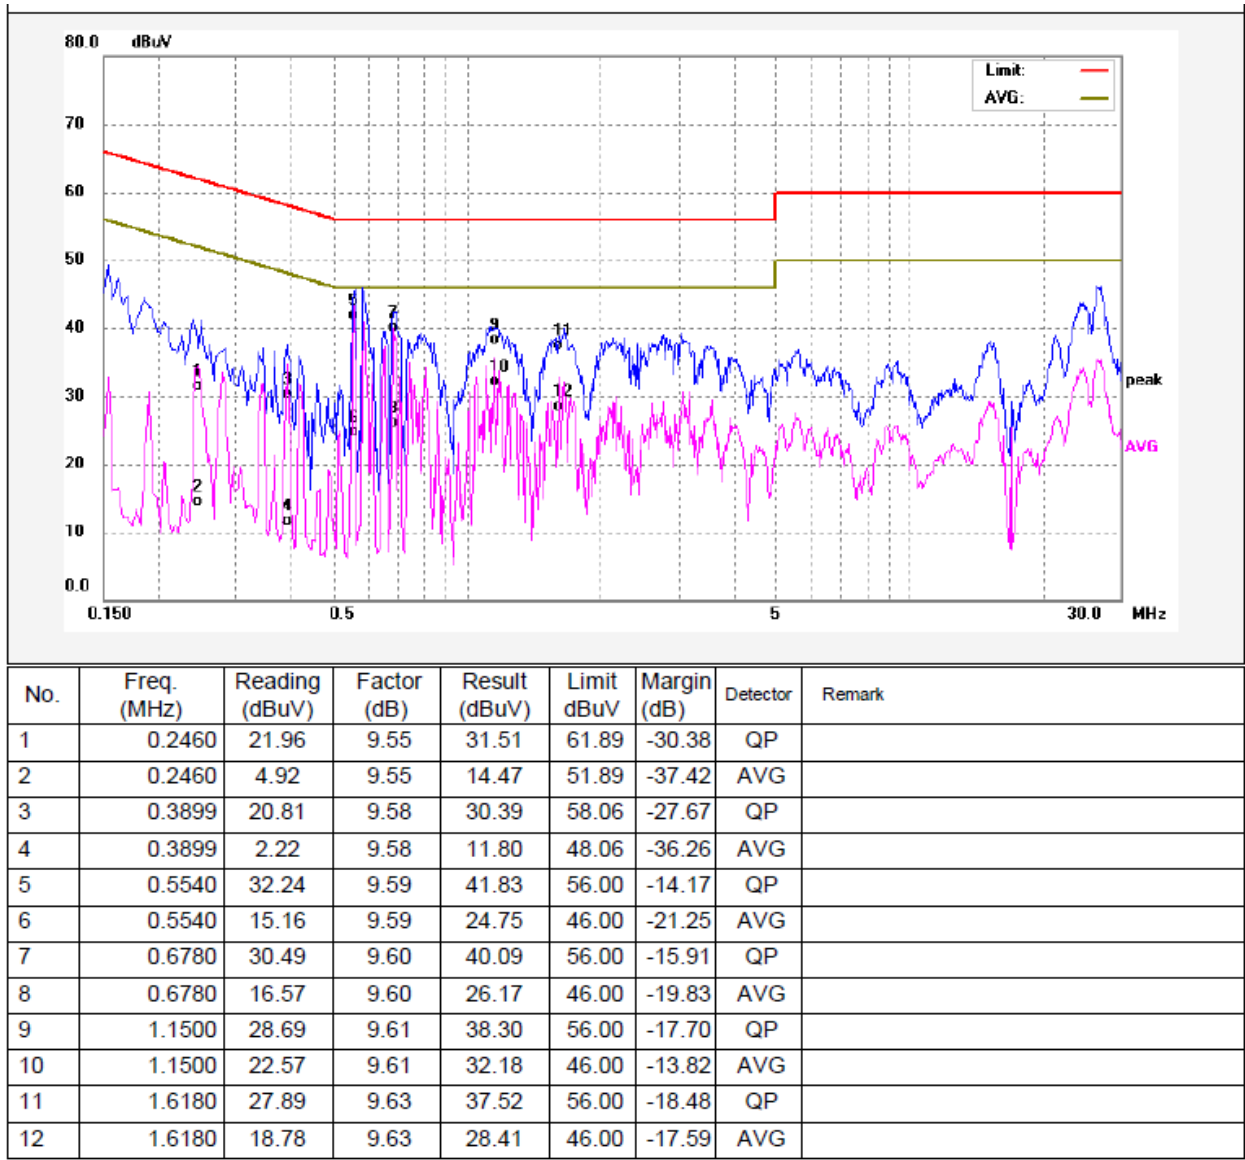

8 Radiated Emissions

Test Requirement: 47CFR FCC Part15 Subpart C §15.209&15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019;
ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

8.1 EUT Operation

Operating Environment:

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation:

The test was performed in Transmitting mode, the worst test data were shown in the report.


8.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

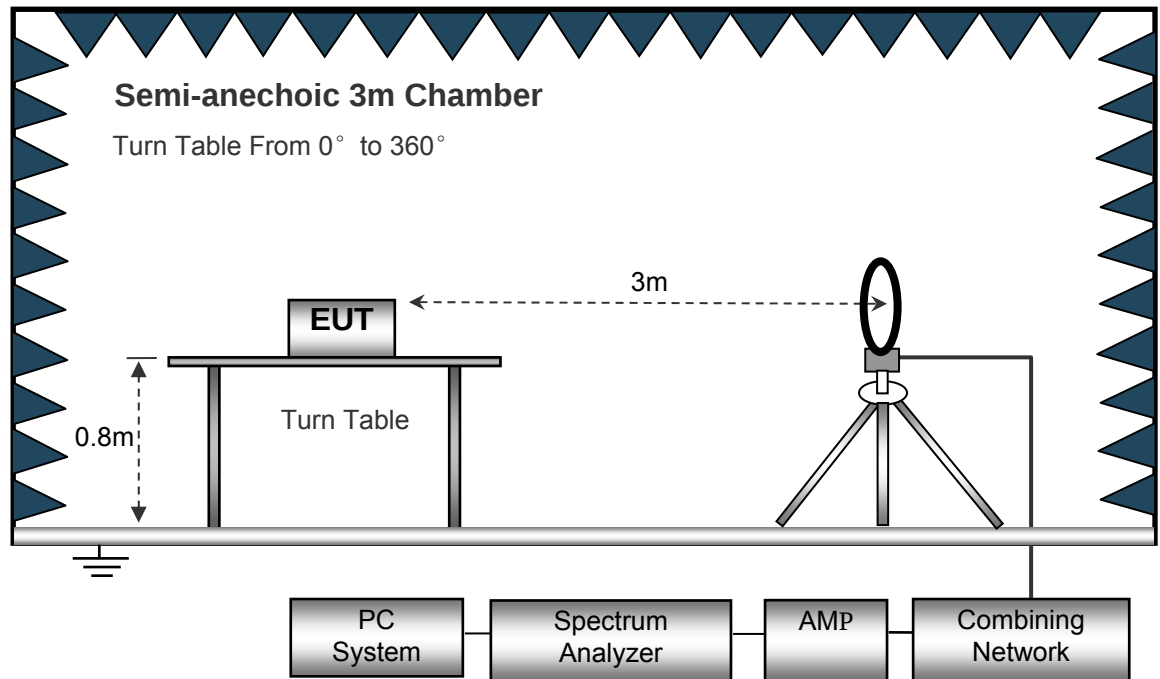

The test setup for emission measurement from 30 MHz to 1 GHz.

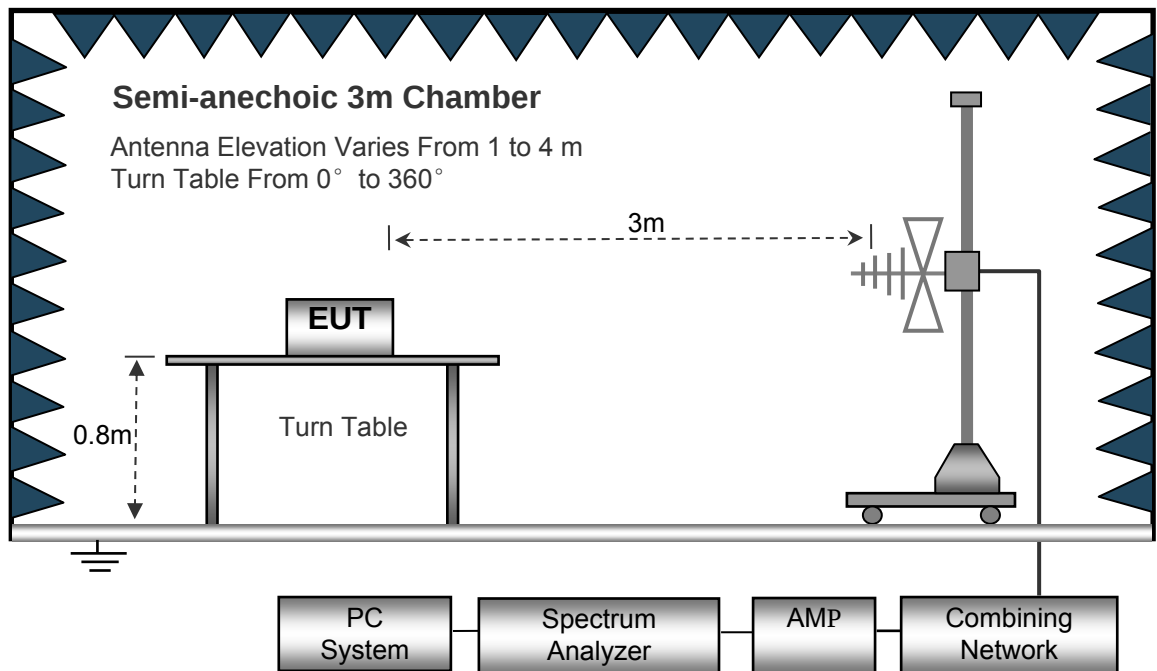

The test setup for emission measurement above 1 GHz.

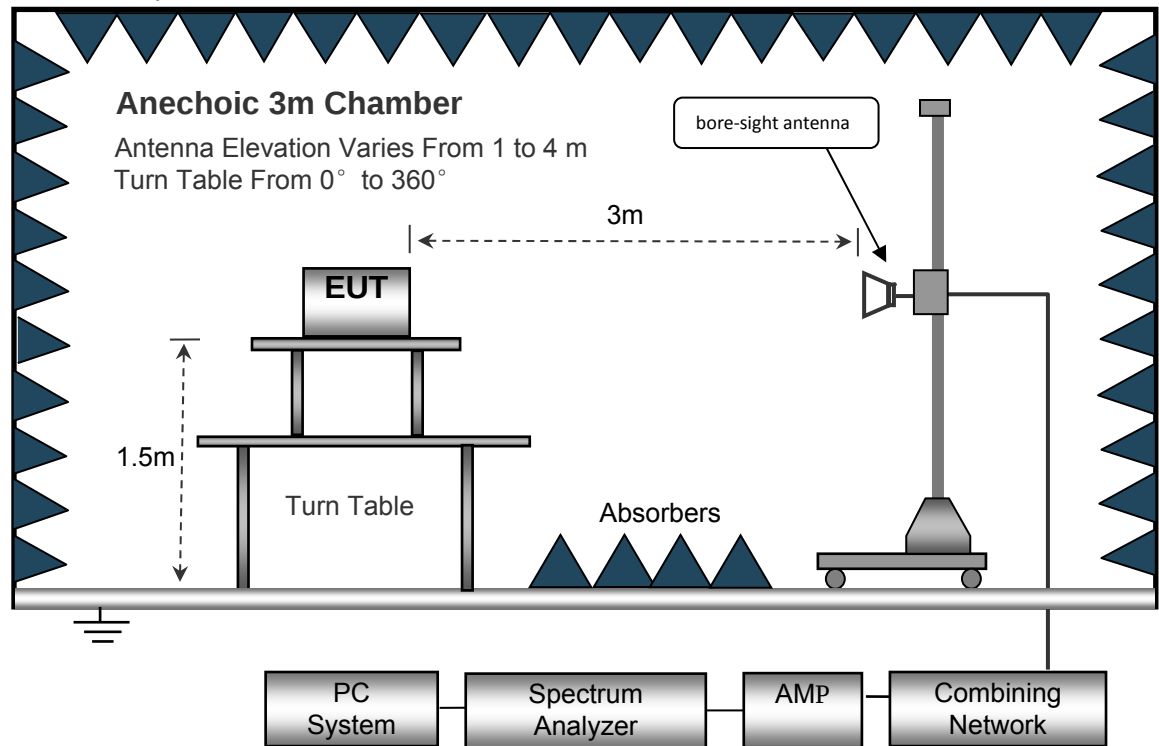

8.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
IF Bandwidth..... 10kHz
Video Bandwidth..... 10kHz
Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
Detector PK
Resolution Bandwidth..... 100kHz
Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed Auto
Detector PK
Resolution Bandwidth..... 1MHz
Video Bandwidth..... 3MHz
Detector Ave.
Resolution Bandwidth..... 1MHz
Video Bandwidth..... 10Hz

8.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in Z axis,so the worst data were shown as follow.
8. A 2.4GHz high –pass filter is used during radiated emissions above 1GHz measurement.

8.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

8.6 Summary of Test Results

Test Frequency: 9kHz ~ 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency: 30MHz ~ 8GHz

Note: All test mode were tested, only the worst-case (Ant. 0 +Ant. 1 802.11n HT20 mode) were record in the report.

Model: VetiPad M1

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11n HT20: Low Channel 2412MHz									
264.53	38.58	QP	324	1.5	H	-13.21	25.37	46.00	-20.63
264.53	45.15	QP	284	1.0	V	-13.21	31.94	46.00	-14.06
4824.00	56.48	PK	359	1.6	V	-1.06	55.42	74.00	-18.58
4824.00	40.03	Ave	359	1.6	V	-1.06	38.97	54.00	-15.03
7236.00	46.80	PK	184	1.3	H	1.33	48.13	74.00	-25.87
7236.00	34.85	Ave	184	1.3	H	1.33	36.18	54.00	-17.82
2327.20	46.58	PK	250	1.7	V	-13.19	33.39	74.00	-40.61
2327.20	37.70	Ave	250	1.7	V	-13.19	24.51	54.00	-29.49
2357.64	43.03	PK	86	1.7	H	-13.14	29.89	74.00	-44.11
2357.64	37.97	Ave	86	1.7	H	-13.14	24.83	54.00	-29.17
2498.64	43.33	PK	35	1.4	V	-13.08	30.25	74.00	-43.75
2498.64	37.38	Ave	35	1.4	V	-13.08	24.30	54.00	-29.70

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11n HT20: Middle Channel 2437MHz									
264.53	37.75	QP	309	1.9	H	-13.21	24.54	46.00	-21.46
264.53	44.76	QP	235	1.0	V	-13.21	31.55	46.00	-14.45
4874.00	56.85	PK	302	1.8	V	-0.62	56.23	74.00	-17.77
4874.00	39.10	Ave	302	1.8	V	-0.62	38.48	54.00	-15.52
7311.00	45.89	PK	23	1.7	H	2.21	48.10	74.00	-25.90
7311.00	34.96	Ave	23	1.7	H	2.21	37.17	54.00	-16.83
2311.10	45.58	PK	67	1.1	V	-13.19	32.39	74.00	-41.61
2311.10	39.20	Ave	67	1.1	V	-13.19	26.01	54.00	-27.99
2360.12	42.72	PK	132	1.9	H	-13.14	29.58	74.00	-44.42
2360.12	36.30	Ave	132	1.9	H	-13.14	23.16	54.00	-30.84
2488.42	43.25	PK	14	1.5	V	-13.08	30.17	74.00	-43.83
2488.42	37.48	Ave	14	1.5	V	-13.08	24.40	54.00	-29.60

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11n HT20: High Channel 2462MHz									
264.53	37.77	QP	203	1.4	H	-13.21	24.56	46.00	-21.44
264.53	45.00	QP	0	1.5	V	-13.21	31.79	46.00	-14.21
4924.00	57.44	PK	88	1.3	V	-0.24	57.20	74.00	-16.80
4924.00	38.50	Ave	88	1.3	V	-0.24	38.26	54.00	-15.74
7386.00	46.07	PK	33	1.6	H	2.84	48.91	74.00	-25.09
7386.00	35.13	Ave	33	1.6	H	2.84	37.97	54.00	-16.03
2322.03	46.34	PK	249	1.4	V	-13.19	33.15	74.00	-40.85
2322.03	38.47	Ave	249	1.4	V	-13.19	25.28	54.00	-28.72
2371.89	42.83	PK	47	1.9	H	-13.14	29.69	74.00	-44.31
2371.89	36.47	Ave	47	1.9	H	-13.14	23.33	54.00	-30.67
2493.24	44.13	PK	141	1.6	V	-13.08	31.05	74.00	-42.95
2493.24	36.36	Ave	141	1.6	V	-13.08	23.28	54.00	-30.72

Model: VetiPad M1 Plus

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11n HT20: Low Channel 2412MHz									
264.53	45.17	QP	260	1.4	H	-13.21	31.96	46.00	-14.04
264.53	47.76	QP	185	1.6	V	-13.21	34.55	46.00	-11.45
4824.00	53.37	PK	114	1.6	V	-1.06	52.31	74.00	-21.69
4824.00	39.34	Ave	114	1.6	V	-1.06	38.28	54.00	-15.72
7236.00	45.12	PK	234	1.9	H	1.33	46.45	74.00	-27.55
7236.00	37.74	Ave	234	1.9	H	1.33	39.07	54.00	-14.93
2317.21	45.72	PK	271	1.1	V	-13.19	32.53	74.00	-41.47
2317.21	37.94	Ave	271	1.1	V	-13.19	24.75	54.00	-29.25
2360.75	44.61	PK	60	1.5	H	-13.14	31.47	74.00	-42.53
2360.75	38.03	Ave	60	1.5	H	-13.14	24.89	54.00	-29.11
2487.48	42.83	PK	219	1.2	V	-13.08	29.75	74.00	-44.25
2487.48	38.55	Ave	219	1.2	V	-13.08	25.47	54.00	-28.53

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11n HT20: Middle Channel 2437MHz									
264.53	44.56	QP	170	1.1	H	-13.21	31.35	46.00	-14.65
264.53	48.81	QP	283	1.8	V	-13.21	35.60	46.00	-10.40
4874.00	54.74	PK	63	1.8	V	-0.62	54.12	74.00	-19.88
4874.00	40.50	Ave	63	1.8	V	-0.62	39.88	54.00	-14.12
7311.00	45.35	PK	19	1.6	H	2.21	47.56	74.00	-26.44
7311.00	37.93	Ave	19	1.6	H	2.21	40.14	54.00	-13.86
2317.63	45.31	PK	48	1.7	V	-13.19	32.12	74.00	-41.88
2317.63	39.69	Ave	48	1.7	V	-13.19	26.50	54.00	-27.50
2376.99	43.74	PK	33	1.1	H	-13.14	30.60	74.00	-43.40
2376.99	38.58	Ave	33	1.1	H	-13.14	25.44	54.00	-28.56
2485.66	44.85	PK	173	1.4	V	-13.08	31.77	74.00	-42.23
2485.66	38.82	Ave	173	1.4	V	-13.08	25.74	54.00	-28.26

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11n HT20: High Channel 2462MHz									
264.53	44.22	QP	190	1.7	H	-13.21	31.01	46.00	-14.99
264.53	48.01	QP	217	1.9	V	-13.21	34.80	46.00	-11.20
4924.00	54.01	PK	154	1.7	V	-0.24	53.77	74.00	-20.23
4924.00	41.90	Ave	154	1.7	V	-0.24	41.66	54.00	-12.34
7386.00	45.28	PK	89	1.2	H	2.84	48.12	74.00	-25.88
7386.00	37.78	Ave	89	1.2	H	2.84	40.62	54.00	-13.38
2310.97	46.33	PK	241	1.9	V	-13.19	33.14	74.00	-40.86
2310.97	38.16	Ave	241	1.9	V	-13.19	24.97	54.00	-29.03
2383.78	44.91	PK	253	1.4	H	-13.14	31.77	74.00	-42.23
2383.78	37.14	Ave	253	1.4	H	-13.14	24.00	54.00	-30.00
2496.48	44.31	PK	185	1.5	V	-13.08	31.23	74.00	-42.77
2496.48	38.20	Ave	185	1.5	V	-13.08	25.12	54.00	-28.88

Test Frequency: 8GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

9 Photographs of test setup and EUT.

Note: Please refer to appendix: Appendix-VetiPad M1 & VetiPad M1 Plus-Photos.

=====End of Report=====