



TEST REPORT

Applicant: EP-TEC Solutions Pte Ltd
Address of Applicant: 2 Sims Close #05-07 Gemini @ Sims Singapore 387298
Manufacturer/Factory: EP-TEC Solutions Pte Ltd
Address of Manufacturer: 2 Sims Close #05-07 Gemini @ Sims Singapore 387298
Product Name: InfinityPro Interactive Flat Panel
Model No.: X Series, V Series, E Series
Trade Mark: InfinityPro
FCC ID: 2A8WI-XSERIES
Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
Date of Test: Sep.23, 2022- Oct.14, 2022
Date of report issued: Oct.18, 2022
Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Remark:

The results shown in this test report refer only to the sample(s) tested , this test report cannot be reproduced, except in full without prior written permission of the company.

The report would be invalid without specific stamp of test institute and the signatures of compiler and approver

Prepared By

Shenzhen ETR Standard Technology Co., Ltd.

Address: No.103, No.10, Phase I, Zone 3, Xinxing Industrial Park, Xinhe, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Compiled by:

Reviewed by:

Project Engineer

Project Manager



Authorized Signature



Report Revision History

Report No.	Description	Issue Date
ET-22092019E02	Original	Oct.18, 2022

Contents

Page

1. TEST SUMMARY	4
2. GENERAL INFORMATION	5
3.1 GENERAL DESCRIPTION OF EUT	5
3.2 TEST MODE	7
3.3 DESCRIPTION OF SUPPORT UNITS	7
3.4 DEVIATION FROM STANDARDS	7
3.5 ABNORMALITIES FROM STANDARD CONDITIONS	7
3.6 TEST FACILITY	7
3.7 TEST LOCATION.....	7
ADDITIONAL INSTRUCTIONS.....	7
3. TEST INSTRUMENTS LIST	8
4. TEST RESULTS AND MEASUREMENT DATA.....	9
5.1 ANTENNA REQUIREMENT	9
5.2 CONDUCTED EMISSIONS	9
5.3 CONDUCTED PEAK OUTPUT POWER	13
5.4 CHANNEL BANDWIDTH & 99% OCCUPY BANDWIDTH.....	15
5.5 POWER SPECTRAL DENSITY	21
5.6 BAND EDGES	26
Conducted Emission Method.....	26
Radiated Emission Method.....	31
5.7 SPURIOUS EMISSION.....	36
Conducted Emission Method.....	36
Radiated Emission Method.....	45
5. TEST SETUP PHOTO	62
6. EUT CONSTRUCTIONAL DETAILS	62

1. Test Summary

Test Item	Section	Result	Test by
Antenna requirement	FCC part 15.203/15.247 (c) RSS-Gen §6.8	Pass	/
AC Power Line Conducted Emission	FCC part 15.207 RSS-Gen §8.8	Pass	Qiao Li
Conducted Peak Output Power	FCC part 15.247 (b)(3) RSS-247 §5.4.b	Pass	Yvan Fan
Channel Bandwidth & 99% OCB	FCC part 15.247 (a)(2) RSS-247 §5.2.a RSS-Gen § 6.6	Pass	Yvan Fan
Power Spectral Density	FCC part 15.247 (e) RSS-247 §5.2.b	Pass	Yvan Fan
Band Edge	FCC part 15.247(d) RSS-247 §5.5	Pass	Yvan Fan
Spurious Emission	FCC part 15.205/15.209 RSS-Gen §8.9 §8.10	Pass	Qiao Li

Remark: Test according to ANSI C63.10:2013 and RSS-Gen

Pass: The EUT complies with the essential requirements in the standard.

Measurement Uncertainty

Test Item	Uncertainty Criterion	Measurement Uncertainty	Notes
Occupied Channel Bandwidth	±5%	±0.55%	(1)
RF output power, conducted	±1.5dB	±0.99dB	(1)
Power Spectral Density, conducted	±3dB	±0.61dB	(1)
Unwanted Emissions, conducted	±3dB	±0.64dB	(1)
AC Power Line Conducted Emission	±6dB	± 3.02 dB	(1)
Radiated emissions Below 1GHz	±6dB	±4.30 dB	(1)
Radiated emissions Above 1GHz	±6dB	±4.35 dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

2. General Information

3.1 General Description of EUT

Product Name:	InfinityPro Interactive Flat Panel
Model No.:	X Series, V Series, E Series
Test Model:	X Series
Difference of model(s)	All the models are the same circuit and RF module, except the appearance color.
Hardware version:	N/A
Software version:	N/A
Sample(s) Status	Engineer sample
Channel numbers:	802.11b/802.11g /802.11n(HT20): 11 802.11n(HT40):7
Channel separation:	5MHz
Modulation technology:	802.11b: Direct Sequence Spread Spectrum (DSSS) 802.11g/802.11n(H20)/802.11n(HT40): Orthogonal Frequency Division Multiplexing (OFDM)
Antenna Type:	<i>External antenna</i>
Antenna gain:	1.89dBi
Power supply:	AC 100-240V 50/60Hz

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)	
	802.11b/802.11g/802.11n(HT20)	802.11n(HT40)
Lowest channel	2412MHz	2422MHz
Middle channel	2437MHz	2437MHz
Highest channel	2462MHz	2452MHz

3.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
<i>Remark: During the test, the dutycycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:				
Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.				
Mode	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)
Data rate	1Mbps	6Mbps	6.5Mbps	13Mbps

3.3 Description of Support Units

Equipment	Model	S/N	Manufacturer
/	/	/	/
/	/	/	/

3.4 Deviation from Standards

None.

3.5 Abnormalities from Standard Conditions

None.

3.6 Test Facility

Test laboratory:	Shenzhen ETR Standard Technology Co., Ltd.
CNAS Registration Number:	L11864
A2LA Certificate Number:	6640.01
FCC Designation Number:	CN1326
FCC Test Firm Registration:	183064

3.7 Test Location

All tests were performed at:	
Laboratory location:	No.103, No.10, Phase I, Zone 3, Xinxing Industrial Park, Xinhe, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	+86 755 85259392
Fax:	+86 755 27219460

Additional Instructions

Test Software	RFTTestTool.apk
Power level setup	Default

3. Test Instruments list

Item	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	EMI Test Receiver	Rohde&schwarz	ESPI7	100605	2022.3.09	2023.3.08
2	EMI Test Receiver	Rohde&schwarz	ESCI3	102696	2022.3.09	2023.3.08
3	Broadband antenna	schwarabeck	VULB9168	1064	2022.3.11	2024.3.10
4	Horn antenna	schwarabeck	BBHA9120D	9120D-1145	2022.3.09	2023.3.08
5	amplifier	EMtrace	RP01A	50117	2022.3.09	2023.3.08
6	Artificial power network	schwarabeck	NSLK8127	8127483	2022.3.09	2023.3.08
	Artificial power network	ETS	3186/2NM	1132	2022.3.09	2023.3.08
7	10dB attenuator	HUBER+SUHNER	10dB	/	2022.3.09	2023.3.08
8	amplifier	Space-Dtronics	EWLAN0118 G-P40	19113001	2022.3.09	2023.3.08
9	Spectrum analyzer	KEYSIGHT	N9020A	MY55370280	2022.3.09	2023.3.08
10	Power detector box	MWRFTest	MW100-PSB	MW201020JYT	2021.11.19	2022.11.18

Note: the calibration interval of the above test instruments is 12 or 24 months and the calibrations are traceable to international system unit (SI).

Software Name	Manufacturer	Model	Version
RF test software	MWRFTest	MTS 8310	V2.0.0.0
Conducted test software	EZ-EMC	Farad	Ver.EMC-CON 3A1.1
Radiated test software	EZ-EMC	Farad	Ver.FA-03A2 RE

4. Test results and Measurement Data

5.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c) , RSS-Gen §6.8
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna:	
<i>The antennas are External antenna, the best case gain of the antennas are 1.89dBi, reference to the appendix II for details</i>	

5.2 Conducted Emissions


Test Requirement:	FCC Part15 C Section 15.207, RSS-Gen §8.8
--------------------------	---

Test Method:	ANSI C63.10:2013					
Test Frequency Range:	150KHz to 30MHz					
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto					
Limit:	Frequency range (MHz)		Limit (dBuV)			
			Quasi-peak		Average	
	0.15-0.5		66 to 56*		56 to 46*	
	0.5-5		56		46	
	5-30		60		50	
* Decreases with the logarithm of the frequency.						
Test setup:	Reference Plane <i>Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</i>					
Test procedure:	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.					
Test Instruments:	Refer to section 3.0 for details					
Test mode:	Refer to section 2.2 for details					
Test environment:	Temp.:	25.4 °C	Humid.:	53%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

Remark: Both high voltage and low voltage have been tested, and the report only shows the worst case data with AC 120V/60Hz.


Measurement data

Line:

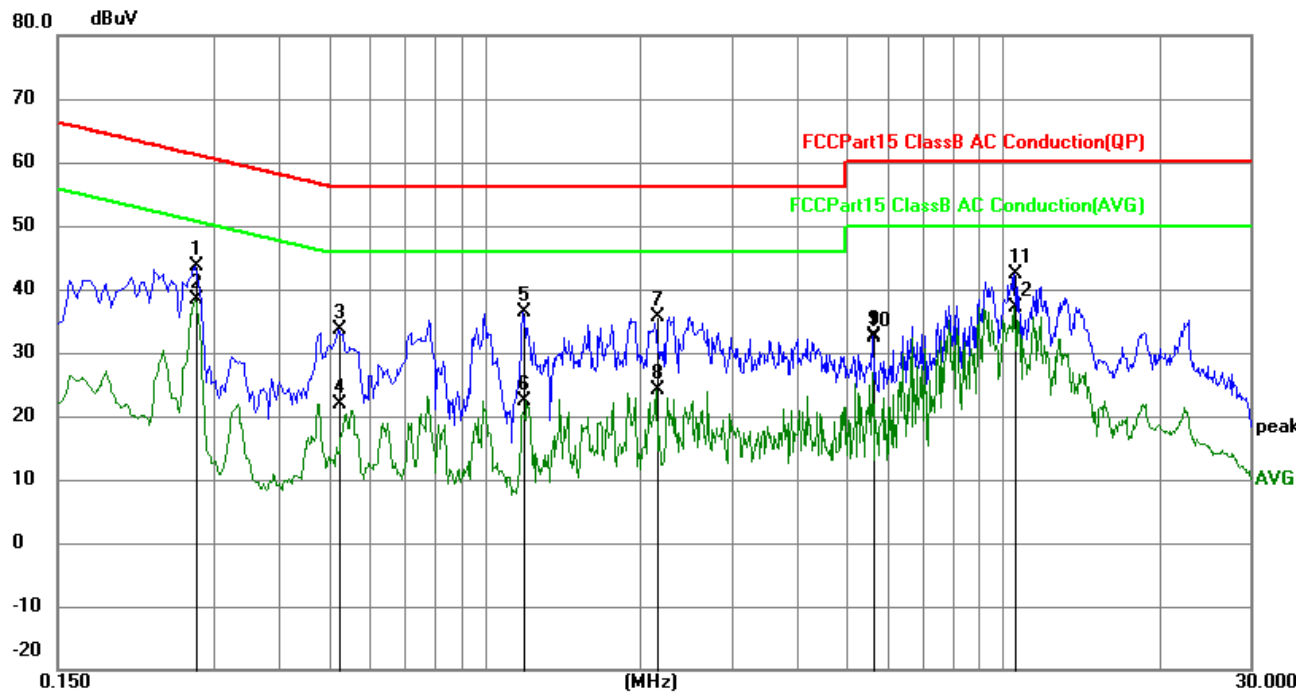

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2760	31.16	12.38	43.54	60.94	-17.40	QP
2	0.2760	26.07	12.38	38.45	50.94	-12.49	AVG
3	0.5231	21.38	12.33	33.71	56.00	-22.29	QP
4	0.5231	9.62	12.33	21.95	46.00	-24.05	AVG
5	1.1849	24.07	12.26	36.33	56.00	-19.67	QP
6	1.1849	10.03	12.26	22.29	46.00	-23.71	AVG
7	2.1478	23.43	12.26	35.69	56.00	-20.31	QP
8	2.1478	11.84	12.26	24.10	46.00	-21.90	AVG
9	5.5948	20.34	12.26	32.60	60.00	-27.40	QP
10	5.5948	20.02	12.26	32.28	50.00	-17.72	AVG
11	10.5180	30.24	12.26	42.50	60.00	-17.50	QP
12	10.5180	24.96	12.26	37.22	50.00	-12.78	AVG

Neutral:

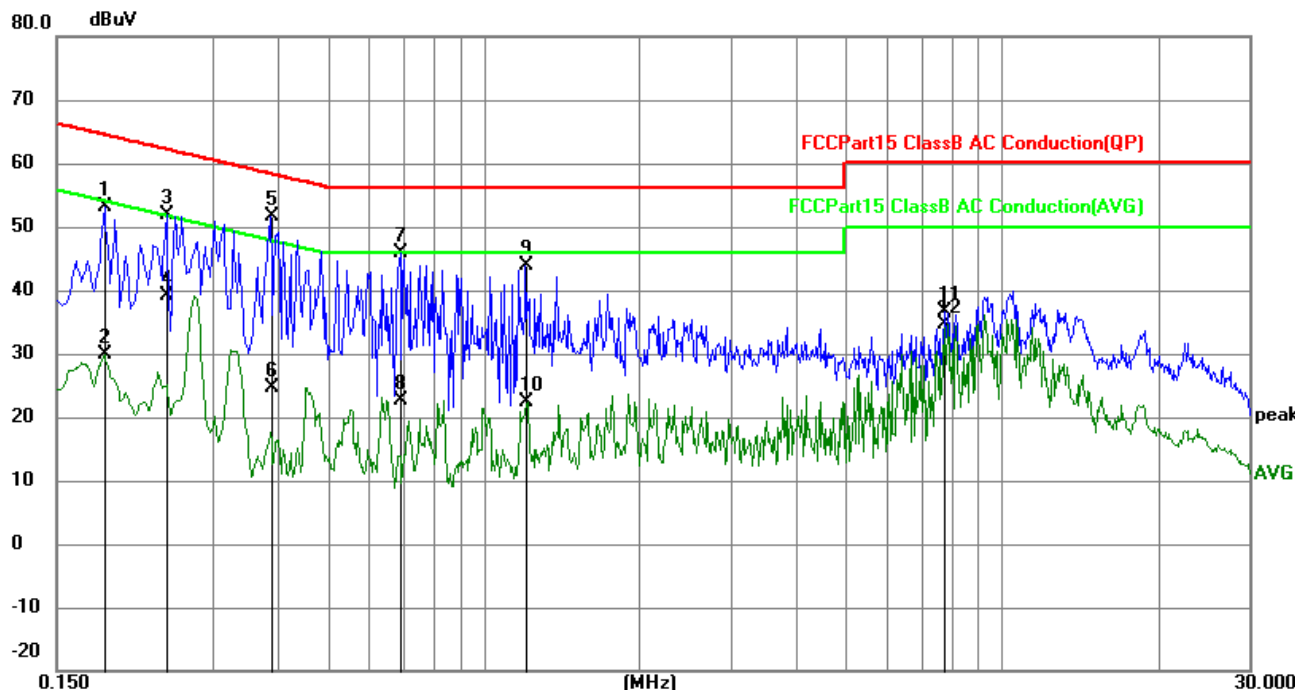


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1859	40.71	12.44	53.15	64.22	-11.07	QP
2	0.1859	17.41	12.44	29.85	54.22	-24.37	AVG
3	0.2444	39.39	12.40	51.79	61.95	-10.16	QP
4	0.2444	26.62	12.40	39.02	51.95	-12.93	AVG
5	0.3885	39.33	12.35	51.68	58.10	-6.42	QP
6	0.3885	12.32	12.35	24.67	48.10	-23.43	AVG
7	0.6900	33.49	12.30	45.79	56.00	-10.21	QP
8	0.6900	10.38	12.30	22.68	46.00	-23.32	AVG
9	1.2074	31.54	12.26	43.80	56.00	-12.20	QP
10	1.2074	10.16	12.26	22.42	46.00	-23.58	AVG
11	7.7685	24.35	12.26	36.61	60.00	-23.39	QP
12	7.7685	22.38	12.26	34.64	50.00	-15.36	AVG

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

5.3 Conducted Peak Output Power

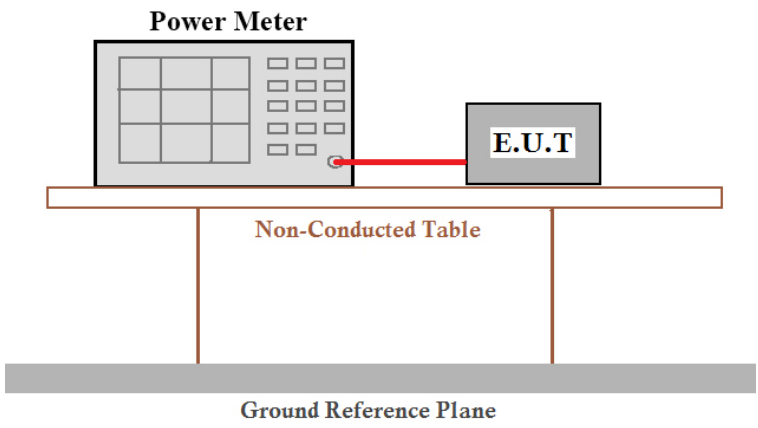Test Requirement :	FCC Part15 C Section 15.247 (b)(3), RSS-247 §5.4.b
Test Method :	KDB558074 D01 DTS Meas Guidance v05or02
Limit:	30dBm
Test setup:	 The diagram illustrates the test setup. A Power Meter and an E.U.T (Equipment Under Test) are connected by a red cable. They are positioned on a Non-Conducted Table, which is elevated from the Ground Reference Plane by two vertical supports.
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass



Measurement Data


Module A

Test CH	Peak Output Power (dBm)				Limit(dBm)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	13.16	16.28	15.74	15.53	30.00	Pass
Middle	13.26	16.81	16.22	15.56		
Highest	13.23	16.84	16.31	15.87		

Module B

Test CH	Peak Output Power (dBm)				Limit(dBm)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	11.36	14.84	14.85	15.08	30.00	Pass
Middle	11.99	15.14	15.03	15.13		
Highest	11.93	15.20	15.35	15.37		

5.4 Channel Bandwidth & 99% Occupancy Bandwidth

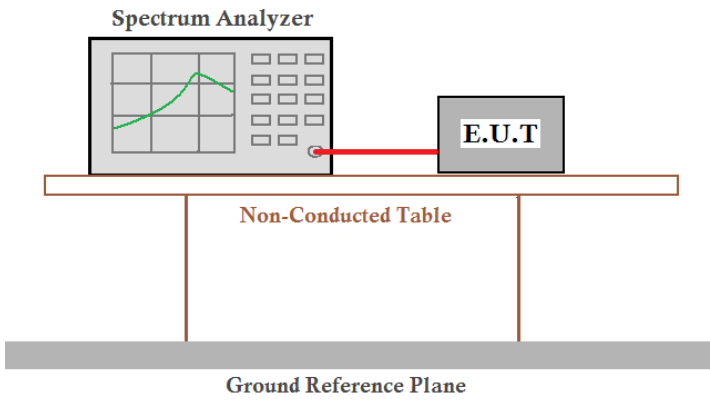Test Requirement :	FCC Part15 C Section 15.247 (a)(2), RSS-247 §5.2.a
Test Method :	KDB558074 D01 DTS Meas Guidance v05or02
Limit:	>500KHz
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass

Measurement Data
Module A

Test CH	Channel Bandwidth (MHz)				Limit(KHz)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	10.07	16.06	17.55	35.68	>500	Pass
Middle	9.563	16.29	17.28	35.68		
Highest	9.557	16.35	17.17	35.05		

Test CH	99% Occupy Bandwidth (MHz)				Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)	
Lowest	14.740	16.522	17.711	36.227	Pass
Middle	14.684	16.500	17.708	36.161	
Highest	14.677	16.537	17.712	36.195	

Module B

Test CH	Channel Bandwidth (MHz)				Limit(KHz)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	9.045	16.32	17.55	35.97	>500	Pass
Middle	9.031	15.69	17.56	35.73		
Highest	8.526	16.32	17.30	35.74		


Test CH	99% Occupy Bandwidth (MHz)				Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)	
Lowest	14.699	16.523	17.703	36.250	Pass
Middle	14.615	16.505	17.677	36.150	
Highest	14.694	16.532	17.706	36.184	

Test plot as follows:


Module A





802.11n20	Lowest channel	802.1120	Middle channel
-----------	----------------	----------	----------------

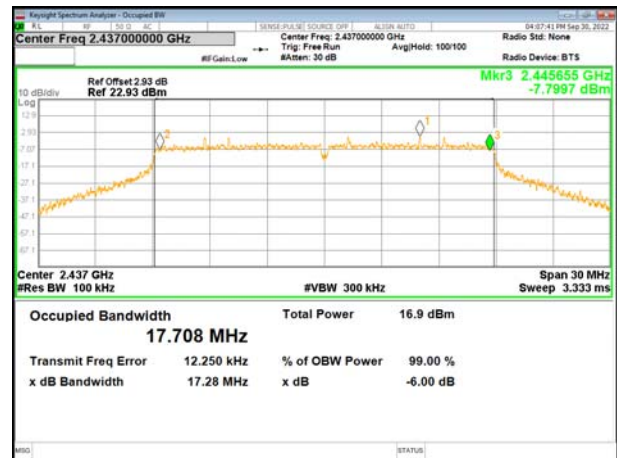

802.11n20	Highest channel	802.11n40	Lowest channel
-----------	-----------------	-----------	----------------

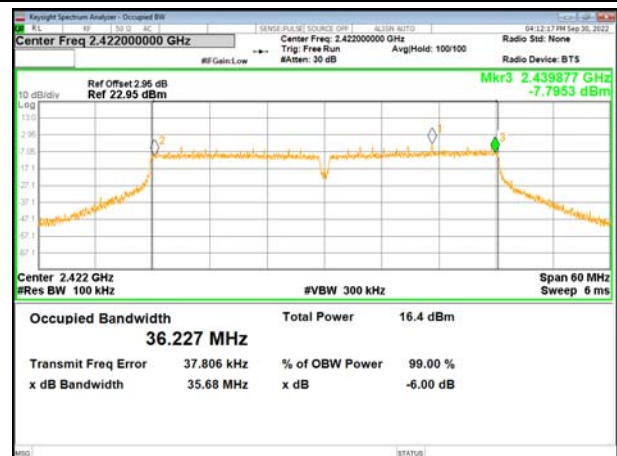


802.11n40	Middle channel	802.11n40	Highest channel
-----------	----------------	-----------	-----------------

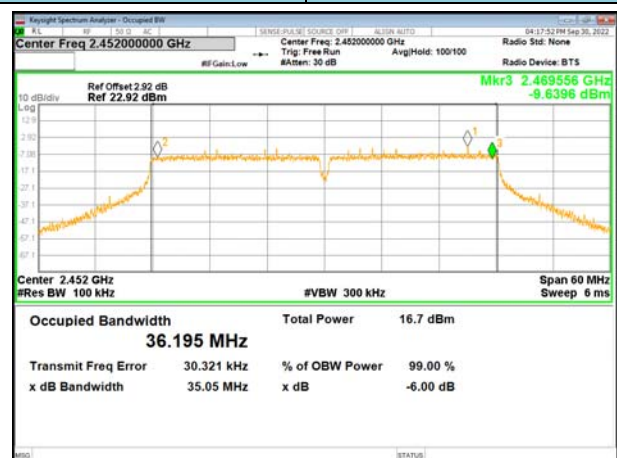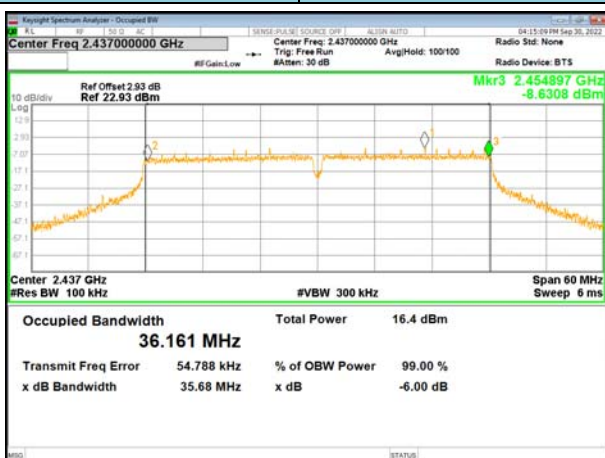

Module B




802.11n20	Lowest channel	802.1120	Middle channel
-----------	----------------	----------	----------------

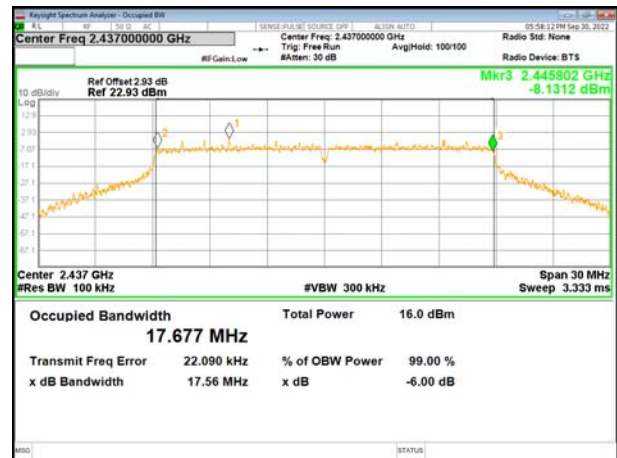


802.11n20	Highest channel	802.11n40	Lowest channel
-----------	-----------------	-----------	----------------



802.11n40	Middle channel	802.11n40	Highest channel
-----------	----------------	-----------	-----------------

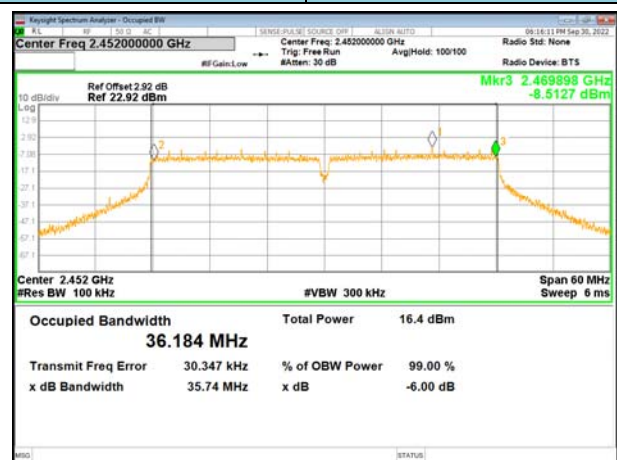

5.5 Power Spectral Density

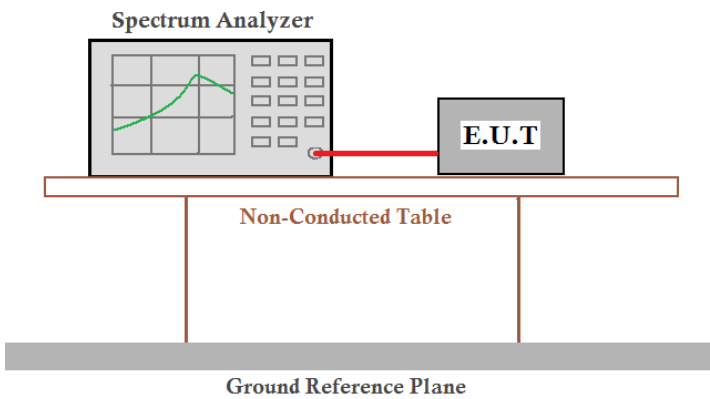Test Requirement:	FCC Part15 C Section 15.247 (e), RSS-247 §5.2.b
Test Method:	KDB558074 D01 DTS Meas Guidance v05or02
Limit:	8dBm/3kHz
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass

Measurement Data

Module A

Test CH	Power Spectral Density (dBm/3kHz)				Limit (dBm/3kHz)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	-10.527	-14.470	-13.798	-18.238	8.00	Pass
Middle	-11.133	-14.110	-14.050	-17.832		
Highest	-10.249	-13.606	-12.513	-17.350		


Module B


Test CH	Power Spectral Density (dBm/3kHz)				Limit (dBm/3kHz)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	-12.388	-15.026	-15.718	-17.389	8.00	Pass
Middle	-11.886	-15.382	-14.564	-18.244		
Highest	-11.667	-15.487	-15.254	-18.082		



Test plot as follows:

Module A


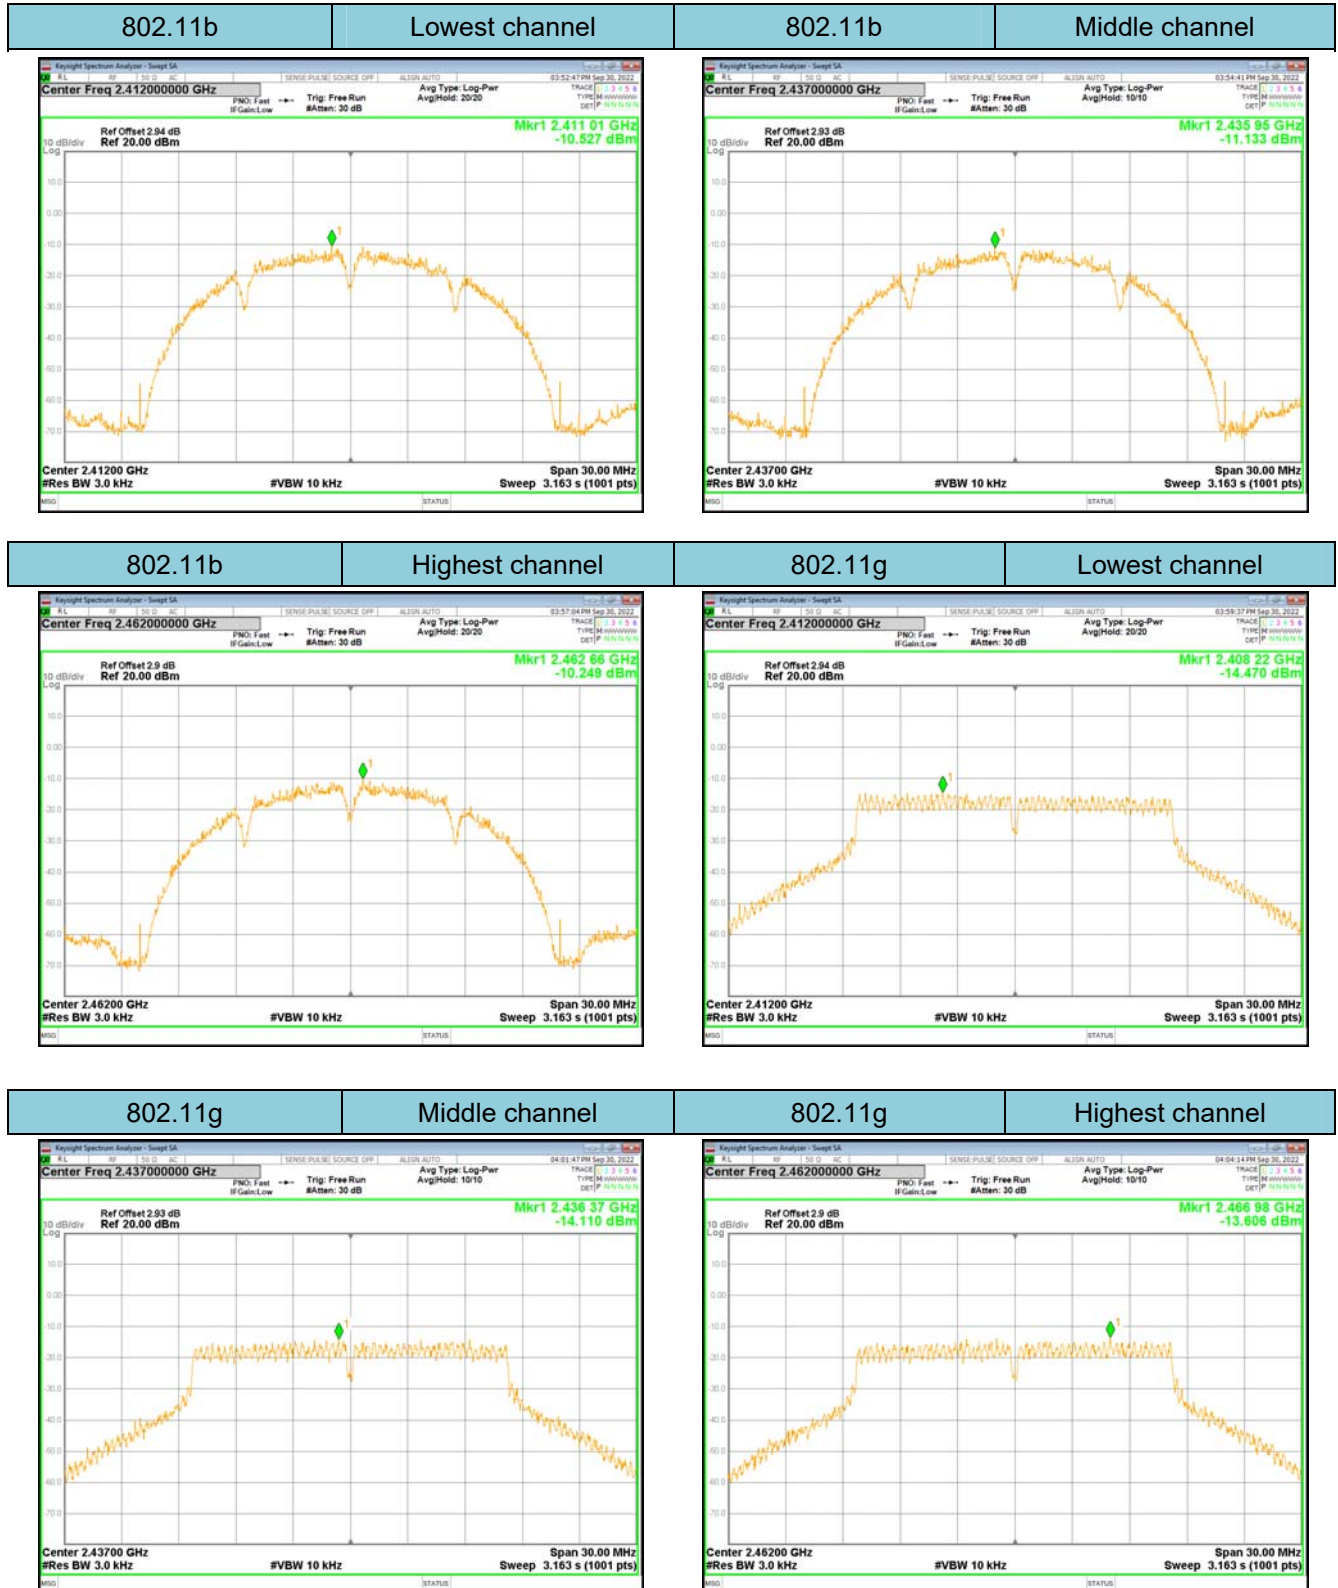


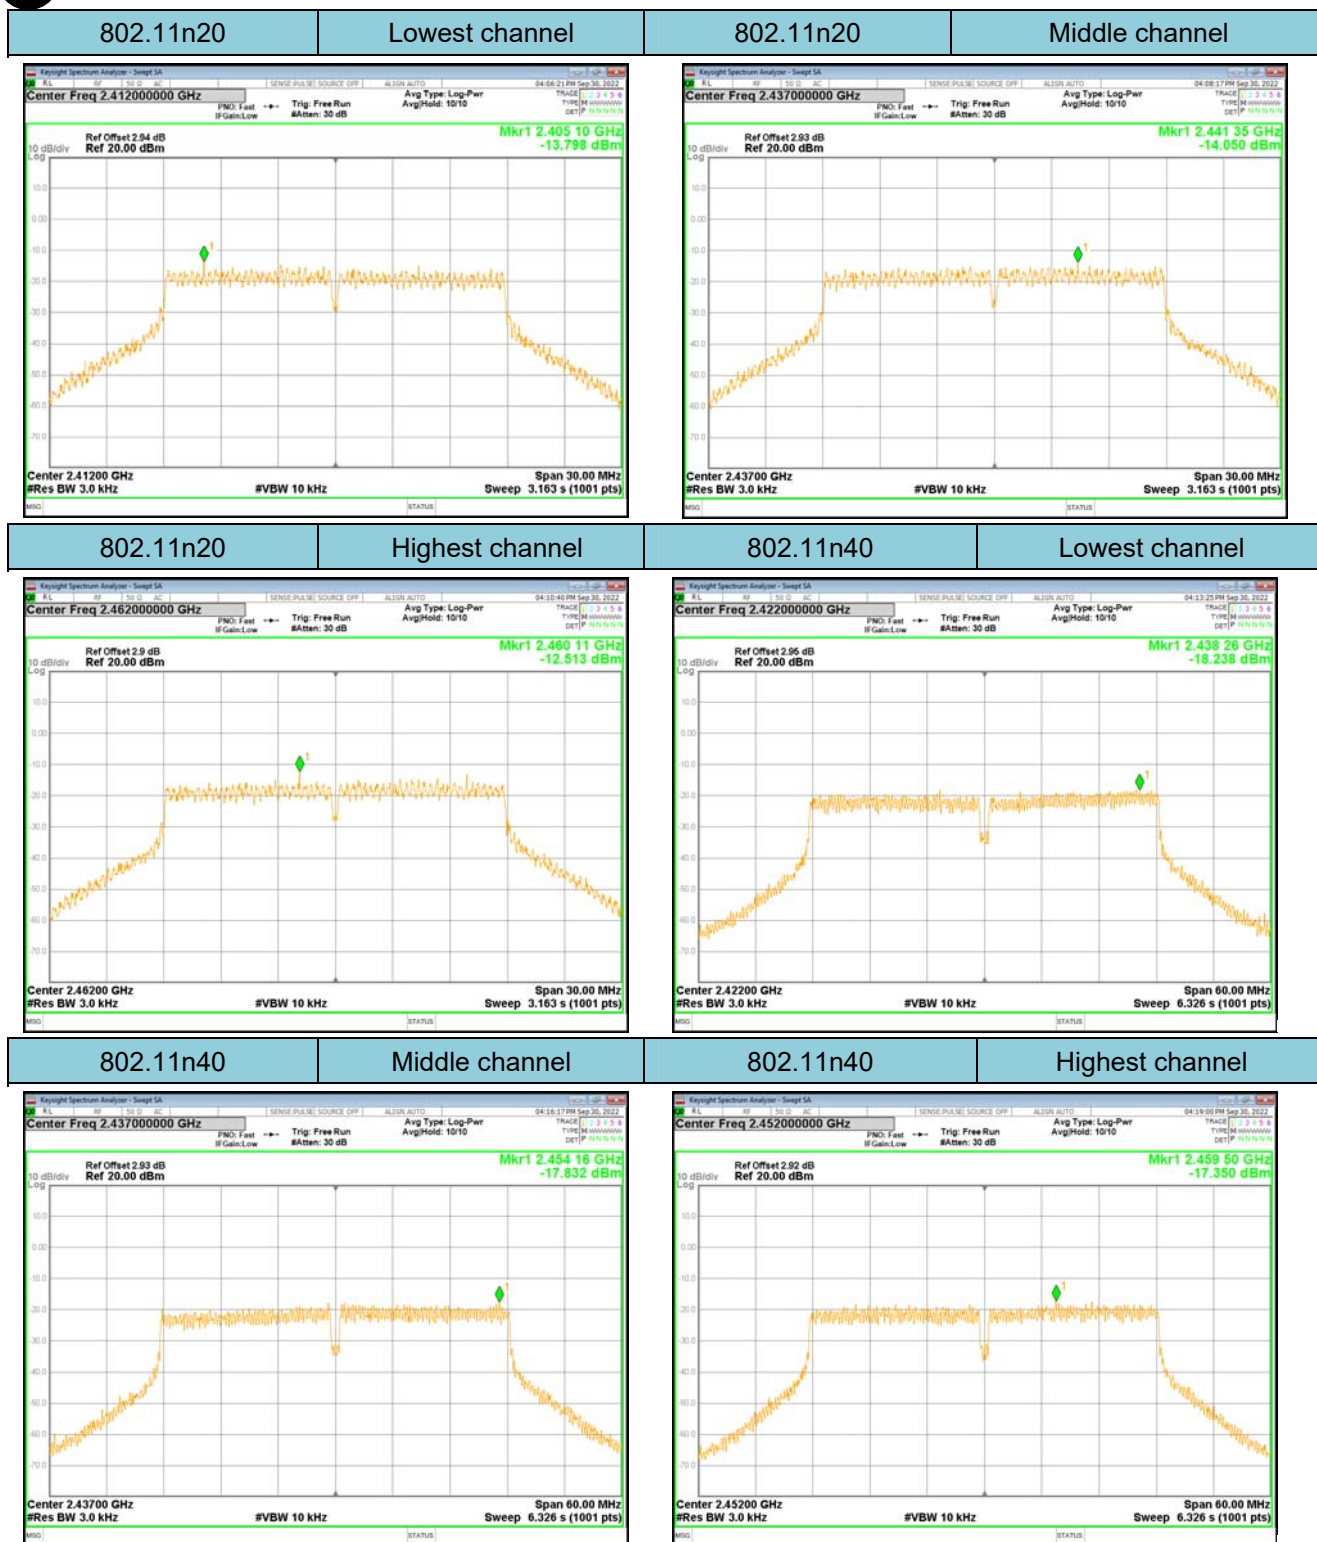



Module B



802.11n20	Lowest channel	802.11n20	Middle channel
-----------	----------------	-----------	----------------

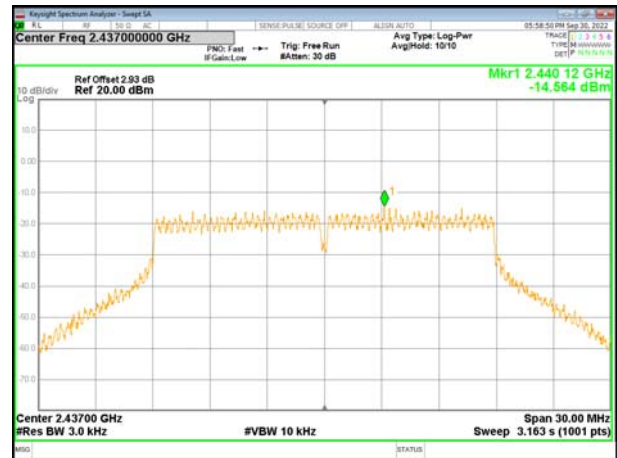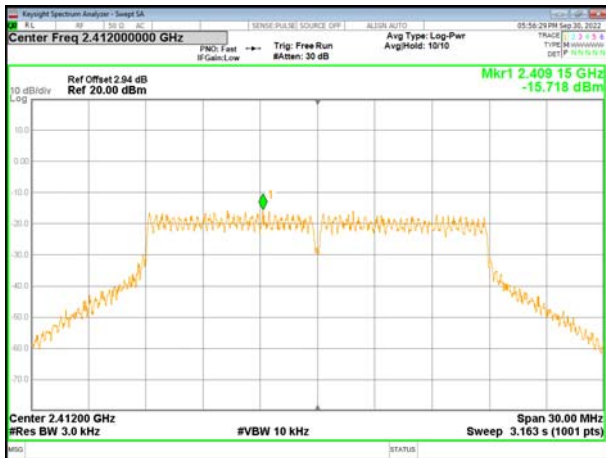

802.11n20	Highest channel	802.11n40	Lowest channel
-----------	-----------------	-----------	----------------

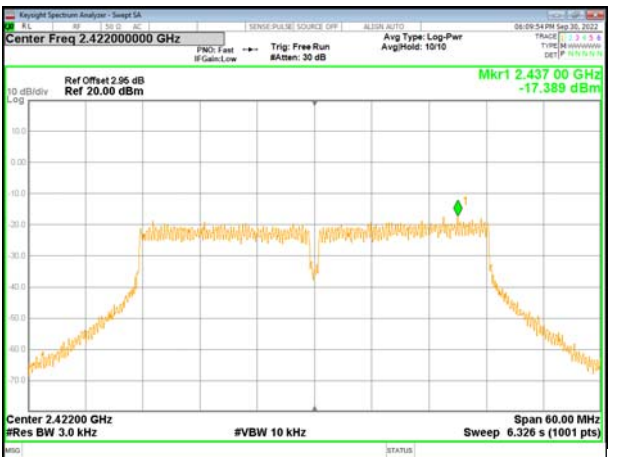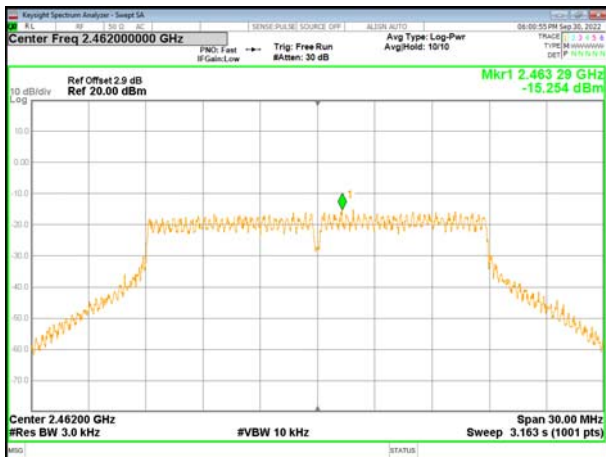


802.11n40	Middle channel	802.11n40	Highest channel
-----------	----------------	-----------	-----------------



5.6 Band edges

Conducted Emission Method

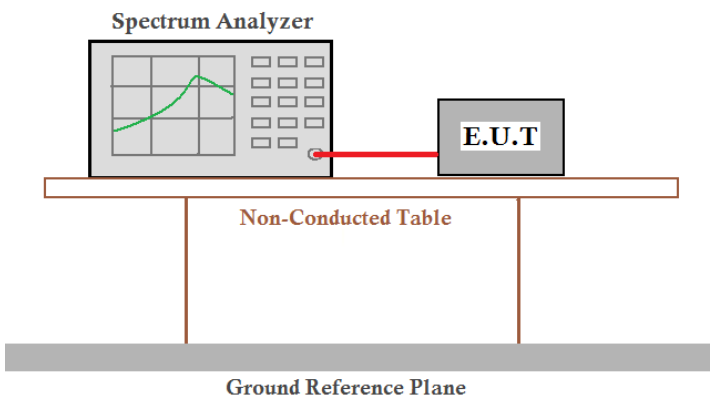
Test Requirement:	FCC Part15 C Section 15.247 (d), RSS-247 §5.2.b
Test Method:	KDB558074 D01 DTS Meas Guidance v05or02
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by two vertical legs and sits on a Ground Reference Plane.
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass

Test plot as follows:

Module A

Test mode:

802.11b

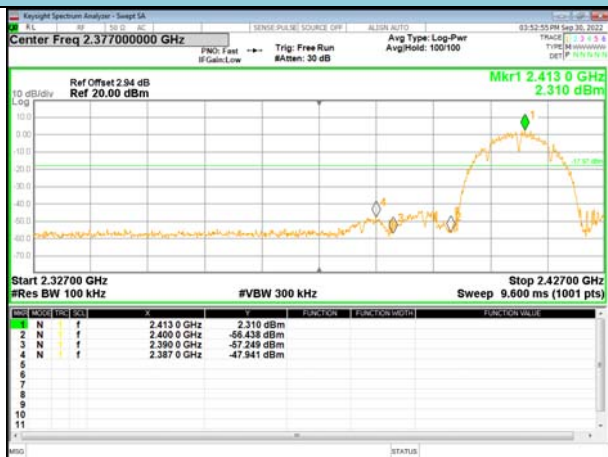


Lowest channel



Highest channel

Test mode:

802.11g

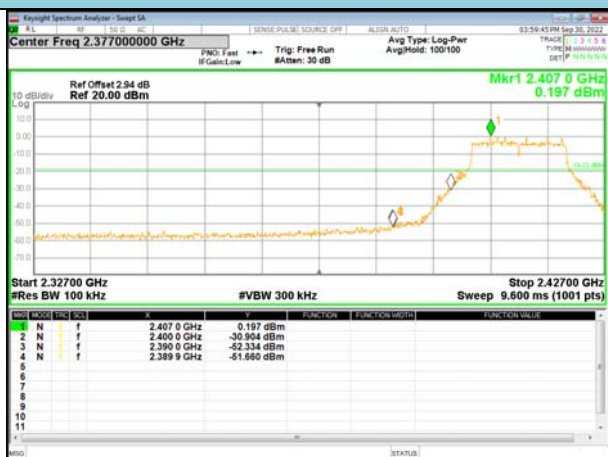


Lowest channel



Highest channel

Test mode:

802.11n20

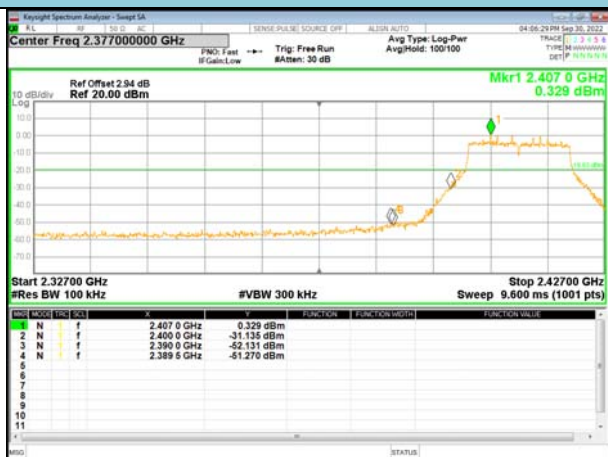

Lowest channel




Highest channel

Test mode:

802.11n40



Lowest channel

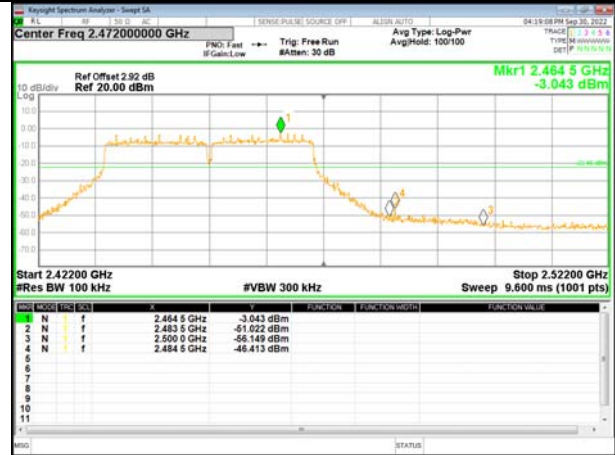


Highest channel

Module B

Test mode:

802.11b

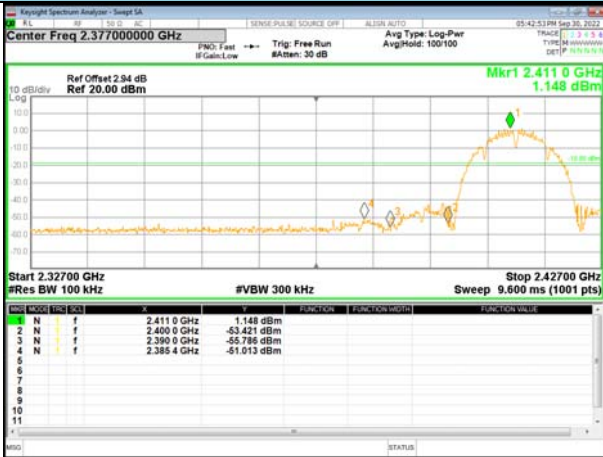


Lowest channel



Highest channel

Test mode:

802.11g

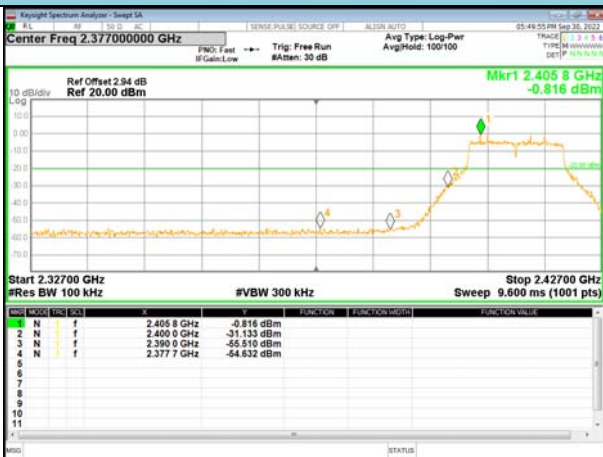


Lowest channel



Highest channel

Test mode:

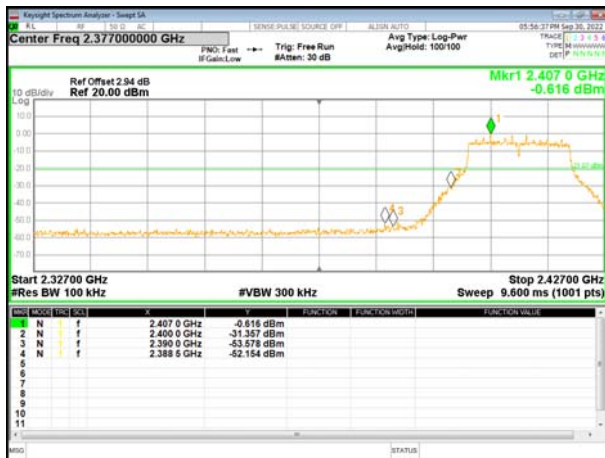

802.11n20



Lowest channel
Test mode:




Highest channel
802.11n40



Lowest channel

Highest channel

Radiated Emission Method

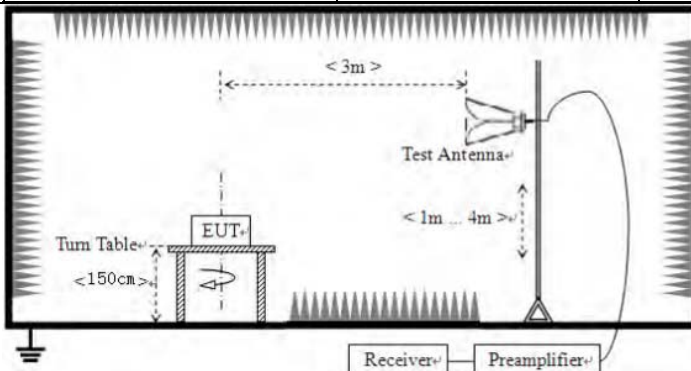Test Requirement:	FCC Part15 C Section 15.209 and 15.205, RSS-Gen §8.9 §8.10				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Average	1MHz	3MHz	Average
Limit:	Frequency		Limit (dBuV/m @3m)		Value
	Above 1GHz		54.00		Average
			74.00		Peak
Test setup:					
Test Procedure:	1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 7. The radiation measurements are performed in X, Y, Z axis positioning. And found the Y axis positioning which it is worse case, only the test worst case mode is recorded in the report.				
Test Instruments:	Refer to section 3.0 for details				
Test mode:	Refer to section 2.2 for details				
Test results:	Pass				

Remark: Both Module have been tested, and the report only shows the worst case data with Module A.

Measurement data:

Test mode:	802.11b	Test channel:	Lowest
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	69.62	27.40	3.43	45.40	55.05	74.00	-18.95	Horizontal
2390.00	69.46	27.10	3.43	45.40	54.59	74.00	-19.41	Horizontal
2310.00	70.16	27.40	3.43	45.40	55.59	74.00	-18.41	Vertical
2390.00	73.96	27.10	3.43	45.40	59.09	74.00	-14.91	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	55.18	27.40	3.43	45.40	40.61	54.00	-13.39	Horizontal
2390.00	57.04	27.10	3.43	45.40	42.17	54.00	-11.83	Horizontal
2310.00	54.46	27.40	3.43	45.40	39.89	54.00	-14.11	Vertical
2390.00	57.69	27.10	3.43	45.40	42.82	54.00	-11.18	Vertical

Test mode:	802.11b	Test channel:	Highest
------------	---------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	70.50	27.80	3.56	45.40	56.46	74.00	-17.54	Horizontal
2500.00	66.69	27.80	3.56	45.40	52.65	74.00	-21.35	Horizontal
2483.50	70.53	27.80	3.56	45.40	56.49	74.00	-17.51	Vertical
2500.00	66.38	27.80	3.56	45.40	52.34	74.00	-21.66	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	60.36	27.80	3.56	45.40	46.32	54.00	-7.68	Horizontal
2500.00	57.20	27.80	3.56	45.40	43.16	54.00	-10.84	Horizontal
2483.50	60.46	27.80	3.56	45.40	46.42	54.00	-7.58	Vertical
2500.00	57.32	27.80	3.56	45.40	43.28	54.00	-10.72	Vertical

Test mode:	802.11g	Test channel:	Lowest
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	65.50	27.40	3.43	45.40	50.93	74.00	-23.07	Horizontal
2390.00	70.26	27.10	3.43	45.40	55.39	74.00	-18.61	Horizontal
2310.00	64.92	27.40	3.43	45.40	50.35	74.00	-23.65	Vertical
2390.00	69.92	27.10	3.43	45.40	55.05	74.00	-18.95	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	57.98	27.40	3.43	45.40	43.41	54.00	-10.59	Horizontal
2390.00	60.06	27.10	3.43	45.40	45.19	54.00	-8.81	Horizontal
2310.00	54.61	27.40	3.43	45.40	40.04	54.00	-13.96	Vertical
2390.00	60.14	27.10	3.43	45.40	45.27	54.00	-8.73	Vertical

Test mode:	802.11g	Test channel:	Highest
------------	---------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	69.22	27.80	3.56	45.40	55.18	74.00	-18.82	Horizontal
2500.00	65.46	27.80	3.56	45.40	51.42	74.00	-22.58	Horizontal
2483.50	69.49	27.80	3.56	45.40	55.45	74.00	-18.55	Vertical
2500.00	64.34	27.80	3.56	45.40	50.30	74.00	-23.70	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	60.76	27.80	3.56	45.40	46.72	54.00	-7.28	Horizontal
2500.00	56.13	27.80	3.56	45.40	42.09	54.00	-11.91	Horizontal
2483.50	60.20	27.80	3.56	45.40	46.16	54.00	-7.84	Vertical
2500.00	56.28	27.80	3.56	45.40	42.24	54.00	-11.76	Vertical

Test mode:	802.11n(HT20)	Test channel:	Lowest
------------	---------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	64.36	27.40	3.43	45.40	49.79	74.00	-24.21	Horizontal
2390.00	68.74	27.10	3.43	45.40	53.87	74.00	-20.13	Horizontal
2310.00	63.30	27.40	3.43	45.40	48.73	74.00	-25.27	Vertical
2390.00	68.21	27.10	3.43	45.40	53.34	74.00	-20.66	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	56.88	27.40	3.43	45.40	42.31	54.00	-11.69	Horizontal
2390.00	60.47	27.10	3.43	45.40	45.60	54.00	-8.40	Horizontal
2310.00	55.78	27.40	3.43	45.40	41.21	54.00	-12.79	Vertical
2390.00	60.32	27.10	3.43	45.40	45.45	54.00	-8.55	Vertical

Test mode:	802.11n(HT20)	Test channel:	Highest
------------	---------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	71.44	27.80	3.56	45.40	57.40	74.00	-16.60	Horizontal
2500.00	66.08	27.80	3.56	45.40	52.04	74.00	-21.96	Horizontal
2483.50	71.94	27.80	3.56	45.40	57.90	74.00	-16.10	Vertical
2500.00	66.63	27.80	3.56	45.40	52.59	74.00	-21.41	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	60.46	27.80	3.56	45.40	46.42	54.00	-7.58	Horizontal
2500.00	55.09	27.80	3.56	45.40	41.05	54.00	-12.95	Horizontal
2483.50	59.62	27.80	3.56	45.40	45.58	54.00	-8.42	Vertical
2500.00	55.72	27.80	3.56	45.40	41.68	54.00	-12.32	Vertical

Test mode:	802.11n(HT40)	Test channel:	Lowest
------------	---------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	64.34	27.40	3.43	45.40	49.77	74.00	-24.23	Horizontal
2390.00	64.20	27.10	3.43	45.40	49.33	74.00	-24.67	Horizontal
2310.00	64.84	27.40	3.43	45.40	50.27	74.00	-23.73	Vertical
2390.00	68.29	27.10	3.43	45.40	53.42	74.00	-20.58	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	54.13	27.40	3.43	45.40	39.56	54.00	-14.44	Horizontal
2390.00	58.60	27.10	3.43	45.40	43.73	54.00	-10.27	Horizontal
2310.00	54.48	27.40	3.43	45.40	39.91	54.00	-14.09	Vertical
2390.00	58.96	27.10	3.43	45.40	44.09	54.00	-9.91	Vertical

Test mode:	802.11n(HT40)	Test channel:	Highest
------------	---------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	72.74	27.80	3.56	45.40	58.70	74.00	-15.30	Horizontal
2500.00	67.89	27.80	3.56	45.40	53.85	74.00	-20.15	Horizontal
2483.50	72.77	27.80	3.56	45.40	58.73	74.00	-15.27	Vertical
2500.00	67.72	27.80	3.56	45.40	53.68	74.00	-20.32	Vertical

Average value:


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	57.72	27.80	3.56	45.40	43.68	54.00	-10.32	Horizontal
2500.00	53.76	27.80	3.56	45.40	39.72	54.00	-14.28	Horizontal
2483.50	56.81	27.80	3.56	45.40	42.77	54.00	-11.23	Vertical
2500.00	52.81	27.80	3.56	45.40	38.77	54.00	-15.23	Vertical

Remarks:

1. The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.
2. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

5.7 Spurious Emission

Conducted Emission Method

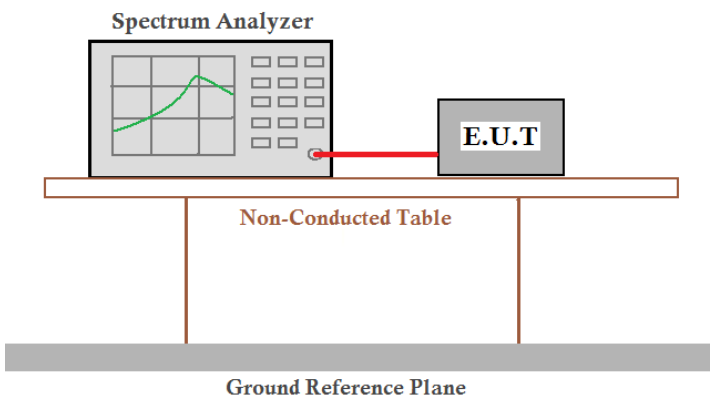Test Requirement:	FCC Part15 C Section 15.247 (d), RSS-Gen §8.9 §8.10
Test Method:	KDB558074 D01 DTS Meas Guidance v05or02
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 The diagram illustrates the test setup for conducted emission measurement. A Spectrum Analyzer is connected via a red cable to an E.U.T (Equipment Under Test). Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass

Remark: /



Test plot as follows:

Module A

802.11b

Lowest channel



30MHz~25GHz

Middle channel



30MHz~25GHz


Highest channel



30MHz~25GHz

802.11g

Lowest channel

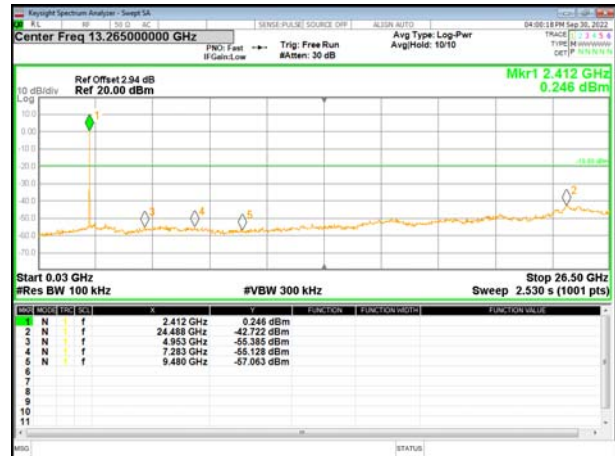

30MHz~25GHz

Middle channel



30MHz~25GHz

Highest channel



30MHz~25GHz

802.11n20

Lowest channel




30MHz~25GHz

Middle channel



30MHz~25GHz


Highest channel

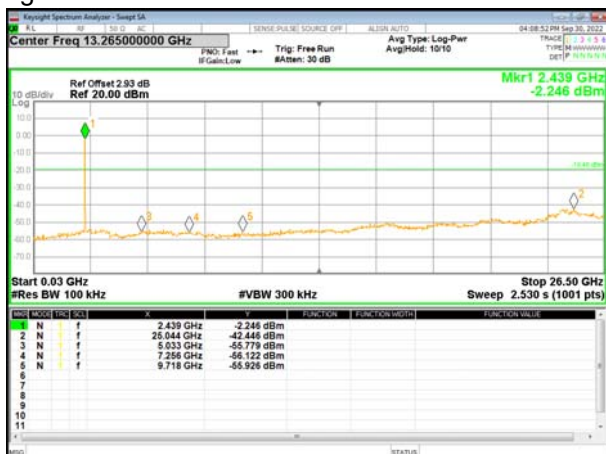

30MHz~25GHz


802.11n40

Lowest channel

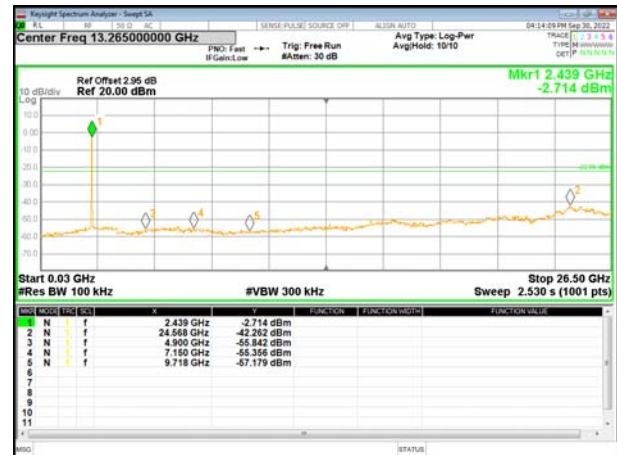


30MHz~25GHz

Middle channel

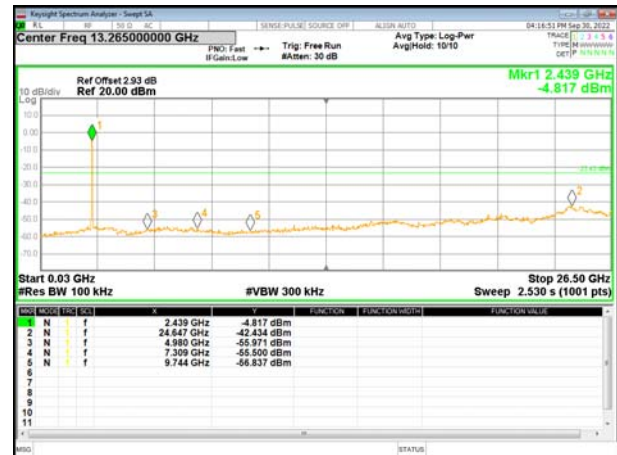

30MHz~25GHz

Highest channel

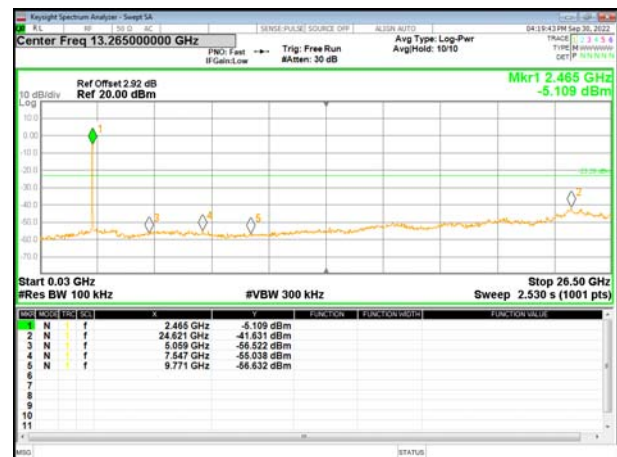

30MHz~25GHz

Module b

802.11b

Lowest channel



30MHz~25GHz

Middle channel



30MHz~25GHz

Highest channel



802.11g

Lowest channel



30MHz~25GHz

Middle channel



30MHz~25GHz

Highest channel



30MHz~25GHz

802.11n20

Lowest channel



30MHz~25GHz

Middle channel



30MHz~25GHz


Highest channel



30MHz~25GHz

802.11n40

Lowest channel

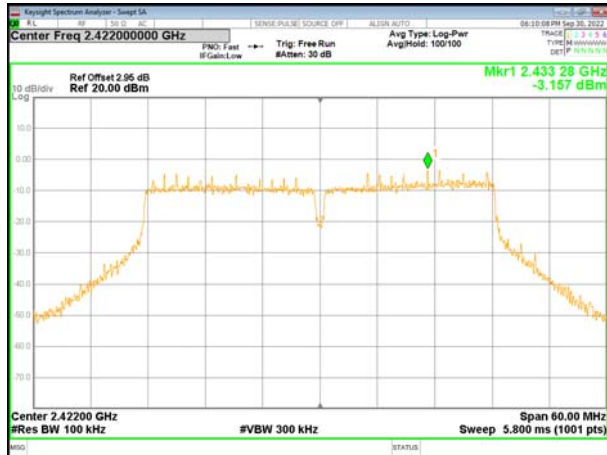

30MHz~25GHz

Middle channel




30MHz~25GHz


Highest channel




30MHz~25GHz

Radiated Emission Method

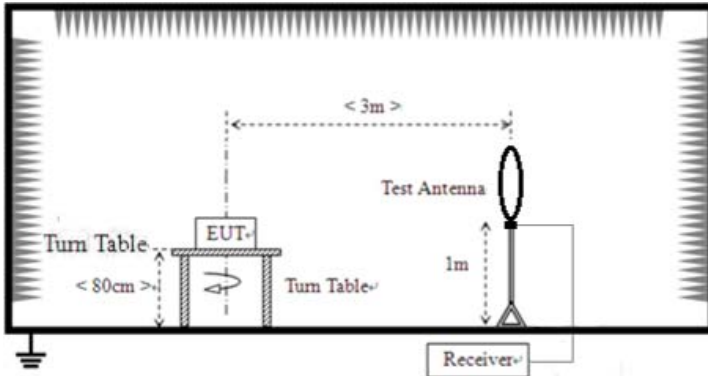Test Requirement:	FCC Part15 C Section 15.209 , RSS-Gen §8.9 §8.10				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Limit (uV/m)	Value	Measurement Distance	
	0.009MHz-0.490MHz	2400/F(KHz)	QP	300m	
	0.490MHz-1.705MHz	24000/F(KHz)	QP	300m	
	1.705MHz-30MHz	30	QP	30m	
	30MHz-88MHz	100	QP	3m	
	88MHz-216MHz	150	QP		
	216MHz-960MHz	200	QP		
	960MHz-1GHz	500	QP		
	Above 1GHz	500	Average		
		5000	Peak		
Test setup:	For radiated emissions from 9kHz to 30MHz				
					
For radiated emissions from 30MHz to1GHz					

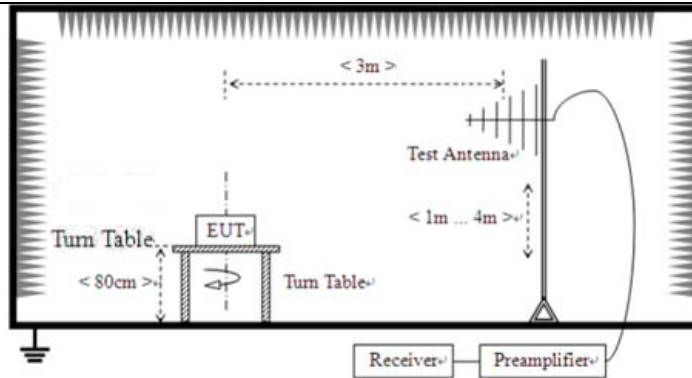

For radiated emissions above 1GHz

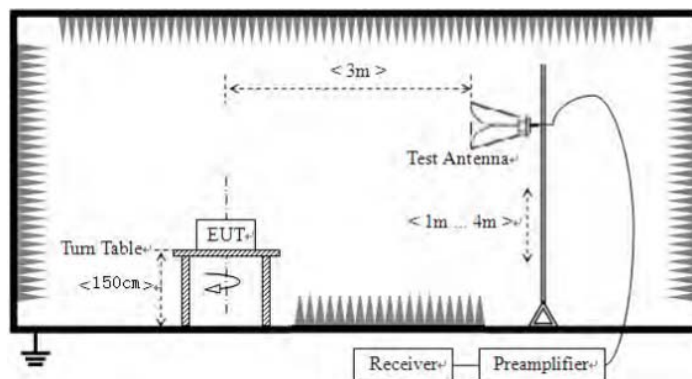

Test Procedure:

1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Test Instruments:

Refer to section 3.0 for details

Test mode:

Refer to section 2.2 for details

Test environment:

Temp.:	25.6 °C	Humid.:	55%	Press.:	1012mbar
--------	---------	---------	-----	---------	----------



Test voltage:	AC 120V, 60Hz
Test results:	Pass

Remarks:

- 1. The report only shows the worst mode. The worst mode is Module A+Module B :802.11g.*
- 2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.*


Measurement data:

■ **9kHz~30MHz**

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.


Below 1GHz

Vertical:

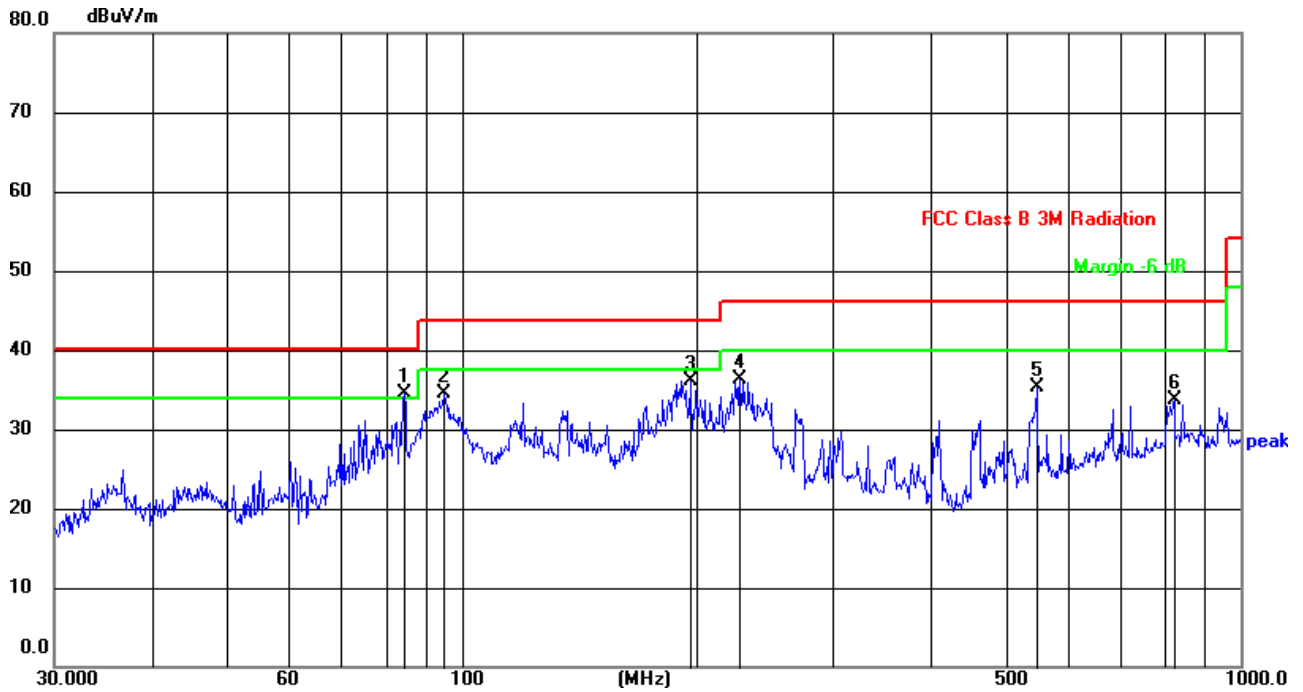

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	84.4054	54.92	-20.38	34.54	40.00	-5.46	QP
2	95.0929	54.66	-20.15	34.51	43.50	-8.99	QP
3	196.5098	54.43	-18.35	36.08	43.50	-7.42	QP
4	227.6904	54.64	-18.42	36.22	46.00	-9.78	QP
5	547.0976	47.82	-12.56	35.26	46.00	-10.74	QP
6	821.7103	40.90	-7.24	33.66	46.00	-12.34	QP

Horizontal:

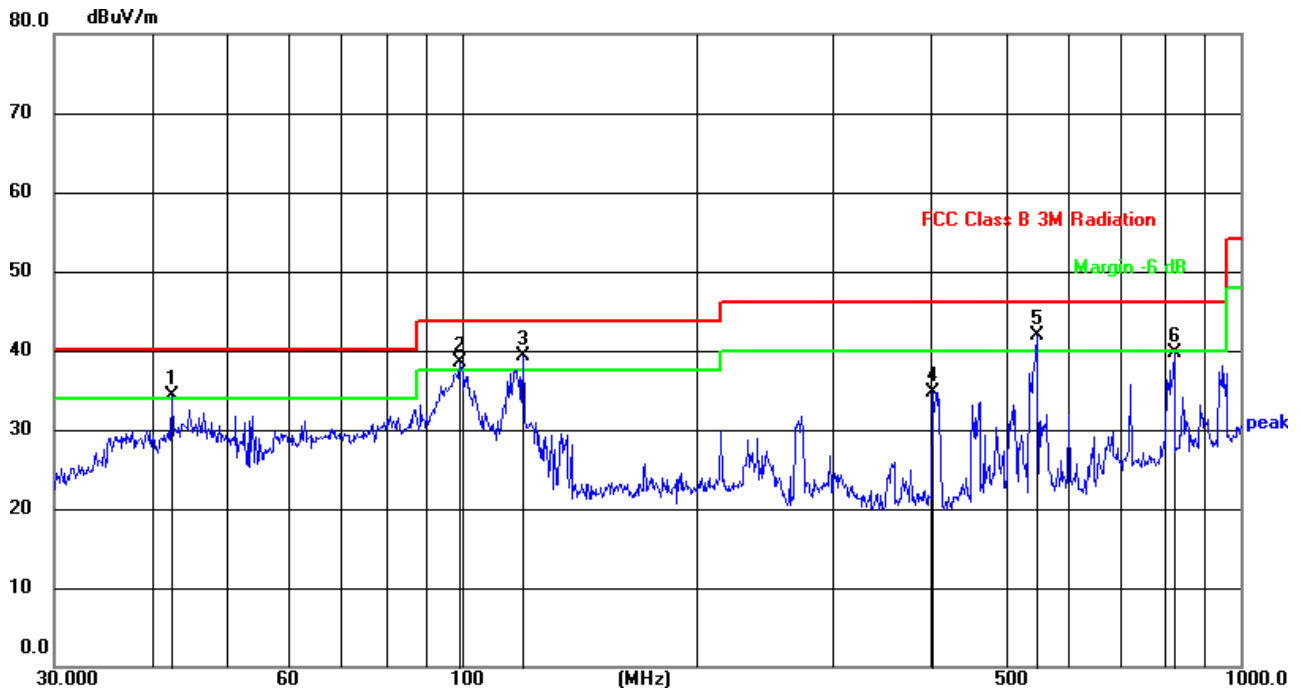

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	42.4508	54.97	-20.76	34.21	40.00	-5.79	QP
2	99.5279	58.55	-19.97	38.58	43.50	-4.92	QP
3	119.8555	58.28	-19.05	39.23	43.50	-4.27	QP
4	401.8383	51.06	-16.38	34.68	46.00	-11.32	QP
5	547.0976	54.39	-12.56	41.83	46.00	-4.17	QP
6	821.7103	46.73	-7.11	39.62	46.00	-6.38	QP

Remarks:

Level = Receiver Reading + Factor

Factor = Antenna Factor + Cable Factor – Preamplifier Factor

■ Above 1GHz

Test mode:	802.11b	Test channel:	Lowest
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	58.15	32.10	5.96	45.50	50.71	74.00	-23.29	Vertical
7236.00	53.69	36.60	6.93	45.60	51.62	74.00	-22.38	Vertical
9648.00	51.96	38.60	8.02	46.20	52.38	74.00	-21.62	Vertical
12060.00	*					74.00		Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4824.00	54.48	32.10	5.96	45.50	47.04	74.00	-26.96	Horizontal
7236.00	50.23	36.60	6.93	45.60	48.16	74.00	-25.84	Horizontal
9648.00	49.54	38.60	8.02	46.20	49.96	74.00	-24.04	Horizontal
12060.00	*					74.00		Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	45.57	32.10	5.96	45.50	38.13	54.00	-15.87	Vertical
7236.00	40.77	36.60	6.93	45.60	38.70	54.00	-15.30	Vertical
9648.00	40.41	38.60	8.02	46.20	40.83	54.00	-13.17	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4824.00	46.60	32.10	5.96	45.50	39.16	54.00	-14.84	Horizontal
7236.00	42.56	36.60	6.93	45.60	40.49	54.00	-13.51	Horizontal
9648.00	41.85	38.60	8.02	46.20	42.27	54.00	-11.73	Horizontal
12060.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.



Test mode:	802.11b	Test channel:	Middle
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	45.74	32.40	5.96	45.50	38.60	74.00	-35.40	Vertical
7311.00	42.22	36.60	6.93	45.60	40.15	74.00	-33.85	Vertical
9748.00	44.18	38.00	8.02	46.20	44.00	74.00	-30.00	Vertical
12185.00	*					74.00		Vertical
14622.00	*					74.00		Vertical
17059.00	*					74.00		Vertical
4874.00	55.01	32.40	5.96	45.50	47.87	74.00	-26.13	Horizontal
7311.00	49.98	36.60	6.93	45.60	47.91	74.00	-26.09	Horizontal
9748.00	52.88	38.00	8.02	46.20	52.70	74.00	-21.30	Horizontal
12185.00	*					74.00		Horizontal
14622.00	*					74.00		Horizontal
17059.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	38.69	32.40	5.96	45.50	31.55	54.00	-22.45	Vertical
7311.00	34.54	36.60	6.93	45.60	32.47	54.00	-21.53	Vertical
9748.00	36.37	38.00	8.02	46.20	36.19	54.00	-17.81	Vertical
12185.00	*					54.00		Vertical
14622.00	*					54.00		Vertical
17059.00	*					54.00		Vertical
4874.00	44.62	32.40	5.96	45.50	37.48	54.00	-16.52	Horizontal
7311.00	41.22	36.60	6.93	45.60	39.15	54.00	-14.85	Horizontal
9748.00	41.65	38.00	8.02	46.20	41.47	54.00	-12.53	Horizontal
12185.00	*					54.00		Horizontal
14622.00	*					54.00		Horizontal
17059.00	*					54.00		Horizontal

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *“*”*, means this data is the too weak instrument of signal is unable to test.

Test mode:	802.11b	Test channel:	Highest
------------	---------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	62.23	32.80	5.96	45.70	55.29	74.00	-18.71	Vertical
7386.00	58.87	36.40	6.93	45.80	56.40	74.00	-17.60	Vertical
9848.00	59.15	38.20	8.02	46.20	59.17	74.00	-14.83	Vertical
12310.00	*					74.00		Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4924.00	66.75	32.80	5.96	45.70	59.81	74.00	-14.19	Horizontal
7386.00	63.79	36.40	6.93	45.80	61.32	74.00	-12.68	Horizontal
9848.00	63.51	38.20	8.02	46.20	63.53	74.00	-10.47	Horizontal
12310.00	*					74.00		Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	48.88	32.80	5.96	45.70	41.94	54.00	-12.06	Vertical
7386.00	45.53	36.40	6.93	45.80	43.06	54.00	-10.94	Vertical
9848.00	43.53	38.20	8.02	46.20	43.55	54.00	-10.45	Vertical
12310.00	*					54.00		Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4924.00	48.11	32.80	5.96	45.70	41.17	54.00	-12.83	Horizontal
7386.00	44.01	36.40	6.93	45.80	41.54	54.00	-12.46	Horizontal
9848.00	42.38	38.20	8.02	46.20	42.40	54.00	-11.60	Horizontal
12310.00	*					54.00		Horizontal
14772.00	*					54.00		Horizontal
17234.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is too weak instrument of signal is unable to test.

Test mode:	802.11g	Test channel:	lowest
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	52.49	32.10	5.96	45.50	45.05	74.00	-28.95	Vertical
7236.00	47.93	36.60	6.93	45.60	45.86	74.00	-28.14	Vertical
9648.00	48.52	38.60	8.02	46.20	48.94	74.00	-25.06	Vertical
12060.00	*					74.00		Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4824.00	59.22	32.10	5.96	45.50	51.78	74.00	-22.22	Horizontal
7236.00	54.94	36.60	6.93	45.60	52.87	74.00	-21.13	Horizontal
9648.00	55.78	38.60	8.02	46.20	56.20	74.00	-17.80	Horizontal
12060.00	*					74.00		Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	38.44	32.10	5.96	45.50	31.00	54.00	-23.00	Vertical
7236.00	34.26	36.60	6.93	45.60	32.19	54.00	-21.81	Vertical
9648.00	35.55	38.60	8.02	46.20	35.97	54.00	-18.03	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4824.00	42.20	32.10	5.96	45.50	34.76	54.00	-19.24	Horizontal
7236.00	38.72	36.60	6.93	45.60	36.65	54.00	-17.35	Horizontal
9648.00	39.21	38.60	8.02	46.20	39.63	54.00	-14.37	Horizontal
12060.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.

Test mode:	802.11g	Test channel:	Middle
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	54.55	32.40	5.96	45.50	47.41	74.00	-26.59	Vertical
7311.00	50.60	36.60	6.93	45.60	48.53	74.00	-25.47	Vertical
9748.00	50.89	38.00	8.02	46.20	50.71	74.00	-23.29	Vertical
12185.00	*					74.00		Vertical
14622.00	*					74.00		Vertical
17059.00	*					74.00		Vertical
4874.00	54.12	32.40	5.96	45.50	46.98	74.00	-27.02	Horizontal
7311.00	50.34	36.60	6.93	45.60	48.27	74.00	-25.73	Horizontal
9748.00	50.55	38.00	8.02	46.20	50.37	74.00	-23.63	Horizontal
12185.00	*					74.00		Horizontal
14622.00	*					74.00		Horizontal
17059.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	47.82	32.40	5.96	45.50	40.68	54.00	-13.32	Vertical
7311.00	43.66	36.60	6.93	45.60	41.59	54.00	-12.41	Vertical
9748.00	42.80	38.00	8.02	46.20	42.62	54.00	-11.38	Vertical
12185.00	*					54.00		Vertical
14622.00	*					54.00		Vertical
17059.00	*					54.00		Vertical
4874.00	46.91	32.40	5.96	45.50	39.77	54.00	-14.23	Horizontal
7311.00	42.55	36.60	6.93	45.60	40.48	54.00	-13.52	Horizontal
9748.00	43.89	38.00	8.02	46.20	43.71	54.00	-10.29	Horizontal
12185.00	*					54.00		Horizontal
14622.00	*					54.00		Horizontal
17059.00	*					54.00		Horizontal

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *"*", means this data is the too weak instrument of signal is unable to test.*



Test mode:	802.11g	Test channel:	Highest
------------	---------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	61.96	32.80	5.96	45.70	55.02	74.00	-18.98	Vertical
7386.00	58.65	36.40	6.93	45.80	56.18	74.00	-17.82	Vertical
9848.00	57.98	38.20	8.02	46.20	58.00	74.00	-16.00	Vertical
12310.00	*					74.00		Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4924.00	61.11	32.80	5.96	45.70	54.17	74.00	-19.83	Horizontal
7386.00	58.82	36.40	6.93	45.80	56.35	74.00	-17.65	Horizontal
9848.00	58.06	38.20	8.02	46.20	58.08	74.00	-15.92	Horizontal
12310.00	*					74.00		Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	44.79	32.80	5.96	45.70	37.85	54.00	-16.15	Vertical
7386.00	41.03	36.40	6.93	45.80	38.56	54.00	-15.44	Vertical
9848.00	41.81	38.20	8.02	46.20	41.83	54.00	-12.17	Vertical
12310.00	*					54.00		Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4924.00	43.72	32.80	5.96	45.70	36.78	54.00	-17.22	Horizontal
7386.00	41.09	36.40	6.93	45.80	38.62	54.00	-15.38	Horizontal
9848.00	40.58	38.20	8.02	46.20	40.60	54.00	-13.40	Horizontal
12310.00	*					54.00		Horizontal
14772.00	*					54.00		Horizontal
17234.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.

Test mode:	802.11n(HT20)	Test channel:	Lowest
------------	---------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	53.54	32.10	5.96	45.50	46.10	74.00	-27.90	Vertical
7236.00	48.92	36.60	6.93	45.60	46.85	74.00	-27.15	Vertical
9648.00	48.71	38.60	8.02	46.20	49.13	74.00	-24.87	Vertical
12060.00	*					74.00		Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4824.00	44.41	32.10	5.96	45.50	36.97	74.00	-37.03	Horizontal
7236.00	45.10	36.60	6.93	45.60	43.03	74.00	-30.97	Horizontal
9648.00	48.95	38.60	8.02	46.20	49.37	74.00	-24.63	Horizontal
12060.00	*					74.00		Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	44.89	32.10	5.96	45.50	37.45	54.00	-16.55	Vertical
7236.00	40.09	36.60	6.93	45.60	38.02	54.00	-15.98	Vertical
9648.00	39.62	38.60	8.02	46.20	40.04	54.00	-13.96	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4824.00	44.34	32.10	5.96	45.50	36.90	54.00	-17.10	Horizontal
7236.00	40.30	36.60	6.93	45.60	38.23	54.00	-15.77	Horizontal
9648.00	39.92	38.60	8.02	46.20	40.34	54.00	-13.66	Horizontal
12060.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.

Test mode:	802.11n(HT20)	Test channel:	Middle
------------	---------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	58.03	32.10	5.96	45.50	50.59	74.00	-23.41	Vertical
7311.00	54.45	36.60	6.93	45.60	52.38	74.00	-21.62	Vertical
9748.00	55.09	38.60	8.02	46.20	55.51	74.00	-18.49	Vertical
12185.00	*					74.00		Vertical
14622.00	*					74.00		Vertical
17059.00	*					74.00		Vertical
4874.00	58.82	32.10	5.96	45.50	51.38	74.00	-22.62	Horizontal
7311.00	53.69	36.60	6.93	45.60	51.62	74.00	-22.38	Horizontal
9748.00	54.81	38.60	8.02	46.20	55.23	74.00	-18.77	Horizontal
12185.00	*					74.00		Horizontal
14622.00	*					74.00		Horizontal
17059.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	48.41	32.10	5.96	45.50	40.97	54.00	-13.03	Vertical
7311.00	43.99	36.60	6.93	45.60	41.92	54.00	-12.08	Vertical
9748.00	43.85	38.60	8.02	46.20	44.27	54.00	-9.73	Vertical
12185.00	*					54.00		Vertical
14622.00	*					54.00		Vertical
17059.00	*					54.00		Vertical
4874.00	48.04	32.10	5.96	45.50	40.60	54.00	-13.40	Horizontal
7311.00	43.10	36.60	6.93	45.60	41.03	54.00	-12.97	Horizontal
9748.00	44.38	38.60	8.02	46.20	44.80	54.00	-9.20	Horizontal
12185.00	*					54.00		Horizontal
14622.00	*					54.00		Horizontal
17059.00	*					54.00		Horizontal

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *“*” means this data is too weak instrument of signal is unable to test.*

Test mode:	802.11n(HT20)	Test channel:	Highest
------------	---------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	60.53	32.80	5.96	45.70	53.59	74.00	-20.41	Vertical
7386.00	56.62	36.40	6.93	45.80	54.15	74.00	-19.85	Vertical
9848.00	57.47	38.20	8.02	46.20	57.49	74.00	-16.51	Vertical
12310.00	*					74.00		Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4924.00	61.04	32.80	5.96	45.70	54.10	74.00	-19.90	Horizontal
7386.00	57.08	36.40	6.93	45.80	54.61	74.00	-19.39	Horizontal
9848.00	56.29	38.20	8.02	46.20	56.31	74.00	-17.69	Horizontal
12310.00	*					74.00		Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	46.79	32.80	5.96	45.70	39.85	54.00	-14.15	Vertical
7386.00	43.19	36.40	6.93	45.80	40.72	54.00	-13.28	Vertical
9848.00	43.25	38.20	8.02	46.20	43.27	54.00	-10.73	Vertical
12310.00	*					54.00		Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4924.00	46.85	32.80	5.96	45.70	39.91	54.00	-14.09	Horizontal
7386.00	42.62	36.40	6.93	45.80	40.15	54.00	-13.85	Horizontal
9848.00	41.86	38.20	8.02	46.20	41.88	54.00	-12.12	Horizontal
12310.00	*					54.00		Horizontal
14772.00	*					54.00		Horizontal
17234.00	*					54.00		Horizontal

Remark:

- 1 Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2 “*”, means this data is the too weak instrument of signal is unable to test.

Test mode:	802.11n(HT40)	Test channel:	Lowest
------------	---------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4844.00	54.15	32.10	5.96	45.50	46.71	74.00	-27.29	Vertical
7266.00	49.14	36.80	6.93	45.60	47.27	74.00	-26.73	Vertical
9688.00	50.86	38.10	8.02	46.20	50.78	74.00	-23.22	Vertical
12060.00	*					74.00		Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4844.00	55.13	32.10	5.96	45.50	47.69	74.00	-26.31	Horizontal
7266.00	48.77	36.80	6.93	45.60	46.90	74.00	-27.10	Horizontal
9688.00	50.60	38.10	8.02	46.20	50.52	74.00	-23.48	Horizontal
12060.00	*					74.00		Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4844.00	43.23	32.10	5.96	45.50	35.79	54.00	-18.21	Vertical
7266.00	38.50	36.80	6.93	45.60	36.63	54.00	-17.37	Vertical
9688.00	39.82	38.10	8.02	46.20	39.74	54.00	-14.26	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4844.00	43.78	32.10	5.96	45.50	36.34	54.00	-17.66	Horizontal
7266.00	39.47	36.80	6.93	45.60	37.60	54.00	-16.40	Horizontal
9688.00	40.03	38.10	8.02	46.20	39.95	54.00	-14.05	Horizontal
12060.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.



Test mode:	802.11n(HT40)	Test channel:	Middle
------------	---------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	58.46	32.10	5.96	45.50	51.02	74.00	-22.98	Vertical
7311.00	53.72	36.60	6.93	45.60	51.65	74.00	-22.35	Vertical
9748.00	52.11	38.60	8.02	46.20	52.53	74.00	-21.47	Vertical
12185.00	*					74.00		Vertical
14622.00	*					74.00		Vertical
17059.00	*					74.00		Vertical
4874.00	56.31	32.10	5.96	45.50	48.87	74.00	-25.13	Horizontal
7311.00	52.77	36.60	6.93	45.60	50.70	74.00	-23.30	Horizontal
9748.00	53.00	38.60	8.02	46.20	53.42	74.00	-20.58	Horizontal
12185.00	*					74.00		Horizontal
14622.00	*					74.00		Horizontal
17059.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	47.81	32.10	5.96	45.50	40.37	54.00	-13.63	Vertical
7311.00	43.06	36.60	6.93	45.60	40.99	54.00	-13.01	Vertical
9748.00	43.67	38.60	8.02	46.20	44.09	54.00	-9.91	Vertical
12185.00	*					54.00		Vertical
14622.00	*					54.00		Vertical
17059.00	*					54.00		Vertical
4874.00	47.72	32.10	5.96	45.50	40.28	54.00	-13.72	Horizontal
7311.00	43.01	36.60	6.93	45.60	40.94	54.00	-13.06	Horizontal
9748.00	44.31	38.60	8.02	46.20	44.73	54.00	-9.27	Horizontal
12185.00	*					54.00		Horizontal
14622.00	*					54.00		Horizontal
17059.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.

Test mode:	802.11n(HT40)	Test channel:	Highest
------------	---------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4904.00	53.51	32.80	5.96	45.70	46.57	74.00	-27.43	Vertical
7356.00	47.05	36.20	6.93	45.80	44.38	74.00	-29.62	Vertical
9808.00	48.67	38.40	8.02	46.20	48.89	74.00	-25.11	Vertical
12310.00	*					74.00		Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4904.00	53.06	32.80	5.96	45.70	46.12	74.00	-27.88	Horizontal
7356.00	46.93	36.20	6.93	45.80	44.26	74.00	-29.74	Horizontal
9808.00	47.74	38.40	8.02	46.20	47.96	74.00	-26.04	Horizontal
12310.00	*					74.00		Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4904.00	42.61	32.80	5.96	45.70	35.67	54.00	-18.33	Vertical
7356.00	37.27	36.20	6.93	45.80	34.60	54.00	-19.40	Vertical
9808.00	39.32	38.40	8.02	46.20	39.54	54.00	-14.46	Vertical
12310.00	*					54.00		Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4904.00	42.57	32.80	5.96	45.70	35.63	54.00	-18.37	Horizontal
7356.00	36.88	36.20	6.93	45.80	34.21	54.00	-19.79	Horizontal
9808.00	37.87	38.40	8.02	46.20	38.09	54.00	-15.91	Horizontal
12310.00	*					54.00		Horizontal
14772.00	*					54.00		Horizontal
17234.00	*					54.00		Horizontal

Remark:

- 1 Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2 “*”, means this data is the too weak instrument of signal is unable to test.

5. Test Setup Photo

Reference to the **appendix I** for details.

6. EUT Constructional Details

Reference to the **appendix II** for details.

-----End-----