



# FCC Test Report

## FCC ID : 2A8WL-BWNIP-4L-BS

Applicant: SHARETRONIC DATA TECHNOLOGY (HONG KONG) LIMITED

Address: Room 1904 19/F Tung Wai Commercial Building 109-111 Gloucester Rd Wan Chai HK

Manufacturer: EWIC PHILIPPINES INC.

Address: BLDG NOS 7&8 L2 B4 EZP Warehouse Laguna Technopark Annex, Barangay BO Binan, Binan, Philippines, 4024

EUT: Wire Free Camera with Battery

Trade Mark: N/A

Model Number: FBWNIP-4L-BS-U-301, BTWN81-4-3BL-B, CAM-2PK-B4LWNPU-FP-B, CAM-B4LWNPU-FP-B, BWNIP-4L-BS-U-301

Date of Receipt: Aug. 29, 2022

Test Date: Aug. 30, 2022 - Oct. 08, 2022

Date of Report: Oct. 09, 2022

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone, Baolong Street, Longgang District, Shenzhen, Guangdong, China

Applicable Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247  
ANSI C63.10:2013

Test Result: Pass

Report Number: DL-20220915012E-2

Prepared (Test Engineer): Pxing Huang

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



*This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.*



Table of Contents	Page
<b>1 . SUMMARY OF TEST RESULTS</b>	<b>4</b>
1.1 TEST FACILITY	4
1.2 MEASUREMENT UNCERTAINTY	4
<b>2 . GENERAL INFORMATION</b>	<b>5</b>
2.1 GENERAL DESCRIPTION OF EUT	5
2.2 DESCRIPTION OF TEST MODES	7
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	8
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	8
2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	8
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	9
<b>3 . EMC EMISSION TEST</b>	<b>10</b>
3.1 CONDUCTED EMISSION MEASUREMENT	10
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	10
3.1.2 TEST PROCEDURE	10
3.1.3 DEVIATION FROM TEST STANDARD	10
3.1.4 TEST SETUP	11
3.1.5 EUT OPERATING CONDITIONS	11
3.1.6 TEST RESULTS	11
3.2 RADIATED EMISSION MEASUREMENT	14
3.2.1 RADIATED EMISSION LIMITS	14
3.2.2 TEST PROCEDURE	15
3.2.3 DEVIATION FROM TEST STANDARD	15
3.2.4 TEST SETUP	15
3.2.5 EUT OPERATING CONDITIONS	16
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	17
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	18
3.2.8 TEST RESULTS (1GHZ~25GHZ)	20
3.3 RADIATED BAND EMISSION MEASUREMENT	21
3.3.1 TEST REQUIREMENT:	21
3.3.2 TEST PROCEDURE	21
3.3.3 DEVIATION FROM TEST STANDARD	21
3.3.4 TEST SETUP	22
3.3.5 EUT OPERATING CONDITIONS	22
<b>4 . PEAK OUTPUT POWER</b>	<b>24</b>
4.1 APPLIED PROCEDURES / LIMIT	24
4.1.1 TEST PROCEDURE	24
4.1.2 DEVIATION FROM STANDARD	24
4.1.3 TEST SETUP	24



<b>Table of Contents</b>	<b>Page</b>
4.1.4 EUT OPERATION CONDITIONS	24
4.1.5 TEST RESULTS	25
<b>5 . POWER SPECTRAL DENSITY TEST</b>	<b>26</b>
5.1 APPLIED PROCEDURES / LIMIT	26
5.1.1 TEST PROCEDURE	26
5.1.2 DEVIATION FROM STANDARD	26
5.1.3 TEST SETUP	26
5.1.4 EUT OPERATION CONDITIONS	26
5.1.5 TEST RESULTS	27
<b>6 . 6DB BANDWIDTH TEST</b>	<b>31</b>
6.1 APPLIED PROCEDURES / LIMIT	31
6.1.1 TEST PROCEDURE	31
6.1.2 DEVIATION FROM STANDARD	31
6.1.3 TEST SETUP	31
6.1.4 EUT OPERATION CONDITIONS	31
6.1.5 TEST RESULTS	32
<b>7. OUT OF BAND EMISSIONS TEST</b>	<b>36</b>
7.1 TEST LIMIT	36
7.1.1 TEST PROCEDURE	36
7.1.2 TEST SETUP	36
7.1.3 TEST RESULT	36
<b>8. SPURIOUS RF CONDUCTED EMISSION</b>	<b>40</b>
8.1 TEST LIMIT	40
8.1.1 TEST PROCEDURE	40
8.1.2 TEST SETUP	40
8.1.3 TEST RESULT	40
<b>9. ANTENNA REQUIREMENT</b>	<b>44</b>
9.1 STANDARD REQUIREMENT	44
9.1.1 EUT ANTENNA	44
<b>10. TEST SEUUP PHOTO</b>	<b>45</b>
<b>11. EUT PHOTO</b>	<b>45</b>



## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.205/15.209	Radiated Emission and Restricted Bands	PASS	
15.247(d)	Conducted Unwanted emissions and Bandedge	PASS	
15.247 (b)(3)	Peak Output Power	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (e)	Power Spectral Density	PASS	
15.203/15.247 (c)	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

### 1.1 TEST FACILITY

Shenzhen DL Testing Technology Co., Ltd.

Add. : 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone, Baolong Street, Longgang District, Shenzhen, Guangdong, China

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

ISED Registration number: 27485

IC Registered No.:CN0118

### 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$  providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.56\text{dB}$
2	RF power,conducted	$\pm 0.42\text{dB}$
3	Spurious emissions,conducted	$\pm 2.76\text{dB}$
4	All emissions,radiated(<1G)	$\pm 3.65\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Product Name:	Wire Free Camera with Battery
Trademark	N/A
Model No.:	FBWNIP-4L-BS-U-301
Sample ID:	DL-20220915012E-1#
Serial No.:	BTWN81-4-3BL-B, CAM-2PK-B4LWNPU-FP-B, CAM-B4LWNPU-FP-B, BWNIP-4L-BS-U-301
Model Difference	PCB board, circuit, structure and internal of these model(s) are the same, Only model name is different for these model.
Operation Frequency:	2412~2462 MHz for 802.11b/g/n/axHT20 2422~2452 MHz for 802.11n/axHT40
Channel numbers:	11 Channels for 802.11b/g/n/ax(HT20) 7 channels for 802.11n/axHT40
Channel separation:	5MHz
Modulation technology:	802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g/n(20)/ ax(20)/ ax(40)n(40): DSSS (CCK, DQPSK,DBPSK)+OFDM+OFAMA (QPSK, BPSK, 16-QAM, 64-QAM)
Rate of Transmitter	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps 802.11n/ax: up to 150Mbps
Antenna Type:	Internal Antenna
Antenna gain:	2.04dBi
Power supply:	DC 3.7V by battery (5200mAh); Charging input: DC 5V
Battery Information:	Model: 18650 Nominal Voltage: 3.7V Nominal Capacity: 5200mAh/19.24Wh



## Note:

1.For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.The EUT's all information provided by client.

## 2. Channel List(802.11b/g/n/axHT20)

Channel	Frequency (GHz)	Channel	Frequency (GHz)
01	2.412	08	2.447
02	2.417	09	2.452
03	2.422	10	2.457
04	2.427	11	2.462
05	2.432		
06	2.437		
07	2.442		

## Channel List(802.11n/axHT40)

Channel	Frequency (GHz)	Channel	Frequency (GHz)
03	2.422	08	2.447
04	2.427	09	2.452
05	2.432		
06	2.437		
07	2.442		



## 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11nHT20 CH1/ CH6/ CH11
Mode 4	802.11nHT40 CH3/ CH6/ CH09
Mode 5	802.11axHT20 CH1/ CH6/ CH11
Mode 6	802.11axHT40 CH3/ CH6/ CH09
Mode 7	Link Mode

For Conducted & Radiated Emission	
Final Test Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11nHT20 CH1/ CH6/ CH11
Mode 4	802.11nHT40 CH3/ CH6/ CH09
Mode 5	802.11axHT20 CH1/ CH6/ CH11
Mode 6	802.11axHT40 CH3/ CH6/ CH09
Mode 7	Link Mode


Note: 1. The measurements are performed at the highest, middle, lowest available channels.

2. During the test, the duty cycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.




## 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

### Radiated Spurious Emission Test



### Conducted Spurious Emission Test



## 2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
E-1	Wire Free Camera with Battery	FBWNIP-4L-BS-U-301	N/A	EUT
AE	Notebook	B40-80	MP07F6JD	AE

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

## 2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the end product.

Max output power Setting						
Test software Version	Test program: SecureCRT					
Mode	802.11b	802.11g	802.11n HT20	802.11n HT40	802.11ax HT20	802.11ax HT40
Data Rate	1Mbps	1Mbps	MSC0	MSC0	MSC0 SU	MSC0 SU
Power Setting of Softwave	11	11	11	11	11	11





## 2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

### Radiation test, Band-edge test and 6db bandwidth test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4408B	MY50140780	Nov. 06, 2021	Nov. 05, 2022
2	Test Receiver (9kHz-7GHz)	R&S	ESRP7	101393	Nov. 06, 2021	Nov. 05, 2022
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB9162	00306	Nov. 06, 2021	Nov. 05, 2022
4	Horn Antenna (1GHz-18GHz)	Schwarzbeck	BBHA9120D	02139	Nov. 06, 2021	Nov. 05, 2022
5	Horn Antenna (18GHz-40GHz)	A.H. Systems	SAS-574	588	Nov. 06, 2021	Nov. 05, 2022
6	Amplifier (9KHz-6GHz)	Schwarzbeck	BBV9743B	00153	Nov. 06, 2021	Nov. 05, 2022
7	Amplifier (1GHz-18GHz)	EMEC	EM01G8GA	00270	Nov. 06, 2021	Nov. 05, 2022
8	Amplifier (18GHz-40GHz)	Quanjuda	DLE-161	97	Nov. 06, 2021	Nov. 05, 2022
9	Loop Antenna (9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	Nov. 06, 2021	Nov. 05, 2022
10	RF cables1 (9kHz-1GHz)	ChengYu	966	004	Nov. 06, 2021	Nov. 05, 2022
11	RF cables2 (1GHz-40GHz)	ChengYu	966	003	Nov. 06, 2021	Nov. 05, 2022
12	Antenna connector	Florida RF Labs	N/A	RF 01#	Nov. 06, 2021	Nov. 05, 2022
13	Power probe	KEYSIGHT	U2021XA	MY55210018	Nov. 06, 2021	Nov. 05, 2022
14	Signal Analyzer 9kHz-26.5GHz	Agilent	N9020A	MY55370280	Nov. 06, 2021	Nov. 05, 2022
15	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	Nov. 06, 2021	Nov. 05, 2022
16	D.C. Power Supply	LongWei	PS-305D	010964729	Nov. 06, 2021	Nov. 05, 2022

### Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	843 Shielded Room	ChengYu	843 Room	843	Nov. 25, 2019	Nov. 24, 2022
2	EMI Receiver	R&S	ESR	101421	Nov. 06, 2021	Nov. 05, 2022
3	LISN	R&S	ENV216	102417	Nov. 06, 2021	Nov. 05, 2022
4	843 Cable 1#	ChengYu	CE Cable	001	Nov. 06, 2021	Nov. 05, 2022

### Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ_EMCC	EMC-CON 3A1.1
2	EMC radiation test system	FALA	EZ_EMCC	FA-03A2
3	RF test system	MAIWEI	MTS8310	2.0.0.0
4	RF communication test system	MAIWEI	MTS8200	2.0.0.0



### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


##### 3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

##### 3.1.3 DEVIATION FROM TEST STANDARD

No deviation

### 3.1.4 TEST SETUP

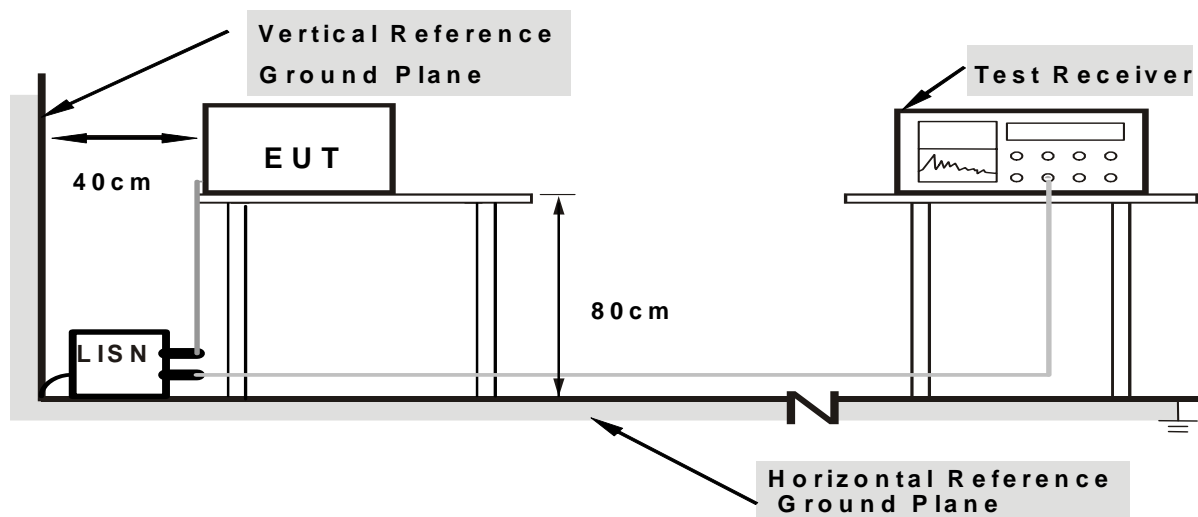

- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

### 3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


### 3.1.6 TEST RESULTS

Remark:

1. All modes were tested at AC 120V and 240V, only the worst result of AC 120V was reported.
2. Remark: We tested at 802.11b/802.11g/802.11n HT20/802.11n HT40/ 802.11ax HT20/802.11ax HT40 mode and recored the worst data 802.11b mode for in report.



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode:	Transmitting 802.11b mode

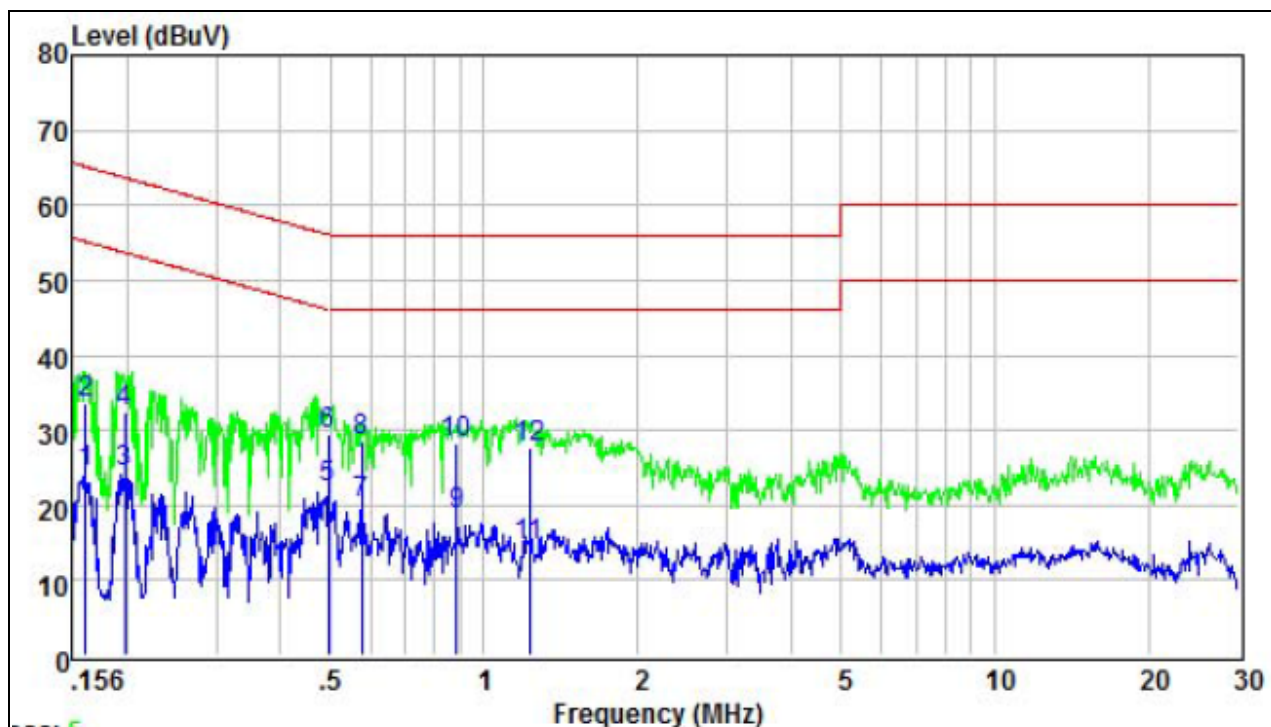

ice: 5


Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.17	14.81	9.45	0.01	24.27	55.16	-30.89	Average
2	0.17	24.17	9.45	0.01	33.63	65.16	-31.53	QP
3	0.20	14.84	9.46	0.01	24.31	53.67	-29.36	Average
4	0.20	23.03	9.46	0.01	32.50	63.67	-31.17	QP
5	0.50	12.88	9.49	0.01	22.38	46.05	-23.67	Average
6	0.50	20.00	9.49	0.01	29.50	56.05	-26.55	QP
7	0.58	10.61	9.49	0.01	20.11	46.00	-25.89	Average
8	0.58	19.00	9.49	0.01	28.50	56.00	-27.50	QP
9	0.88	9.25	9.51	0.01	18.77	46.00	-27.23	Average
10	0.88	18.84	9.51	0.01	28.36	56.00	-27.64	QP
11	1.23	5.00	9.52	0.01	14.53	46.00	-31.47	Average
12	1.23	18.13	9.52	0.01	27.66	56.00	-28.34	QP



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode:	Transmitting 802.11b mode

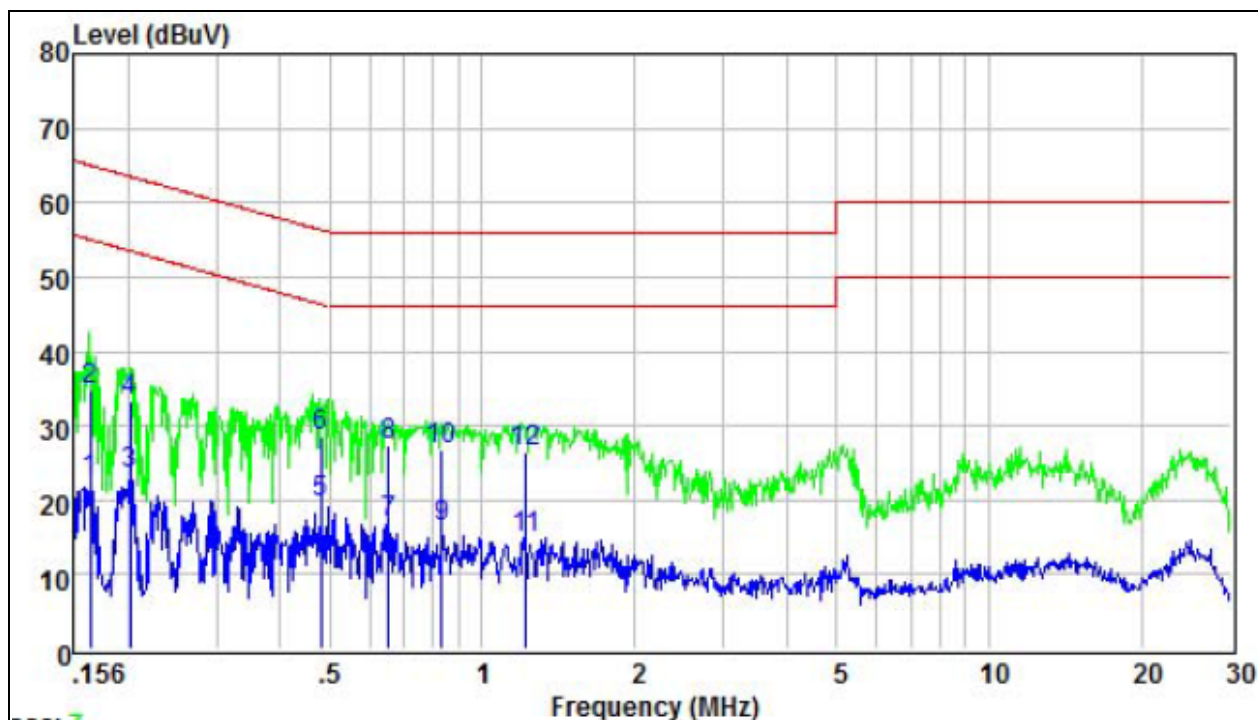

Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.17	13.15	9.37	0.01	22.53	55.03	-32.50	Average
2	0.17	25.31	9.37	0.01	34.69	65.03	-30.34	QP
3	0.20	14.17	9.38	0.01	23.56	53.54	-29.98	Average
4	0.20	23.81	9.38	0.01	33.20	63.54	-30.34	QP
5	0.48	10.12	9.41	0.01	19.54	46.32	-26.78	Average
6	0.48	19.08	9.41	0.01	28.50	56.32	-27.82	QP
7	0.65	7.66	9.43	0.01	17.10	46.00	-28.90	Average
8	0.65	18.06	9.43	0.01	27.50	56.00	-28.50	QP
9	0.83	7.04	9.43	0.01	16.48	46.00	-29.52	Average
10	0.83	17.46	9.43	0.01	26.90	56.00	-29.10	QP
11	1.22	5.52	9.44	0.01	14.97	46.00	-31.03	Average
12	1.22	16.88	9.44	0.01	26.33	56.00	-29.67	QP





### 3.2 RADIATED EMISSION MEASUREMENT

#### 3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~230	180	3
230~960	200	3
Above 960	500	3

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	25GHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP



### 3.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre( Above 18GHz the distance is 1 meter and table is 1.5 metre).
- Test the EUT in the lowest channel, the middle channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

### 3.2.3 DEVIATION FROM TEST STANDARD


No deviation

### 3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

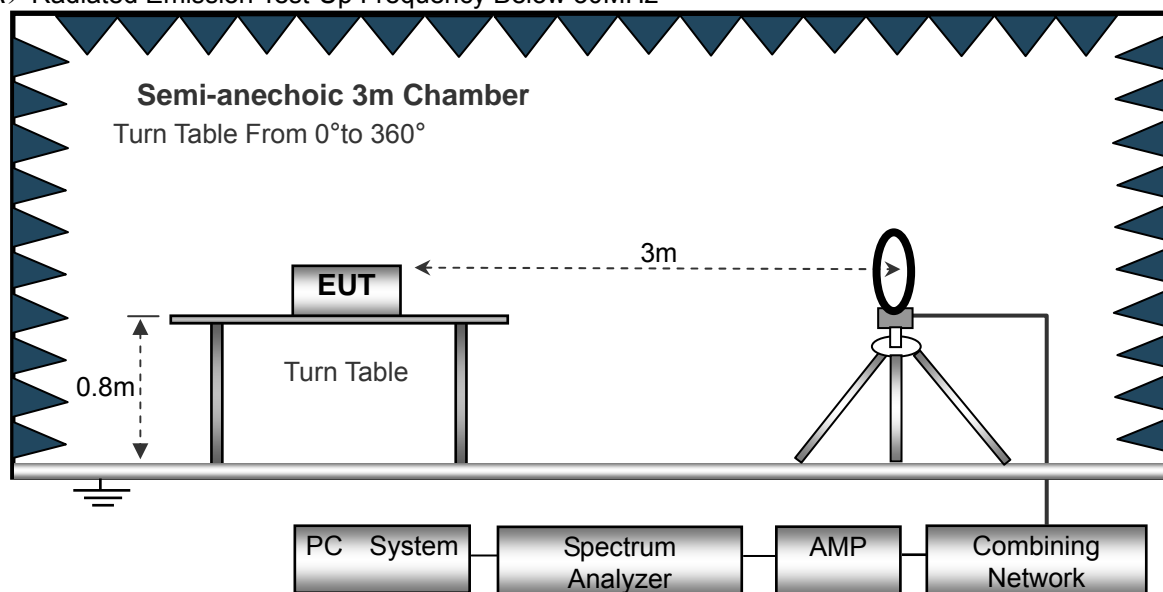

### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

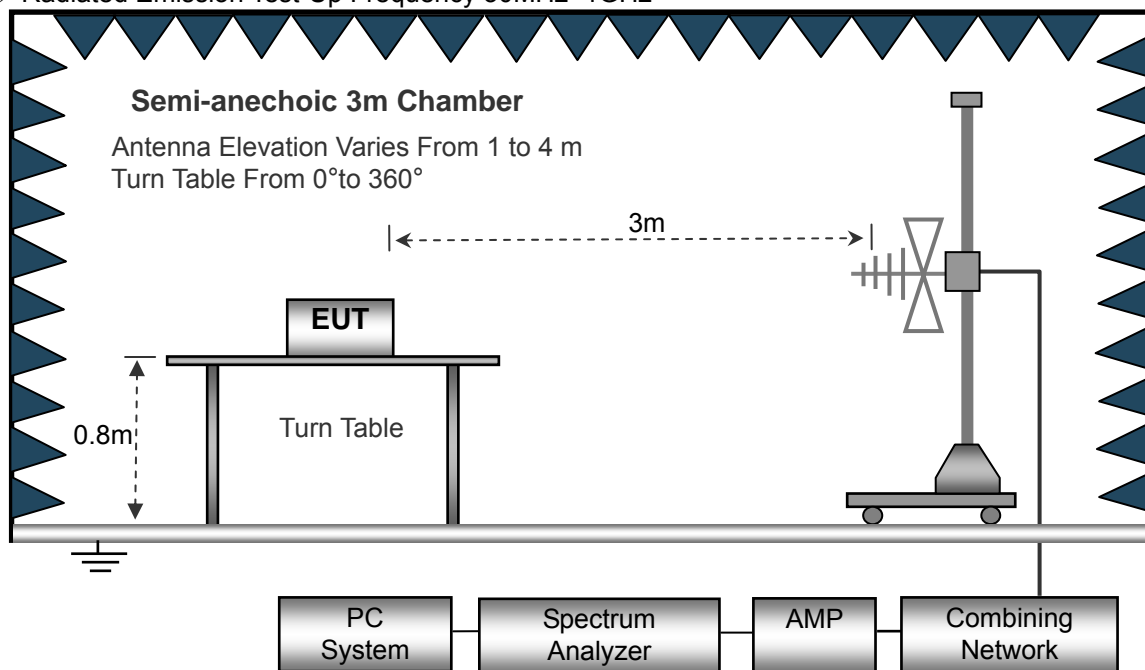

### (C) Radiated Emission Test-Up Frequency Above 1GHz

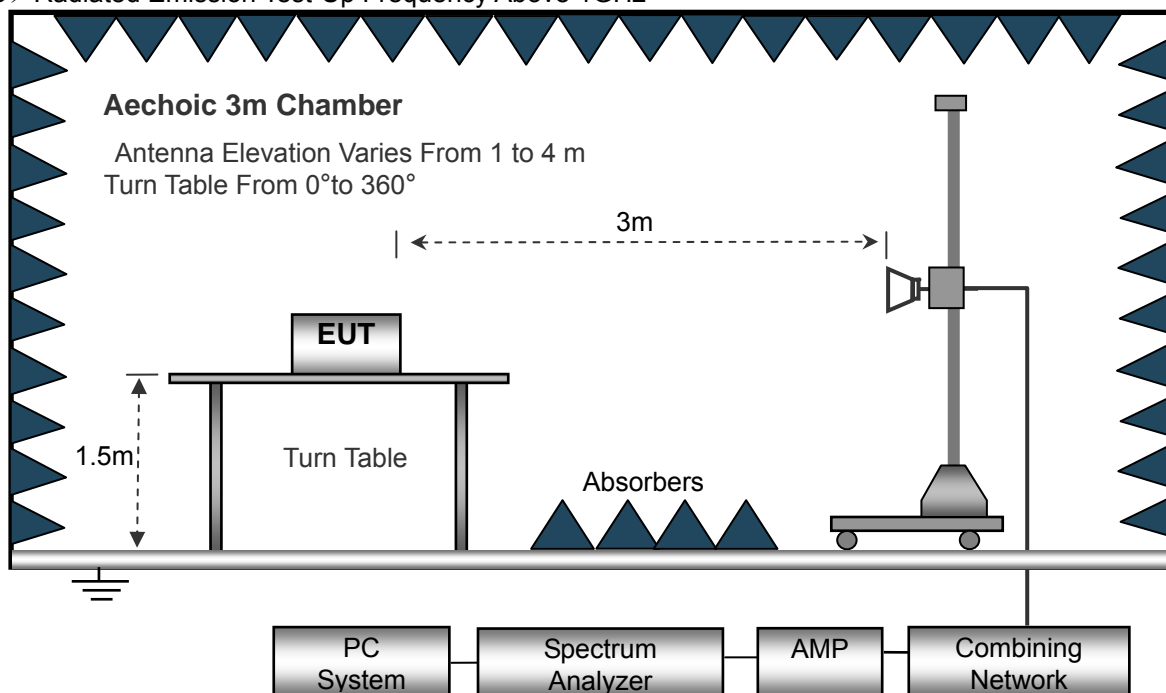

### 3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



**3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)**

Temperature:	20℃	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Mode 1	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

**NOTE:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.


**Remark:**

1. All modes of 802.11b/g/n20/n40 were test at Low, Middle, and High channel, only the worst result of 802.11b Low Channel was reported for below 1GHz test.
2. Remark: We tested at 802.11b/802.11g/802.11n HT20/802.11n HT40/ 802.11ax HT20/802.11ax HT40 mode and recored the worst data 802.11b mode in report.





Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	AC 120V/60Hz		
Test Mode :	Transmitting 802.11b mode		

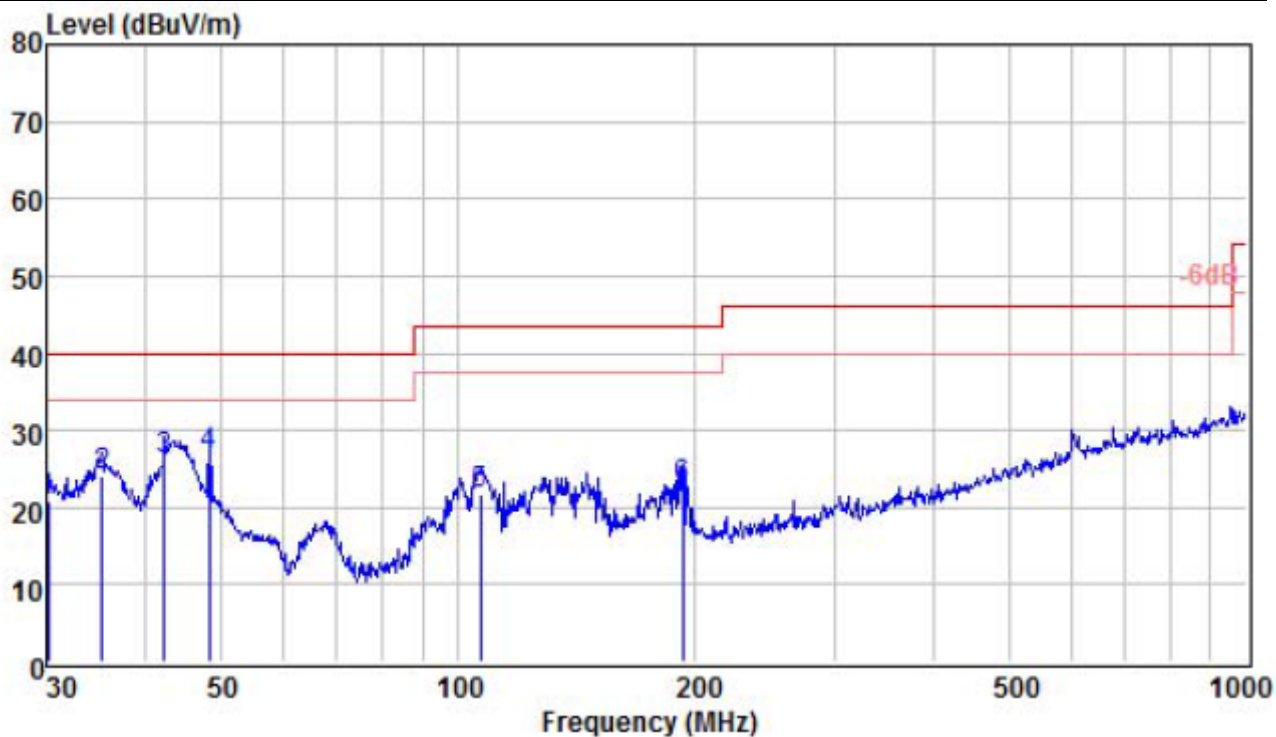

	Freq	Read	Antenna	Cable		Limit	Over	
	MHz	Level	Factor	Loss	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m	dB	
1	30.11	1.35	18.74	0.58	20.67	40.00	-19.33	QP
2	35.25	7.98	15.70	0.41	24.09	40.00	-15.91	QP
3	42.30	13.96	11.96	0.28	26.20	40.00	-13.80	QP
4	48.33	17.04	9.48	0.26	26.78	40.00	-13.22	QP
5	106.76	11.61	9.40	0.83	21.84	43.50	-21.66	QP
6	192.42	11.33	10.32	0.88	22.53	43.50	-20.97	QP

Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;

**3.2.8 TEST RESULTS (1GHZ~25GHZ)**

802.11b(Record the wors test data in report.)

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2412									
V	4824.00	66.36	50.36	5.77	31.29	53.06	74.00	-20.94	PK
V	4824.00	55.78	50.26	5.77	31.29	42.58	54.00	-11.42	AV
V	7236.00	66.26	49.85	6.32	36.63	59.36	74.00	-14.64	PK
V	7236.00	53.58	49.73	6.32	36.66	46.83	54.00	-7.17	AV
V	16087.00	48.97	51.25	7.45	41.52	46.69	74.00	-27.31	PK
H	4824.00	65.69	50.36	5.77	31.29	52.39	74.00	-21.61	PK
H	4824.00	56.35	50.15	5.77	31.29	43.26	54.00	-10.74	AV
H	7236.00	67.86	49.26	6.32	36.63	61.55	74.00	-12.45	PK
H	7236.00	55.21	49.89	6.32	36.63	48.27	54.00	-5.73	AV
H	16087.00	49.66	51.26	7.45	41.52	47.37	74.00	-26.63	PK
operation frequency:2437									
V	4874.00	66.98	50.88	5.77	31.38	53.25	74.00	-20.75	PK
V	4874.00	55.66	50.36	5.77	31.38	42.45	54.00	-11.55	AV
V	7311.00	69.45	50.14	6.32	36.63	62.26	74.00	-11.74	PK
V	7311.00	53.63	50.23	6.32	36.63	46.35	54.00	-7.65	AV
V	16087.00	48.45	51.36	7.45	41.52	46.06	74.00	-27.94	PK
H	4874.00	66.36	50.25	5.77	31.38	53.26	74.00	-20.74	PK
H	4874.00	55.58	50.15	5.77	31.38	42.58	54.00	-11.42	AV
H	7311.00	69.56	50.33	6.32	36.63	62.18	74.00	-11.82	PK
H	7311.00	53.59	50.42	6.32	36.63	46.12	54.00	-7.88	AV
H	16087.00	48.73	51.53	7.45	41.52	46.17	74.00	-27.83	PK
operation frequency:2462									
V	4924.00	67.23	50.55	5.77	31.36	53.81	74.00	-20.19	PK
V	4924.00	56.15	50.62	5.77	31.36	42.66	54.00	-11.34	AV
V	7386.00	68.23	50.45	6.32	36.58	60.68	74.00	-13.32	PK
V	7386.00	53.52	50.66	6.32	36.58	45.76	54.00	-8.24	AV
V	16087.00	49.96	50.96	7.45	41.52	47.97	74.00	-26.03	PK
H	4924.00	67.11	50.73	5.77	31.36	53.51	74.00	-20.49	PK
H	4924.00	55.26	50.56	5.77	31.36	41.83	54.00	-12.17	AV
H	7386.00	67.26	50.29	6.32	36.58	59.87	74.00	-14.13	PK
H	7386.00	55.12	50.13	6.32	36.58	47.89	54.00	-6.11	AV
H	16087.00	49.33	51.09	7.45	41.52	47.21	74.00	-26.79	PK

**Remark:**

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



### 3.3 RADIATED BAND EMISSION MEASUREMENT

#### 3.3.1 TEST REQUIREMENT:

FCC Part15 C Section 15.209 and 15.205

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to RSS-Gen Issue 5.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

#### 3.3.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

#### 3.3.3 DEVIATION FROM TEST STANDARD

No deviation

### 3.3.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

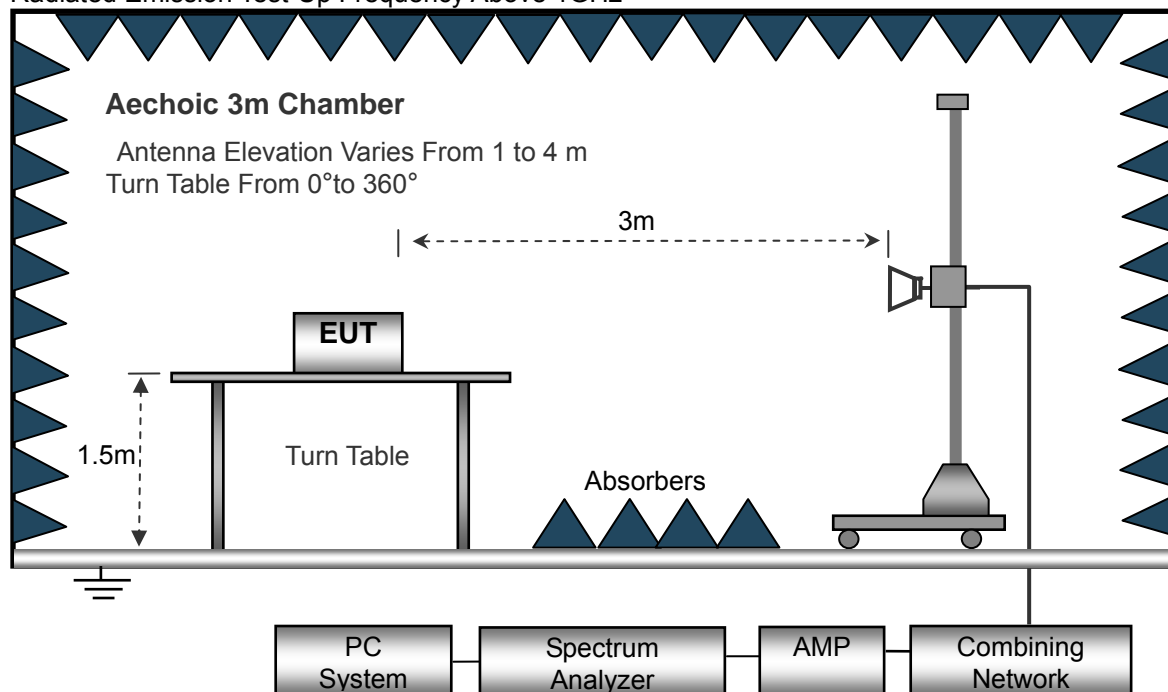

### 3.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

We tested at 802.11b/802.11g/802.11n HT20/802.11n HT40/ 802.11ax HT20/802.11ax HT40 mode at the antenna single and recored the worst data mode in report.



### 3.3.6 TEST RESULT

802.11b (Record the worst test data in report.)

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2412									
V	2390.00	75.03	52.12	4.83	23.97	51.71	74.00	-22.29	PK
V	2390.00	66.01	52.12	4.83	23.97	42.69	54.00	-11.31	AV
V	2400.00	75.16	52.16	4.85	23.98	51.83	74.00	-22.17	PK
V	2400.00	65.06	52.16	4.85	23.98	41.73	54.00	-12.27	AV
H	2390.00	76.08	52.12	4.83	23.97	52.76	74.00	-21.24	PK
H	2390.00	65.69	52.12	4.83	23.97	42.37	54.00	-11.63	AV
H	2400.00	76.17	52.16	4.85	23.98	52.84	74.00	-21.16	PK
H	2400.00	65.22	52.16	4.85	23.98	41.89	54.00	-12.11	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2462									
V	2483.50	76.22	52.03	2.86	27.44	54.49	74.00	-19.51	PK
V	2483.50	65.19	52.52	2.86	27.44	42.97	54.00	-11.03	AV
V	2500.00	76.36	52.36	2.88	27.49	54.37	74.00	-19.63	PK
V	2500.00	64.85	52.53	2.88	27.49	42.69	54.00	-11.31	AV
H	2483.50	76.58	52.29	2.86	27.44	54.59	74.00	-19.41	PK
H	2483.50	65.96	52.29	2.86	27.44	43.97	54.00	-10.03	AV
H	2500.00	76.47	52.81	2.88	27.49	54.03	74.00	-19.97	PK
H	2500.00	65.66	52.21	2.88	27.49	43.82	54.00	-10.18	AV

**Remark:**

1. Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.





#### 4. PEAK OUTPUT POWER

##### 4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

##### 4.1.1 TEST PROCEDURE

- The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW > the 20 dB bandwidth of the emission being measured  
Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel  
VBW  $\geq$  RBW  
Sweep = auto  
Detector function = peak  
Trace = max hold

##### 4.1.2 DEVIATION FROM STANDARD

No deviation.

##### 4.1.3 TEST SETUP



##### 4.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



**4.1.5 TEST RESULTS**

Temperature:	25 °C	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage :	AC 120V/60Hz

Mode	Test Channel	Peak Output Power (dBm)	LIMIT (dBm)	Result
802.11b	Low	18.865	30.00	PASS
	Moddle	18.632	30.00	PASS
	High	18.569	30.00	PASS
802.11g	Low	15.635	30.00	PASS
	Moddle	15.238	30.00	PASS
	High	15.336	30.00	PASS
802.11n HT20	Low	15.236	30.00	PASS
	Moddle	15.463	30.00	PASS
	High	15.552	30.00	PASS
802.11n HT40	Low	14.335	30.00	PASS
	Moddle	14.189	30.00	PASS
	High	14.235	30.00	PASS
802.11ax HT20	Low	14.010	30.00	PASS
	Moddle	14.036	30.00	PASS
	High	14.231	30.00	PASS
802.11ax HT40	Low	9.306	30.00	PASS
	Moddle	9.210	30.00	PASS
	High	9.056	30.00	PASS



## 5. POWER SPECTRAL DENSITY TEST

### 5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	= the frequency band of operation
RB	$RBW \geq 3kHz$
VB	$VBW \geq 3RBW$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

#### 5.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

#### 5.1.2 DEVIATION FROM STANDARD

No deviation.

#### 5.1.3 TEST SETUP



#### 5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**5.1.5 TEST RESULTS**


Mode	Test Channel	Reading Level (dBm)	Limit (dBm)	Result
802.11b	Low	-8.352	8	PASS
	Moddle	-8.182	8	PASS
	High	-9.289	8	PASS
802.11g	Low	-9.307	8	PASS
	Moddle	-9.036	8	PASS
	High	-9.313	8	PASS
802.11n20	Low	-9.293	8	PASS
	Moddle	-9.692	8	PASS
	High	-9.139	8	PASS
802.11n40	Low	-12.094	8	PASS
	Moddle	-11.763	8	PASS
	High	-12.347	8	PASS
802.11ax20	Low	-8.094	8	PASS
	Moddle	-8.582	8	PASS
	High	-8.034	8	PASS
802.11ax40	Low	-12.507	8	PASS
	Moddle	-13.471	8	PASS
	High	-12.195	8	PASS



802.11b




802.11g

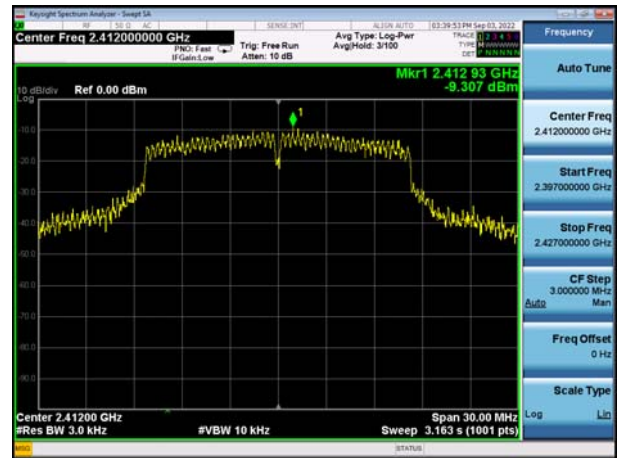

2412MHz




2412MHz

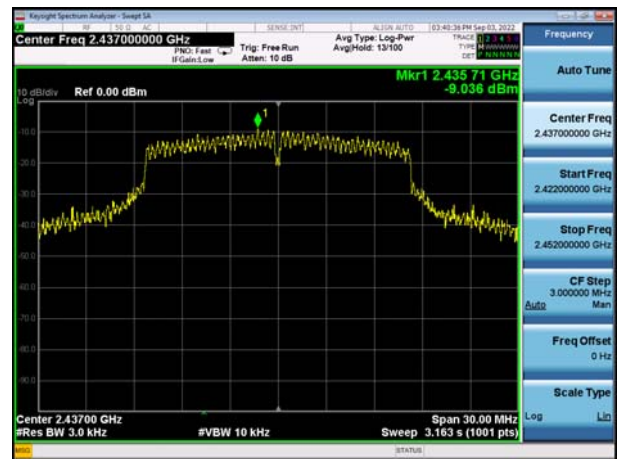

2437MHz



2437MHz

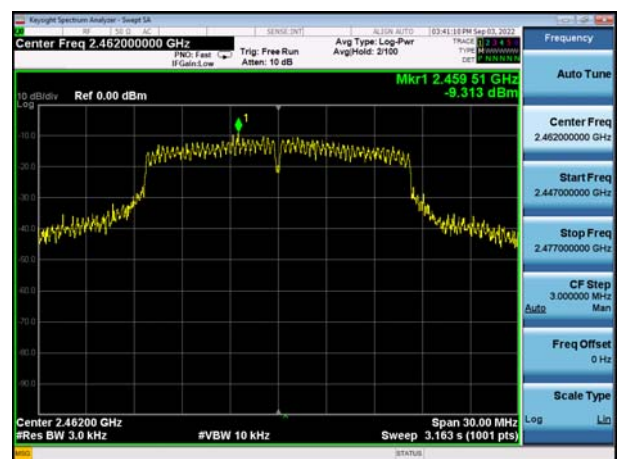

2462MHz



2462MHz







802.11n HT20




802.11n HT40

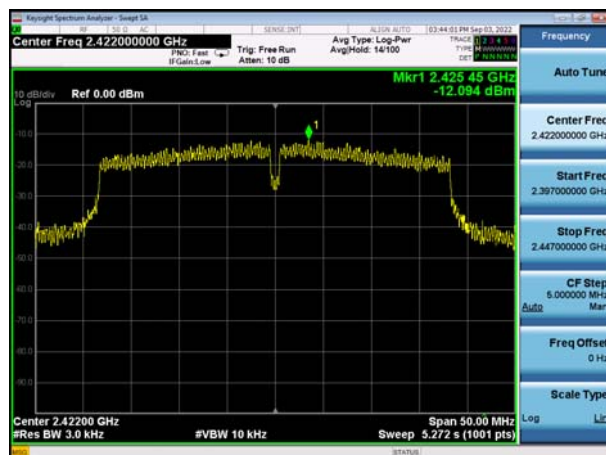


2412MHz

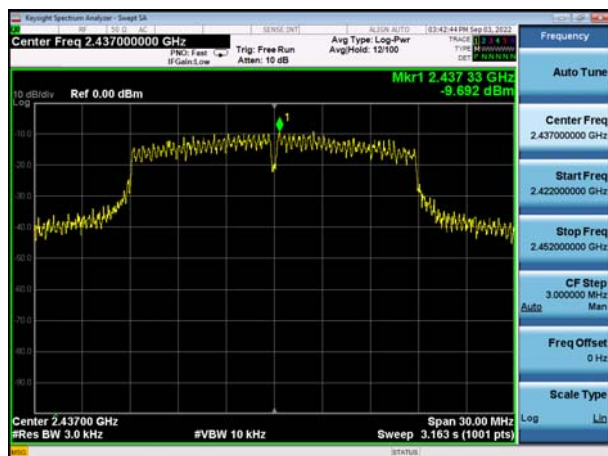


2422MHz

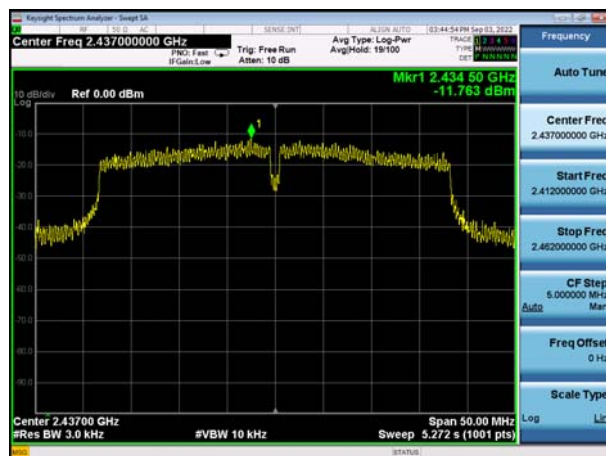

2437MHz

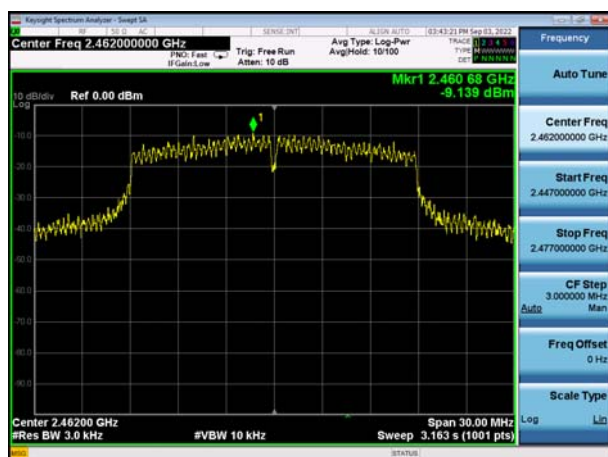

2437MHz

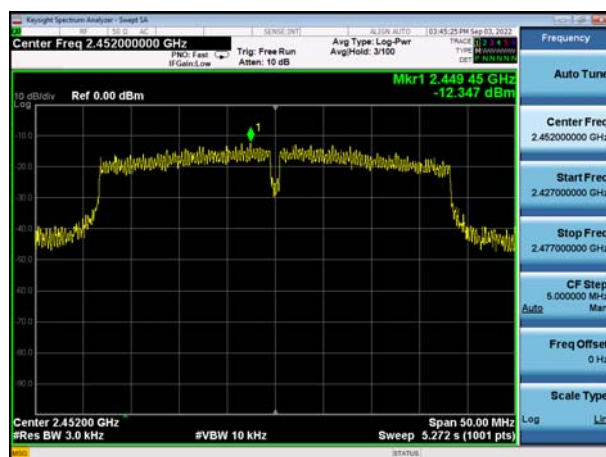


2462MHz


2452MHz




802.11ax HT20

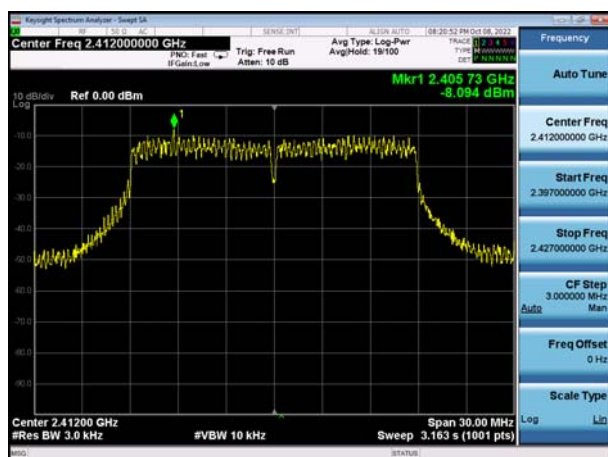


802.11ax HT40

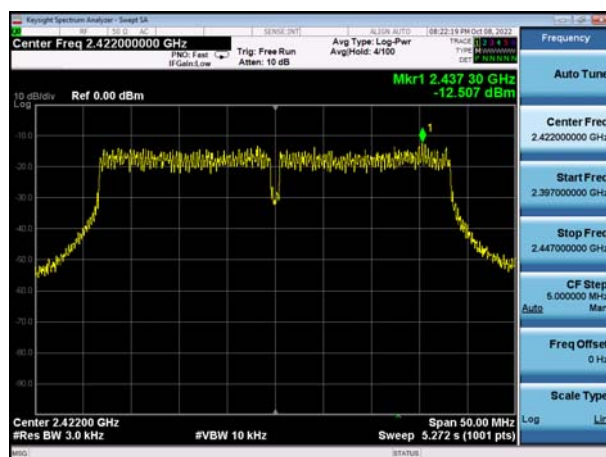


2412MHz

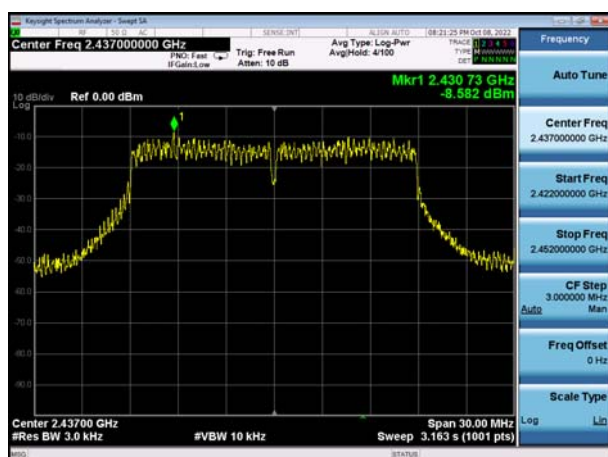


2422MHz

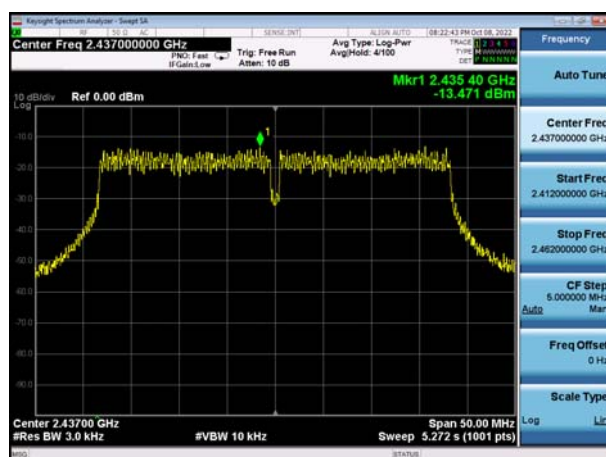

2437MHz

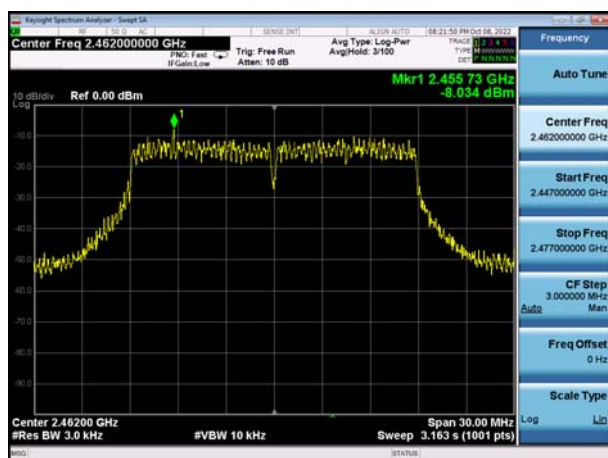

2437MHz

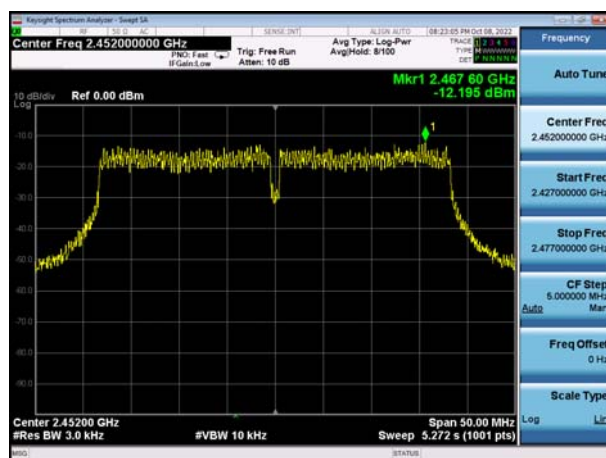

2462MHz



2452MHz







## 6. 6DB BANDWIDTH TEST

### 6.1 APPLIED PROCEDURES / LIMIT

RSS-247 ISSUE 2: FEBRUARY 2017				
Section	Test Item	Limit	Frequency Range(MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS


#### 6.1.1 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

#### 6.1.2 DEVIATION FROM STANDARD

No deviation.

#### 6.1.3 TEST SETUP

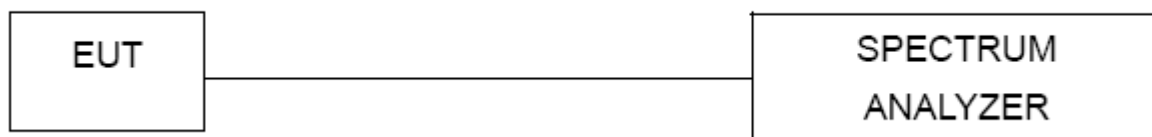

#### 6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**6.1.5 TEST RESULTS**

	Test Channel	6dB Bandwidth (MHz)	Limit (MHz)	Result
802.11b	Low	12.10	0.5	Pass
	Middle	10.14	0.5	Pass
	High	11.09	0.5	Pass
802.11g	Low	16.36	0.5	Pass
	Middle	16.32	0.5	Pass
	High	16.31	0.5	Pass
802.11n HT20	Low	17.13	0.5	Pass
	Middle	17.09	0.5	Pass
	High	17.09	0.5	Pass
802.11n HT40	Low	35.13	0.5	Pass
	Middle	35.12	0.5	Pass
	High	35.12	0.5	Pass
802.11ax HT20	Low	17.54	0.5	Pass
	Middle	17.54	0.5	Pass
	High	17.37	0.5	Pass
802.11ax HT40	Low	36.36	0.5	Pass
	Middle	36.37	0.5	Pass
	High	36.29	0.5	Pass





802.11b




802.11g



2412MHz



2412MHz

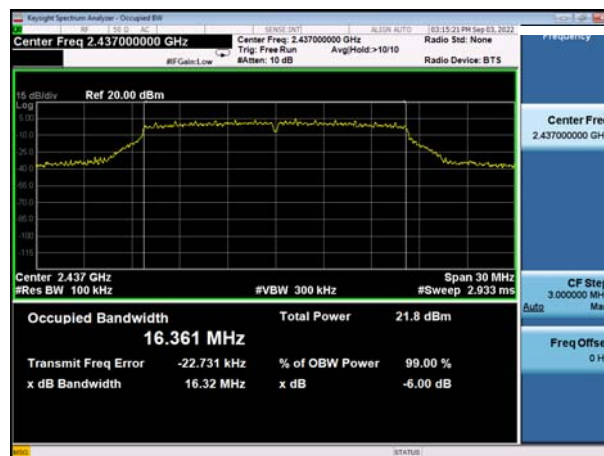

2437MHz



2437MHz



2462MHz


2462MHz




## 802.11n HT20




## 802.11n HT40

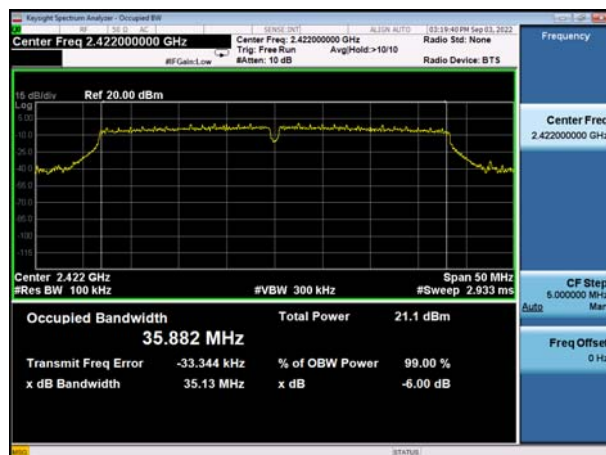


## 2412MHz

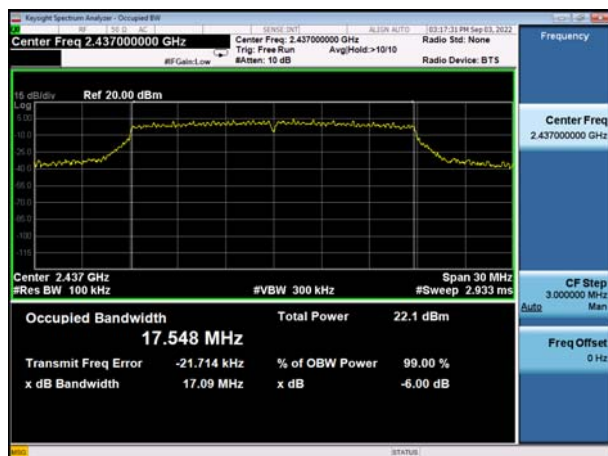


## 2422MHz

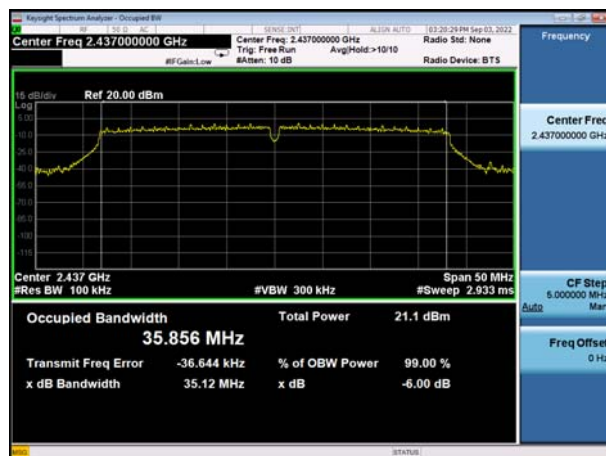

## 2437MHz

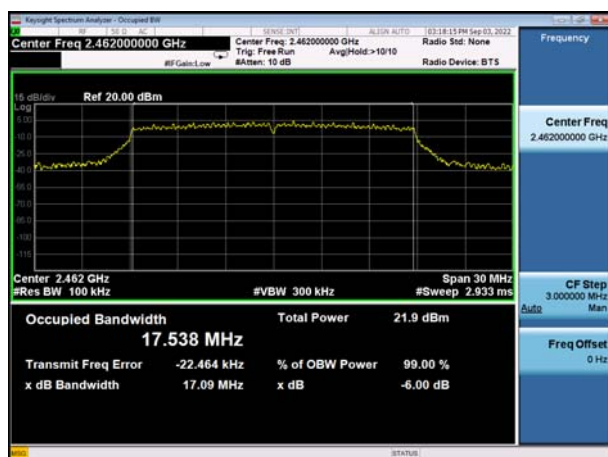

## 2437MHz

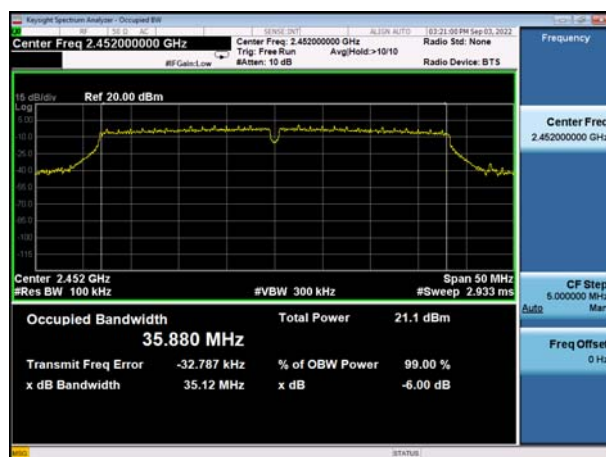

## 2462MHz


## 2452MHz




802.11ax HT20




802.11ax HT40

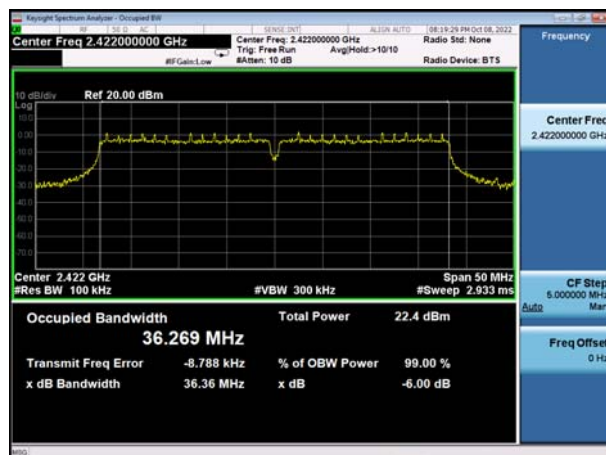


2412MHz

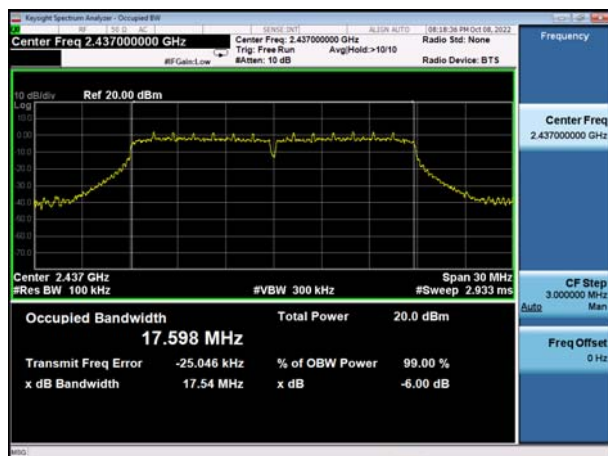


2422MHz

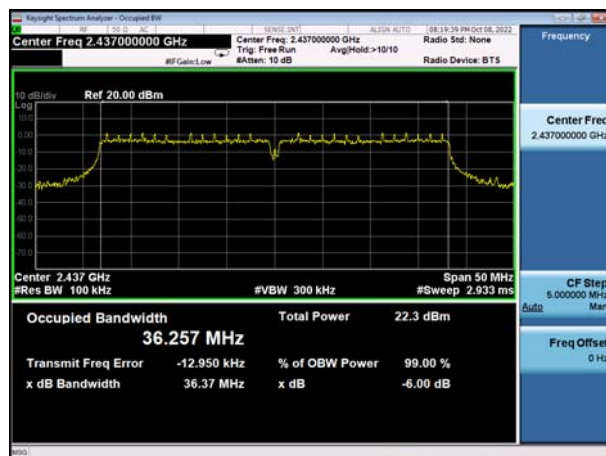

2437MHz

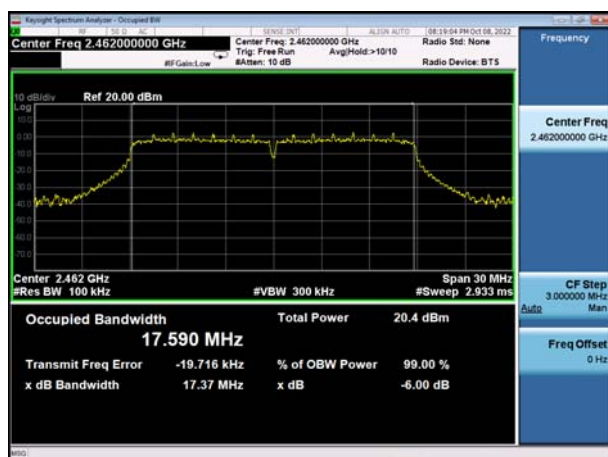

2437MHz

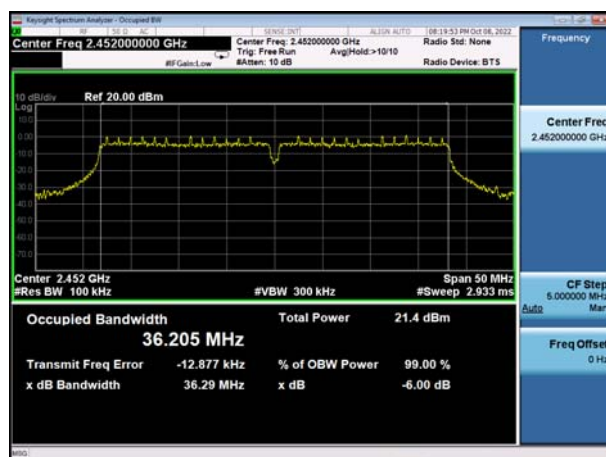

2462MHz

2452MHz



## 7. OUT OF BAND EMISSIONS TEST


### 7.1 TEST LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB.

#### 7.1.1 TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as TX operation and connect directly to the spectrum analyzer.
3. Based on RSS-247 Issue 2 Section 15.247: RBW=100KHz, VBW=300KHz.
4. Set detected by the spectrum analyzer with peak detector.

#### 7.1.2 TEST SETUP



#### 7.1.3 TEST RESULT



PASS



## 802.11b

Frequency (MHz)	Delta Peak to Band emission (dBc)	Limit (dBc)	Verdict
2400.00	42.085	20	PASS
2483.50	58.110	20	PASS



  

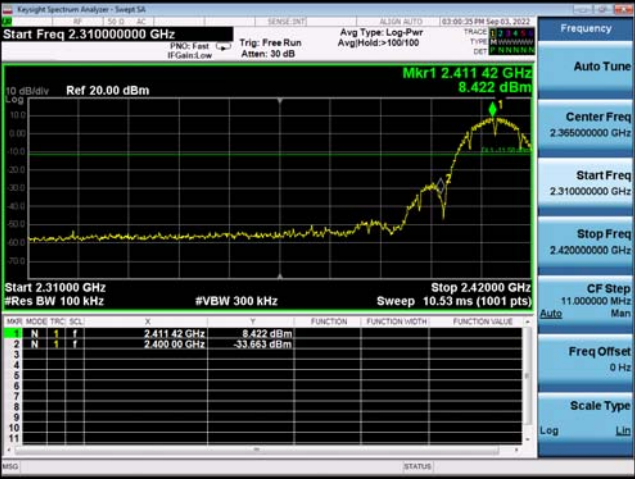	
2412	2462

## 802.11g

Frequency (MHz)	Delta Peak to Band emission (dBc)	Limit (dBc)	Verdict
2400.00	32.563	20	PASS
2483.05	41.692	20	PASS

	
2412	2462

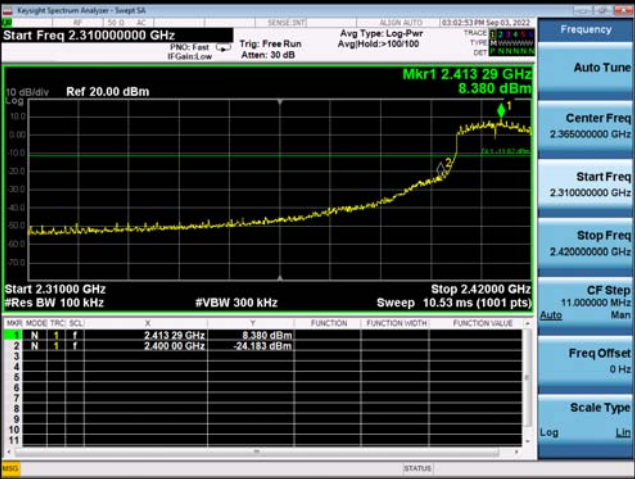



## 802.11n HT20

Frequency (MHz)	Delta Peak to Band emission (dBc)	Limit (dBc)	Verdict
2400.00	32.054	20	PASS
2483.50	41.571	20	PASS

	2412
	2462

## 802.11n HT40

Frequency (MHz)	Delta Peak to Band emission (dBc)	Limit (dBc)	Verdict
2400.00	31.523	20	PASS
2483.50	33.731	20	PASS



	2422
	2452



## 802.11ax HT20

Frequency (MHz)	Delta Peak to Band emission (dBc)	Limit (dBc)	Verdict
2400.00	31.784	20	PASS
2483.50	40.244	20	PASS


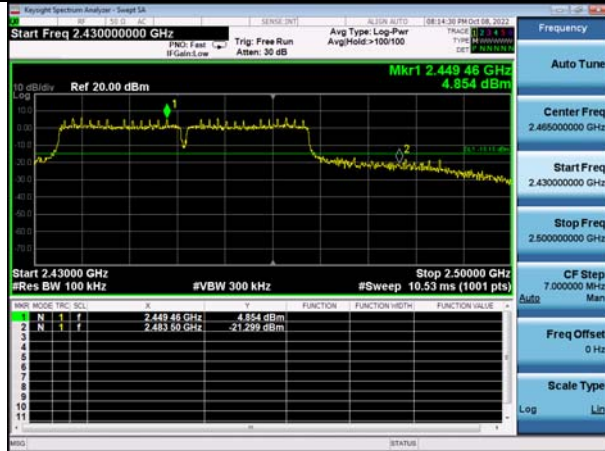
  

	2412
	2462

## 802.11ax HT40

Frequency (MHz)	Delta Peak to Band emission (dBc)	Limit (dBc)	Verdict
2400.00	26.140	20	PASS
2483.50	26.153	20	PASS

	2422
	2452



## 8. SPURIOUS RF CONDUCTED EMISSION


### 8.1 TEST LIMIT

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.
3. For below 30MHz, For 9KHz-150kHz, 150K-10MHz, We use the RBW 1KHz, 10KHz, So the limit need to calculated by " $10\lg(BW1/BW2)$ ". for example For 9KHz-150kHz, RBW 1KHz, The Limit= the highest emission level-20-10lg(100/1)= the highest emission level-40.

#### 8.1.1 TEST PROCEDURE

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013, For 9KHz-150kHz, Set RBW=1kHz and VBW= 3KHz; For 150KHz-10MHz, Set RBW=10kHz and VBW= 30KHz; For 10MHz-25GHz, Set RBW=100kHz and VBW= 300KHz in order to measure the peak field strength, and measure frequency range from 9KHz to 25GHz.

#### 8.1.2 TEST SETUP

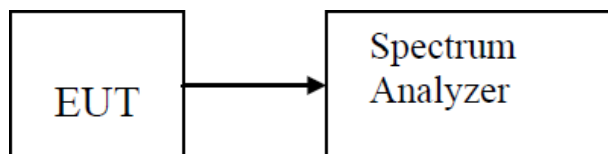

#### 8.1.3 TEST RESULT

PASS

Remark: The measurement frequency range is from 9KHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data and record the worst test data for 802.11b in report.






Test Mode:

802.11b

Test channel :


01

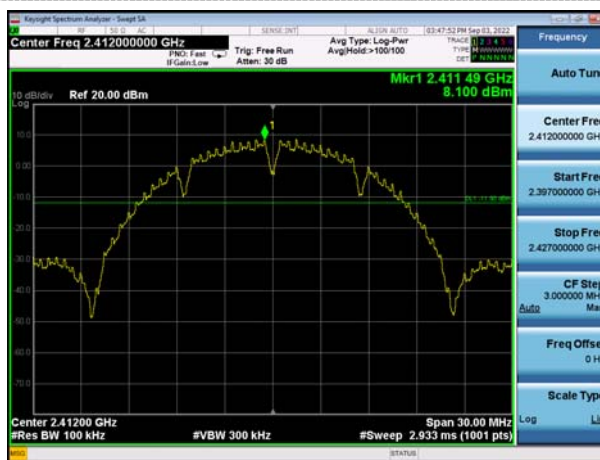

Channel 01



30MHz ~3GHz

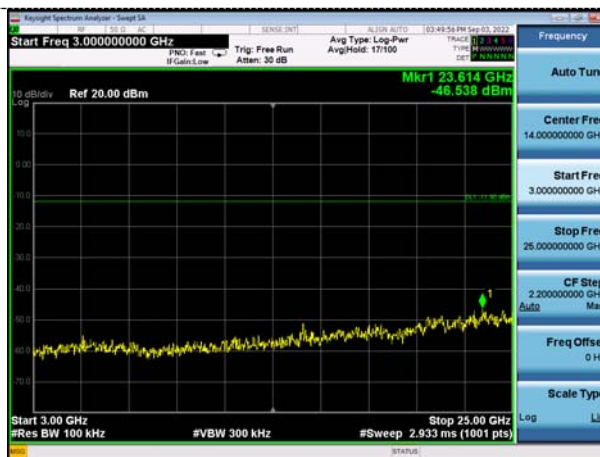

3GHz~25GHz




Test Mode:

802.11b

Test channel :


06

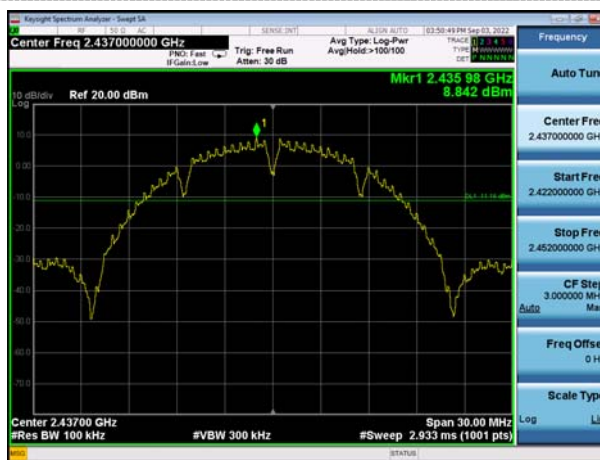

Channel 06



30MHz ~3GHz

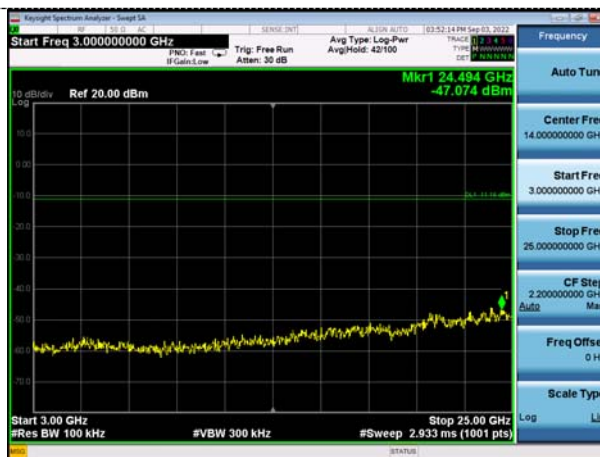

3GHz~25GHz




Test Mode:


802.11b

Test channel :


11

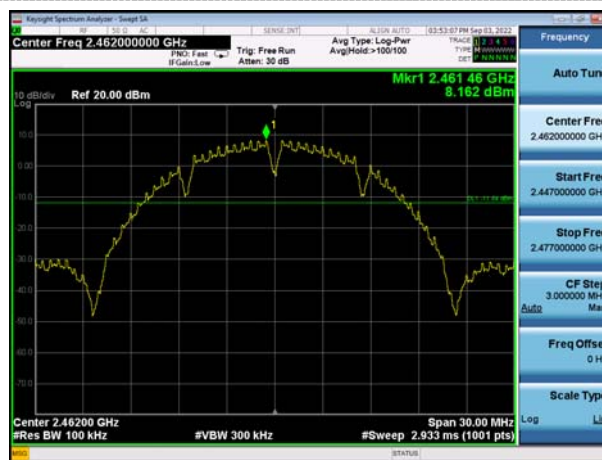

Channel 11

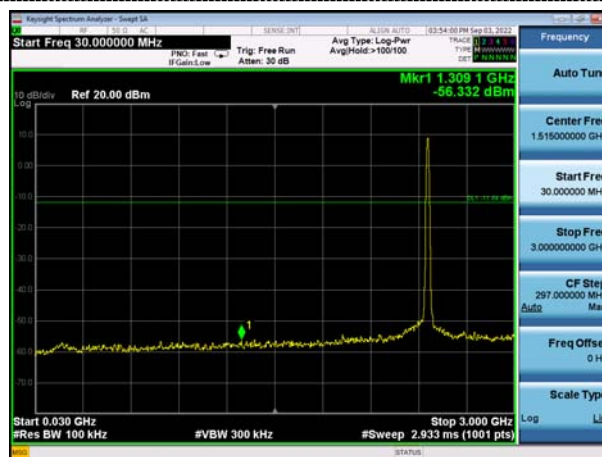

30MHz ~3GHz

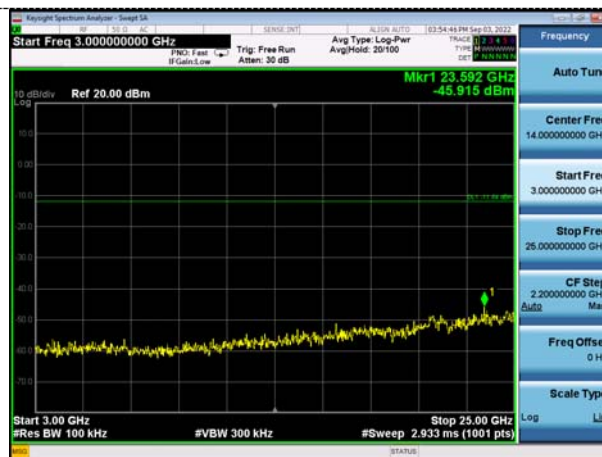

3GHz~25GHz


## 9. ANTENNA REQUIREMENT

### 9.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

#### 9.1.1 EUT ANTENNA

The EUT antenna is internal antenna,. It comply with the standard requirement.

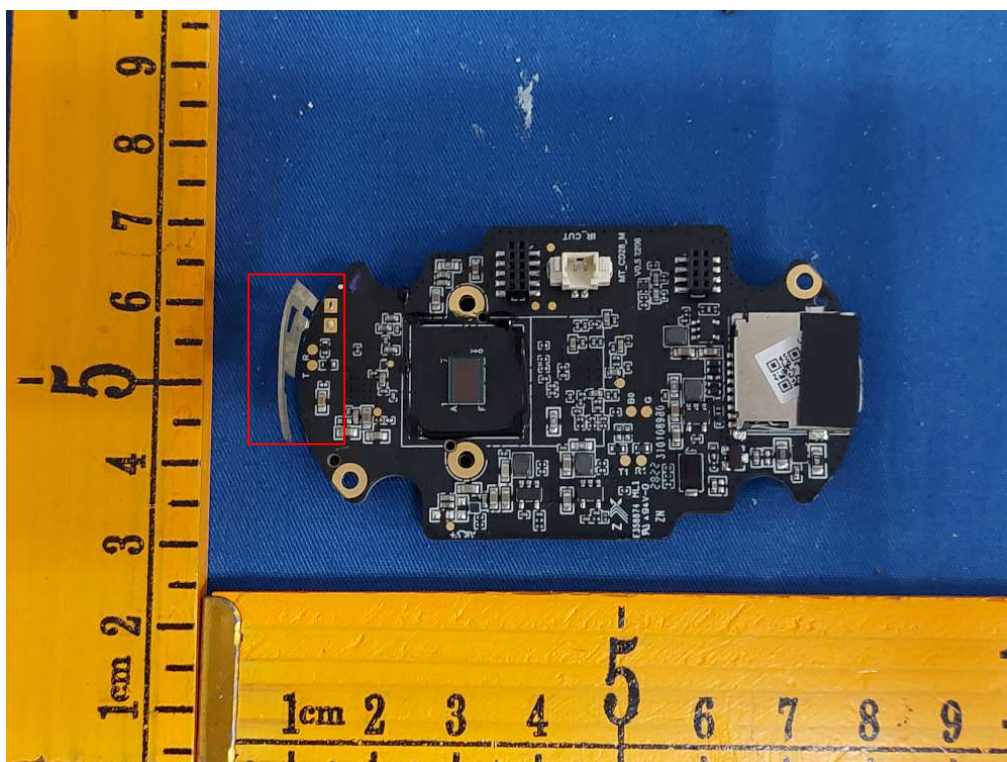




## 10. TEST SEUUP PHOTO

Reference to the appendix I for details.

## 11. EUT PHOTO

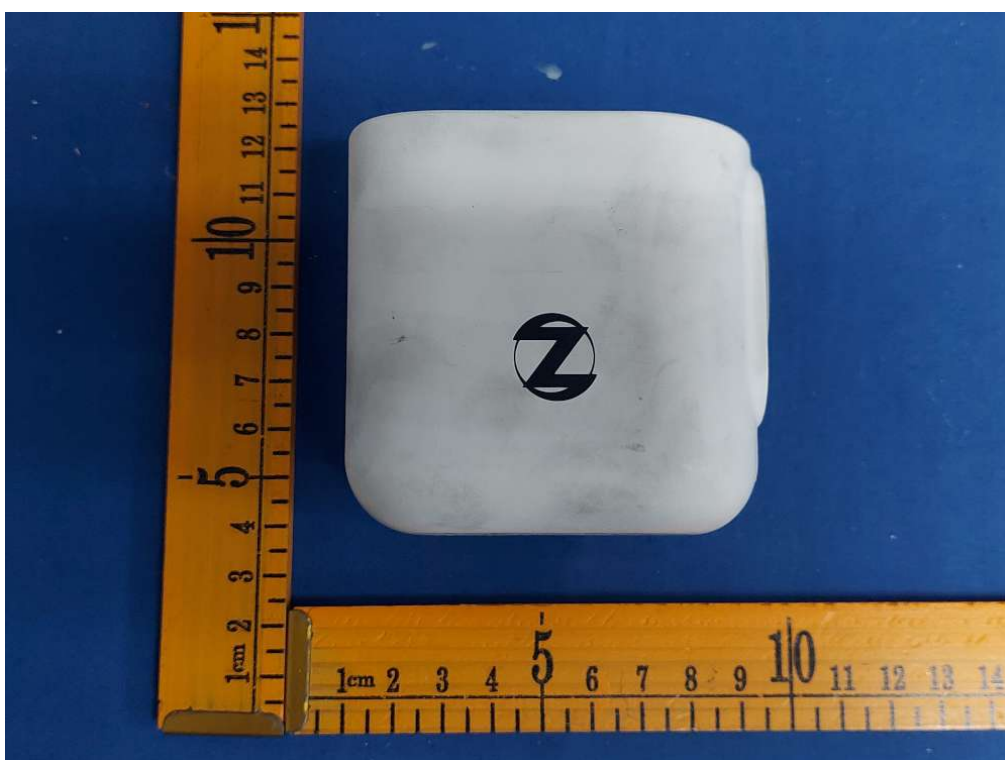





















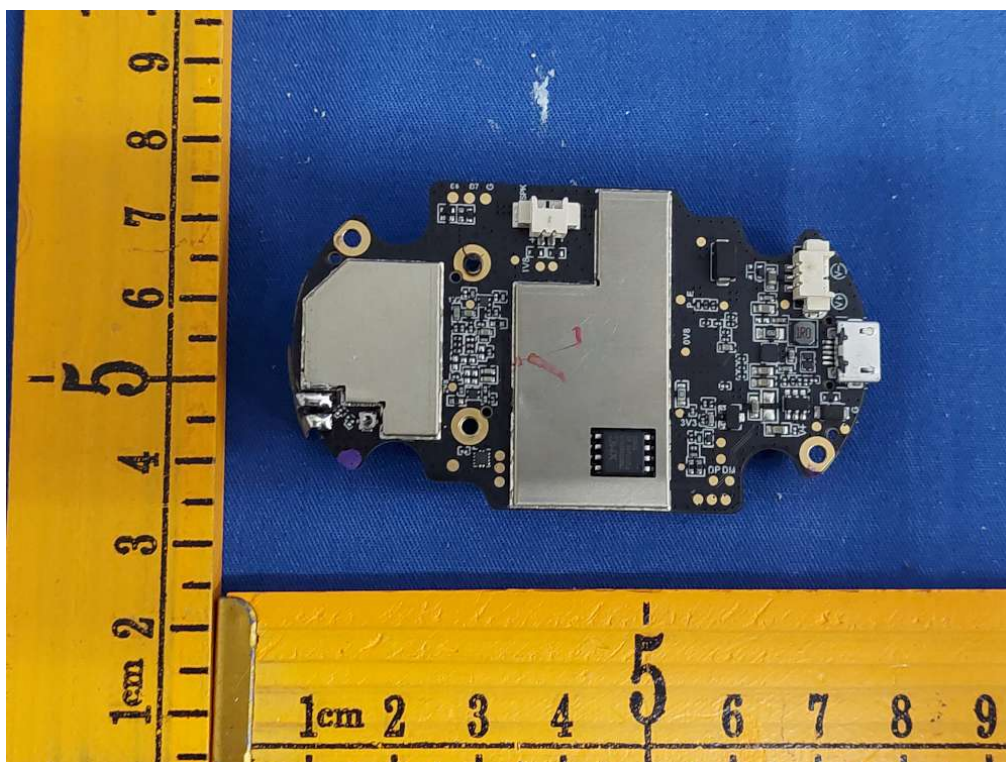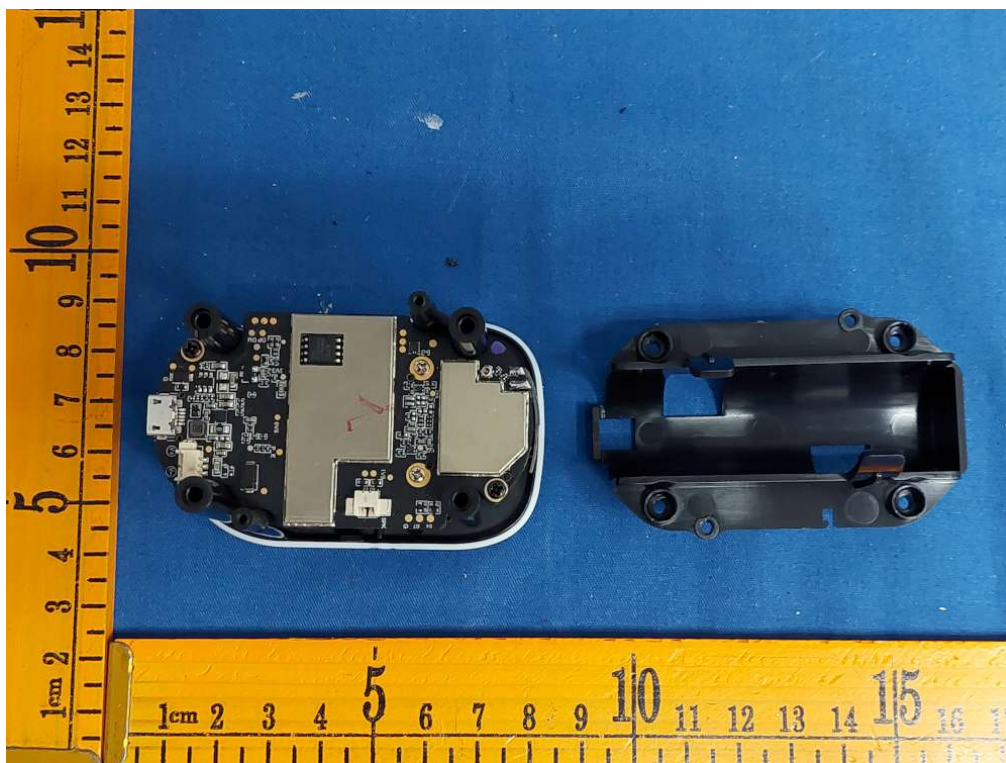





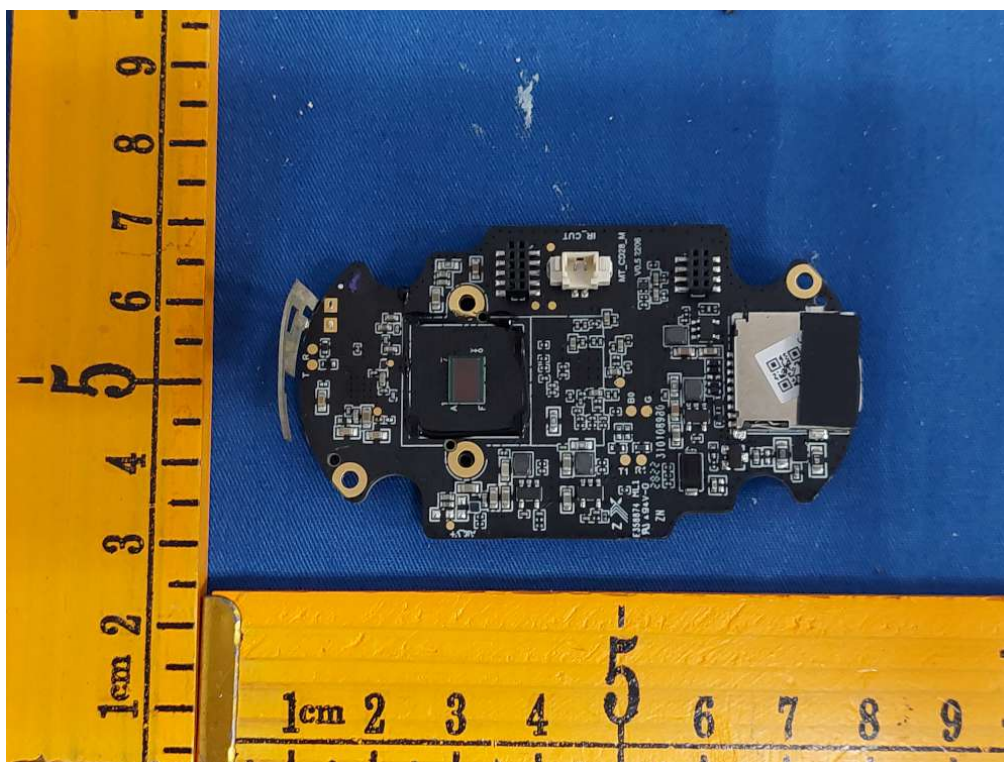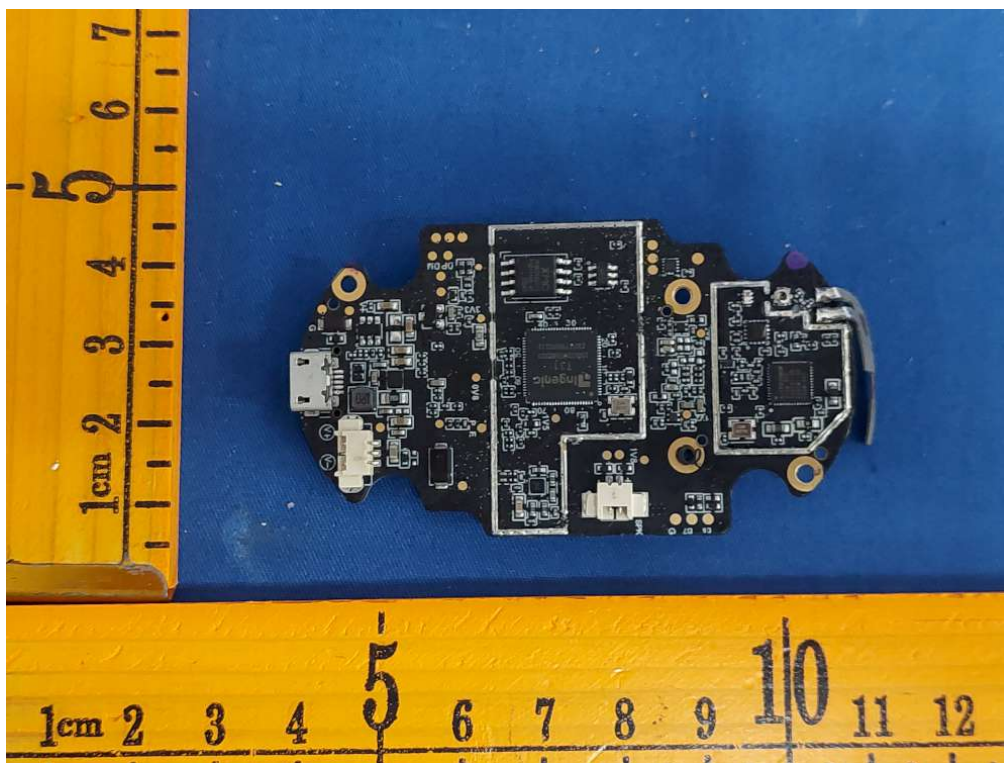




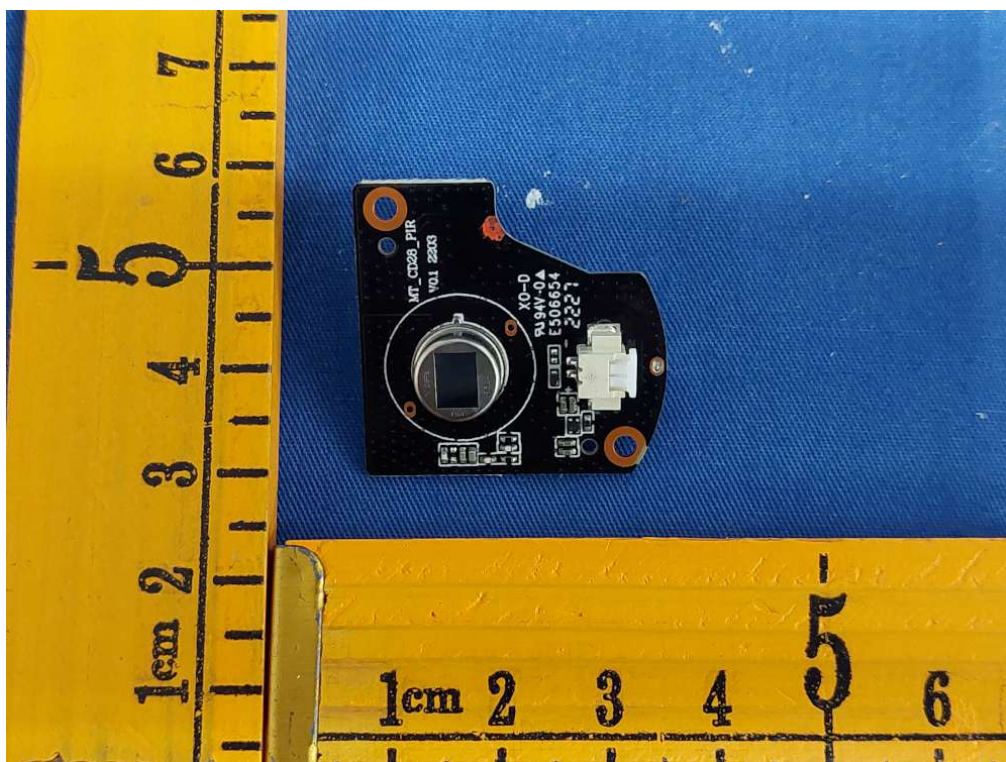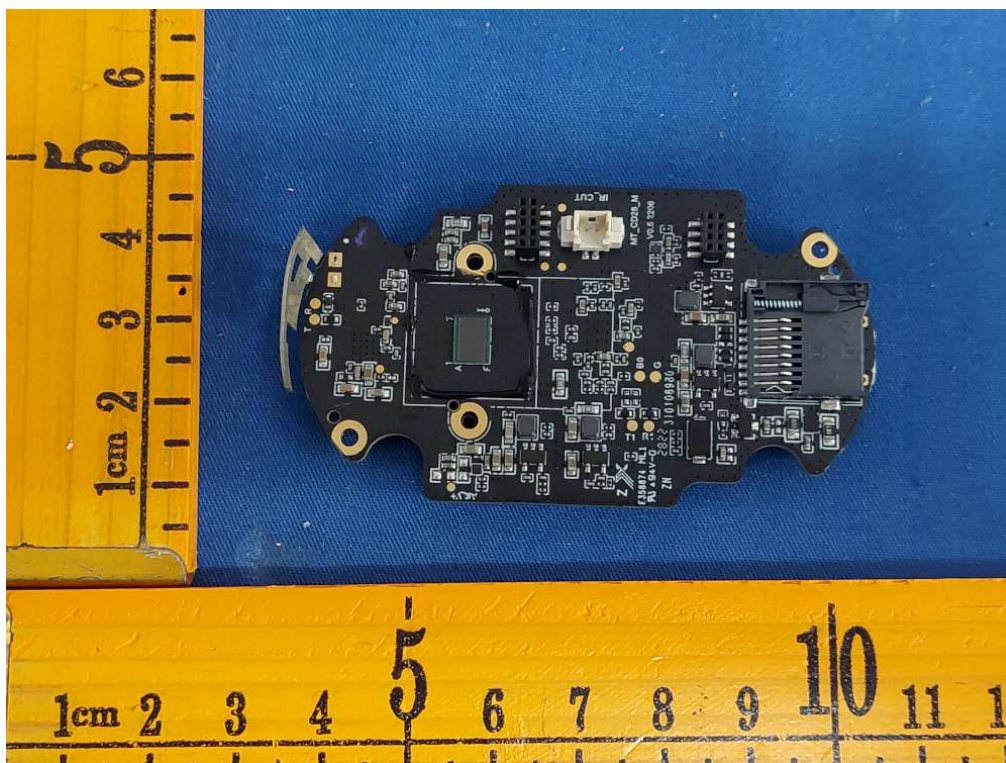



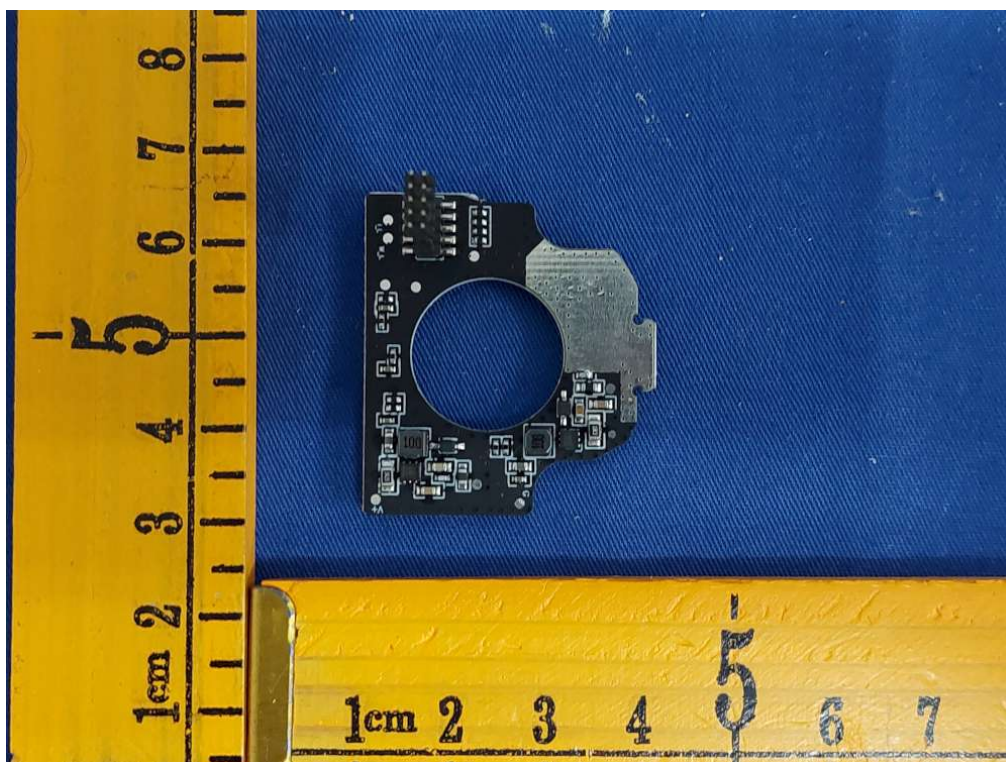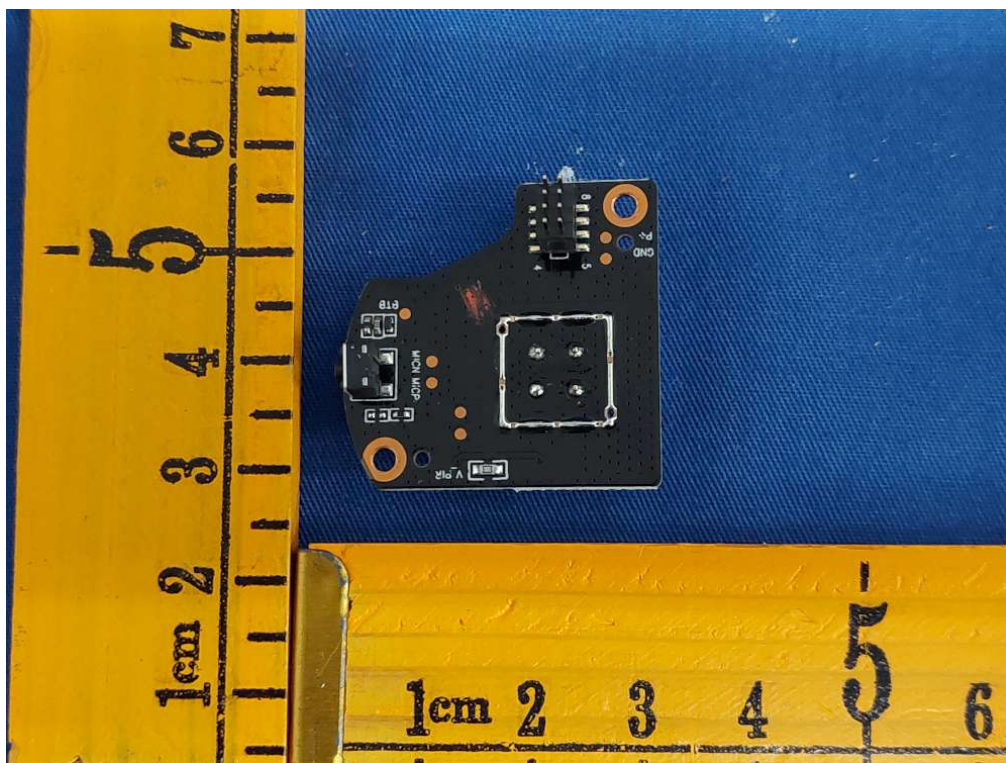



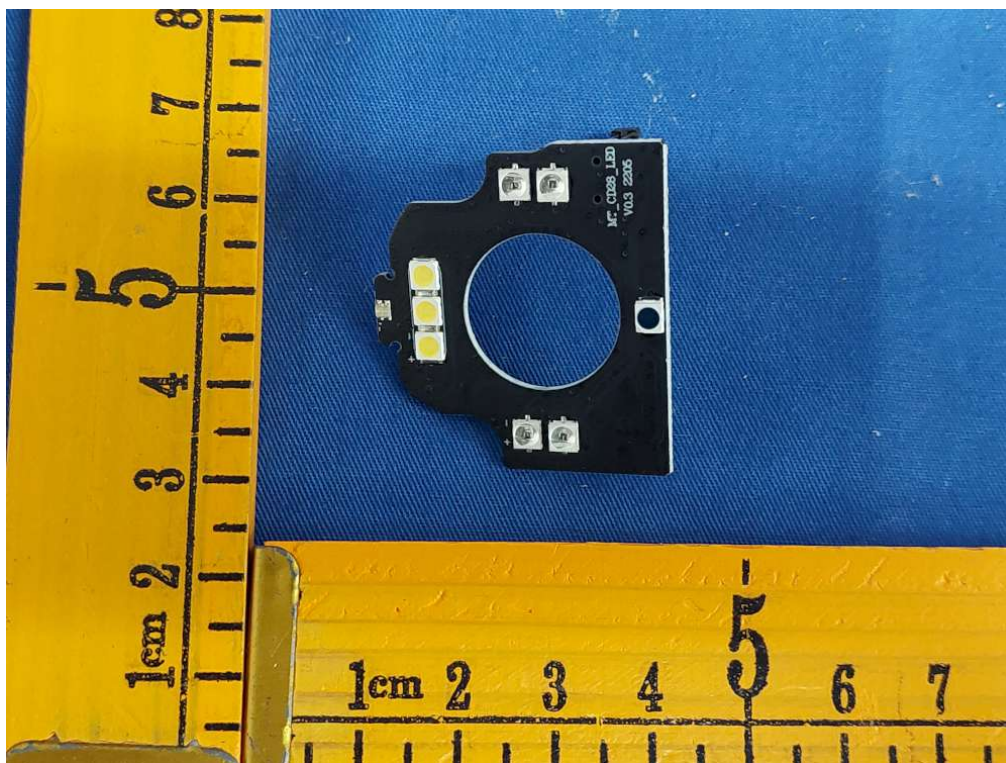

\*\*\*\*\* END OF REPORT \*\*\*\*\*