

承 认 书

客户名称: 瀚彩

客户料号:

我司型号: G25-2.5-7.8UH-3200GS-8MM

送样日期: 2022 年 9 月 26 日

供应方: Dongguan Jiresi Technology Co., LTD

绘 制	审 核	批 准
王 莉 芝	邓 祥 桂	陆 如 圣

客户承认:

合 格	不 合 格	承 认
备 注		


Tel:

Fax: 86+ 13632701380

Address: No. 152, Guanchang Section, Taigongling Village, Dalingshan
Town, Dongguan City, China.

客户名称	客户料号	我司型号	版 本	日 期
瀚彩		G25-2.5-7.8UH-3200GS-9MM	A0	2022.9.26

一、Plane structure diagram: unit:MM

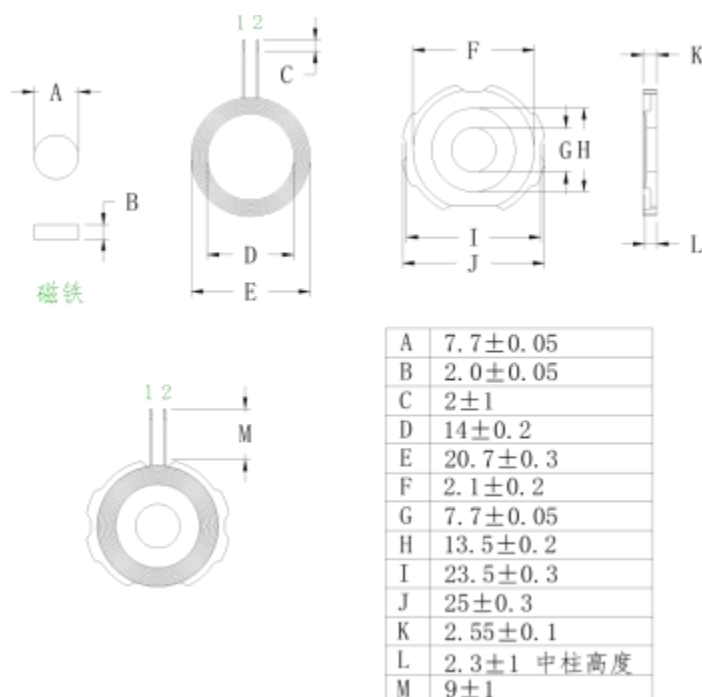

二、Product parameters:

Product parameters	Wire diameter	Number of turns	note
1 - 2	0.08*28P	14	Hot air stranded wire

三、The technical requirements:

- Secure the ends and ends of the wires to prevent loose or broken wires
- According to customer requirements, the excessively long wire shears are plated with tin, and the depth of tin plating is 2 ± 1 MM
- Point the appropriate white glue on the soft magnetic chip, stick the coil, and ensure that the product surface is clean and tidy during the process
- The soft magnetic chip with round hole, no damage
- Additional procedure (according to customer's requirements) : install 7.7x2.0mm magnet in the middle hole of the finished product, and attach 14mm round double-sided adhesive to the back of the finished product, and then package

四、Electrical parameters:

1.

Inductance value Inductance value, Q 值:

$$\text{PIN } 1 - 2 = 7.8\mu\text{H} \pm 0.2\mu\text{H}$$

$$Q \text{ 值} \geq 35$$

The above inductance values are based on Quanhua 1062A instrument, 10KHZ/0.3Vrms as standard or equivalent.

Q value is based on Quanhua 1062A instrument, 100KHZ/0.3Vrms as standard or equivalent

五、Bill of materials:

number	name	material	supplier	note
1	Hot air stranded wire	0.08X28P	维汉或等同	
2	Magnetic sheet	G25 The soft base material	天通或等同	
3	tin	High temperature environment	千岛或等同	
4	White glue	BY882	宝月或等同	
5	Strong magnetic	7.7*2 (Strength is greater than the 3200GS)	联胜或等同	
6	Double-sided adhesive	The diameter of 14mm(513)	鸿辉	