

**KDB 865664 D01 SAR Measurement 100MHz to 6GHz
FCC 47 CFR part 2 (2.1093)**

SAR EVALUATION REPORT

For

**GAI-Tronics, Rugged Cellular Telephone with LTE FDD Radio
Model Name / Number: Cellular Commander 231-02-304J-612
Contains FCC ID: 2A8ZW-COMMANDER**

**REPORT NUMBER UL-SAR-RP14149259-916A V4.0
ISSUE DATE: 09 JAN 2023**

Prepared for

**GAI-Tronics (a division of Hubbell Limited)
STRETTON BUSINESS PARK
BRUNEL DR BURTON UPON TRENT,
DE13 0BZ
UNITED KINGDOM**

Prepared by

**UL INTERNATIONAL (UK) LTD
UNIT 1-3 HORIZON, WADE ROAD, KINGSLAND BUSINESS PARK,
BASINGSTOKE, HAMPSHIRE, RG24 8AH, UK
TEL: +44 (0) 1256 312 100
FAX: +44 (0) 1256 312 001**



REVISION HISTORY

Ver.	Issue Date	Revisions	Revised By
1.0	01 Dec 2022	Initial Issue	--
2.0	06 Dec 2022	Updated as per the feedback from TCB.	Naseer Mirza
3.0	19 Dec 2022	Updated as per the feedback from TCB.	Naseer Mirza
4.0	09 Jan 2023	Updated as per the feedback from TCB.	Naseer Mirza

TABLE OF CONTENTS

1. Attestation of Test Results.....	4
2. Test Specification, Methods and Procedures	5
2.1. Test Specification	5
2.2. Methods and Procedures Reference Documentation	5
2.3. Definition of Measurement Equipment	5
3. Facilities and Accreditation.....	6
4. SAR Measurement System & Test Equipment.....	7
4.1. SAR Measurement System	7
4.2. SAR Measurement Procedure	8
4.3. Test Equipment	10
5. Measurement Uncertainty	12
5.1. Uncertainty – Freq. < 3 GHz 10g	13
6. Device Under Test (DUT)	14
6.1. Description of Device Under Test (DUT)	14
6.2. Wireless Technologies	15
6.3. Nominal and Maximum Output power	17
7. RF Exposure Conditions (Test Configurations).....	18
7.1. Configuration Consideration	18
7.2. SAR Test Exclusion Consideration	18
8. Conducted output power measurements.....	19
9. Dielectric Property Measurements & System Check.....	24
9.1. Tissue Dielectric Parameters	24
9.2. System Check	26
9.3. Numerical SAR Target Values	26
9.4. Dielectric Property Measurements & System Check Results	27
10. Measurements, Examinations and Derived Result	28
10.2. SAR Measurement Variability	30
11. Highest Standalone SAR and Simultaneous Transmission	31
11.1. Highest Standalone Reported SAR	31
11.2. Simultaneous Transmission analysis	31
12. Appendixes	32
12.1. Photos and Ports Location	32
12.2. System Check Plots	46
12.3. SAR Distribution Plots	52
12.4. Calibration Certificate for E-Field Probe	58
12.5. Calibration Certificate for Dipole	59
12.6. Tissues-Equivalent Media Recipes	60

1. Attestation of Test Results

Applicant Name:	GAI-Tronics (a division of Hubbell Ltd.)					
Model Name/Number:	Cellular Commander / 231-02-304J-612					
Test Device is	A representative test sample					
Device category	Portable					
Date Tested	23 September 2022 to 03 October 2022					
FCC 47 CFR (2.1093) Limits for SAR Exposure Characteristics	General Population – Localised SAR (Limbs) –10g SAR limit 4.0 W/kg					
The highest reported SAR values for Localized SAR	RF Exposure Conditions		Equipment Class			
			Licensed	DTS	U-NII	DSS
	Standalone	Limbs	1.67 W/Kg	N/A	N/A	N/A
Applicable Standards	FCC 47 CFR part 2 (2.1093) KDB publications					
Test Results	Pass					
UL International (UK) Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL International (UK) Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties are in accordance with the above standard and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report. Note: The results documented in this report apply only to the tested sample(s), under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL International (UK) Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL International (UK) Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by UKAS. This report is written to support regulatory compliance of the applicable standards stated above.						
Issued By: 			Prepared By: 			
Naseer Mirza Operations Leader UL			Masood Khan Lab Test Engineer UL			

2.Test Specification, Methods and Procedures

2.1.Test Specification

Reference:	KDB Publication Number: 865664 D01 SAR Measurement 100 MHz to 6 GHz
Title:	SAR Measurement Requirements for 100 MHz to 6 GHz
Introduction:	The SAR Measurement procedures for 100MHz to 6GHz are described in this document. Field probes, tissue dielectric properties, SAR scans, measurement accuracy and variability of the measured results are discussed. The field probe and SAR scan requirements are derived from criteria considered in standard IEEE 1528-2013. The wireless product and technology specific procedures in applicable KDB publications are required to be used unless further guidance has been approved by the FCC.
Purpose of Test:	To determine if the Equipment Under Test complies with the Specific Absorption Rate for general population/uncontrolled exposure limit of 1.6 W/kg as specified in FCC 47 CFR part 2 (2.1093).

2.2. Methods and Procedures Reference Documentation

The methods and procedures used were as detailed in:

IEC/IEEE 62209-1528:2020

Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices.

FCC KDB Publication:

KDB 447498 D03 Supplement C Cross-Reference v01
 KDB 447498 D04 Interim General RF Exposure Guidance v01
 KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
 KDB 865664 D02 RF Exposure Reporting v01r02
 KDB 941225 D05 SAR for LTE Devices v02r05

2.3. Definition of Measurement Equipment

The measurement equipment used complied with the requirements of the standards referenced in the methods & procedures section above. Section 4.3 contains a list of the test equipment used.

3.Facilities and Accreditation

The measurement facilities used to collect data are located at


Horizon Unit 1-3, Wade Road, Kingsland Business Park, Basingstoke, Hampshire, RG24 8AH, UK	Facility Type
SAR Lab 63	Controlled Environment Chamber

UL International (UK) Ltd is accredited by UKAS (United Kingdom Accreditation Service, Accredited to ISO/IEC 17025:2017), Laboratory UKAS Code 5772.

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY test systems used for performing compliance tests consists of the following items:

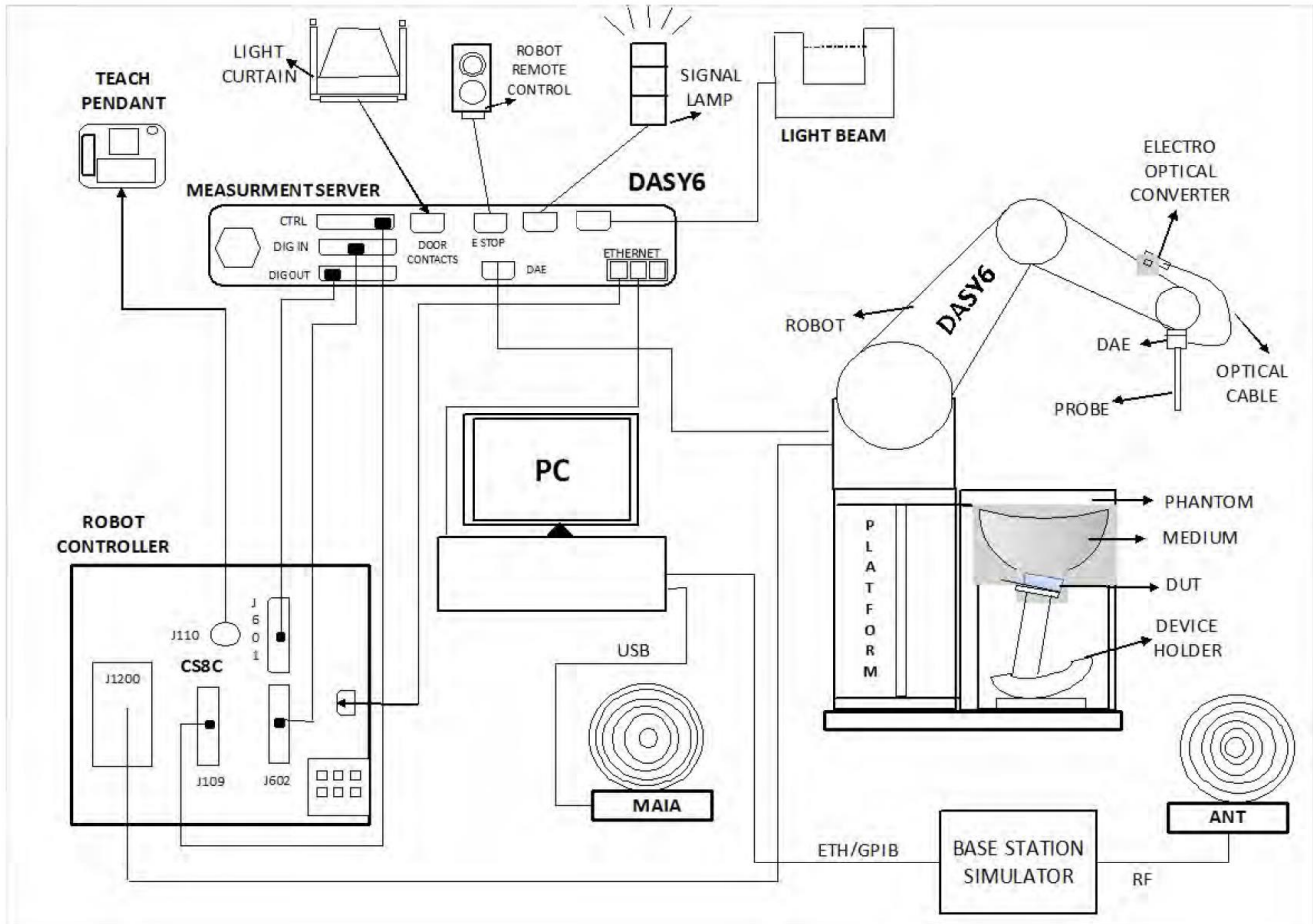

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win10 with DASY software installed.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

4.2. SAR Measurement Procedure

4.2.1. Normal SAR Measurement Procedure

The following procedure shall be performed for each of the test conditions

- a) Measure the local SAR at a test point within 8 mm of the phantom inner surface that is closest to the DUT.
- b) Measure the two-dimensional SAR distribution within the phantom (area scan procedure). The boundary of the measurement area shall not be closer than 20 mm from the phantom side walls. The distance between the measurement points should enable the detection of the location of local maximum with an accuracy of better than half the linear dimension of the tissue cube after interpolation. A maximum grid spacing of 20 mm for frequencies below 3 GHz and $(60/f \text{ [GHz]})$ mm for frequencies of 3 GHz and greater is recommended. The maximum distance between the geometrical centre of the probe detectors and the inner surface of the phantom shall be 5 mm for frequencies below 3 GHz and $\delta \ln(2)/2$ mm for frequencies of 3 GHz and greater, where δ is the plane wave skin depth and $\ln(x)$ is the natural logarithm. The maximum variation of the sensor-phantom surface distance shall be ± 1 mm for frequencies below 3 GHz and $\pm 0,5$ mm for frequencies of 3 GHz and greater. At all measurement points the angle of the probe with respect to the line normal to the surface should be less than 5° . If this cannot be achieved for a measurement distance to the phantom inner surface shorter than the probe diameter, additional uncertainty evaluation is needed.
- c) From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that will not be within the zoom scan of other peaks; additional peaks shall be measured only when the primary peak is within 2 dB of the SAR compliance limit (e.g., 1 W/kg for 1,6 W /kg 1 g limit, or 1,26 W/kg for 2 W /kg, 10 g limit).
- d) Measure the three-dimensional SAR distribution at the local maxima locations identified in step c) (zoom scan). For frequencies at or below 3 GHz, the following procedure shall be applied: The horizontal grid step shall be 8 mm or less. The grid step in the vertical direction shall be 5 mm or less if uniform spacing is used. If variable spacing is used in the vertical direction, the maximum spacing between the two closest measured points to the phantom shell (M1 and M2) shall be 4 mm or less and the spacing between farther points shall increase by a factor of 1,5 or less. The minimum size of the zoom scan volume shall be 30 mm by 30 mm by 30 mm.

For frequencies above 3 GHz, the minimum size of the zoom scan volume may be reduced to 22 mm by 22 mm by 22 mm. The horizontal grid step shall be $(24/f \text{ [GHz]})$ mm or less. If uniform spacing in the vertical direction is used, the grid step in the vertical direction shall be $(10/(f \text{ [GHz]} - 1))$ mm or less. If variable spacing is used in the vertical direction, the maximum spacing between the two measured points closest to the phantom shell shall be $(12/f \text{ [GHz]})$ mm or less and the spacing between further points shall increase by a factor of 1,5 or less. For other parameters, see Zoom Scan Parameters table.

When the highest 1 g or 10 g cube is touching the boundary of a zoom-scan volume, the entire zoom scan shall be repeated with the new centre located at the maximum psSAR location indicated by the preceding zoom scan measurement. If the zoom scan measured as defined above complies with both of the following criteria, or if the peak spatial-average SAR is below 0,1 W/kg, no additional measurements are needed:

- 1) the smallest horizontal distance from the local SAR peaks to all points 3 dB below the SAR peak shall be larger than the horizontal grid steps in both x and y directions (Δx , Δy). This shall be checked for the measured zoom scan plane conformal to the phantom at the distance z_{M1} . The minimum distance shall be recorded in the SAR test report;
- 2) the ratio of the SAR at the second measured point (M2) to the SAR at the closest measured point (M1) at the x-y location of the measured maximum SAR value shall be at least 30 %. This ratio (in %) shall be recorded in the SAR test report.

If one or both of the above criteria are not met, the zoom scan measurement shall be repeated using a finer resolution while keeping the other zoom scan parameters compatible with Zoom Scan Parameters table. New horizontal and vertical grid steps shall be determined from the measured SAR distribution so that the above criteria are met. Compliance with the above two criteria shall be demonstrated for the new measured zoom scan. The size of the higher resolution zoom scan and other parameters of Zoom Scan Parameters table shall apply. The closest point to the phantom shell shall be 2 mm or less for graded grids and the grading factor shall be 1,5 or less.

Uncertainties due to field distortion between the media boundary and the dielectric enclosure of the probe should also be minimized, which is achieved if the distance between the phantom surface and physical tip of the probe is larger than the probe tip diameter. Other methods may utilize correction procedures to compensate for boundary effects that enable high precision measurements closer than half the probe diameter. For all measurement points, the angle of the probe normal to the flat phantom surface shall be less than 5°.

Zoom Scan Parameters

Parameter	DUT transmit frequency being tested	
	$f \leq 3$ GHz	$3 \text{ GHz} < f \leq 6$ GHz
Maximum distance between the closest measured points and the phantom surface (z_{M1} in Figure 14 and Table 2, in mm)	5	$\delta \ln(2)/2^a$
Maximum angle between the probe axis and the flat phantom surface normal (α in Figure 14)	5°	5°
Maximum spacing between measured points in the x- and y-directions (Δx and Δy , in mm)	8	$24/f^{b,c}$
For uniform grids: Maximum spacing between measured points in the direction normal to the phantom shell (Δz_1 in Figure 14, in mm)	5	$10/(f - 1)$
For graded grids: Maximum spacing between the two closest measured points in the direction normal to the phantom shell (Δz_1 in Figure 14, in mm)	4	$12/f$
For graded grids: Maximum incremental increase in the spacing between measured points in the direction normal to the phantom shell ($R_z = \Delta z_2/\Delta z_1$ in Figure 14)	1,5	1,5
Minimum edge length of the zoom scan volume in the x- and y-directions (L_z in 7.2.5.3, in mm)	30	22
Minimum edge length of the zoom scan volume in the direction normal to the phantom shell (L_h in 7.2.5.3, in mm)	30	22
Tolerance in the probe angle	1°	1°
^a δ is the penetration depth for a plane-wave incident normally on a planar half-space. ^b This is the maximum spacing allowed, which may not work for all circumstances. ^c f is the frequency in GHz.		

- e) Use post processing (e.g. interpolation and extrapolation) procedures to determine the local SAR values at the spatial resolution needed for mass averaging.
- f) The local SAR should be measured at the same location as in Step a). SAR drift is assessed and reported in the uncertainty budget.

In the event that the evaluation of measurement drift exceeds the 5 % tolerance, it is required that SAR be reassessed following guidelines contained within this standard.

If the drift is larger than 5 %, then the measurement drift shall be considered a bias, not an uncertainty. A correction shall be applied to the measured SAR value. It is not necessary to record the drift in the uncertainty budget (i.e. $u_i = 0$ %). The uncertainty budget reported in a measurement report should correspond to the highest SAR value reported (after correction, if applicable). Alternatively, the uncertainty budget reported should cover all measurements, i.e., it should report a conservative value.

4.3. Test Equipment

Measuring equipment used to perform the tests is documented in this report and has been calibrated in accordance with UKAS' recommendations and is traceable to recognized national standards.

UL Asset No.	Instrument Name	Manufacturer	Type	Serial No.	Date Last Calibrated	Cal. Interval (Months)
134030	E-Field Probe	SPEAG	EX3DV4	3995	20 Apr 2022	12
168974	Data Acquisition Equipment	SPEAG	DAE4	1543	22 Feb 2022	12
171435	Phantom	SPEAG	ELI V8	2091	Cal. as part of system	-
129785	Dipole Antenna	SPEAG	D750V3	1011	14 Feb 2022	12
132959	Dipole Antenna	SPEAG	D900V2	035	14 Feb 2022	12
130607	Dipole Antenna	SPEAG	D1800V2	264	20 Oct 2021	12
132925	Dipole Antenna	SPEAG	D1900V2	537	21 Feb 2022	12
155020	POWERSOURCE1	SPEAG	SE UMS 160 AB	1026	13 Jan 2022	12
180463	POWERSOURCE1	SPEAG	SE UMS 160 BA	4012	20 Jun 2022	12
169105	RS Hygrometer	RS Components	408-6109	708Q06R	23 Feb 2022	12
PRE0179706	Body Handset Positioner	SPEAG	MD4HACV5	None	Cal. not required	-
PRE0179701	Head Handset Positioner	SPEAG	MD4HHTV5	None	Cal. not required	-
PRE0178117	Measurement Server	SPEAG	SE UMS 028 BB	1563	Cal. not required	-
PRE0179697	Phantom Support Structure	SPEAG	Phantom Table	-	Cal. not required	-
PRE0178114	Robot Arm	Staubli	TX60 L	F17/5ENYF1/A/01	Cal. not required	-
PRE0178121	Robot Power Supply	SPEAG	CS8C	F17/5ENYF1/C/01	Cal. not required	-
166282	Power Sensor	Rohde & Schwarz	NRP-Z51	103031-NV	31 Mar 2022	12
133925	Power Sensor	Rohde & Schwarz	NRP-Z51	103246	23 Mar 2022	12
166281	Power Sensor	Rohde & Schwarz	NRP-Z51	104649-JG	31 Mar 2022	12
174120	Thermometer (Fluid)	Testo	Testo 720	3327513	02 Mar 2022	12
199469	Thermometer (Fluid)	Testo	Testo 720	3465036	05 Apr 2022	12
147741	Vector Network Analyser	Rohde & Schwarz	ZND 132.5170K92	100151	01 Apr 2022	12
PRE0145189	DAK 3.5 Fluid Probe	SPEAG	SM DAK 040 CA	1089	Cal. before use	-
PRE0135306	Digital Camera	Nikon	S3600	41010357	Cal. not required	-
PRE0195838	RF Coax Cable	Taoglas	CAB.721		Cal. not required	-
PRE0195840	RF Coax Cable	Taoglas	CAB.721		Cal. not required	-
PRE0136931	RF Coax Cable	-	70530/4PE	-	Cal. not required	-
PRE0140096	RF Coax Cable	Huber+Suhner	ST18/SMAm/Nm/36	-	Cal. not required	-

4.3.1. SAR System Specifications

Robot System	
Positioner:	Stäubli Unimation Corp. Robot Model: TX60L
Repeatability:	±0.030 mm
No. of Axis:	6
Serial Number:	F17/5ENYF1/A/01
Reach:	800 mm
Payload:	2.0 kg
Control Unit:	CS8C
Programming Language:	V+
Data Acquisition Electronic (DAE) System	
Serial Number:	DAE4 SN: 1543
PC Controller	
PC:	HP EliteDesk800
Operating System:	Windows 10
Data Card:	DASY Measurement Server
Data Converter	
Features:	Signal Amplifier, multiplexer, A/D converted and control logic.
Software:	DASY6 PRO Software
Connecting Lines:	Optical downlink for data and status info. Optical uplink for commands and clock.
PC Interface Card	
Function:	24 bit (64 MHz) DSP for real time processing Link to DAE4 16 bit A/D converter for surface detection system serial link to robot direct emergency stop output for robot.
Phantom	
Phantom:	ELI Phantom
Shell Material:	Fibreglass
Thickness:	2.0 ±0.1 mm
E-Field Probe	
Model:	EX3DV4
Serial No:	3995
Construction:	Triangular core
Frequency:	10MHz to >6GHz
Linearity:	±0.2 dB (30 MHz to 6 GHz)
Probe Length (mm):	337
Probe Diameter (mm):	10
Tip Length (mm):	9
Tip Diameter (mm):	2.5
Sensor X Offset (mm):	1
Sensor Y Offset (mm):	1
Sensor Z Offset (mm):	1

5. Measurement Uncertainty

No measurement or test can ever be perfect, and the imperfections give rise to error of measurement in the results. Consequently, the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor, such that a confidence level of approximately 95% is maintained. For the purposes of this document “approximately” is interpreted as meaning “effectively” or “for most practical purposes”.

Test Name	Confidence Level	Calculated Uncertainty
Uncertainty- Freq. < 3 GHz 10g	95%	±25.33%

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty, the published guidance of the appropriate accreditation body is followed.

5.1. Uncertainty – Freq. < 3 GHz 10g

Type	Source of uncertainty	+ Value	- Value	Probability Distribution	Divisor	C _i (10g)	Standard Uncertainty		v _i or v _{eff}
							+ u (%)	- u (%)	
B	Probe calibration	12.000	12.000	normal (k=2)	2.0000	1.0000	6.000	6.000	∞
B	Probe calibration drift	1.700	1.700	Rectangular	1.7321	1.0000	0.981	0.981	∞
B	Probe Linearity and Detection Limits	4.700	4.700	Rectangular	1.7321	1.0000	2.714	2.714	∞
B	Broadband Signal	3.000	3.000	Rectangular	1.7321	1.0000	1.732	1.732	∞
B	Probe Isotropy	7.600	7.600	Rectangular	1.7321	1.0000	4.388	4.388	∞
B	Data Acquisition	0.300	0.300	normal (k=1)	1.0000	1.0000	0.300	0.300	∞
B	RF Ambient conditions	0.260	0.260	normal (k=1)	1.0000	1.0000	0.260	0.260	∞
B	Probe Positioning	0.700	0.700	normal (k=1)	1.0000	0.1400	0.098	0.098	∞
B	Data Processing Errors	4.000	4.000	Rectangular	1.7321	1.0000	2.309	2.309	∞
B	Uncertainty in SAR correction for deviations in permittivity and conductivity	1.900	1.900	normal (k=1)	1.0000	0.8400	1.596	1.596	∞
B	Liquid Conductivity (measured value)	5.288	5.288	normal (k=2)	2.0000	0.0000	0.000	0.000	∞
B	Liquid Permittivity (measured value)	2.500	2.500	normal (k=2)	2.0000	0.0000	0.000	0.000	∞
B	Liquid Conductivity (temperature uncertainty)	1.430	1.430	Rectangular	1.7321	0.7100	0.586	0.586	∞
B	Liquid Permittivity (temperature uncertainty)	0.310	0.310	Rectangular	1.7321	0.7100	0.127	0.127	∞
B	Phantom Shell Permittivity	14.000	14.000	Rectangular	1.7321	0.2500	2.021	2.021	∞
B	Distance DUT - TSL	2.000	2.000	normal (k=1)	1.0000	2.0000	4.000	4.000	∞
A	Test Sample Positioning	4.240	4.240	normal (k=1)	1.0000	1.0000	4.240	4.240	25
A	Device Holder uncertainty	6.090	6.090	normal (k=1)	1.0000	1.0000	6.090	6.090	5
B	DUT Modulation	2.400	2.400	Rectangular	1.7321	1.0000	1.386	1.386	∞
B	Drift of output power	5.000	5.000	Rectangular	1.7321	1.0000	2.887	2.887	∞
	Combined standard uncertainty			t-distribution			12.66	12.66	90
	Expanded uncertainty			k = 2			25.33	25.33	90

6. Device Under Test (DUT)

6.1. Description of Device Under Test (DUT)

Serial Number:	Radiated Samples	SAR1 : 22762224
	Conducted Sample	SAR1 : 22762224
Hardware Version Number:	P400 PCB V3	
Software Version Number:	1.46	
FW Version:	SIM7600G_V2.0.2	
Country of Origin:	United Kingdom	
Date of Receipt:	15 Feb 2022	
DUT Description:	The device under test is a 'module integrated' in a 'Rugged Cellular Telephone'. DUT supports LTE FDD (QPSK/16QAM) band 2, 4, 5, 12 and 66.	
Operating Configurations	Limbs	
Device dimension	Overall (Length x Width x Depth): 292.00 mm x 190.00 mm x 140.00 mm	
Battery Type	☐ Standard – Lithium-ion battery ☒ Extended (large capacity) - Internal high capacity, deep discharge lead-acid	

6.2.Wireless Technologies

Wireless technologies	Frequency bands	Operating mode	Duty Cycle
LTE ☒ (FDD)	Band 2 Band 4 Band 5 Band 12 Band 66	QPSK 16QAM	100% (FDD)
Does this device SV-LTE (1xRTT-LTE)? ☐ Yes ☒ No			

Additional Information Related to Testing:

Antenna Type:	Internal integral
Antenna Lengths:	As specified in Appendix 12.1

Number of Antennas:	Antenna Name	Antenna Type	Antenna Description	Type
	ANT1	WWAN	Cellular LTE (4G)	1 fixed

Wireless Technologies

LTE							
Band	Description						
LTE FDD 2	Frequency Range: 1850 - 1910 MHz						
	Channel Description	Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Channel No. / Freq. (MHz)						
	Low	18700 / 1860.0	18675 / 1857.5	18650 / 1855.0	18625 / 1852.5	18615 / 1851.5	18607 / 1850.7
	Mid	18900 / 1880.0	18900 / 1880.0	18900 / 1880.0	18900 / 1880.0	18900 / 1880.0	18900 / 1880.0
	High	19100 / 1970.0	19125 / 1972.5	19150 / 1975	19175 / 1977.5	19185 / 1908.5	19193 / 1909.3
LTE FDD 4	Frequency Range: 1710 - 1755 MHz						
	Channel Description	Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Channel No. / Freq. (MHz)						
	Low	20050 / 1720.0	20025 / 1717.5	20000 / 1715.0	19975 / 1712.5	19965 / 1711.5	19957 / 1710.7
	Mid	20175 / 1732.5	20175 / 1732.5	20175 / 1732.5	20175 / 1732.5	20175 / 1732.5	20175 / 1732.5
	High	20300 / 1745.0	20325 / 1747.5	20350 / 1750.0	20375 / 1752.5	20385 / 1753.5	20393 / 1754.3
LTE FDD 5	Frequency Range: 824 - 849 MHz						
	Channel Description	Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Channel No. / Freq. (MHz)						
	Low			20450 / 829.0	20425 / 826.5	20415 / 825.5	20407 / 824.7
	Mid			20525 / 836.5	20525 / 836.5	20525 / 836.5	20525 / 836.5
	High			20600 / 844.0	20625 / 846.5	20635 / 847.5	20643 / 848.3
LTE FDD 12	Frequency Range: 777 - 787 MHz						
	Channel Description	Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Channel No. / Freq. (MHz)						
	Low			23060 / 704.0	23035 / 701.5	23025 / 700.5	23017 / 699.7
	Mid			23095 / 707.5	23095 / 707.5	23095 / 707.5	23095 / 707.5
	High			23130 / 711.0	23155 / 713.5	23165 / 714.5	23173 / 715.3
LTE FDD 66	Frequency Range: 1710 - 1780 MHz						
	Channel Description	Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Channel No. / Freq. (MHz)						
	Low	132072 / 1720.0	132047 / 1717.5	132022 / 1715.0	131997 / 1712.5	131987 / 1711.5	131979 / 1710.7
	Mid	132322 / 1745.0	132322 / 1745.0	132322 / 1745.0	132322 / 1745.0	132322 / 1745.0	132322 / 1745.0
	High	132572 / 1770.0	132597 / 1772.5	132622 / 1775.0	132647 / 1777.5	132657 / 1778.5	132665 / 1779.3

6.3. Nominal and Maximum Output power

6.3.1. Cellular - LTE

RF Air interface	Mode	Target + Max. Tolerances (dBm)					
		Bandwidth (MHz)					
		20	15	10	5	3	1.4
LTE FDD 2	QPSK (1RB)	23.50	23.50	23.50	23.50	23.50	23.50
	QPSK (50% RB)	22.50	22.50	22.50	22.50	22.50	23.50
	QPSK (100% RB)	22.50	22.50	22.50	22.50	22.50	22.50
	16-QAM (1RB)	22.50	22.50	22.50	22.50	22.50	22.50
	16-QAM (50% RB)	21.50	21.50	21.50	21.50	21.50	22.50
	16-QAM (100% RB)	21.50	21.50	21.50	21.50	21.50	21.50
LTE FDD 4	QPSK (1RB)	23.50	23.50	23.50	23.50	23.50	23.50
	QPSK (50% RB)	22.50	22.50	22.50	22.50	22.50	23.50
	QPSK (100% RB)	22.50	22.50	22.50	22.50	22.50	22.50
	16-QAM (1RB)	22.50	22.50	22.50	22.50	22.50	22.50
	16-QAM (50% RB)	21.50	21.50	21.50	21.50	21.50	22.50
	16-QAM (100% RB)	21.50	21.50	21.50	21.50	21.50	21.50
LTE FDD 5	QPSK (1RB)			23.50	23.50	23.50	23.50
	QPSK (50% RB)			22.50	22.50	22.50	23.50
	QPSK (100% RB)			22.50	22.50	22.50	22.50
	16-QAM (1RB)			22.50	22.50	22.50	22.50
	16-QAM (50% RB)			21.50	21.50	21.50	22.50
	16-QAM (100% RB)			21.50	21.50	21.50	21.50
LTE FDD 12	QPSK (1RB)			23.50	23.50	23.50	23.50
	QPSK (50% RB)			22.50	22.50	22.50	23.50
	QPSK (100% RB)			22.50	22.50	22.50	22.50
	16-QAM (1RB)			22.50	22.50	22.50	22.50
	16-QAM (50% RB)			21.50	21.50	21.50	22.50
	16-QAM (100% RB)			21.50	21.50	21.50	21.50
LTE FDD 66	QPSK (1RB)	23.50	23.50	23.50	23.50	23.50	23.50
	QPSK (50% RB)	22.50	22.50	22.50	22.50	22.50	23.50
	QPSK (100% RB)	22.50	22.50	22.50	22.50	22.50	22.50
	16-QAM (1RB)	22.50	22.50	22.50	22.50	22.50	22.50
	16-QAM (50% RB)	21.50	21.50	21.50	21.50	21.50	22.50
	16-QAM (100% RB)	21.50	21.50	21.50	21.50	21.50	21.50

7. RF Exposure Conditions (Test Configurations)

7.1. Configuration Consideration

Technology Port	Configuration	Antenna-to-User Separation	Position	Antenna-to-Edge Separation (mm)	Evaluation Considered
Cellular Antenna (WWAN)	Extremity (Limbs)	0mm	Front	< 50	Yes
			Top	> 50	No
			Right	< 50	Yes
			Bottom	> 50	No
			Left	> 50	No

Notes:

- The Antenna to edge separation distances are indicated in the 'Antenna Schematics' located in Section 12.1 of this report

7.2. SAR Test Exclusion Consideration

Frequency Band	Configuration(s)
	Body
LTE FDD 2	No
LTE FDD 4	No
LTE FDD 5	No
LTE FDD 12	No
LTE FDD 66	No

Note:

- As per KDB Publication 447498, the frequency bands with rated power including upper tolerance, which qualify for standalone test exclusion, are as per the above table.
- The details for the Maximum Rated Power and tolerance(s) can be found in section 6.3.1

8. Conducted output power measurements

8.1.1. LTE FDD Band 2 – Extremity

Ch.BW (MHz)	Config	Mode	Channel	Frequency (MHz)	Measured Avg Power (dBm)						
					1RB			50%RB			100%RB
					0 Offset	49 Offset	99 Offset	0 Offset	25 Offset	50 Offset	
20	Extremity	QPSK	18700	1860.0	22.50	23.35	22.80	22.25	22.10	21.95	22.20
			18900	1880.0	22.60	22.75	22.65	21.65	21.60	21.55	21.60
			19100	1900.0	22.80	22.80	23.00	21.65	21.70	21.80	21.65
		16QAM	18700	1860.0	21.70	21.55	21.00	Not Supported			
			18900	1880.0	21.05	21.40	21.15				
			19100	1900.0	21.00	21.20	21.60				
Ch.BW (MHz)	Config	Mode	Channel	Frequency (MHz)	Measured Avg Power (dBm)						
					1RB			50%RB			100%RB
					0 Offset	37 Offset	74 Offset	0 Offset	19 Offset	39 Offset	
15	Extremity	QPSK	18675	1857.5	22.95	23.05	23.05	22.25	22.30	21.95	22.00
			18900	1880.0	22.95	22.65	22.80	21.50	21.55	21.45	21.50
			19125	1902.5	22.45	22.70	22.95	21.70	21.85	21.90	21.75
		16QAM	18675	1857.5	21.30	21.60	21.10	Not Supported			
			18900	1880.0	21.25	21.50	21.55				
			19125	1902.5	21.00	21.35	21.40				
Ch.BW (MHz)	Config	Mode	Channel	Frequency (MHz)	Measured Avg Power (dBm)						
					1RB			50%RB			100%RB
					0 Offset	25 Offset	49 Offset	0 Offset	13 Offset	25 Offset	
10	Extremity	QPSK	18650	1855.0	23.05	23.45	23.10	22.30	22.25	22.05	22.25
			18900	1880.0	22.90	22.85	22.70	21.60	21.55	21.60	21.40
			19150	1905.0	22.20	23.10	23.10	21.80	22.00	21.95	21.95
		16QAM	18650	1855.0	21.60	21.90	21.65	21.15	21.30	21.20	Not Supported
			18900	1880.0	21.15	21.35	21.30	20.55	20.80	20.55	
			19150	1905.0	21.25	21.75	21.60	20.70	20.90	20.80	
Ch.BW (MHz)	Config	Mode	Channel	Frequency (MHz)	Measured Avg Power (dBm)						
					1RB			50%RB			100%RB
					0 Offset	13 Offset	24 Offset	0 Offset	7 Offset	13 Offset	
5	Extremity	QPSK	18700	1852.5	23.20	23.45	23.05	22.35	22.40	22.35	22.30
			18900	1880.0	22.45	22.60	22.65	21.40	21.60	21.40	21.50
			19175	1907.5	22.85	23.00	22.70	21.85	22.00	21.90	21.90
		16QAM	18700	1852.5	21.95	21.85	21.55	20.85	21.05	20.90	21.05
			18900	1880.0	21.05	21.25	21.35	20.20	20.30	20.40	20.35
			19175	1907.5	21.20	21.50	21.40	20.80	21.15	21.00	20.90
Ch.BW (MHz)	Config	Mode	Channel	Frequency (MHz)	Measured Avg Power (dBm)						
					1RB			50%RB			100%RB
					0 Offset	8 Offset	14 Offset	0 Offset	4 Offset	7 Offset	
3	Extremity	QPSK	18615	1851.5	23.25	23.40	23.15	22.40	22.50	22.50	22.30
			18900	1880.0	22.75	22.70	22.65	21.70	21.70	21.65	21.65
			19185	1908.5	23.00	22.95	22.75	22.10	22.10	22.05	22.10
		16QAM	18615	1851.5	21.90	21.75	22.00	21.20	21.35	21.50	21.25
			18900	1880.0	21.10	21.30	21.45	20.80	20.55	20.60	20.60
			19185	1908.5	21.30	21.50	21.30	20.70	21.00	21.05	21.05
Ch.BW (MHz)	Config	Mode	Channel	Frequency (MHz)	Measured Avg Power (dBm)						
					1RB			50%RB			100%RB
					0 Offset	3 Offset	5 Offset	0 Offset	2 Offset	3 Offset	
1.4	Extremity	QPSK	18607	1850.7	23.45	23.40	23.40	23.40	23.50	23.40	22.45
			18900	1880.0	22.50	22.95	22.50	22.55	22.55	22.55	21.70
			19193	1909.3	23.00	23.25	23.05	23.15	23.35	23.20	22.15
		16QAM	18607	1850.7	22.40	21.90	21.65	22.45	22.35	22.40	21.45
			18900	1880.0	21.20	21.85	21.65	21.75	21.70	21.60	20.65
			19193	1909.3	21.65	22.10	21.70	22.15	22.30	22.40	21.40

8.1.2. LTE FDD Band 4 – Extremity

Ch.BW (MHz)	Config	Mode	Channel	Frequency (MHz)	Measured Avg Power (dBm)							
					1RB			50%RB			100%RB	
					0 Offset	49 Offset	99 Offset	0 Offset	25 Offset	50 Offset		
20	Extremity	QPSK	20050	1720.0	23.35	23.25	22.65	22.50	22.50	22.35	22.50	
			20175	1732.5	23.05	23.20	22.90	22.20	22.35	22.10	22.25	
			20300	1745.0	22.70	23.05	23.05	22.25	22.10	22.00	22.05	
		16QAM	20050	1720.0	21.30	21.95	21.35	Not Supported				
			20175	1732.5	21.40	21.45	21.05					
			20300	1745.0	21.85	21.70	21.30					
Ch.BW (MHz)	Config	Mode	Channel	Frequency (MHz)	Measured Avg Power (dBm)							
					1RB			50%RB			100%RB	
					0 Offset	37 Offset	74 Offset	0 Offset	19 Offset	39 Offset		
15	Extremity	QPSK	20025	1717.5	23.35	23.40	23.20	22.45	22.35	22.45	22.35	
			20175	1732.5	22.95	23.00	22.95	22.25	22.35	22.10	22.25	
			20325	1747.5	22.95	22.90	23.10	22.05	21.95	21.95	21.85	
		16QAM	20025	1717.5	21.80	21.75	21.65	Not Supported				
			20175	1732.5	21.60	21.65	21.55					
			20325	1747.5	21.60	21.20	21.25					
Ch.BW (MHz)	Config	Mode	Channel	Frequency (MHz)	Measured Avg Power (dBm)							
					1RB			50%RB			100%RB	
					0 Offset	25 Offset	49 Offset	0 Offset	13 Offset	25 Offset		
10	Extremity	QPSK	20000	1715	23.50	23.45	23.35	22.35	22.40	22.35	22.40	
			20175	1732.5	22.95	23.00	22.95	22.45	22.35	22.25	22.35	
			20350	1750	22.90	23.10	23.20	22.20	22.30	22.15	22.05	
		16QAM	20000	1715.0	21.95	22.20	21.80	21.40	21.35	21.40	Not Supported	
			20175	1732.5	21.70	21.70	21.25	21.05	21.05	21.00		
			20350	1750.0	21.20	21.65	21.50	21.00	21.15	21.05		
Ch.BW (MHz)	Config	Mode	Channel	Frequency (MHz)	Measured Avg Power (dBm)							
					1RB			50%RB			100%RB	
					0 Offset	13 Offset	24 Offset	0 Offset	7 Offset	13 Offset		
5	Extremity	QPSK	19975	1712.5	23.20	23.20	23.15	22.40	22.35	22.40	22.40	
			20175	1732.5	23.15	23.20	23.10	22.30	22.35	22.25	22.35	
			20375	1752.5	22.95	23.05	23.10	21.90	22.10	22.10	22.10	
		16QAM	19975	1712.5	21.85	21.75	21.70	20.95	21.35	21.35	21.30	
			20175	1732.5	21.40	21.45	21.30	20.85	20.95	20.75	21.00	
			20375	1752.5	21.35	21.30	21.45	20.85	21.10	21.10	21.00	
Ch.BW (MHz)	Config	Mode	Channel	Frequency (MHz)	Measured Avg Power (dBm)							
					1RB			50%RB			100%RB	
					0 Offset	8 Offset	14 Offset	0 Offset	4 Offset	7 Offset		
3	Extremity	QPSK	19965	1851.5	23.15	23.35	23.10	22.50	22.35	22.40	22.35	
			20175	1732.5	22.90	22.90	23.05	22.25	22.30	22.15	22.25	
			20385	1753.5	22.90	22.95	22.95	22.10	22.10	22.00	21.95	
		16QAM	19965	1711.5	21.75	21.75	21.75	21.20	21.40	21.30	21.40	
			20175	1732.5	21.60	21.60	21.50	21.10	21.05	20.90	21.25	
			20385	1753.5	21.35	21.60	21.60	20.90	21.00	20.95	21.00	
Ch.BW (MHz)	Config	Mode	Channel	Frequency (MHz)	Measured Avg Power (dBm)							
					1RB			50%RB			100%RB	
					0 Offset	3 Offset	5 Offset	0 Offset	2 Offset	3 Offset		
1.4	Extremity	QPSK	19957	1710.7	23.15	23.00	23.00	23.15	23.25	23.25	22.35	
			20175	1732.5	23.10	23.10	22.90	23.15	23.25	23.10	22.40	
			20393	1754.3	22.85	23.05	22.95	23.05	23.05	23.10	22.10	
		16QAM	19957	1710.7	22.40	22.10	22.10	22.35	22.50	22.50	21.50	
			20175	1732.5	21.65	21.60	21.20	22.05	22.40	22.25	21.25	
			20393	1754.3	21.30	21.40	21.45	22.00	22.00	22.05	21.30	

8.1.3. LTE FDD Band 5 – Extremity

Ch.BW (MHz)	Config	Mode	Channel	Frequency (MHz)	Measured Avg Power (dBm)						
					1RB			50%RB			100%RB
					0 Offset	25 Offset	49 Offset	0 Offset	13 Offset	25 Offset	
10	Extremity	QPSK	20450	829.0	23.00	22.85	22.95	21.95	22.00	22.05	21.95
			20525	836.5	22.70	22.95	22.75	21.95	21.90	21.90	22.05
			20600	844.0	22.80	23.10	23.25	22.00	22.00	22.05	22.00
		16QAM	20450	829.0	21.40	21.85	21.30	20.80	20.95	21.00	-
			20525	836.5	21.25	21.65	21.30	20.80	20.90	20.90	-
			20600	844.0	21.30	21.80	21.50	20.95	20.95	21.00	-
Ch.BW (MHz)	Config	Mode	Channel	Frequency (MHz)	Measured Avg Power (dBm)						
					1RB			50%RB			100%RB
					0 Offset	13 Offset	24 Offset	0 Offset	7 Offset	13 Offset	
5	Extremity	QPSK	20425	826.5	22.80	22.80	22.90	21.95	22.00	21.90	21.90
			20525	836.6	22.90	22.85	22.80	22.00	22.05	22.00	22.05
			20625	846.5	22.85	23.15	22.80	22.15	22.25	22.25	22.10
		16QAM	20450	829.0	21.25	21.25	21.15	20.75	20.95	20.90	20.75
			20525	836.6	21.55	21.45	21.45	21.05	20.80	20.85	20.85
			20600	844.0	21.35	21.60	21.30	21.00	21.15	21.05	21.05
Ch.BW (MHz)	Config	Mode	Channel	Frequency (MHz)	Measured Avg Power (dBm)						
					1RB			50%RB			100%RB
					0 Offset	8 Offset	14 Offset	0 Offset	4 Offset	7 Offset	
3	Extremity	QPSK	20415	825.5	23.05	22.95	22.90	22.00	21.90	21.95	22.00
			20525	836.6	22.95	22.75	22.80	22.15	22.00	21.90	22.00
			20635	847.5	22.90	23.25	23.10	22.35	22.30	22.15	22.35
		16QAM	20415	825.5	21.55	21.35	21.45	21.05	20.75	20.80	21.05
			20525	836.6	21.65	21.60	21.60	20.95	20.85	20.80	20.90
			20635	847.5	21.65	21.70	21.45	21.15	21.05	20.95	21.20
Ch.BW (MHz)	Config	Mode	Channel	Frequency (MHz)	Measured Avg Power (dBm)						
					1RB			50%RB			100%RB
					0 Offset	3 Offset	5 Offset	0 Offset	2 Offset	3 Offset	
1.4	Extremity	QPSK	20407	824.7	23.15	23.30	23.00	23.15	23.20	23.15	22.00
			20525	836.6	22.65	22.70	22.75	22.95	22.90	22.85	21.85
			20643	848.3	23.20	23.25	23.05	23.40	23.25	23.20	22.35
		16QAM	20407	824.7	21.85	21.80	21.75	22.10	22.15	22.05	21.15
			20525	836.6	21.60	21.60	21.55	21.70	21.85	21.90	21.05
			20643	848.3	21.80	21.55	21.50	22.10	22.20	22.15	21.45

8.1.4. LTE FDD Band 12 – Extremity

Ch.BW (MHz)	Config	Mode	Channel	Frequency (MHz)	Measured Avg Power (dBm)						
					1RB			50%RB			100%RB
					0 Offset	25 Offset	49 Offset	0 Offset	13 Offset	25 Offset	
10	Extremity	QPSK	23060	704.0	23.00	23.20	23.00	22.25	22.35	22.30	22.05
			23095	707.5	23.05	23.20	22.80	22.25	22.35	22.10	22.25
			23130	711.0	23.05	23.05	22.75	22.15	22.20	21.90	22.10
		16QAM	23060	704.0	21.80	22.25	21.60	21.00	21.20	21.15	Not Supported
			23095	707.5	21.40	21.80	21.45	21.05	21.15	21.20	
			23130	711.0	21.45	22.20	21.30	21.20	21.20	20.95	
Ch.BW (MHz)	Config	Mode	Channel	Frequency (MHz)	Measured Avg Power (dBm)						
					1RB			50%RB			100%RB
					0 Offset	13 Offset	24 Offset	0 Offset	7 Offset	13 Offset	
5	Extremity	QPSK	23035	701.5	23.00	23.25	23.05	22.25	22.20	22.15	22.20
			23095	707.5	23.05	23.30	22.95	22.30	22.35	22.25	22.35
			23155	713.5	22.85	22.75	22.80	22.10	22.15	21.95	22.05
		16QAM	23035	701.5	21.85	21.95	21.80	21.00	21.10	21.00	21.10
			23095	707.5	21.50	21.85	21.70	20.95	21.10	21.00	21.20
			23155	713.5	21.60	21.70	21.35	20.95	20.95	20.85	20.90
Ch.BW (MHz)	Config	Mode	Channel	Frequency (MHz)	Measured Avg Power (dBm)						
					1RB			50%RB			100%RB
					0 Offset	25 Offset	49 Offset	0 Offset	13 Offset	25 Offset	
3	Extremity	QPSK	23025	700.5	22.95	23.00	22.95	22.25	22.25	22.25	22.20
			23095	707.5	23.25	23.30	23.25	22.30	22.40	22.20	22.20
			23165	714.5	23.15	22.85	22.95	22.10	22.05	22.10	22.00
		16QAM	23025	700.5	21.85	21.80	21.55	21.15	21.10	21.10	21.30
			23095	707.5	21.70	21.80	21.60	21.20	21.30	21.40	21.20
			23165	714.5	21.85	21.45	21.70	21.05	21.00	21.00	21.05
Ch.BW (MHz)	Config	Mode	Channel	Frequency (MHz)	Measured Avg Power (dBm)						
					1RB			50%RB			100%RB
					0 Offset	13 Offset	24 Offset	0 Offset	7 Offset	13 Offset	
1.4	Extremity	QPSK	23017	699.7	22.95	23.15	23.10	23.00	23.05	22.95	22.20
			23095	707.5	23.20	23.30	23.30	23.25	23.15	23.15	22.25
			23173	715.3	23.05	23.05	23.00	23.05	23.05	23.00	22.00
		16QAM	23017	699.7	22.00	22.15	21.70	21.75	22.15	22.20	21.35
			23095	707.5	21.95	22.10	22.10	22.05	22.20	22.25	21.40
			23173	715.3	21.80	21.85	21.75	21.85	21.75	21.85	21.10

8.1.4. LTE FDD Band 66 – Extremity

Ch.BW (MHz)	Config	Mode	Channel	Frequency (MHz)	Measured Avg Power (dBm)						
					1RB			50%RB			100%RB
					0 Offset	49 Offset	99 Offset	0 Offset	25 Offset	50 Offset	
20	Extremity	QPSK	132072	1720.0	23.20	23.30	22.95	22.35	22.10	22.10	22.35
			132322	1745.0	23.05	22.80	22.95	21.90	21.90	22.00	21.80
			132572	1770.0	22.95	23.00	22.80	21.95	22.05	21.75	21.90
		16QAM	132072	1720.0	21.70	21.95	21.20	Not Supported			
			132322	1745.0	21.30	21.90	21.55				
			132572	1770.0	21.35	21.85	21.45				
Ch.BW (MHz)	Config	Mode	Channel	Frequency (MHz)	Measured Avg Power (dBm)						
					1RB			50%RB			100%RB
					0 Offset	37 Offset	74 Offset	0 Offset	19 Offset	39 Offset	
15	Extremity	QPSK	132047	1717.5	23.00	23.20	23.05	22.10	22.15	22.05	22.10
			132322	1745.0	22.90	22.75	22.80	21.80	21.85	21.85	21.80
			132597	1772.5	22.95	22.80	22.90	21.90	21.85	21.85	21.90
		16QAM	132047	1717.5	21.85	21.95	21.75	Not Supported			
			132322	1745.0	21.50	21.55	21.55				
			132597	1772.5	21.45	21.65	21.30				
Ch.BW (MHz)	Config	Mode	Channel	Frequency (MHz)	Measured Avg Power (dBm)						
					1RB			50%RB			100%RB
					0 Offset	25 Offset	49 Offset	0 Offset	13 Offset	25 Offset	
10	Extremity	QPSK	132022	1715.0	23.05	23.35	23.05	22.15	22.15	22.00	22.15
			132322	1745.0	22.80	22.80	22.80	21.90	21.85	21.75	21.80
			132622	1775.0	22.80	22.95	22.70	21.80	21.85	21.75	21.90
		16QAM	132022	1715.0	21.70	22.00	21.35	21.20	21.30	21.15	Not Supported
			132322	1745.0	21.00	21.75	21.20	20.85	20.95	20.90	
			132622	1775.0	21.35	21.80	21.35	20.95	21.00	20.85	
Ch.BW (MHz)	Config	Mode	Channel	Frequency (MHz)	Measured Avg Power (dBm)						
					1RB			50%RB			100%RB
					0 Offset	13 Offset	24 Offset	0 Offset	7 Offset	13 Offset	
5	Extremity	QPSK	131997	1712.5	22.85	23.10	22.95	22.15	22.05	21.95	22.10
			132322	1745.0	22.65	22.80	22.80	21.70	21.85	21.95	21.80
			132647	1777.5	22.75	22.80	22.70	21.85	21.85	21.75	21.85
		16QAM	131997	1712.5	21.85	21.80	21.55	21.10	21.25	21.15	21.25
			132322	1745.0	21.55	21.55	21.50	20.90	21.20	21.30	21.15
			132647	1777.5	21.65	21.60	21.40	20.85	20.85	20.75	21.20
Ch.BW (MHz)	Config	Mode	Channel	Frequency (MHz)	Measured Avg Power (dBm)						
					1RB			50%RB			100%RB
					0 Offset	25 Offset	49 Offset	0 Offset	13 Offset	25 Offset	
3	Extremity	QPSK	131987	1711.5	23.00	23.05	23.05	22.05	22.10	22.05	22.05
			132322	1745.0	22.70	22.85	22.85	21.70	21.85	21.90	21.80
			132657	1778.5	22.80	22.65	22.75	21.90	21.85	21.80	21.90
		16QAM	131987	1711.5	21.50	21.60	21.65	21.10	21.15	21.10	21.15
			132322	1745.0	21.40	21.35	21.20	20.90	20.90	21.05	20.95
			132657	1778.5	21.55	21.40	21.40	20.90	20.80	20.70	20.95
Ch.BW (MHz)	Config	Mode	Channel	Frequency (MHz)	Measured Avg Power (dBm)						
					1RB			50%RB			100%RB
					0 Offset	13 Offset	24 Offset	0 Offset	7 Offset	13 Offset	
1.4	Extremity	QPSK	131979	1710.7	23.30	23.50	23.10	23.35	23.40	23.30	22.30
			132322	1745.0	22.95	23.10	23.05	23.10	22.95	22.95	22.00
			132665	1779.3	23.10	23.10	23.10	23.25	23.20	23.05	22.00
		16QAM	131979	1710.7	21.85	21.95	21.85	22.05	22.05	22.15	21.45
			132322	1745.0	21.60	21.60	21.20	21.80	21.90	21.85	21.10
			132665	1779.3	21.60	21.55	21.55	21.90	21.95	21.95	20.85

9. Dielectric Property Measurements & System Check

9.1. Tissue Dielectric Parameters

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

IEC/IEEE 62209-1528:2020

Target Frequency (MHz)	Head Simulating Liquid	
	ϵ_r	σ (S/m)
4	55.00	0.75
13	55.00	0.75
30	55.00	0.75
150	52.30	0.76
300	45.30	0.87
450	43.50	0.87
750	41.90	0.89
835	41.50	0.90
900	41.50	0.97
915	41.50	0.98
1450	40.50	1.20
1500	40.40	1.23
1610	40.30	1.29
1640	40.20	1.31
1750	40.10	1.37
1800	40.00	1.40
1900	40.00	1.40
2000	40.00	1.40
2100	39.80	1.49
2300	39.50	1.67
2450	39.20	1.80
2600	39.00	1.96
3000	38.50	2.40
3500	37.90	2.91
4000	37.40	3.43
4500	36.80	3.94
5000	36.20	4.45
5100	36.10	4.55
5200	36.00	4.66
5250	35.90	4.71
5300	35.90	4.76
5400	35.80	4.86
5500	35.60	4.96
5600	35.50	5.07
5700	35.40	5.17
5750	35.40	5.22
5800	35.30	5.27
6000	35.10	5.48
6500	34.50	6.07
7000	33.90	6.65
7500	33.30	7.24
8000	32.70	7.84
8500	32.10	8.46
9000	31.60	9.08
9500	31.00	9.71
10000	30.40	10.40

NOTE: For convenience, permittivity and conductivity values at some frequencies that are not part of the original data from Drossos et al. [B60] or the extension to 5800 MHz are provided (i.e., the values shown in italics). These values were linearly interpolated between the values in this table that are immediately above and below these values, except the values at 6000 MHz that were linearly extrapolated from the values at 3000 MHz and 5800 MHz.

9.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

9.3. Numerical SAR Target Values

The numerical SAR target values are obtained from the reference standards. The measured values are normalised to 1 Watt.

System Dipole	Freq. (MHz)	Numerical SAR Target Values (W/kg)	
		1g/10g	Head
D750V3	750	1g	8.49
		10g	5.55
D900V2	900	1g	10.90
		10g	6.99
D1800V2	1800	1g	38.40
		10g	20.10
D1900V2	1900	1g	39.70
		10g	20.50

9.4. Dielectric Property Measurements & System Check Results

The 1-g SAR and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within $\pm 10\%$ of the manufacturer calibrated dipole SAR target and $\pm 15\%$ of the numerical target.

Site 63

750 Head

Date: 27 Sep 2022

Reference Dipole Antenna: D750V3 - SN1011

Simulant	Frequency (MHz)	Room Temp (°C)	Liquid Temp (°C)	Parameters	Measured Value	Target Type	Target Value	Deviation (%)	Limit (%)
Head	750	21.9	20.8	ϵ_r	42.84	Numerical	41.94	2.15	10
				σ (S/m)	0.89	Numerical	0.89	-0.04	10
				1g (W/kg)	8.24	Experimental	8.50	-3.11	10
						Numerical	8.49	-3.00	15
				10g (W/kg)	5.47	Experimental	5.57	-1.80	10
						Numerical	5.55	-1.45	15

900 Head

Date: 26 Sep 2022

Reference Dipole Antenna: D900V2 - SN035

Simulant	Frequency (MHz)	Room Temp (°C)	Liquid Temp (°C)	Parameters	Measured Value	Target Type	Target Value	Deviation (%)	Limit (%)
Head	900	21.9	20.8	ϵ_r	42.44	Numerical	41.50	2.25	10
				σ (S/m)	0.95	Numerical	0.97	-2.33	10
				1g (W/kg)	10.47	Experimental	11.00	-4.81	10
						Numerical	10.90	-3.93	15
				10g (W/kg)	6.83	Experimental	7.10	-3.85	10
						Numerical	6.99	-2.34	15

1800 Head

Date: 27 Sep 2022

Reference Dipole Antenna: D1800V2 - SN264

Simulant	Frequency (MHz)	Room Temp (°C)	Liquid Temp (°C)	Parameters	Measured Value	Target Type	Target Value	Deviation (%)	Limit (%)
Head	1800	21.9	20.8	ϵ_r	40.81	Numerical	40.00	2.03	10
				σ (S/m)	1.39	Numerical	1.40	-1.00	10
				1g (W/kg)	37.98	Experimental	38.50	-1.36	10
						Numerical	38.40	-1.10	15
				10g (W/kg)	19.96	Experimental	20.00	-0.20	10
						Numerical	20.10	-0.70	15

1800 Head

Date: 03 Oct 2022

Reference Dipole Antenna: D1800V2 - SN264

Simulant	Frequency (MHz)	Room Temp (°C)	Liquid Temp (°C)	Parameters	Measured Value	Target Type	Target Value	Deviation (%)	Limit (%)
Head	1800	20.4	20.6	ϵ_r	40.48	Numerical	40.00	1.19	10
				σ (S/m)	1.40	Numerical	1.40	-0.21	10
				1g (W/kg)	41.40	Experimental	38.50	7.54	10
						Numerical	38.40	7.82	15
				10g (W/kg)	21.86	Experimental	20.00	9.28	10
						Numerical	20.10	8.74	15

1900 Head

Date: 23 Sep 2022

Reference Dipole Antenna: D1900V2 - SN537

Simulant	Frequency (MHz)	Room Temp (°C)	Liquid Temp (°C)	Parameters	Measured Value	Target Type	Target Value	Deviation (%)	Limit (%)
Head	1900	20.5	20.7	ϵ_r	41.04	Numerical	40.00	2.61	10
				σ (S/m)	1.45	Numerical	1.40	3.24	10
				1g (W/kg)	38.15	Experimental	39.70	-3.90	10
						Numerical	39.70	-3.90	15
				10g (W/kg)	19.79	Experimental	20.80	-4.84	10
						Numerical	20.50	-3.45	15

10. Measurements, Examinations and Derived Result

10.1. Specific Absorption Rate - Test Results

10.1.1. LTE FDD 2 - Extremity (Limbs) 10g

Max Reported SAR = 1.67 (W/kg)

					For LTE Only		Power (dBm)		10g: SAR Results (W/kg)			
Mode	Dist. (mm)	EUT Position	Channel Number	Freq (MHz)	#RB	Start RB	Tune Up Limit	Meas.	Meas. SAR Level	Reported SAR	Notes	Plot No.
QPSK	0	Right	18700	1860.0	1	50	23.50	23.35	1.24	1.28	-	
QPSK	0	Right	18700	1860.0	50	0	22.50	22.25	0.96	1.01	-	
QPSK	0	Right	18900	1880.0	1	50	23.50	22.75	1.25	1.49	-	
QPSK	0	Right	19100	1900.0	1	99	23.50	23.00	1.49	1.67	-	001
QPSK	0	Front	18700	1860.0	1	50	23.50	23.35	0.14	0.14	-	
QPSK	0	Front	18700	1860.0	50	0	22.50	22.25	0.11	0.12	-	

Note(s):

10.1.2. LTE FDD 4 - Extremity (Limbs) 10g

Max Reported SAR = 0.78 (W/kg)

					For LTE Only		Power (dBm)		10g: SAR Results (W/kg)			
Mode	Dist. (mm)	EUT Position	Channel Number	Freq (MHz)	#RB	Start RB	Tune Up Limit	Meas.	Meas. SAR Level	Reported SAR	Notes	Plot No.
QPSK	0	Right	20050	1720.0	1	0	23.50	23.35	0.70	0.73	-	
QPSK	0	Right	20050	1720.0	50	0	22.50	22.50	0.56	0.56	-	
QPSK	0	Right	20175	1732.5	1	49	23.50	23.20	0.61	0.65	-	
QPSK	0	Right	20300	1745.0	1	99	23.50	23.05	0.71	0.78	-	002
QPSK	0	Front	20050	1720.0	1	0	23.50	23.35	0.18	0.18	-	
QPSK	0	Front	20050	1720.0	50	0	22.50	22.50	0.15	0.15	-	

Note(s):

10.1.3. LTE FDD 5 - Extremity (Limbs) 10g

Max Reported SAR = 0.35 (W/kg)

					For LTE Only		Power (dBm)		10g: SAR Results (W/kg)			
Mode	Dist. (mm)	EUT Position	Channel Number	Freq (MHz)	#RB	Start RB	Tune Up Limit	Meas.	Meas. SAR Level	Reported SAR	Notes	Plot No.
QPSK	0	Right	20600	844.0	1	49	23.50	23.25	0.28	0.29	-	
QPSK	0	Right	20600	844.0	25	25	22.50	22.05	0.24	0.27	-	
QPSK	0	Right	20450	829.0	1	0	23.50	23.00	0.27	0.30	-	
QPSK	0	Right	20525	836.5	1	24	23.50	22.95	0.31	0.35	-	003
QPSK	0	Front	20600	844.0	1	49	23.50	23.25	0.08	0.08	-	
QPSK	0	Front	20600	844.0	25	25	22.50	22.05	0.07	0.08	-	

Note(s):

10.1.4.LTE FDD 12 - Extremity (Limbs) 10g**Max Reported SAR = 1.02 (W/kg)**

					For LTE Only		Power (dBm)		10g: SAR Results (W/kg)			
Mode	Dist. (mm)	EUT Position	Channel Number	Freq (MHz)	#RB	Start RB	Tune Up Limit	Meas.	Meas. SAR Level	Reported SAR	Notes	Plot No.
QPSK	0	Right	23060	704.0	1	24	23.50	23.20	0.88	0.95	-	
QPSK	0	Right	23060	704.0	25	13	22.50	22.35	0.73	0.75	-	
QPSK	0	Right	23095	707.5	1	24	23.50	23.20	0.95	1.02	-	004
QPSK	0	Right	23130	711.0	1	24	23.50	23.05	0.89	0.99	-	
QPSK	0	Front	23060	704.0	1	24	23.50	23.20	0.28	0.30	-	
QPSK	0	Front	23060	704.0	25	13	22.50	22.35	0.22	0.22	-	

Note(s):**10.1.5.LTE FDD 66 - Extremity (Limbs) 10g****Max Reported SAR = 0.82 (W/kg)**

					For LTE Only		Power (dBm)		10g: SAR Results (W/kg)			
Mode	Dist. (mm)	EUT Position	Channel Number	Freq (MHz)	#RB	Start RB	Tune Up Limit	Meas.	Meas. SAR Level	Reported SAR	Notes	Plot No.
QPSK	0	Right	132072	1720.0	1	49	23.50	23.30	0.75	0.79	-	
QPSK	0	Right	132072	1720.0	50	0	22.50	22.35	0.59	0.61	-	
QPSK	0	Right	132322	1745.0	1	0	23.50	23.05	0.65	0.72	-	
QPSK	0	Right	132572	1770.0	1	49	23.50	23.00	0.73	0.82	-	005
QPSK	0	Front	132072	1720.0	1	49	23.50	23.30	0.13	0.14	-	
QPSK	0	Front	132072	1720.0	50	0	22.50	22.35	0.10	0.11	-	

Note(s):

10.2. SAR Measurement Variability

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

Limbs 10g-SAR:

- 1) Repeated measurement is not required when the original highest measured SAR is < 2.0 W/Kg; steps 2) through 4) do not apply.
- 2) When the original highest measured 10g-SAR is ≥ 2.00 W/Kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 3.625 W/kg (~10% from the 10g-SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 3.75 W/Kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Note: Measured 10g-SAR levels were below the thresholds hence measurement variability was not considered.

11.Highest Standalone SAR and Simultaneous Transmission

11.1.Highest Standalone Reported SAR

Individual Transmitter Evaluation per Band: Cellular

Cellular Limbs 10g

Exposure Configuration	Technology Band	Reported 10g - SAR (W/Kg)	Equipment Class	Highest Reported 10g -SAR (W/Kg)
		Core 0		
		Ant 1		
Limbs (Separation Distance 0mm)	LTE 2	1.67	PCB	1.67
	LTE 4	0.78		0.78
	LTE 5	0.35		0.35
	LTE 12	1.02		1.02
	LTE 66	0.82		0.82

11.2. Simultaneous Transmission analysis

Simultaneous transmission SAR test analysis is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna.

Note: No Simultaneous Transmission is required as DUT only support one Tx Antenna.