

承 認 書

SPECIFICATION FOR APPROVAL

客 戶:
CUSTOMER:客 戶 料 號:
CUST P/N:松 島 料 號:
FINE P/N:產 品 型 號:
DESC:日 期:
DATE:版 本:
Version:

手表发射线圈 6.5UH 0.08*24P*6TS

Watch transmitting coil 6.5UH

2024/07/20

A.0

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE
黃燕銘	寧元安	黃錦華	

深圳市松島科技有限公司

Shenzhen Songdao Technology Co., LTD

工廠地址： 东莞市东坑镇骏发三路 123 号三甲高新技术产业园 2 栋 8 楼

Address: 8th Floor, Building 2, Sanjia High-tech Industrial Park, No.123 Junfa Third Road, Dongkeng Town,
Dongguan City

TEL: 13728755750

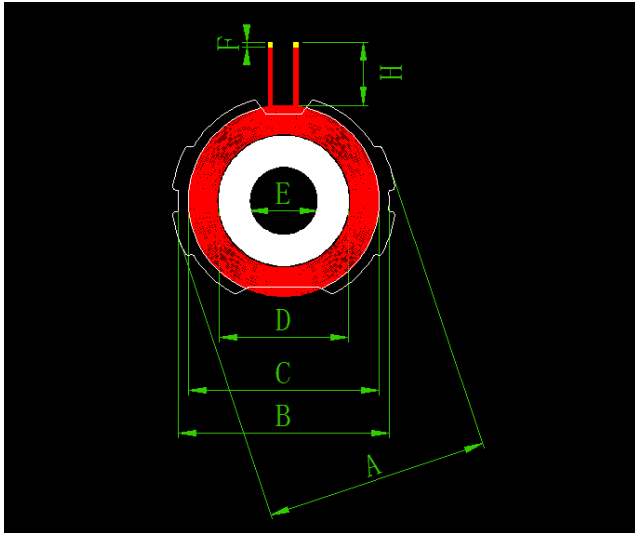
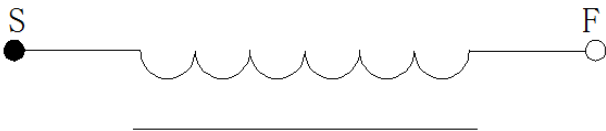
E-mail: 506388681@qq.com

版本變更履歷

Version Change History

[illegible]

SPECIFICATION

產 品 型 號: DESC	苹果发射线圈 15*21.5-6.5UH iWatch transmitting coil 15*21.5-6.5UH	版本 Rev: A.0	客戶 CUST:	XXX
			客户料号 CUST P/N:	
一、尺寸 DIMENSION:(mm) 			A	24.5±0.5
			B	23.7±0.5
			C	21.5±0.5
			D	14.5±0.3
			E	7.7±0.05
			F	3±2
			H	40±2
二、原理图 SCHEMATIC DIAGRAM: 			注:	
			1.交叉出线;Cross outlet	
			2.出线位置缠 mm(ref)宽度高温胶纸 Ts;Wrap mm(ref) width high-temperature adhesive paper around the outlet position	
			3.线圈贴圆形硬磁片两端带缺口，磁片尺寸 24.5±0.5mm, 内孔 7.7mm,厚度为 2.6±0.2mm	
			The coil is attached to the circular hard disk with notches at both ends, the disk size is 24.5±0.5mm, the inner hole is 7.7mm, and the thickness is 2.6±0.2mm	
			4.磁铁 N52, 7.5*2.2mm,背胶	
			Magnet N52, 7.5*2.2mm, backed by glue	

三、绕线参数 Winding Specification:

序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1	S	F	漆包线 0.08*24P	6Ts	CCW

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25±10°C, 湿度 RELATIVE HUMIDITY:65±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	3.1uH ±20%单独线圈 Single coil	100KHz/0.25V	LCZ METER 1062B
2	IND.	S-F	6.5 uH ±20%单独线圈 Single coil	100KHz/0.25V	LCZ METER 1062B
3	DCR	S-F	≤110m Ω	100KHz/0.25V	LCZ METER 502B
4	Q	S-F	≥32	100KHz/0.25V	LCZ METER 502B

拟制/日期 PREPARED BY/DATE	审核/日期 CHECKED BY/DATE
黄燕铭 2024/07/20	黄锦华 2024/07/20