



深圳市深广电子科技有限公司

Shenzhen Shenguang Electronic Technology Co.,LTD

客户/Client

Shenzhen LeChong Technology Co., Ltd.

名称/TYPE

A11/43.5/20.5/single coil/single slot PE black film/1.0 sponge backing adhesive/0.08 * 80 * 10TS/wire length
50MM/6.5UH

产品型号

Model NO

产品编号

Part numbering systey

客户料号

V99

Client p/NO

工程编号

Enginrer NO

TQE 1800510003

日期/Date

2025-4-15

本公司工程部/For Enginer Departner Only	
修改内容/Rvised Content	认可日期/APPproved Date

编制/Prepared

谢燕琪

审核/Checked

段家旺

认可/Approved

谢小仔

客户认可回签/Authorixed Signaturure Company Chop		
工程/ Enginrer	认可/QC APPproved	认可日期/APPproved

Address:Floor 401, Factory No. 1165, Guanhua Community, Guanlan Street, Longhua District, Shenzhen, China



深圳市深广电子科技有限公司

Shenzhen Shenguang Electronic Technology Co.,LTD

一、线圈工艺/Winding Procese:

NO	Winding	Wire gauge	Number of turns	Winding direction	Remarks
1	N1	2UEW-B-0.08*80P	10TS	CCW	
2					

二. 电气性能/FEATURES:

1.测试条件 (Test conditions) : 25°C,65%RH@100KHz/1V

1.1 电感量 (Inductance)

1.11 L0A (Individual coil) =4.1uH±20%

1.12 L0A(Coil+Magnetic Disc)=6.5uH±10%

1.2 Q 值=30MIN

1.3 直流电阻 (DCR) : 85mΩ MAX

1.4 工作温度(Operating Temperature): -25°C~85°C


2.测试仪器(Test instrument): L:1068+1310;**DCR**:502BC;**SIZE**:Callipers

3.材料清单

NO	project	material
1	WIRE	φ 0.08*8p 2UEW-1.15mm
2	FERRITE	43.5*5.3*0.8 Type slot ferrite hard magnet
3	GLUE	White glue
4	SOLDER	XCD-907B
5	Adhesive	1.0 Sponge backing adhesive+PE black film
6	High temperature adhesive	/
7		


Address:Floor 401, Factory No. 1165, Guanhua Community, Guanlan Street, Longhua District, Shenzhen, China

三. 电路图/CIRCUIT DIAGRAM



Unit: MM

四. 外形图/OUTSIDE DIAGRA

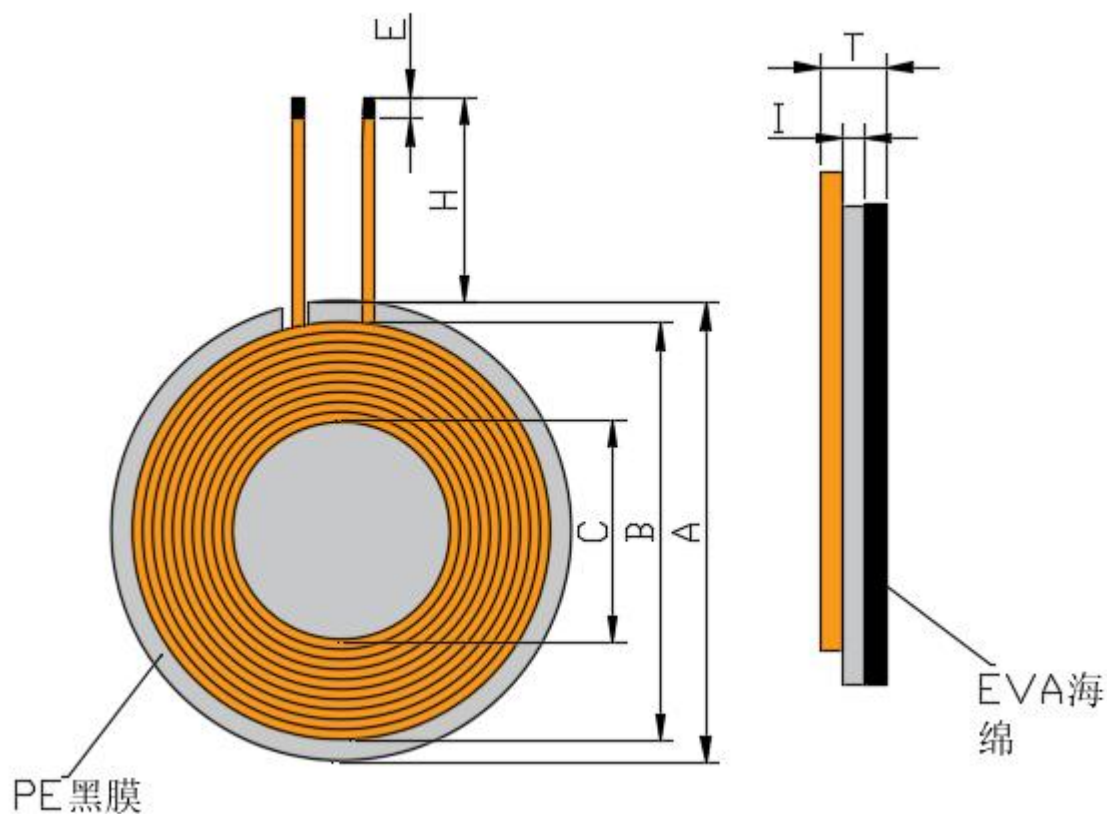


Note: The coil does not have high-temperature adhesive tape attached;

	A	B	C	E	H	I	T	
STD	43.5±0.5	39±1	20.5±0.5	2-5	50±2	0.8±0.1	3.0Max	

Unit: MM

五. 包装/PACKAGE

5.1 包装图片 Packing pictures:

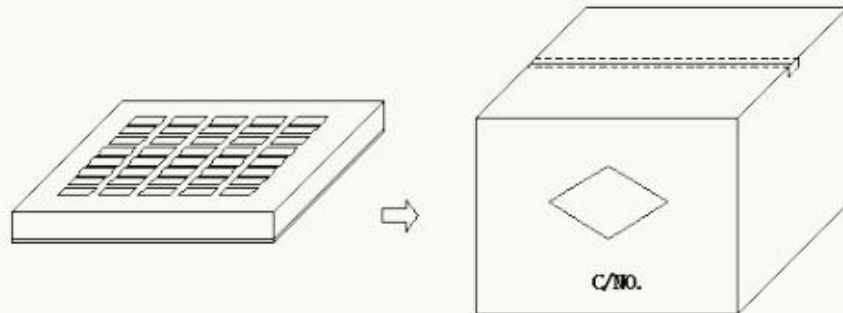

5.2 包装数量及规格 Packing Quantity:

项目 Item	数量 Quantity	材料规格 Material
盒 Box	350 Pcs	345*330*50 mm
箱 Big Carton	1400 Pcs	360*340*280 mm

5.3 包装以现有包装盘为参照标准，以实际出货包装为准，如有特要求可以定制。

The packaging shall be based on the existing packing plate and the actual delivery package shall prevail .If there is any requirement,we can customize it.



深圳市深广电子科技有限公司

Shenzhen Shenguang Electronic Technology Co.,LTD

六、贮存和使用条件 Storage and Use condition

6.1 贮存条件 Storage condition

6.1.1 建议贮存条件：温度 $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$ ，湿度 70% (Max.)

Recommended keeping conditions: $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$, 70%RH (Max.)

6.1.2 贮存期限：自生产之日起六个月内

Storage life : Within the limits of six months from being produced.

6.2 使用条件 Use condition

使用条件限制：温度 $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$ ，湿度 $\leq 90\%$

Use condition limit: $T=-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$, $\text{RH} \leq 90\%$.