

TEST REPORT

Report No.: BCTC2502890039-3E

Applicant: Acer India PVT Limited

Product Name: Notebook

Test Model: TravelLite TL15-43M

Tested Date: 2025-02-20 to 2025-04-09

Issued Date: 2025-04-09



Shenzhen BCTC Testing Co., Ltd.

FCC ID: 2A94K-TL15-43M

Product Name: Notebook

Trademark: 

Model/Type Reference: Travelite TL15-43M
Travelite TL15-43M-G2

Prepared For: Acer India PVT Limited

Address: Acer India PVT Limited, 6th Floor, Embassy Heights, No.13, Magrath Road, Bangalore, 560025, India

Manufacturer: Acer India PVT Limited

Address: Acer India PVT Limited, 6th Floor, Embassy Heights, No.13, Magrath Road, Bangalore, 560025, India

Prepared By: Shenzhen BCTC Testing Co., Ltd.

Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China.

Sample Received Date: 2025-02-20

Sample Tested Date: 2025-02-20 to 2025-04-09

Issue Date: 2025-04-09


Report No.: BCTC2502890039-3E

Test Standards: FCC Part15.247
ANSI C63.10-2013

Test Results: PASS

Remark: This is WIFI-2.4GHz band radio test report.

Tested by:



Shanshan. Zhang / Project Handler

Approved by:



Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.


Table Of Content

Test Report Declaration	Page
1. Version	5
2. Test Summary	6
3. Measurement Uncertainty	7
4. Product Information And Test Setup	8
4.1 Product Information.....	8
4.2 Test Setup Configuration	9
4.3 Support Equipment	9
4.4 Channel List	10
4.5 Test Mode	10
4.6 Table Of Parameters Of Text Software Setting.....	11
4.7 Antenna.....	11
5. Test Facility And Test Instrument Used.....	12
5.1 Test Facility.....	12
5.2 Test Instrument Used.....	12
6. Conducted Emissions.....	14
6.1 Block Diagram Of Test Setup.....	14
6.2 Limit	14
6.3 Test procedure	14
6.4 EUT operating Conditions	14
6.5 Test Result.....	15
7. Radiated Emissions.....	19
7.1 Block Diagram Of Test Setup.....	19
7.2 Limit	20
7.3 Test procedure	21
7.4 EUT Operating Conditions	22
7.5 Test Result.....	22
8. Radiated Band Emission Measurement And Restricted Bands Of Operation	35
8.1 Block Diagram Of Test Setup.....	35
8.2 Limit	35
8.3 Test procedure	36
8.4 EUT Operating Conditions	36
8.5 Test Result.....	37
9. Power Spectral Density Test	39
9.1 Block Diagram Of Test Setup.....	39
9.2 Limit	39
9.3 Test procedure	39
9.4 EUT Operating Conditions	39
9.5 Test Result.....	40
10. Bandwidth Test.....	50
10.1 Block Diagram Of Test Setup.....	50
10.2 Limit	50
10.3 Test procedure	50
10.4 EUT Operating Conditions	50
10.5 Test Result.....	51
11. Peak Output Power Test	61
11.1 Block Diagram Of Test Setup.....	61

11.2	Limit	61
11.3	Test Procedure	61
11.4	EUT Operating Conditions	61
11.5	Test Result.....	62
12.	100 kHz Bandwidth Of Frequency Band Edge	63
12.1	Block Diagram Of Test Setup.....	63
12.2	Limit	63
12.3	Test Procedure	63
12.4	EUT Operating Conditions	63
12.5	Test Result.....	64
13.	Duty Cycle Of Test Signal	94
13.1	Standard Requirement	94
13.2	Formula.....	94
13.3	Test Procedure	94
13.4	Test Result.....	94
14.	Antenna Requirement	101
14.1	Limit	101
14.1	Test Result.....	101
15.	EUT Photographs.....	102
16.	EUT Test Setup Photographs.....	103


(Note: N/A Means Not Applicable)

TEST
TO
OVER
t See

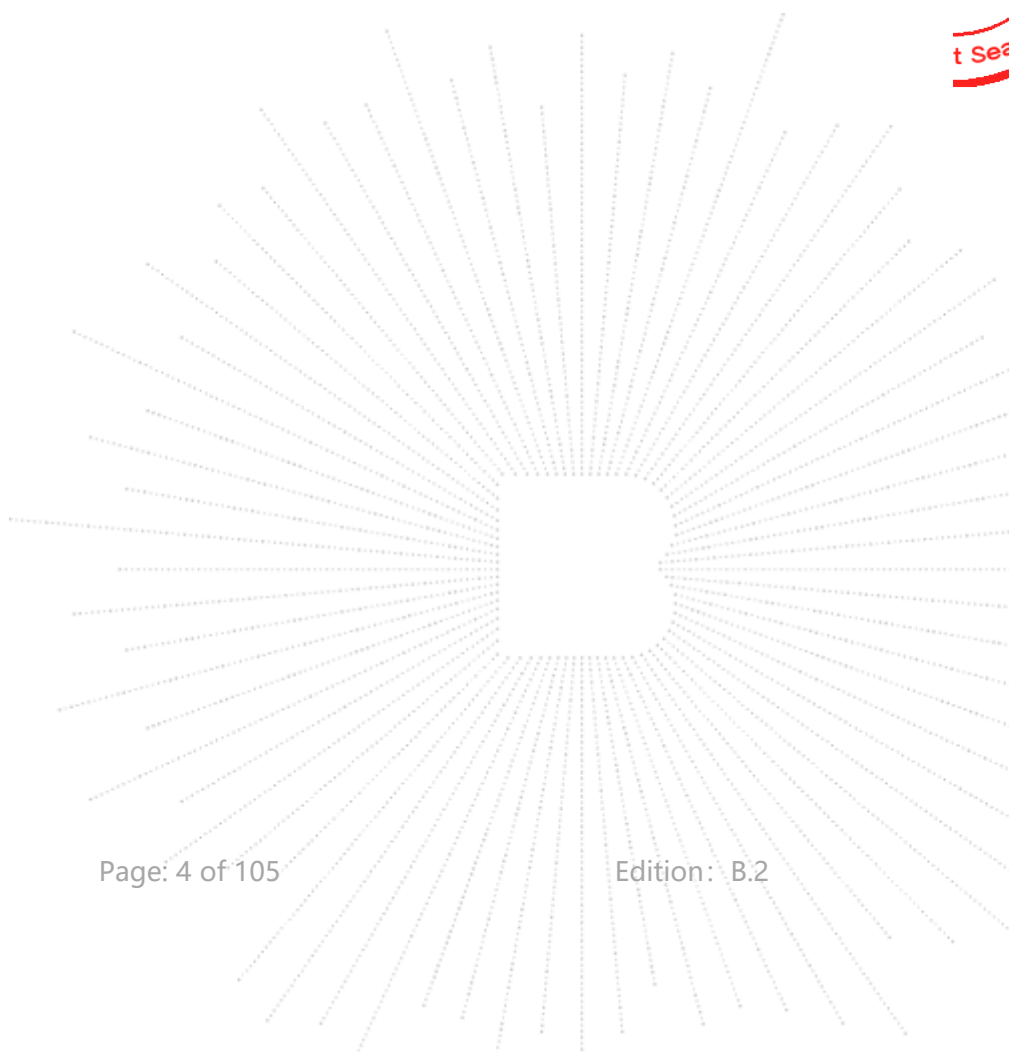

1. Version

Report No.	Issue Date	Description	Approved
BCTC2502890039-3E	2025-04-09	Original	Valid

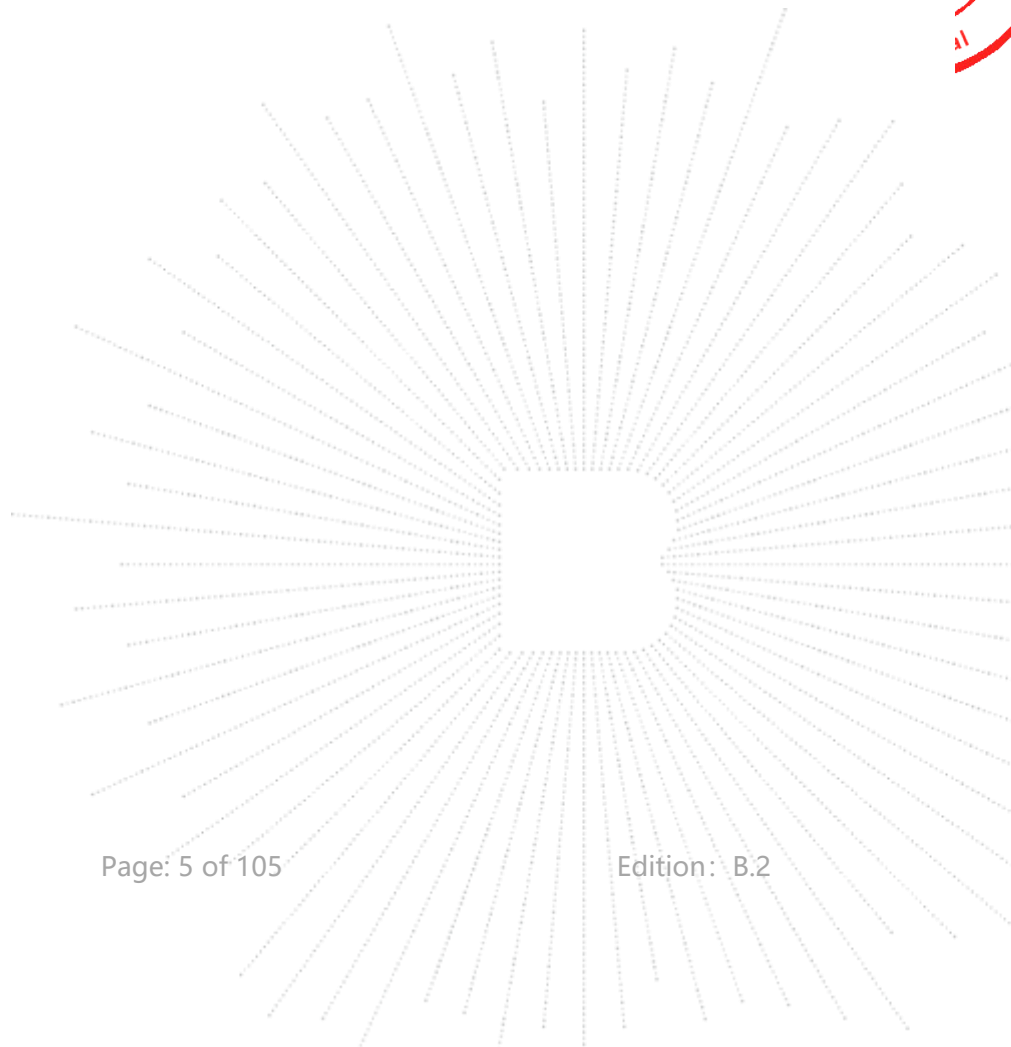

2. Test Summary

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No.	Results
1	Conducted Emission	15.207	PASS
2	6dB Bandwidth	15.247 (a)(2)	PASS
3	Peak Output Power	15.247 (b)	PASS
4	Radiated Spurious Emission	15.247 (d)	PASS
5	Power Spectral Density	15.247 (e)	PASS
6	Restricted Band of Operation	15.205	PASS
7	Band Edge (Out of Band Emissions)	15.247 (d)	PASS
8	Antenna Requirement	15.203	PASS

3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9KHz-30MHz)	U=3.7dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
3	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
4	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
5	Conducted Emission (150kHz-30MHz)	U=3.20dB
6	Conducted Adjacent channel power	U=1.38dB
7	Power Spectral Density	U=1.19dB
8	Conducted output power uncertainty Above 1G	U=1.576dB
9	Conducted output power uncertainty below 1G	U=1.28dB
10	Conducted spurious emissions	U=0.55dB
11	Occupied Bandwidth/Frequency Range	U=3.46%
12	humidity uncertainty	U=5.3%
13	Temperature uncertainty	U=0.59℃
14	Frequency Error	U=53.50Hz
15	Frequency Drift	U=0.64kHz

4. Product Information And Test Setup


4.1 Product Information

Model/Type Reference:	Travelite TL15-43M Travelite TL15-43M-G2
Model Differences:	All the model are the same circuit and RF module, except model names and appearance of the color.
Hardware Version:	N/A
Software Version:	N/A
Operation Frequency:	802.11b/g/n/ax20MHz:2412~2462 MHz 802.11n/ax40MHz:2422~2452 MHz
Bit Rate of Transmitter:	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n Up to 300Mbps 802.11ax Up to 400Mbps
Type of Modulation:	WIFI: OFDM/DSSS/OFDMA
Number Of Channel:	802.11b/g/n/ax20MHz:11 CH 802.11n/ax40MHz: 7 CH
Antenna installation:	Internal antenna*2
Antenna Gain:	WiFi (2.4GHz): Antenna A: 1.96 dBi, Antenna B: 2.16 dBi Remark: ☒ The antenna gain of the product comes from the antenna report provided by the customer, and the test data is affected by the customer information. ☐ The antenna gain of the product is provided by the customer, and the test data is affected by the customer information.
Ratings:	DC 20V from adapter or DC 11.4V from battery
Adapter 1:	MODEL: PA-1650-58 INPUT: 100-240V~1.6A 50/60Hz OUTPUT: 5.0V ===3.0A / 9.0V ===3.0A / 12.0V ===3.0A 5.0V/15.0W 15.0V ===3.0A / 20.0V ===3.25A 20.0V/65.0W
Adapter 2:	MODEL: ADP-65KE D INPUT: 100-240V~1.7A 50/60Hz OUTPUT: 5.0V ===3.0A, 15.0W / 9.0V ===3.0A / 12.0V ===3.0A 15.0V ===3.0A / 20.0V ===3.25A, 65.0W

4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

Conducted Emission and Radiated Spurious Emission:

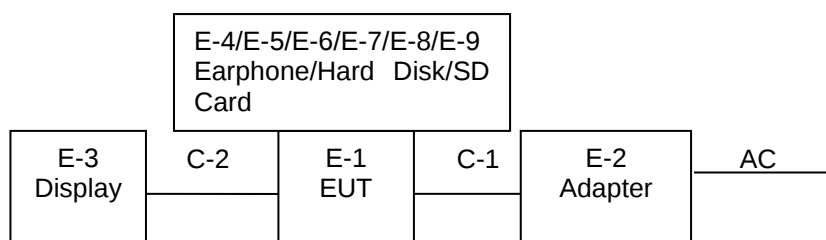

4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	Notebook		TravelLite TL15-43M	---	EUT
E-2	Adapter	---	PA-1650-58/ADP-65KE D	---	Auxiliary
E-3	Display	Xiaomi	L43M7-ES	---	Auxiliary
E-4	Earphone	SONY	IER-M7	---	Auxiliary
E-5	Hard disk	UGREEN	CM347	---	Auxiliary
E-6	Hard disk	WD	SN770	---	Auxiliary
E-7	Hard disk	Samsung	990PRO	---	Auxiliary
E-8	Hard disk	WD	WD Elements SE	---	Auxiliary
E-9	SD card	SanDisk	32G	---	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note
C-1	---	---	1m	DC cable unshielded
C-2	---	---	0.8m	HDMI cable unshielded

Notes:

- All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

Channel List for 802.11b/g/n/ax(20)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	02	2417	03	2422
04	2427	05	2432	06	2437
07	2442	08	2447	09	2452
10	2457	11	2462		

Channel List for 802.11n/ax(40)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	04	2427	05	2432
06	2437	07	2442	08	2447
09	2452				

4.5 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

For All Mode	Description	Modulation Type
Mode 1	CH 01	802.11b
Mode 2	CH 06	
Mode 3	CH 11	
Mode 4	CH 01	802.11g
Mode 5	CH 06	
Mode 6	CH 11	
Mode 7	CH 01	802.11n20/ 802.11ax20
Mode 8	CH 06	
Mode 9	CH 11	
Mode 10	CH 03	802.11n40/ 802.11ax40
Mode 11	CH 06	
Mode 12	CH 09	
Mode 13	Link mode (Conducted emission and Radiated emission)	

Notes:

1. The measurements are performed at the highest, middle, lowest available channels.
2. The measurements are performed at all Bit Rate of Transmitter, the worst data was reported
3. According to ANSI C63.10 standards, the test results are both the "worst case" and "worst setup" 11Mbps for 802.11b,6Mbps for 802.11g,13Mbps for 802.11n(H20), 54Mbps for 802.11n(H40), 400Mbps for 802.11ax20 and 802.11ax40.
4. This product does not support RU mode.

4.6 Table Of Parameters Of Text Software Setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Test software Version	CMD		
Frequency	2412 MHz	2437 MHz	2462 MHz
Parameters	DEF	DEF	DEF
Frequency	2422MHz	2437MHz	2452MHz
Parameters	DEF	DEF	DEF

4.7 Antenna

Table for Internal antenna

Ant.	Brand	Model Name	Antenna Type	Gain (dBi)	NOTE
A	N/A	N/A	Internal antenna	1.96	N/A
B	N/A	N/A	Internal antenna	2.16	N/A

EUT has two Internal antennas with Max gain GANT 0dBi on every antenna, CDD device with one spatial streams, also can operate with one spatial streams according to KDB662911 D01 v02r01, Directional gain= GANT + Array Gain, where Array Gain is as follows.

1) For power spectral density (PSD) measurements,
 $\text{Array Gain} = 10 \log(\text{NANT}/\text{NSS}) \text{ dB} = 10 \log(2/1) = 3.01 \text{ dB}$,
 So the directional gain for PSD is 5.07 dBi

2) For power measurements,
 The Array gain = 0 dB for $\text{NANT} \leq 4$,
 So the directional gain for Power measurements is 2.16 dBi

5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address:1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

A2LA certificate registration number is: CN1212

ISED Registered No.: 23583

ISED CAB identifier: CN0017

5.2 Test Instrument Used

Conducted Emissions Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Receiver	R&S	ESR3	102075	May 16, 2024	May 15, 2025
LISN	R&S	ENV216	101375	May 16, 2024	May 15, 2025
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\
Pulse limiter	Schwarzbeck	VTSD 9561-F	01323	May 16, 2024	May 15, 2025


RF Conducted Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Power Metter	Keysight	E4419	\	May 16, 2024	May 15, 2025
Power Sensor (AV)	Keysight	E9300A	\	May 16, 2024	May 15, 2025
Signal Analyzer20kHz-26.5GHz	Keysight	N9020A	MY49100060	May 16, 2024	May 15, 2025
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 16, 2024	May 15, 2025
Radio frequency control box	MAIWEI	MW100-RFC B	\	\	\
Software	MAIWEI	MTS 8310	\	\	\

Radiated Emissions Test (966 Chamber01)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	May 15, 2023	May 14, 2026
Receiver	R&S	ESR3	102075	May 16, 2024	May 15, 2025
Receiver	R&S	ESRP	101154	May 16, 2024	May 15, 2025
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 16, 2024	May 15, 2025
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	942	May 21, 2024	May 20, 2025
Loop Antenna(9KHz -30MHz)	Schwarzbeck	FMZB1519B	00014	May 21, 2024	May 20, 2025
Amplifier	SKET	LAPA_01G18 G-45dB	SK2021040901	May 16, 2024	May 15, 2025
Horn Antenna	Schwarzbeck	BBHA9120D	1541	May 21, 2024	May 20, 2025
Amplifier(18G Hz-40GHz)	MITEQ	TTA1840-35-HG	2034381	May 16, 2024	May 15, 2025
Horn Antenn(18GHz-40GHz)	Schwarzbeck	BBHA9170	00822	May 21, 2024	May 20, 2025
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 16, 2024	May 15, 2025
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

SHENZHEN

6. Conducted Emissions

6.1 Block Diagram Of Test Setup

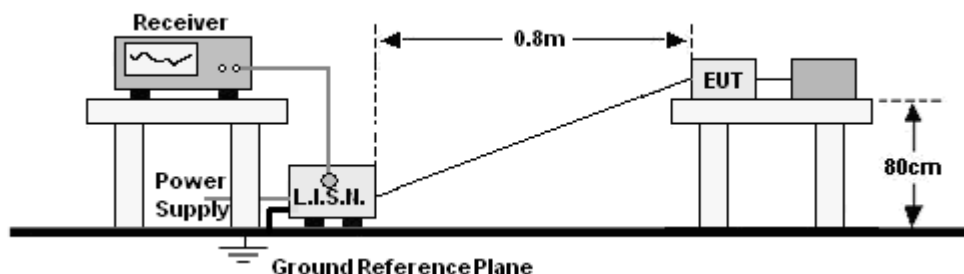

6.2 Limit

Frequency (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:

- *Decreasing linearly with logarithm of frequency.
- The lower limit shall apply at the transition frequencies.

6.3 Test procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

6.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

6.5 Test Result

Temperature:	24.3 °C	Relative Humidity:	53%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 13(Adapter 1)	Polarization:	L

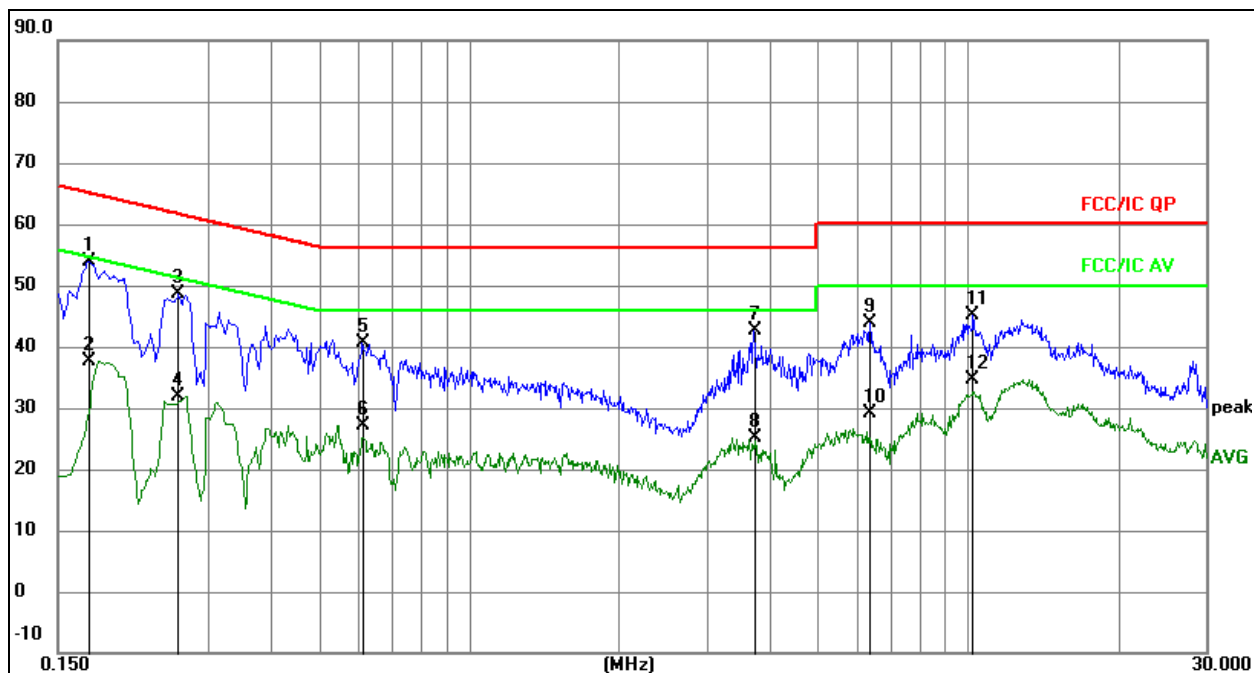


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz		dB	dBuV	dBuV	dB	Detector
1	*	0.1722	33.87	20.07	53.94	64.85	-10.91	QP
2		0.1722	17.60	20.07	37.67	54.85	-17.18	AVG
3		0.2615	28.61	20.07	48.68	61.38	-12.70	QP
4		0.2615	11.85	20.07	31.92	51.38	-19.46	AVG
5		0.6108	20.47	20.09	40.56	56.00	-15.44	QP
6		0.6108	7.10	20.09	27.19	46.00	-18.81	AVG
7		3.7198	22.48	20.13	42.61	56.00	-13.39	QP
8		3.7198	5.04	20.13	25.17	46.00	-20.83	AVG
9		6.3520	23.61	20.16	43.77	60.00	-16.23	QP
10		6.3520	9.00	20.16	29.16	50.00	-20.84	AVG
11		10.2332	24.84	20.18	45.02	60.00	-14.98	QP
12		10.2332	14.41	20.18	34.59	50.00	-15.41	AVG

Temperature:	24.3 °C	Relative Humidity:	53%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 13(Adapter 1)	Polarization:	N

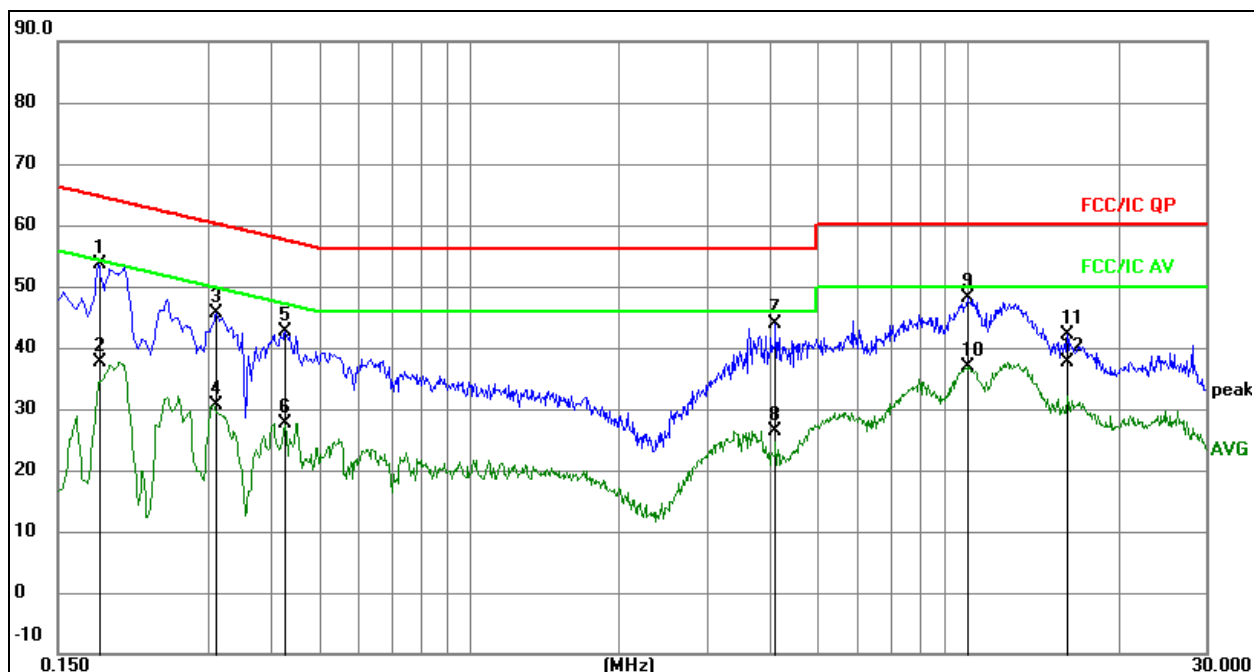


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1806	33.56	20.07	53.63	64.46	-10.83	QP
2		0.1806	17.48	20.07	37.55	54.46	-16.91	AVG
3		0.3116	25.65	20.07	45.72	59.93	-14.21	QP
4		0.3116	10.58	20.07	30.65	49.93	-19.28	AVG
5		0.4282	22.58	20.08	42.66	57.29	-14.63	QP
6		0.4282	7.65	20.08	27.73	47.29	-19.56	AVG
7		4.1137	23.71	20.14	43.85	56.00	-12.15	QP
8		4.1137	6.29	20.14	26.43	46.00	-19.57	AVG
9		9.9657	28.02	20.17	48.19	60.00	-11.81	QP
10		9.9657	16.76	20.17	36.93	50.00	-13.07	AVG
11		15.8014	21.92	20.31	42.23	60.00	-17.77	QP
12		15.8014	17.29	20.31	37.60	50.00	-12.40	AVG

Temperature:	24.3 °C	Relative Humidity:	53%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 13(Adapter 2)	Polarization:	L

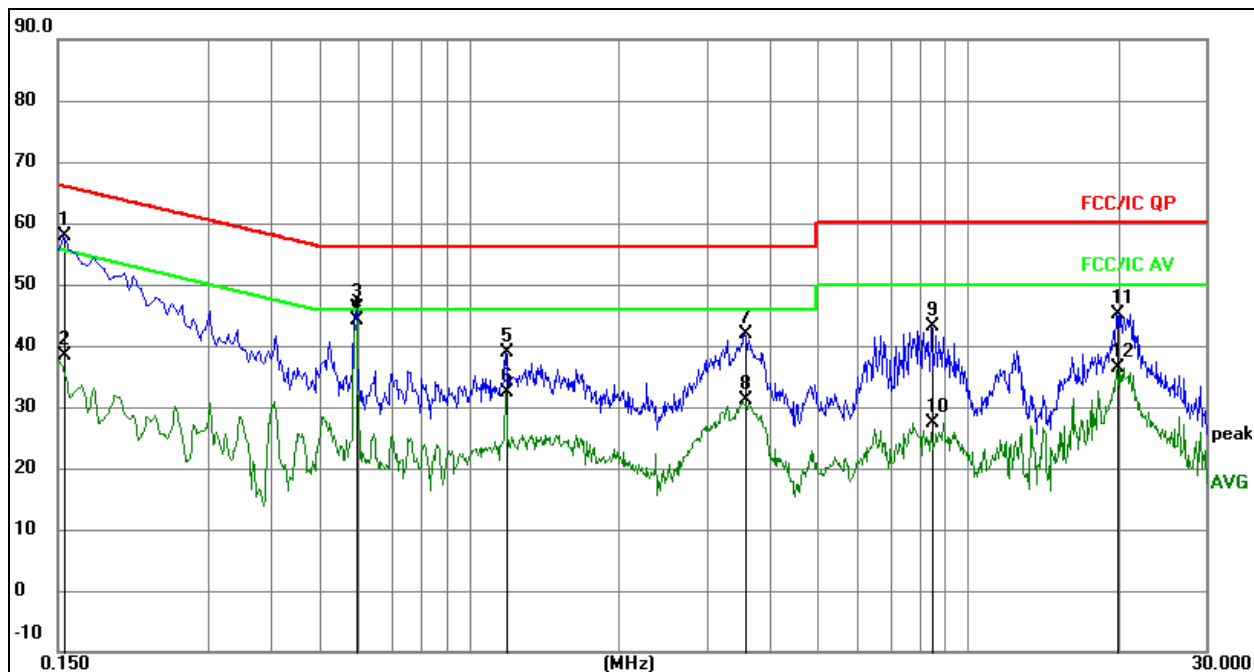


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level dB	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1545	37.93	20.07	58.00	65.75	-7.75	QP
2		0.1545	18.21	20.07	38.28	55.75	-17.47	AVG
3		0.5955	26.04	20.08	46.12	56.00	-9.88	QP
4	*	0.5955	24.05	20.08	44.13	46.00	-1.87	AVG
5		1.1895	18.91	20.09	39.00	56.00	-17.00	QP
6		1.1895	12.35	20.09	32.44	46.00	-13.56	AVG
7		3.5655	21.64	20.13	41.77	56.00	-14.23	QP
8		3.5655	11.00	20.13	31.13	46.00	-14.87	AVG
9		8.4614	23.03	20.16	43.19	60.00	-16.81	QP
10		8.4614	7.14	20.16	27.30	50.00	-22.70	AVG
11		19.9095	24.83	20.33	45.16	60.00	-14.84	QP
12		19.9095	16.09	20.33	36.42	50.00	-13.58	AVG

Temperature:	24.3 °C	Relative Humidity:	53%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 13(Adapter 2)	Polarization:	N

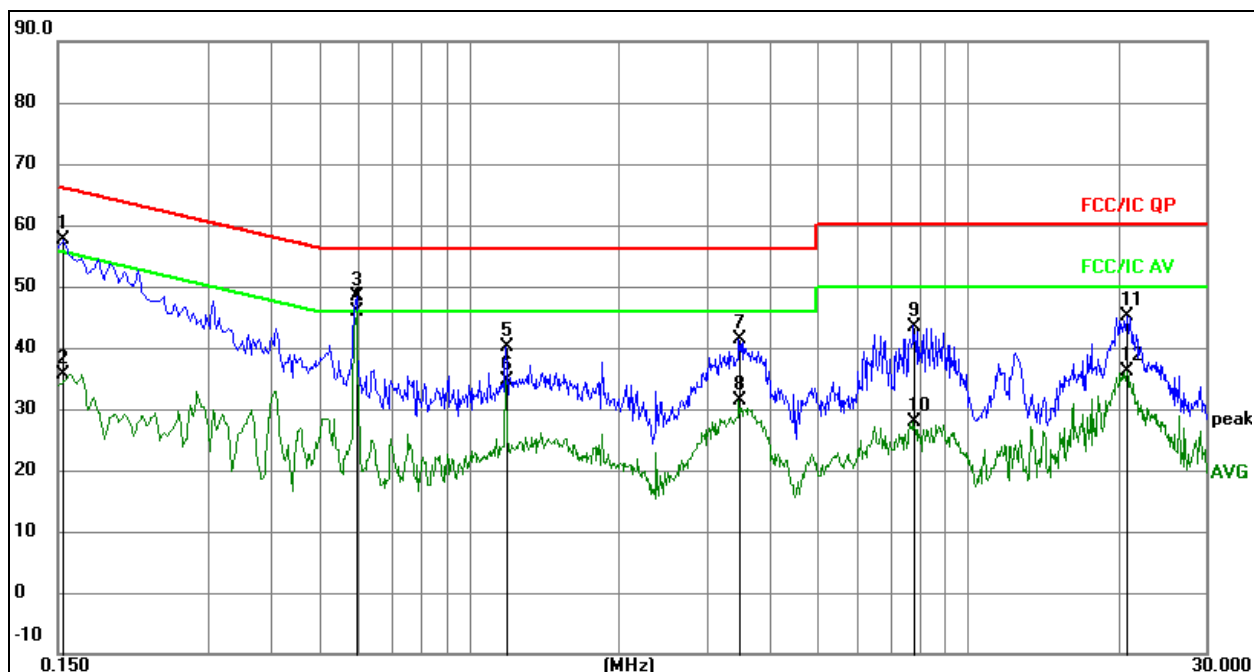
Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1539	37.66	20.07	57.73	65.79	-8.06	QP
2		0.1539	15.68	20.07	35.75	55.79	-20.04	AVG
3		0.5948	28.21	20.08	48.29	56.00	-7.71	QP
4	*	0.5948	25.74	20.08	45.82	46.00	-0.18	AVG
5		1.1844	20.07	20.09	40.16	56.00	-15.84	QP
6		1.1844	14.43	20.09	34.52	46.00	-11.48	AVG
7		3.4722	21.25	20.13	41.38	56.00	-14.62	QP
8		3.4722	11.35	20.13	31.48	46.00	-14.52	AVG
9		7.7689	23.34	20.16	43.50	60.00	-16.50	QP
10		7.7689	7.75	20.16	27.91	50.00	-22.09	AVG
11		20.8137	24.74	20.32	45.06	60.00	-14.94	QP
12		20.8137	15.89	20.32	36.21	50.00	-13.79	AVG


7. Radiated Emissions

7.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

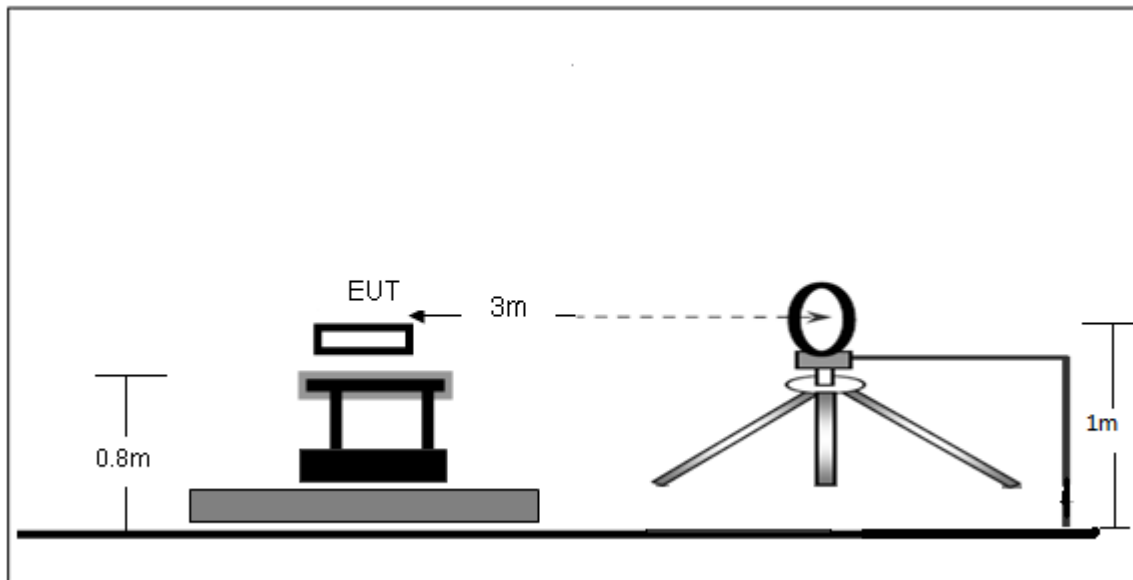

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

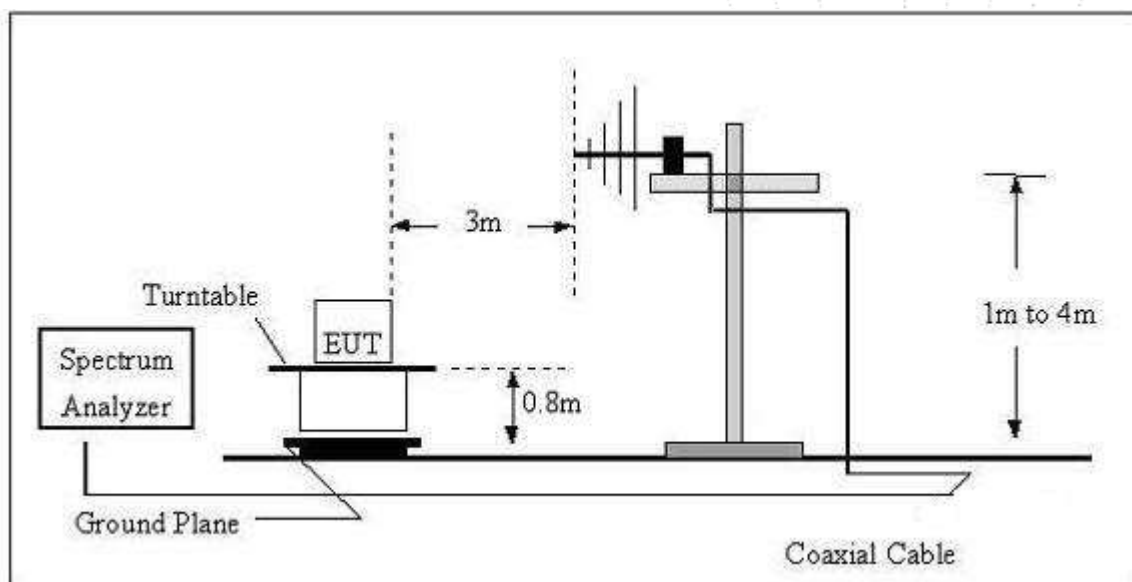

(C) Radiated Emission Test-Up Frequency Above 1GHz

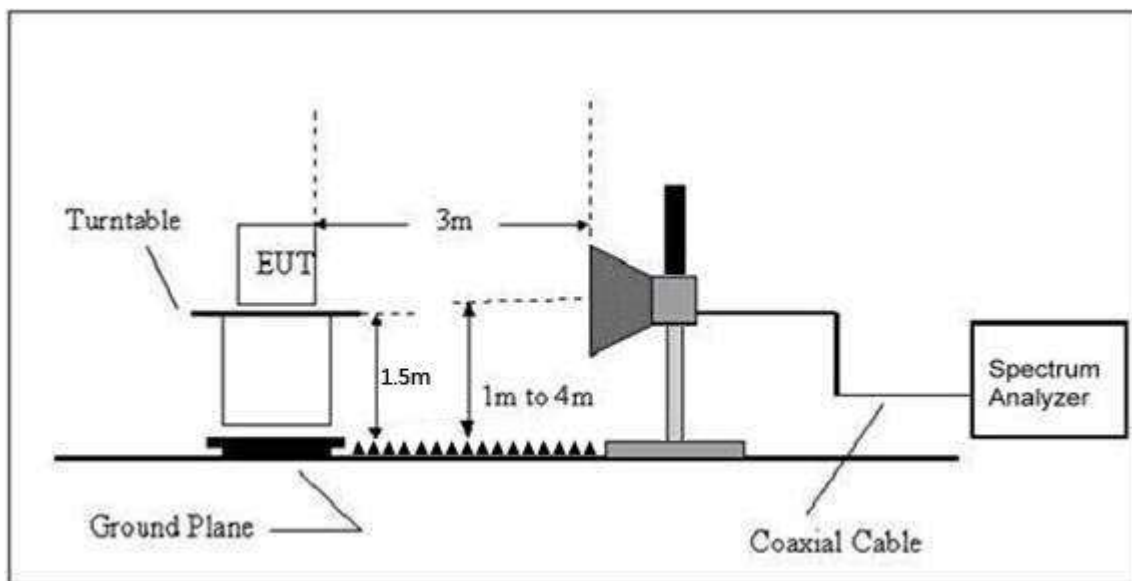

7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength uV/m	Distance (m)	Field Strength Limit at 3m Distance	
			uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	$10000 * 2400/F(\text{kHz})$	$20\log(2400/F(\text{kHz})) + 80$
0.490 ~ 1.705	24000/F(kHz)	30	$100 * 24000/F(\text{kHz})$	$20\log(24000/F(\text{kHz})) + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log(30) + 40$
30 ~ 88	100	3	100	$20\log(100)$
88 ~ 216	150	3	150	$20\log(150)$
216 ~ 960	200	3	200	$20\log(200)$
Above 960	500	3	500	$20\log(500)$

Limits Of Radiated Emission Measurement (Above 1000MHz)

Frequency (MHz)	Limit (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54

Notes:

- (1)The limit for radiated test was performed according to FCC PART 15C.
- (2)The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Frequency Range Of Radiated Measurement

(a) For an intentional radiator the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in this paragraph:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator operates at or above 95 GHz: To the third harmonic of the highest fundamental frequency or to 750 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (5) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a) (1)through (4) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this section, whichever is the higher frequency range of investigation.

7.3 Test procedure

Receiver Parameter	Setting
Attenuation	Auto
9kHz~150kHz	RBW 200Hz for QP
150kHz~30MHz	RBW 9kHz for QP
30MHz~1000MHz	RBW 120kHz for QP

Spectrum Parameter	Setting
1-25GHz	RBW 1 MHz /VBW 1 MHz for Peak, RBW 1 MHz / VBW 10Hz for Average

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middlest channel, the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

7.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

7.5 Test Result

Below 30MHz

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz, DC 11.4V
Test Mode:	Mode 13	Polarization :	---

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS


Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.

Temperature:	24.1 °C	Relative Humidity:	51%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 13 (Adapter 1)	Polarization:	Horizontal

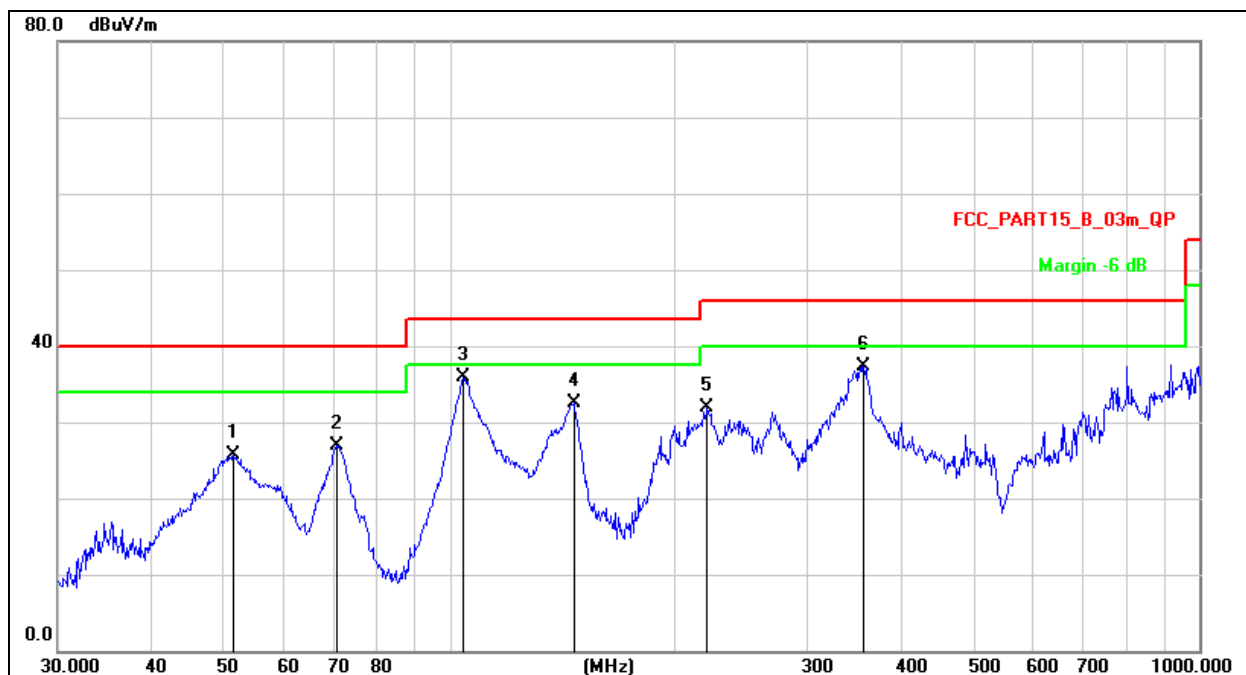


Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Measurement = Reading Level + Correct Factor
- Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		51.4807	39.77	-14.10	25.67	40.00	-14.33	QP
2		70.8315	45.08	-18.15	26.93	40.00	-13.07	QP
3	*	104.1701	52.07	-16.22	35.85	43.50	-7.65	QP
4		146.3735	51.59	-19.18	32.41	43.50	-11.09	QP
5		220.6171	46.98	-15.13	31.85	46.00	-14.15	QP
6		356.6758	48.64	-11.39	37.25	46.00	-8.75	QP

Temperature:	24.1 °C	Relative Humidity:	51%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 13 (Adapter 1)	Polarization:	Vertical

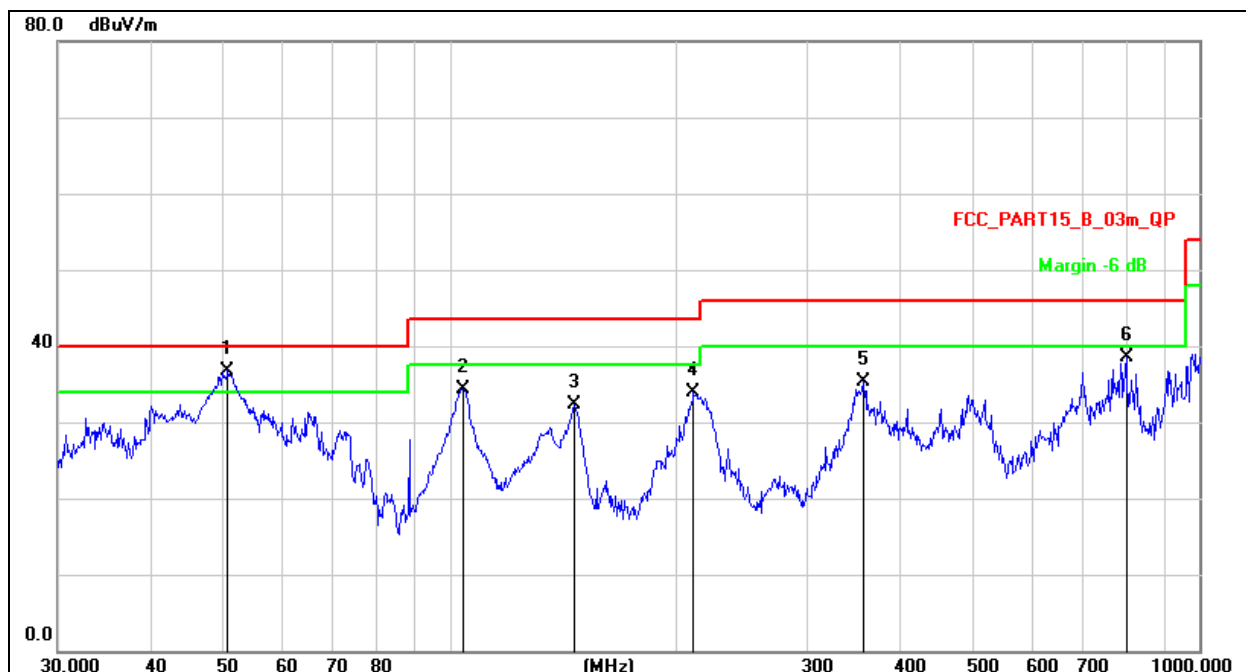


Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Measurement = Reading Level + Correct Factor
- Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	*	50.5860	50.78	-13.98	36.80	40.00	-3.20	QP
2		104.1701	50.57	-16.22	34.35	43.50	-9.15	QP
3		146.3735	51.47	-19.18	32.29	43.50	-11.21	QP
4		211.5265	49.24	-15.39	33.85	43.50	-9.65	QP
5		356.6758	46.70	-11.39	35.31	46.00	-10.69	QP
6		798.9797	42.97	-4.41	38.56	46.00	-7.44	QP

CO.LTD

Temperature:	24.1 °C	Relative Humidity:	51%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 13 (Adapter 2)	Polarization:	Horizontal

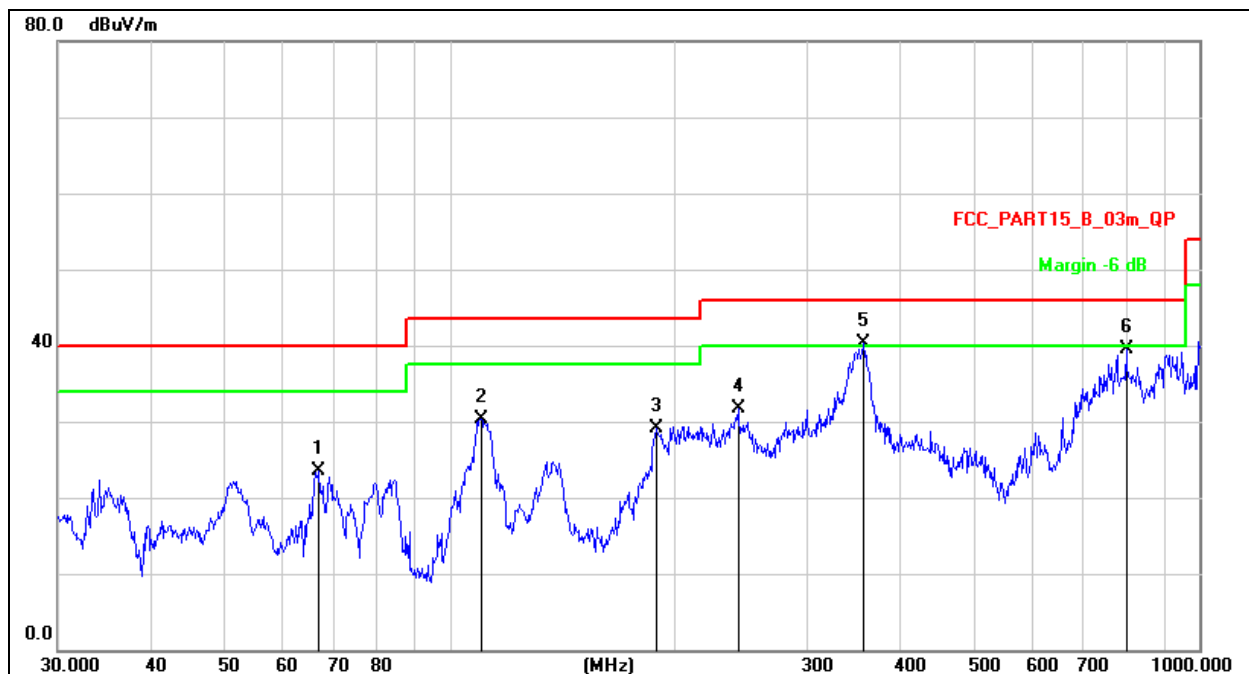


Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Measurement = Reading Level + Correct Factor
- Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		66.9669	40.63	-17.17	23.46	40.00	-16.54	QP
2		110.1816	47.04	-16.64	30.40	43.50	-13.10	QP
3		188.4125	45.75	-16.58	29.17	43.50	-14.33	QP
4		242.5253	46.12	-14.50	31.62	46.00	-14.38	QP
5	*	356.6758	51.69	-11.39	40.30	46.00	-5.70	QP
6		798.9797	43.82	-4.41	39.41	46.00	-6.59	QP

Temperature:	24.1 °C	Relative Humidity:	51%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 13 (Adapter 2)	Polarization:	Vertical

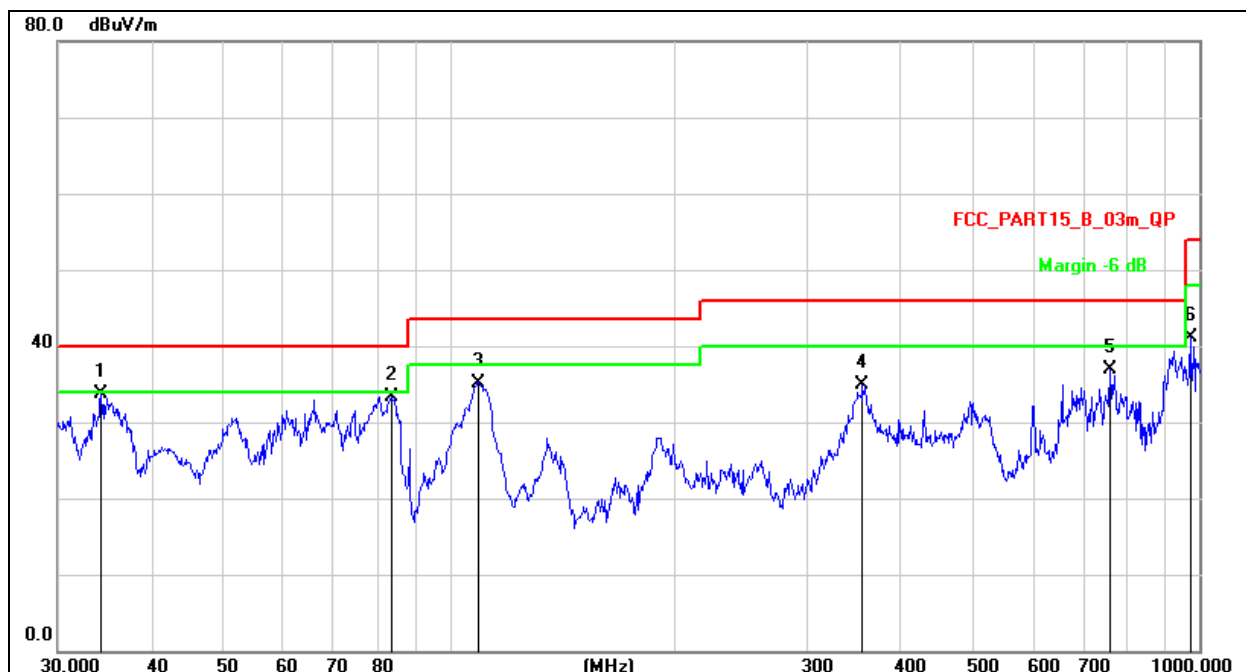


Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Measurement = Reading Level + Correct Factor
- Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	*	34.2760	49.57	-15.82	33.75	40.00	-6.25	QP
2		83.5222	52.32	-18.92	33.40	40.00	-6.60	QP
3		109.0286	51.76	-16.56	35.20	43.50	-8.30	QP
4		355.4273	46.28	-11.41	34.87	46.00	-11.13	QP
5		760.7036	41.84	-4.86	36.98	46.00	-9.02	QP
6		972.3374	43.82	-2.68	41.14	54.00	-12.86	QP

Temperature:	24.1 °C	Relative Humidity:	51%RH
Pressure:	101KPa	Test Voltage:	DC 11.4V
Test Mode:	Mode 13	Polarization:	Horizontal

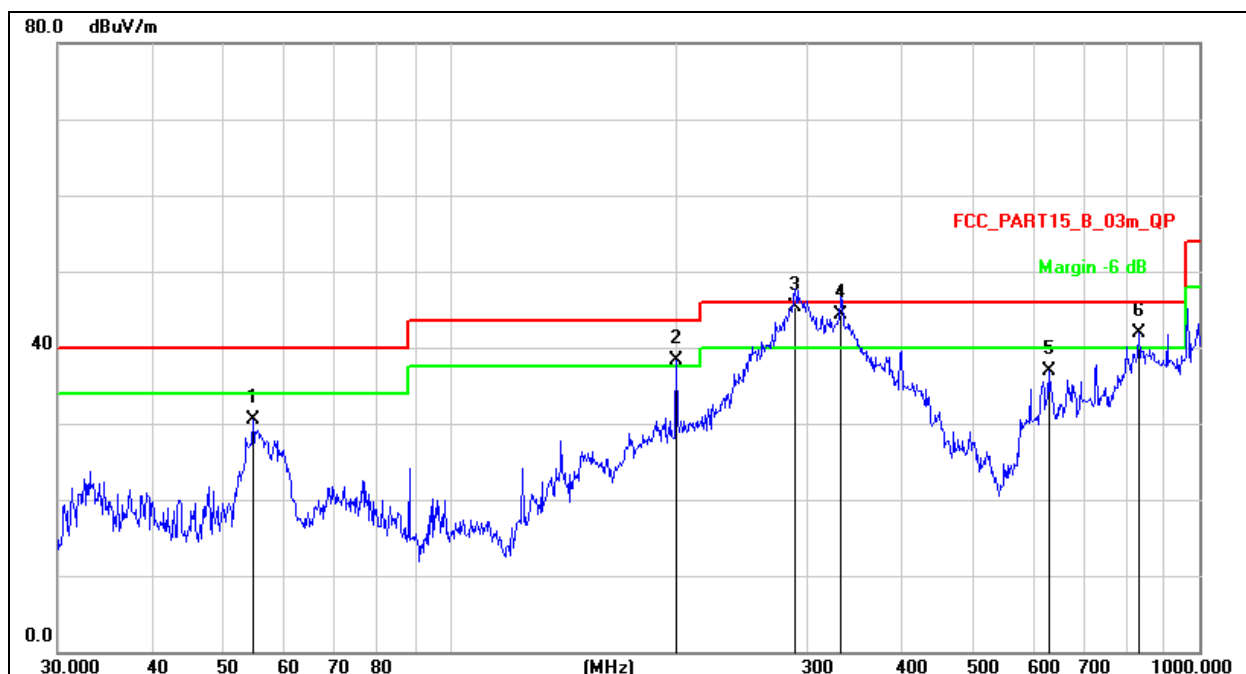


Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Measurement = Reading Level + Correct Factor
- Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		54.6428	45.13	-14.53	30.60	40.00	-9.40	QP
2	!	200.6880	54.02	-15.70	38.32	43.50	-5.18	QP
3	*	289.0020	58.77	-13.47	45.30	46.00	-0.70	QP
4	!	332.5187	56.40	-12.10	44.30	46.00	-1.70	QP
5		629.4772	43.32	-6.51	36.81	46.00	-9.19	QP
6	!	830.4002	46.05	-4.14	41.91	46.00	-4.09	QP

Temperature:	24.1 °C	Relative Humidity:	51%RH
Pressure:	101KPa	Test Voltage:	DC 11.4V
Test Mode:	Mode 13	Polarization:	Vertical

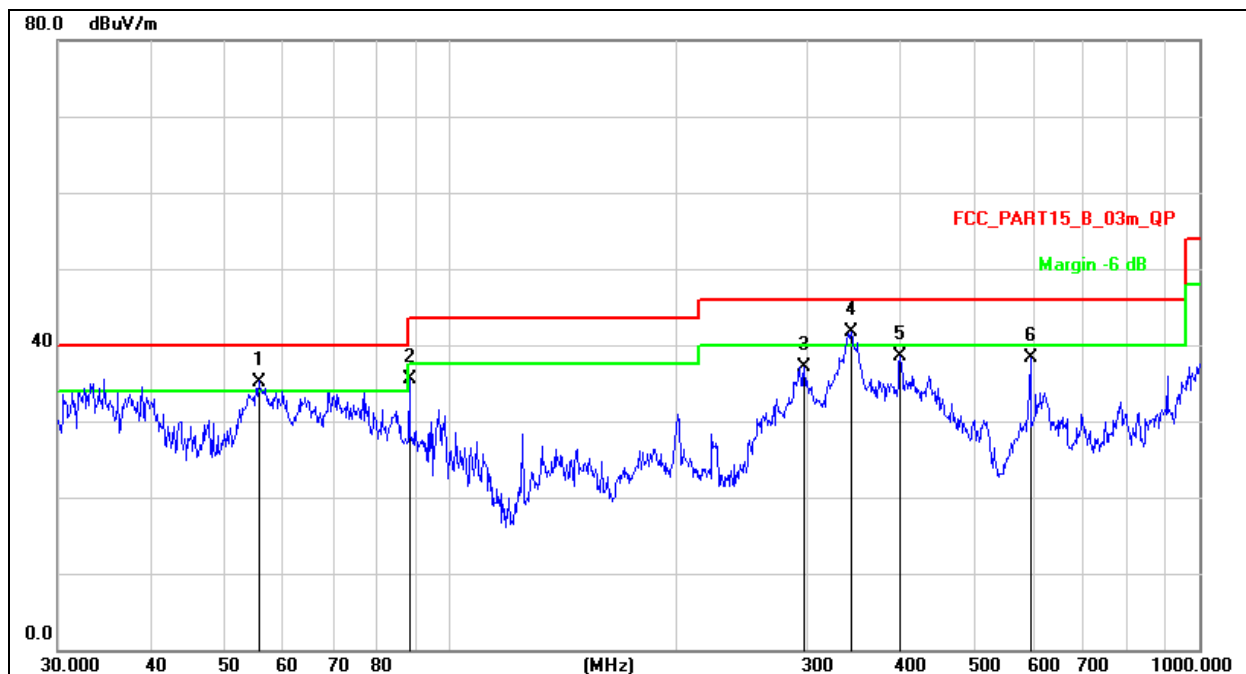

Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Measurement = Reading Level + Correct Factor
- Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	!	55.6094	49.86	-14.66	35.20	40.00	-4.80	QP
2		88.3421	53.30	-17.79	35.51	43.50	-7.99	QP
3		297.2241	50.38	-13.30	37.08	46.00	-8.92	QP
4	*	343.1800	53.47	-11.72	41.75	46.00	-4.25	QP
5		399.0302	49.33	-10.85	38.48	46.00	-7.52	QP
6		595.1329	45.58	-7.35	38.23	46.00	-7.77	QP

Between 1GHz – 25GHz

802.11b

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2412MHz							
V	4824.00	70.94	-19.95	50.99	74.00	-23.01	PK
V	4824.00	60.44	-19.95	40.49	54.00	-13.51	AV
V	7236.00	63.79	-14.14	49.65	74.00	-24.35	PK
V	7236.00	53.57	-14.14	39.43	54.00	-14.57	AV
H	4824.00	67.16	-19.95	47.21	74.00	-26.79	PK
H	4824.00	57.66	-19.95	37.71	54.00	-16.29	AV
H	7236.00	61.04	-14.14	46.90	74.00	-27.10	PK
H	7236.00	52.56	-14.14	38.42	54.00	-15.58	AV
Middle channel:2437MHz							
V	4874.00	67.27	-19.85	47.42	74.00	-26.58	PK
V	4874.00	61.06	-19.85	41.21	54.00	-12.79	AV
V	7311.00	59.32	-13.93	45.39	74.00	-28.61	PK
V	7311.00	50.00	-13.93	36.07	54.00	-17.93	AV
H	4874.00	63.05	-19.85	43.20	74.00	-30.80	PK
H	4874.00	53.21	-19.85	33.36	54.00	-20.64	AV
H	7311.00	57.95	-13.93	44.02	74.00	-29.98	PK
H	7311.00	49.58	-13.93	35.65	54.00	-18.35	AV
High channel:2462MHz							
V	4924.00	69.81	-19.75	50.06	74.00	-23.94	PK
V	4924.00	60.22	-19.75	40.47	54.00	-13.53	AV
V	7386.00	63.14	-13.72	49.42	74.00	-24.58	PK
V	7386.00	53.12	-13.72	39.40	54.00	-14.60	AV
H	4924.00	68.79	-19.75	49.04	74.00	-24.96	PK
H	4924.00	57.93	-19.75	38.18	54.00	-15.82	AV
H	7386.00	62.12	-13.72	48.40	74.00	-25.60	PK
H	7386.00	53.77	-13.72	40.05	54.00	-13.95	AV

Remark:

1. Measurement = Reading Level + Correct Factor, Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Measurement - Limit
2. If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
5. The worst case is Antenna A.

802.11g

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2412MHz							
V	4824.00	71.65	-19.95	51.70	74.00	-22.30	PK
V	4824.00	62.90	-19.95	42.95	54.00	-11.05	AV
V	7236.00	61.55	-14.14	47.41	74.00	-26.59	PK
V	7236.00	51.13	-14.14	36.99	54.00	-17.01	AV
H	4824.00	70.27	-19.95	50.32	74.00	-23.68	PK
H	4824.00	60.05	-19.95	40.10	54.00	-13.90	AV
H	7236.00	58.63	-14.14	44.49	74.00	-29.51	PK
H	7236.00	49.85	-14.14	35.71	54.00	-18.29	AV
Middle channel:2437MHz							
V	4874.00	69.84	-19.85	49.99	74.00	-24.01	PK
V	4874.00	63.81	-19.85	43.96	54.00	-10.04	AV
V	7311.00	60.11	-13.93	46.18	74.00	-27.82	PK
V	7311.00	51.98	-13.93	38.05	54.00	-15.95	AV
H	4874.00	65.92	-19.85	46.07	74.00	-27.93	PK
H	4874.00	55.39	-19.85	35.54	54.00	-18.46	AV
H	7311.00	58.77	-13.93	44.84	74.00	-29.16	PK
H	7311.00	51.44	-13.93	37.51	54.00	-16.49	AV
High channel:2462MHz							
V	4924.00	71.04	-19.75	51.29	74.00	-22.71	PK
V	4924.00	63.03	-19.75	43.28	54.00	-10.72	AV
V	7386.00	63.10	-13.72	49.38	74.00	-24.62	PK
V	7386.00	52.75	-13.72	39.03	54.00	-14.97	AV
H	4924.00	69.62	-19.75	49.87	74.00	-24.13	PK
H	4924.00	59.90	-19.75	40.15	54.00	-13.85	AV
H	7386.00	61.68	-13.72	47.96	74.00	-26.04	PK
H	7386.00	53.90	-13.72	40.18	54.00	-13.82	AV

Remark:

1. Measurement = Reading Level + Correct Factor, Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Measurement - Limit
2. If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
5. The worst case is Antenna A.

802.11n20

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2412MHz							
V	4824.00	72.68	-19.95	52.73	74.00	-21.27	PK
V	4824.00	61.88	-19.95	41.93	54.00	-12.07	AV
V	7236.00	62.95	-14.14	48.81	74.00	-25.19	PK
V	7236.00	53.36	-14.14	39.22	54.00	-14.78	AV
H	4824.00	71.24	-19.95	51.29	74.00	-22.71	PK
H	4824.00	60.40	-19.95	40.45	54.00	-13.55	AV
H	7236.00	60.74	-14.14	46.60	74.00	-27.40	PK
H	7236.00	51.99	-14.14	37.85	54.00	-16.15	AV
Middle channel:2437MHz							
V	4874.00	70.43	-19.85	50.58	74.00	-23.42	PK
V	4874.00	61.84	-19.85	41.99	54.00	-12.01	AV
V	7311.00	62.35	-13.93	48.42	74.00	-25.58	PK
V	7311.00	53.94	-13.93	40.01	54.00	-13.99	AV
H	4874.00	68.01	-19.85	48.16	74.00	-25.84	PK
H	4874.00	57.11	-19.85	37.26	54.00	-16.74	AV
H	7311.00	60.16	-13.93	46.23	74.00	-27.77	PK
H	7311.00	51.28	-13.93	37.35	54.00	-16.65	AV
High channel:2462MHz							
V	4924.00	71.83	-19.75	52.08	74.00	-21.92	PK
V	4924.00	62.08	-19.75	42.33	54.00	-11.67	AV
V	7386.00	63.40	-13.72	49.68	74.00	-24.32	PK
V	7386.00	52.40	-13.72	38.68	54.00	-15.32	AV
H	4924.00	69.41	-19.75	49.66	74.00	-24.34	PK
H	4924.00	59.14	-19.75	39.39	54.00	-14.61	AV
H	7386.00	61.99	-13.72	48.27	74.00	-25.73	PK
H	7386.00	54.46	-13.72	40.74	54.00	-13.26	AV

Remark:

1. Measurement = Reading Level + Correct Factor, Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Measurement - Limit
2. If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
5. Test Mode is MIMO Mode.

802.11n40

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2422MHz							
V	4844.00	71.02	-19.91	51.11	74.00	-22.89	PK
V	4844.00	62.14	-19.91	42.23	54.00	-11.77	AV
V	7266.00	60.71	-14.06	46.65	74.00	-27.35	PK
V	7266.00	51.53	-14.06	37.47	54.00	-16.53	AV
H	4844.00	69.32	-19.91	49.41	74.00	-24.59	PK
H	4844.00	58.92	-19.91	39.01	54.00	-14.99	AV
H	7266.00	58.48	-14.06	44.42	74.00	-29.58	PK
H	7266.00	50.81	-14.06	36.75	54.00	-17.25	AV
Middle channel:2437MHz							
V	4874.00	69.66	-19.85	49.81	74.00	-24.19	PK
V	4874.00	62.20	-19.85	42.35	54.00	-11.65	AV
V	7311.00	62.57	-13.93	48.64	74.00	-25.36	PK
V	7311.00	52.96	-13.93	39.03	54.00	-14.97	AV
H	4874.00	68.59	-19.85	48.74	74.00	-25.26	PK
H	4874.00	58.42	-19.85	38.57	54.00	-15.43	AV
H	7311.00	59.69	-13.93	45.76	74.00	-28.24	PK
H	7311.00	52.09	-13.93	38.16	54.00	-15.84	AV
High channel:2452MHz							
V	4904.00	72.39	-19.79	52.60	74.00	-21.40	PK
V	4904.00	62.47	-19.79	42.68	54.00	-11.32	AV
V	7356.00	65.13	-13.80	51.33	74.00	-22.67	PK
V	7356.00	55.46	-13.80	41.66	54.00	-12.34	AV
H	4904.00	70.46	-19.79	50.67	74.00	-23.33	PK
H	4904.00	60.02	-19.79	40.23	54.00	-13.77	AV
H	7356.00	62.75	-13.80	48.95	74.00	-25.05	PK
H	7356.00	55.22	-13.80	41.42	54.00	-12.58	AV

Remark:

1. Measurement = Reading Level + Correct Factor, Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Measurement - Limit
2. If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
5. Test Mode is MIMO Mode.

802.11ax20

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2412MHz							
V	4824.00	70.49	-19.95	50.54	74.00	-23.46	PK
V	4824.00	59.56	-19.95	39.61	54.00	-14.39	AV
V	7236.00	59.74	-14.14	45.60	74.00	-28.40	PK
V	7236.00	50.47	-14.14	36.33	54.00	-17.67	AV
H	4824.00	68.75	-19.95	48.80	74.00	-25.20	PK
H	4824.00	57.87	-19.95	37.92	54.00	-16.08	AV
H	7236.00	57.33	-14.14	43.19	74.00	-30.81	PK
H	7236.00	50.30	-14.14	36.16	54.00	-17.84	AV
Middle channel:2437MHz							
V	4874.00	66.93	-19.85	47.08	74.00	-26.92	PK
V	4874.00	59.82	-19.85	39.97	54.00	-14.03	AV
V	7311.00	59.66	-13.93	45.73	74.00	-28.27	PK
V	7311.00	50.90	-13.93	36.97	54.00	-17.03	AV
H	4874.00	64.87	-19.85	45.02	74.00	-28.98	PK
H	4874.00	54.53	-19.85	34.68	54.00	-19.32	AV
H	7311.00	57.01	-13.93	43.08	74.00	-30.92	PK
H	7311.00	48.96	-13.93	35.03	54.00	-18.97	AV
High channel:2462MHz							
V	4924.00	68.76	-19.75	49.01	74.00	-24.99	PK
V	4924.00	58.32	-19.75	38.57	54.00	-15.43	AV
V	7386.00	59.77	-13.72	46.05	74.00	-27.95	PK
V	7386.00	49.61	-13.72	35.89	54.00	-18.11	AV
H	4924.00	67.08	-19.75	47.33	74.00	-26.67	PK
H	4924.00	57.54	-19.75	37.79	54.00	-16.21	AV
H	7386.00	57.71	-13.72	43.99	74.00	-30.01	PK
H	7386.00	49.26	-13.72	35.54	54.00	-18.46	AV

Remark:

1. Measurement = Reading Level + Correct Factor, Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Measurement - Limit
2. If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
5. Test Mode is MIMO Mode.

802.11ax40

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2422MHz							
V	4844.00	71.87	-19.91	51.96	74.00	-22.04	PK
V	4844.00	62.99	-19.91	43.08	54.00	-10.92	AV
V	7266.00	63.86	-14.06	49.80	74.00	-24.20	PK
V	7266.00	54.53	-14.06	40.47	54.00	-13.53	AV
H	4844.00	67.33	-19.91	47.42	74.00	-26.58	PK
H	4844.00	57.24	-19.91	37.33	54.00	-16.67	AV
H	7266.00	61.40	-14.06	47.34	74.00	-26.66	PK
H	7266.00	53.01	-14.06	38.95	54.00	-15.05	AV
Middle channel:2437MHz							
V	4874.00	69.53	-19.85	49.68	74.00	-24.32	PK
V	4874.00	63.12	-19.85	43.27	54.00	-10.73	AV
V	7311.00	58.65	-13.93	44.72	74.00	-29.28	PK
V	7311.00	48.70	-13.93	34.77	54.00	-19.23	AV
H	4874.00	67.73	-19.85	47.88	74.00	-26.12	PK
H	4874.00	58.12	-19.85	38.27	54.00	-15.73	AV
H	7311.00	57.32	-13.93	43.39	74.00	-30.61	PK
H	7311.00	50.13	-13.93	36.20	54.00	-17.80	AV
High channel:2452MHz							
V	4904.00	71.98	-19.79	52.19	74.00	-21.81	PK
V	4904.00	63.01	-19.79	43.22	54.00	-10.78	AV
V	7356.00	64.19	-13.80	50.39	74.00	-23.61	PK
V	7356.00	54.98	-13.80	41.18	54.00	-12.82	AV
H	4904.00	69.43	-19.79	49.64	74.00	-24.36	PK
H	4904.00	60.37	-19.79	40.58	54.00	-13.42	AV
H	7356.00	62.00	-13.80	48.20	74.00	-25.80	PK
H	7356.00	54.71	-13.80	40.91	54.00	-13.09	AV


Remark:

1. Measurement = Reading Level + Correct Factor, Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Measurement - Limit
2. If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
5. Test Mode is MIMO Mode.

8. Radiated Band Emission Measurement And Restricted Bands Of Operation

8.1 Block Diagram Of Test Setup

Radiated Emission Test-Up Frequency Above 1GHz

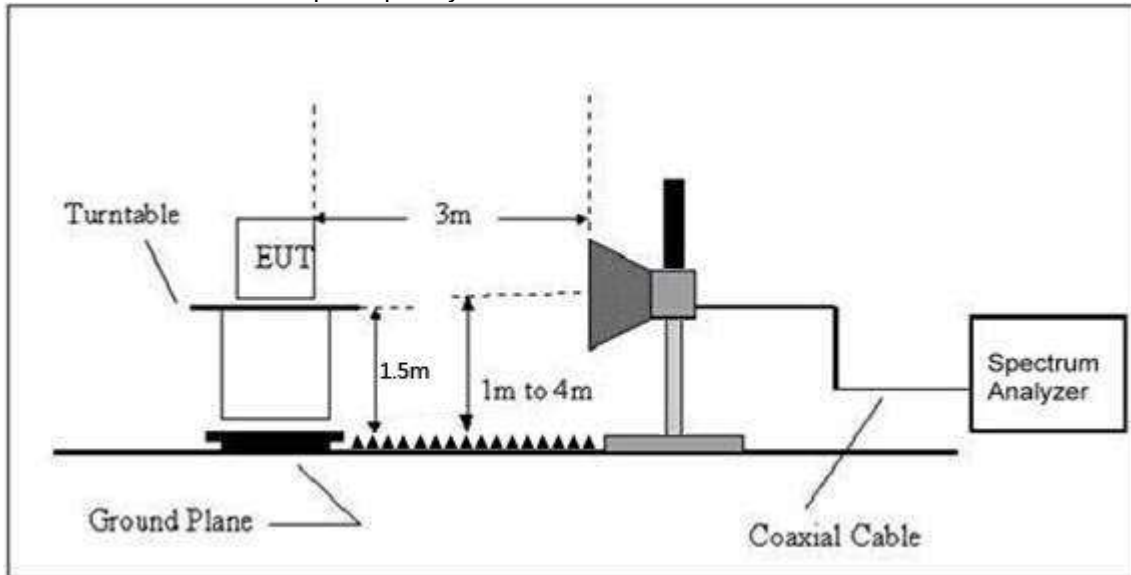

8.2 Limit

FCC Part15 C Section 15.209 and 15.205

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Limits Of Radiated Emission Measurement (Above 1000MHz)

Frequency (MHz)	Limit (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54

Notes:

- (1)The limit for radiated test was performed according to FCC PART 15C.
- (2)The tighter limit applies at the band edges.
- (3)Emission level (dBuV/m)=20log Emission level (uV/m).

8.3 Test procedure

Receiver Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Above 1GHz test procedure as below:

- a.The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middlest channel, the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

8.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

8.5 Test Result

Test mode	Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure-ment (dBuV/m)	Measure-ment (dBuV/m)		Over	Result
					PK	PK	AV	PK	
802.11b	Low Channel 2412MHz								
	H	2390.00	73.60	-25.43	48.17	74.00	54.00	-25.83	PASS
	H	2400.00	76.03	-25.40	50.63	74.00	54.00	-23.37	PASS
	V	2390.00	74.03	-25.43	48.60	74.00	54.00	-25.40	PASS
	V	2400.00	73.75	-25.40	48.35	74.00	54.00	-25.65	PASS
	High Channel 2462MHz								
	H	2483.50	71.73	-25.15	46.58	74.00	54.00	-27.42	PASS
	H	2500.00	68.70	-25.10	43.60	74.00	54.00	-30.40	PASS
	V	2483.50	74.41	-25.15	49.26	74.00	54.00	-24.74	PASS
	V	2500.00	70.59	-25.10	45.49	74.00	54.00	-28.51	PASS
802.11g	Low Channel 2412MHz								
	H	2390.00	72.47	-25.43	47.04	74.00	54.00	-26.96	PASS
	H	2400.00	74.88	-25.40	49.48	74.00	54.00	-24.52	PASS
	V	2390.00	72.81	-25.43	47.38	74.00	54.00	-26.62	PASS
	V	2400.00	73.00	-25.40	47.60	74.00	54.00	-26.40	PASS
	High Channel 2462MHz								
	H	2483.50	71.70	-25.15	46.55	74.00	54.00	-27.45	PASS
	H	2500.00	69.06	-25.10	43.96	74.00	54.00	-30.04	PASS
	V	2483.50	70.95	-25.15	45.80	74.00	54.00	-28.20	PASS
	V	2500.00	66.28	-25.10	41.18	74.00	54.00	-32.82	PASS
802.11 n20	Low Channel 2412MHz								
	H	2390.00	72.98	-25.43	47.55	74.00	54.00	-26.45	PASS
	H	2400.00	74.22	-25.40	48.82	74.00	54.00	-25.18	PASS
	V	2390.00	73.26	-25.43	47.83	74.00	54.00	-26.17	PASS
	V	2400.00	74.38	-25.40	48.98	74.00	54.00	-25.02	PASS
	High Channel 2462MHz								
	H	2483.50	71.81	-25.15	46.66	74.00	54.00	-27.34	PASS
	H	2500.00	68.20	-25.10	43.10	74.00	54.00	-30.90	PASS
	V	2483.50	72.53	-25.15	47.38	74.00	54.00	-26.62	PASS
	V	2500.00	68.76	-25.10	43.66	74.00	54.00	-30.34	PASS
802.11 n40	Low Channel 2422MHz								
	H	2390.00	73.80	-25.43	48.37	74.00	54.00	-25.63	PASS
	H	2400.00	74.97	-25.40	49.57	74.00	54.00	-24.43	PASS
	V	2390.00	74.70	-25.43	49.27	74.00	54.00	-24.73	PASS
	V	2400.00	76.24	-25.40	50.84	74.00	54.00	-23.16	PASS
	High Channel 2452MHz								
	H	2483.50	74.12	-25.15	48.97	74.00	54.00	-25.03	PASS
	H	2500.00	69.50	-25.10	44.40	74.00	54.00	-29.60	PASS
	V	2483.50	74.37	-25.15	49.22	74.00	54.00	-24.78	PASS
	V	2500.00	71.27	-25.10	46.17	74.00	54.00	-27.83	PASS

Remark:

1. Measurement = Reading Level + Correct Factor, Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.
- 3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
5. For 802.11b and 802.11g mode, only test Antenna A(the worst case mode). For 802.11n20 and 802.11n40, test Mode is MIMO Mode.

Test mode	Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measurement (dBuV/m)	Measurement (dBuV/m)		Over	Result
					PK	PK	AV	PK	
802.11 ax20	Low Channel 2412MHz								
	H	2390.00	73.06	-25.43	47.63	74.00	54.00	-26.37	PASS
	H	2400.00	74.11	-25.40	48.71	74.00	54.00	-25.29	PASS
	V	2390.00	73.87	-25.43	48.44	74.00	54.00	-25.56	PASS
	V	2400.00	75.31	-25.40	49.91	74.00	54.00	-24.09	PASS
	High Channel 2462MHz								
	H	2483.50	73.30	-25.15	48.15	74.00	54.00	-25.85	PASS
	H	2500.00	68.93	-25.10	43.83	74.00	54.00	-30.17	PASS
	V	2483.50	73.45	-25.15	48.30	74.00	54.00	-25.70	PASS
	V	2500.00	70.37	-25.10	45.27	74.00	54.00	-28.73	PASS
802.11 ax40	Low Channel 2422MHz								
	H	2390.00	72.84	-25.43	47.41	74.00	54.00	-26.59	PASS
	H	2400.00	73.87	-25.40	48.47	74.00	54.00	-25.53	PASS
	V	2390.00	73.80	-25.43	48.37	74.00	54.00	-25.63	PASS
	V	2400.00	75.41	-25.40	50.01	74.00	54.00	-23.99	PASS
	High Channel 2452MHz								
	H	2483.50	71.65	-25.15	46.50	74.00	54.00	-27.50	PASS
	H	2500.00	68.63	-25.10	43.53	74.00	54.00	-30.47	PASS
	V	2483.50	73.24	-25.15	48.09	74.00	54.00	-25.91	PASS
	V	2500.00	69.27	-25.10	44.17	74.00	54.00	-29.83	PASS
Remark:									
1. Measurement = Reading Level + Correct Factor, Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier.									
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.									
3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB									
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									
5. For 802.11ax20 and 802.11ax40, test Mode is MIMO Mode.									



9. Power Spectral Density Test

9.1 Block Diagram Of Test Setup



9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

Limits Of Radiated Emission Measurement (Above 1000MHz)

9.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: 3 kHz
4. Set the VBW $\geq 3 \times$ RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

9.4 EUT Operating Conditions

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Note: Power Spectral Density(dBm)=Reading+Cable Loss

9.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	DC 11.4V

Test Mode	Frequency	Ant. A Power Spectral Density (dBm/10kHz)	Ant. A Power Spectral Density (dBm/3kHz)	Ant. B Power Spectral Density (dBm/10kHz)	Ant. B Power Spectral Density (dBm/3kHz)	Total power density (dBm/3kHz)	Limit (dBm/ 3kHz)
TX b Mode	2412 MHz	-10.47	-15.70	-11.89	-17.12	/	8
	2437 MHz	-10.47	-15.70	-11.70	-16.93	/	8
	2462 MHz	-11.00	-16.23	-11.90	-17.13	/	8
TX g Mode	2412 MHz	-10.47	-15.70	-11.98	-17.21	/	8
	2437 MHz	-10.54	-15.77	-11.91	-17.14	/	8
	2462 MHz	-11.20	-16.43	-12.22	-17.45	/	8
TX n Mode(20M)	2412 MHz	-12.03	-17.26	-14.02	-19.25	-15.13	8
	2437 MHz	-11.88	-17.11	-13.83	-19.06	-14.97	8
	2462 MHz	-12.15	-17.38	-13.86	-19.09	-15.14	8
TX n Mode(40M)	2422 MHz	-12.52	-17.75	-15.17	-20.40	-15.87	8
	2437 MHz	-12.87	-18.10	-16.88	-22.11	-16.65	8
	2452 MHz	-14.13	-19.36	-16.59	-21.82	-17.41	8
TX ax Mode(20M)	2412 MHz	-11.47	-16.70	-14.86	-20.09	-15.06	8
	2437 MHz	-12.29	-17.52	-13.62	-18.85	-15.12	8
	2462 MHz	-11.76	-16.99	-14.19	-19.42	-15.03	8
TX ax Mode(40M)	2422 MHz	-16.40	-21.63	-17.72	-22.95	-19.23	8
	2437 MHz	-16.51	-21.74	-17.52	-22.75	-19.21	8
	2452 MHz	-16.54	-21.77	-17.83	-23.06	-19.36	8
Note: Correction Factor = 10log(3KHz/RBW in measurement) = -5.23							


Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A Plot.




PSD NVNT b 2462MHz




PSD NVNT g 2412MHz

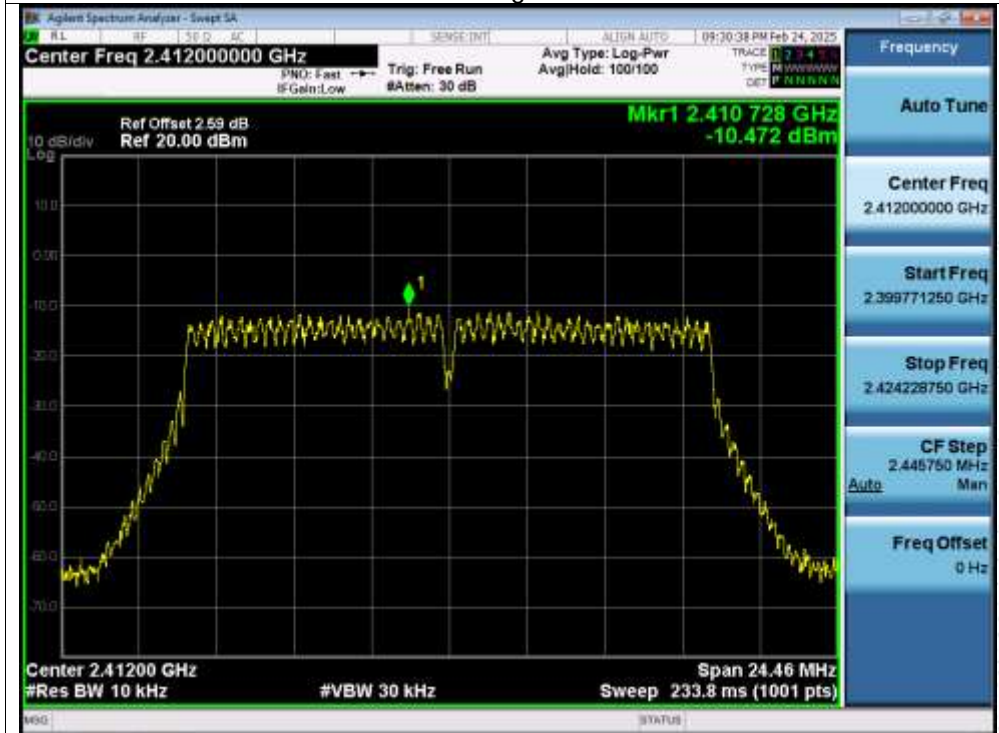


PSD NVNT g 2437MHz

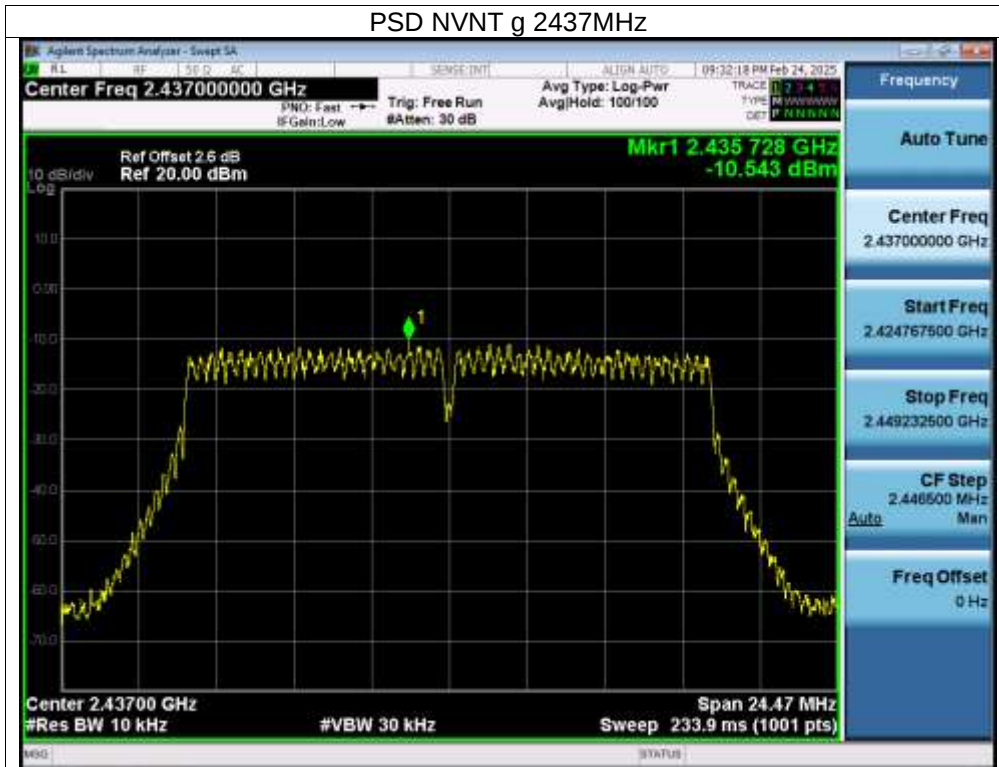


PSD NVNT g 2462MHz

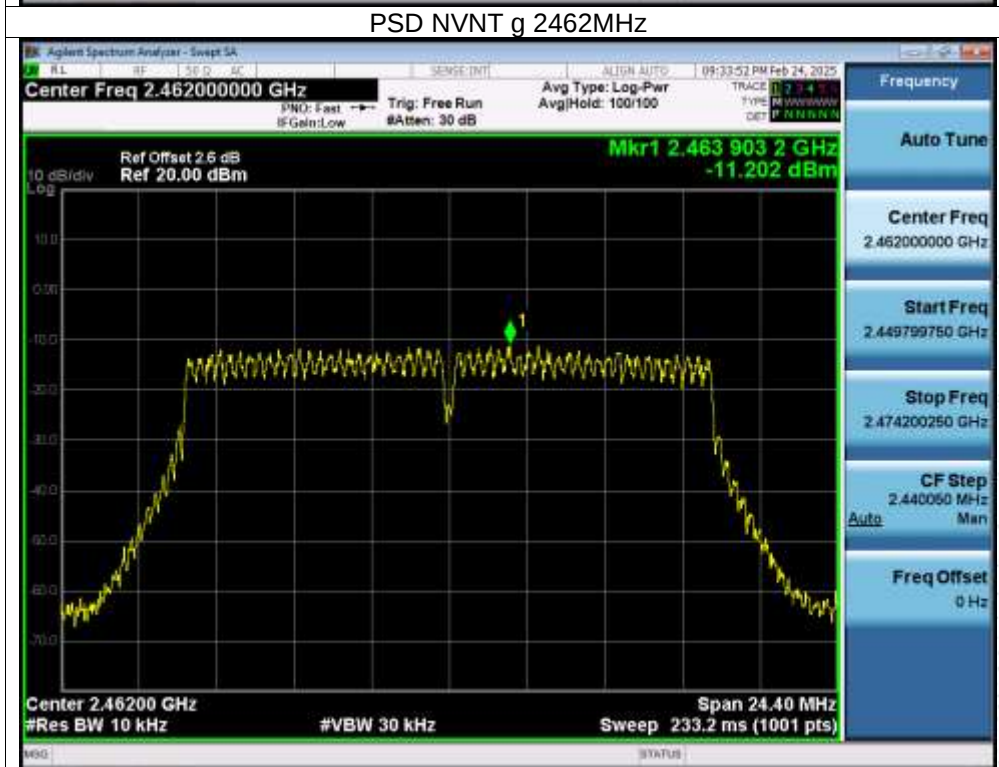

PSD NVNT n20 2412MHz

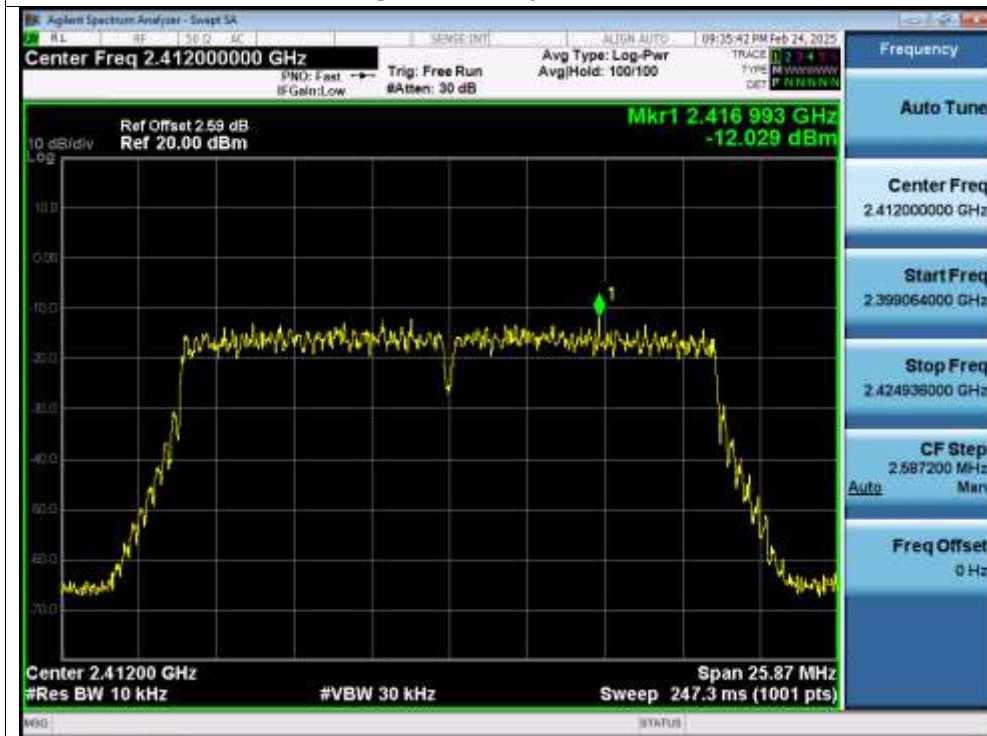


PSD NVNT n20 2437MHz

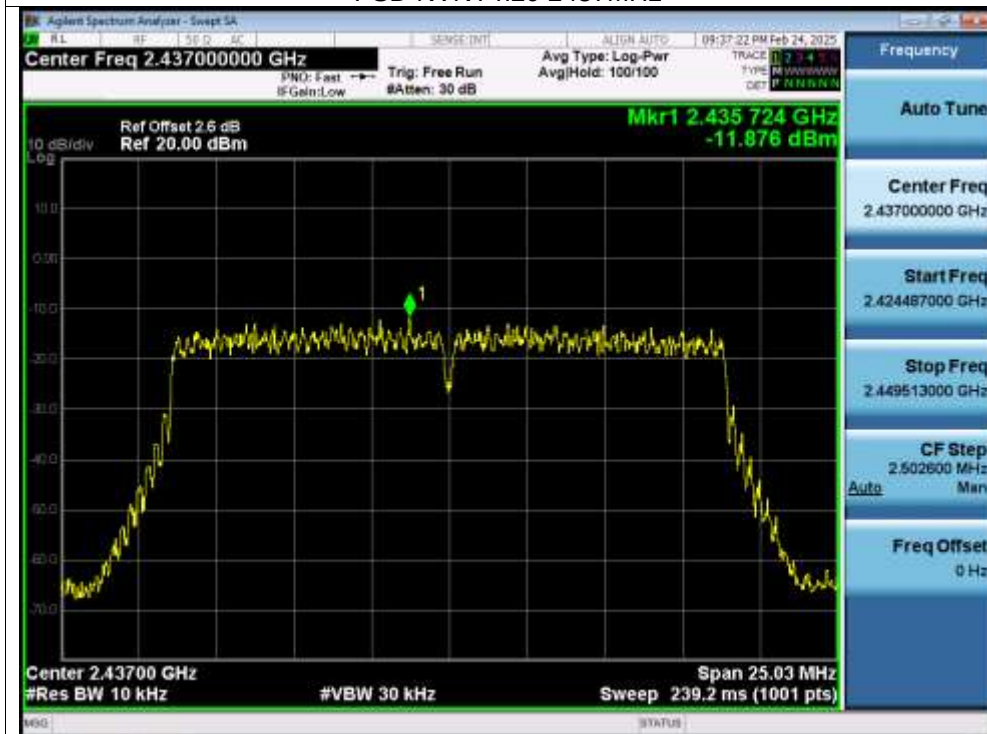





PSD NVNT n20 2462MHz

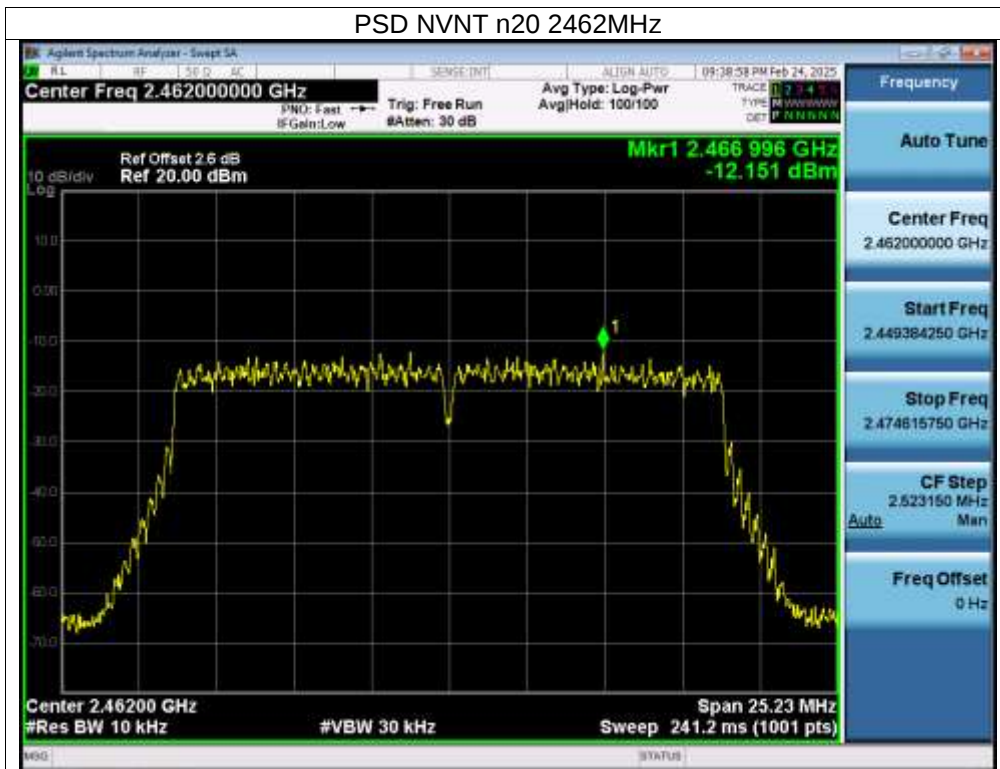


PSD NVNT n40 2422MHz

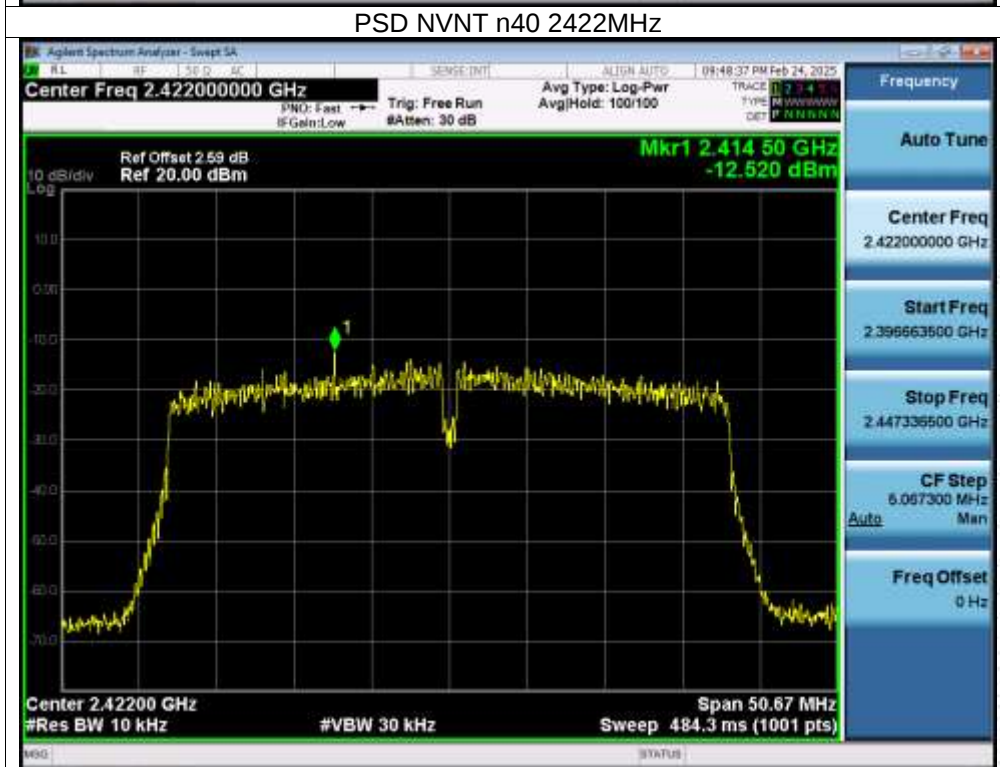


PSD NVNT n40 2437MHz

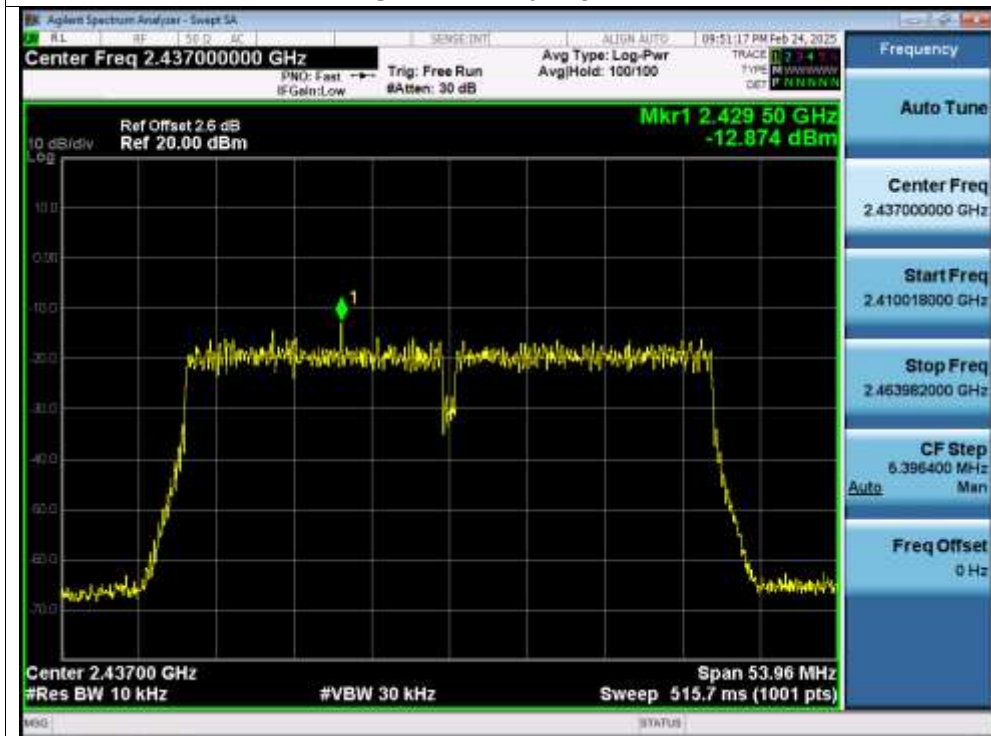


PSD NVNT n40 2452MHz

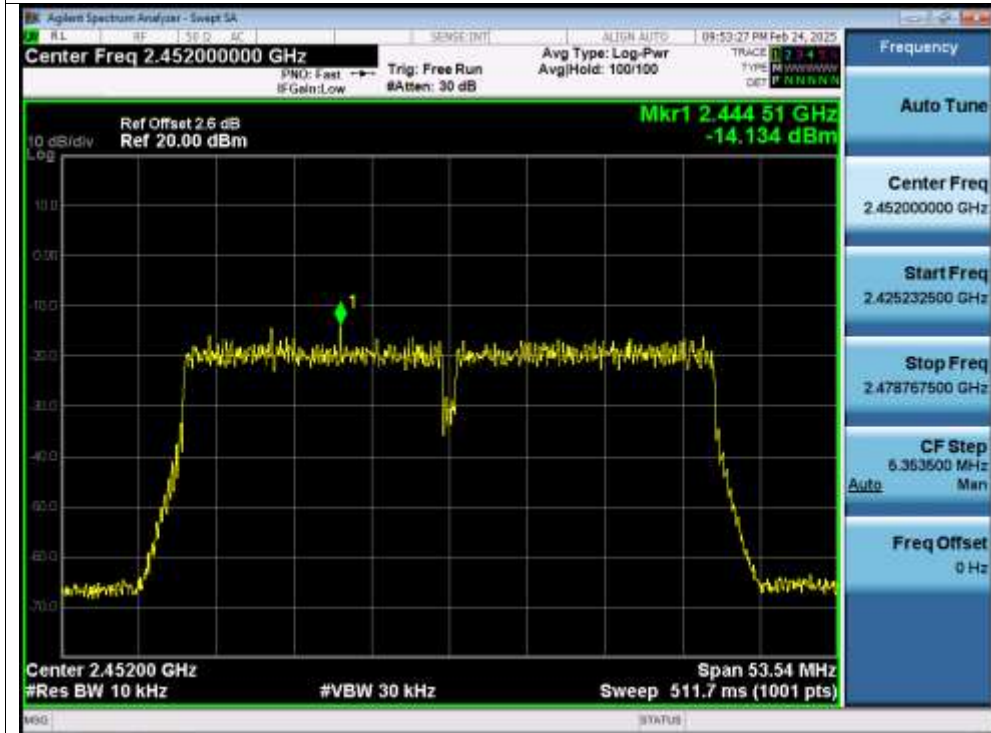


PSD NVNT ax20 2412MHz

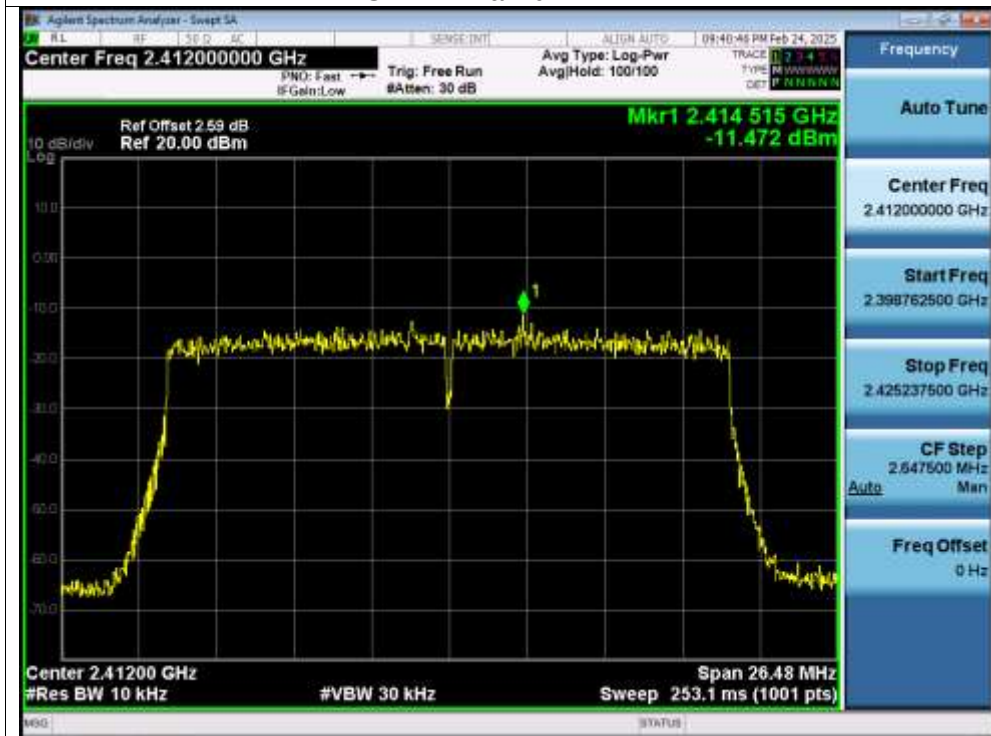


PSD NVNT ax20 2437MHz

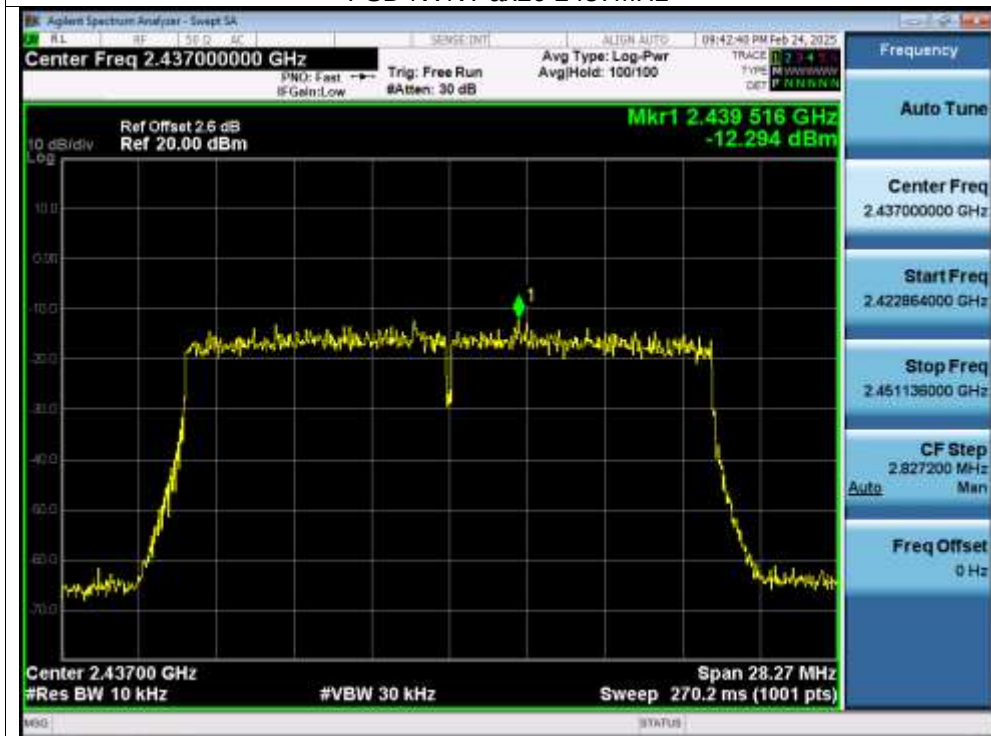


PSD NVNT ax20 2462MHz

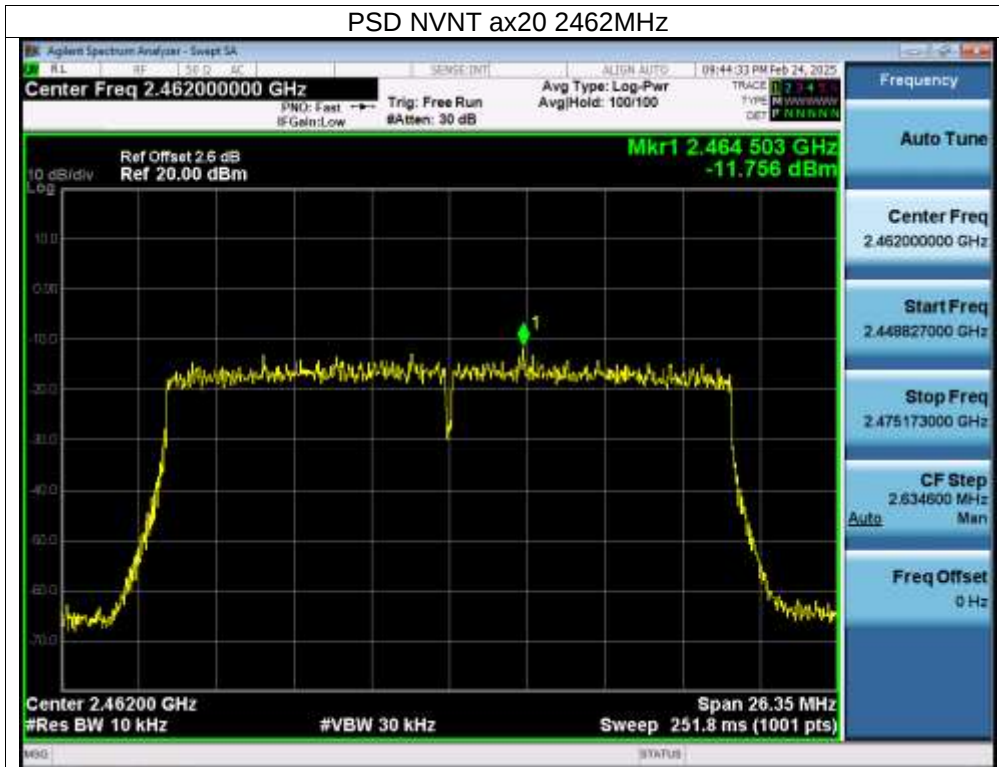


PSD NVNT ax40 2422MHz

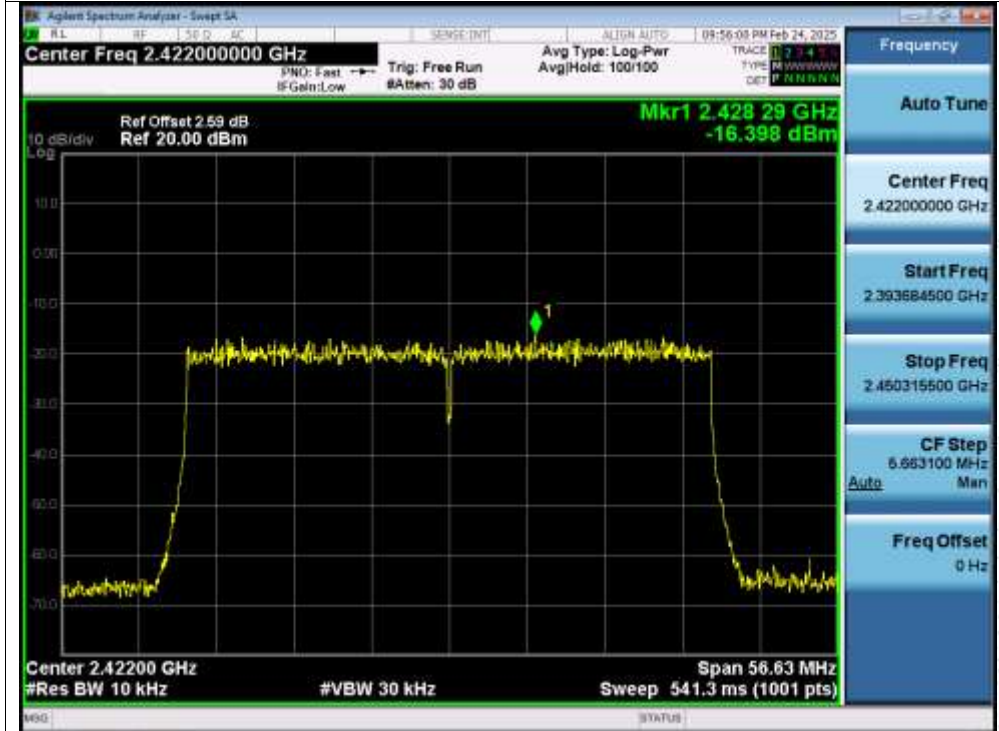

PSD NVNT ax40 2437MHz

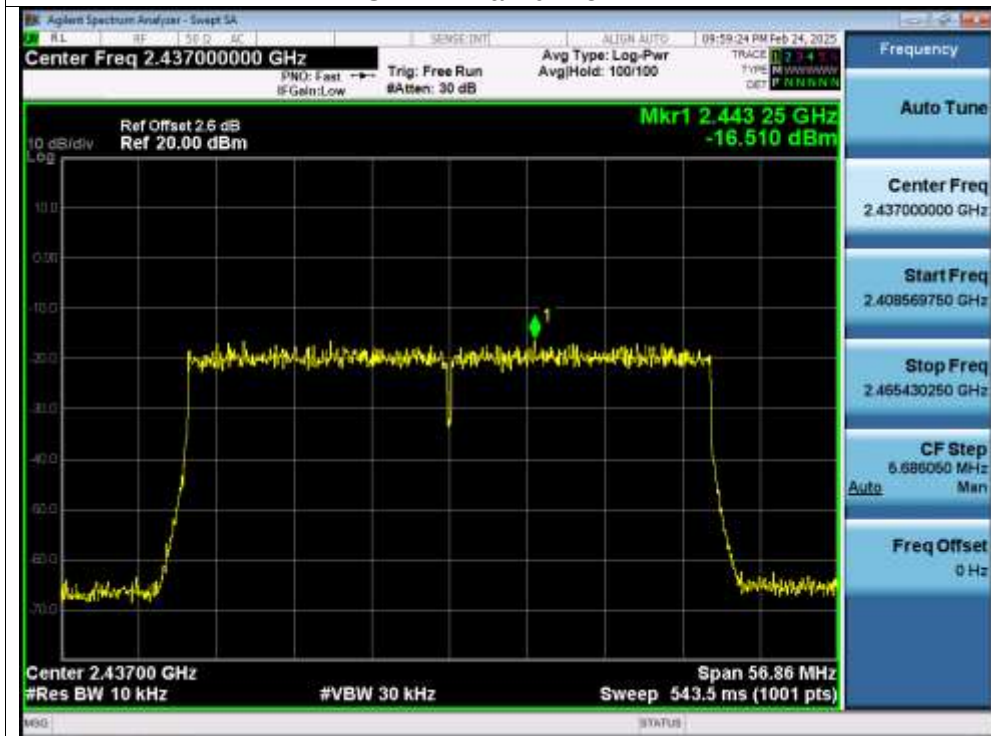

PSD NVNT ax40 2452MHz

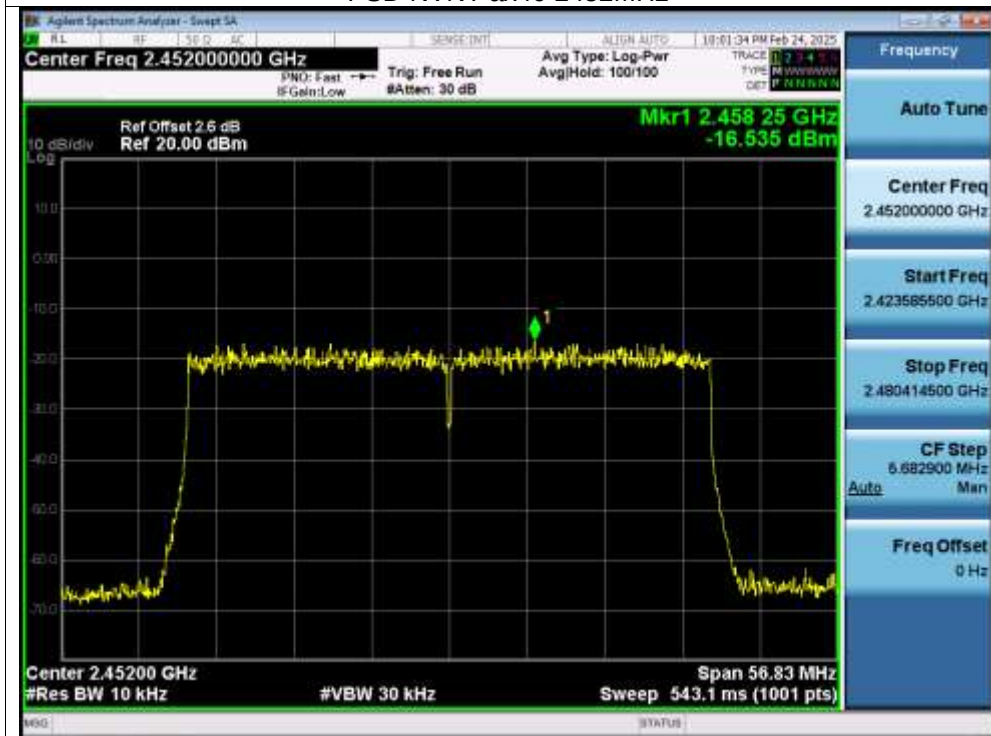

10. Bandwidth Test

10.1 Block Diagram Of Test Setup



10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (-6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 EUT Operating Conditions

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.


Note: Power Spectral Density(dBm)=Reading+Cable Loss

10.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	DC 11.4V

Test Mode	Frequency (MHz)	Ant. A -6dB bandwidth (MHz)	Ant. B -6dB bandwidth (MHz)	Limit (kHz)	Result
TX b Mode	2412	11.092	10.086	500	Pass
	2437	11.044	10.116	500	Pass
	2462	10.132	11.070	500	Pass
TX g Mode	2412	16.305	16.043	500	Pass
	2437	16.310	16.299	500	Pass
	2462	16.267	16.293	500	Pass
TX n Mode(20M)	2412	17.248	17.547	500	Pass
	2437	16.684	16.997	500	Pass
	2462	16.821	17.365	500	Pass
TX n Mode(40M)	2422	33.782	34.993	500	Pass
	2437	35.976	35.884	500	Pass
	2452	35.690	36.272	500	Pass
TX ax Mode(20M)	2412	17.650	18.287	500	Pass
	2437	18.848	18.341	500	Pass
	2462	17.564	18.582	500	Pass
TX ax Mode(40M)	2422	37.754	37.665	500	Pass
	2437	37.907	37.545	500	Pass
	2452	37.886	37.536	500	Pass


Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A Plot.

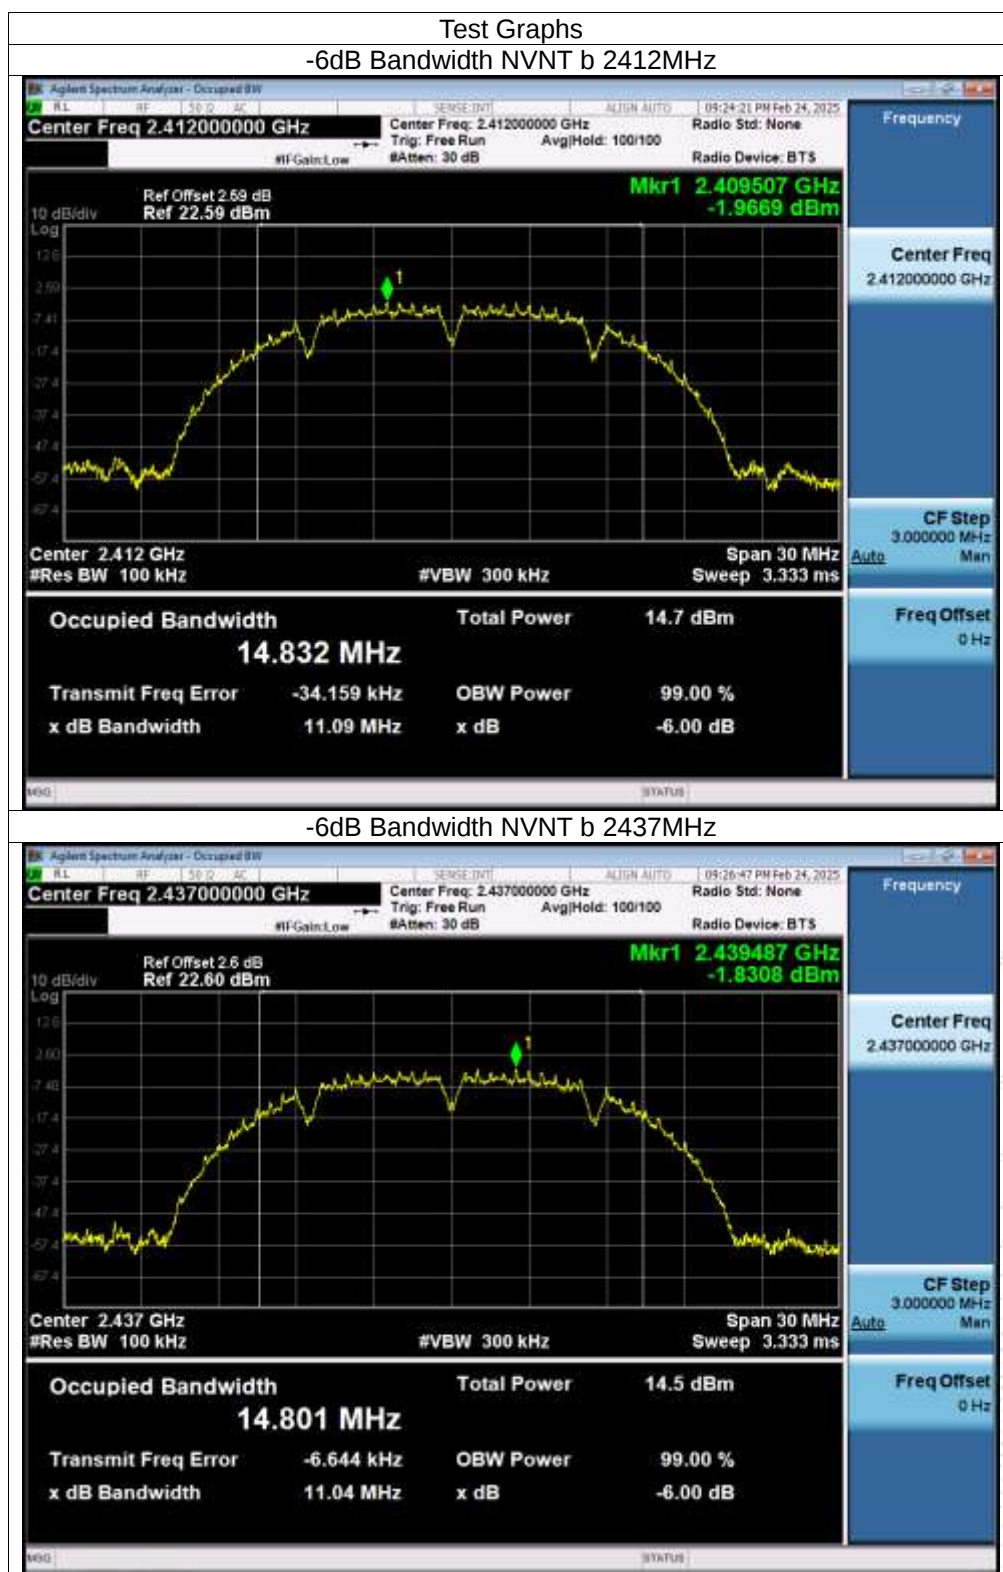


-6dB Bandwidth NVNT b 2462MHz



-6dB Bandwidth NVNT g 2412MHz

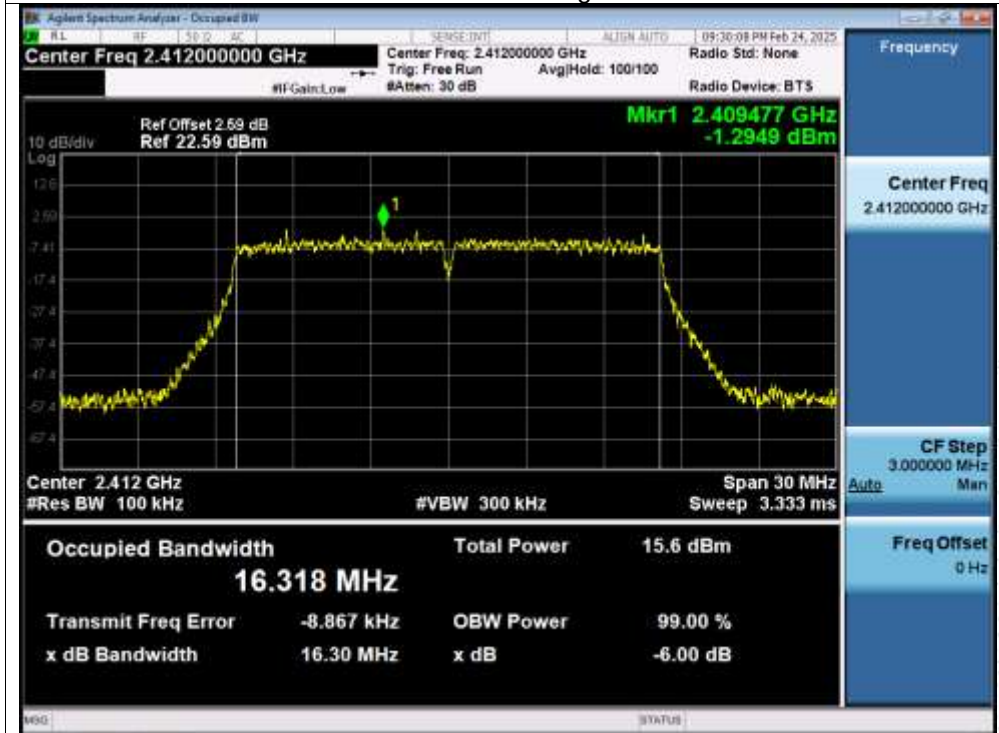


-6dB Bandwidth NVNT g 2437MHz

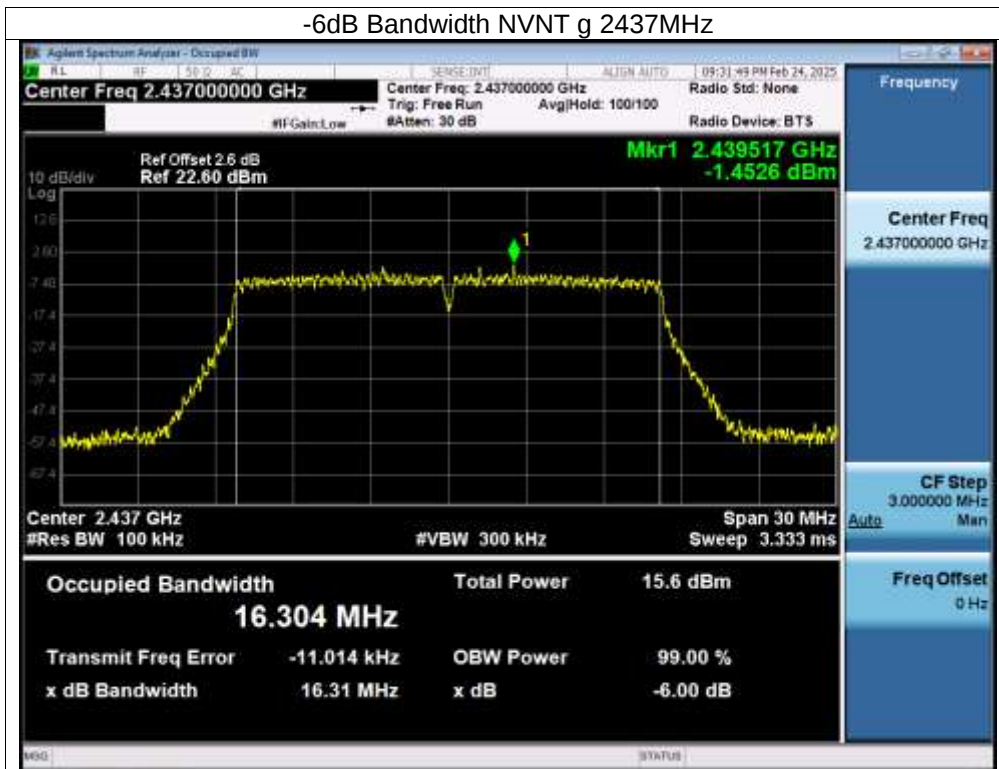

-6dB Bandwidth NVNT g 2462MHz



-6dB Bandwidth NVNT n20 2412MHz

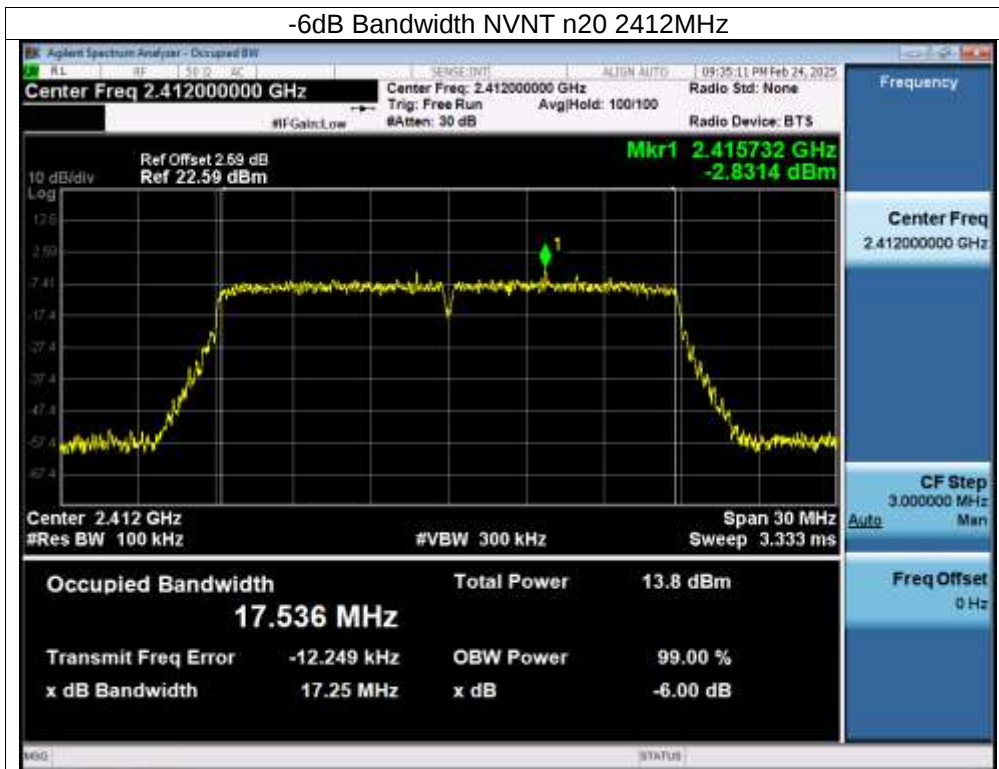

-6dB Bandwidth NVNT n20 2437MHz

