




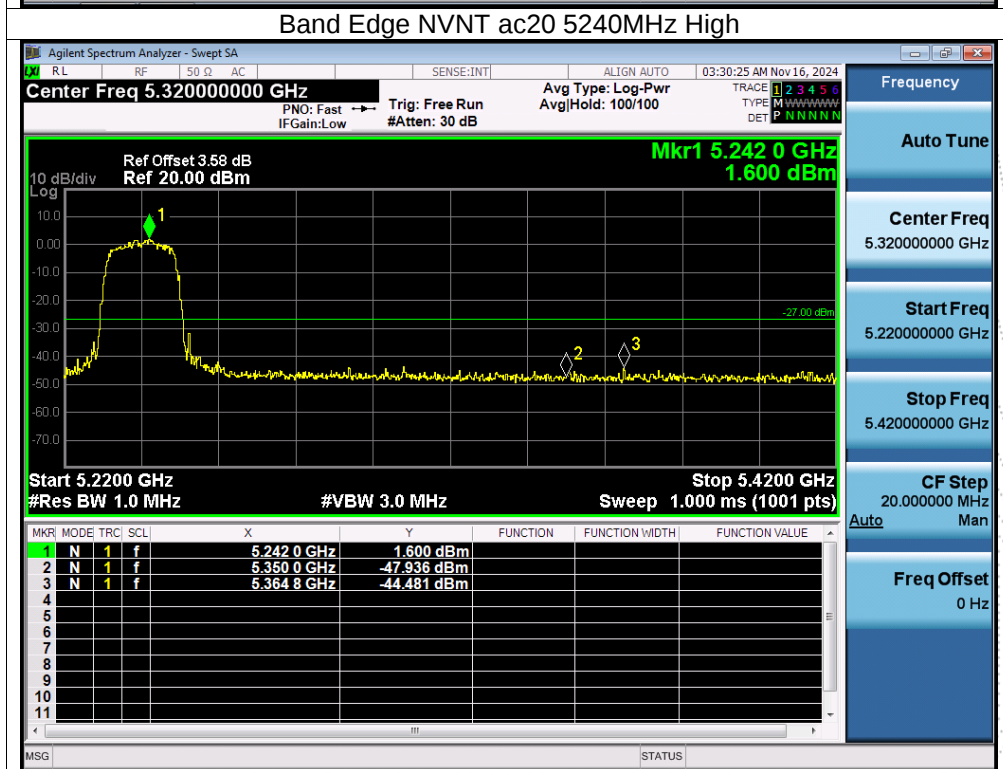
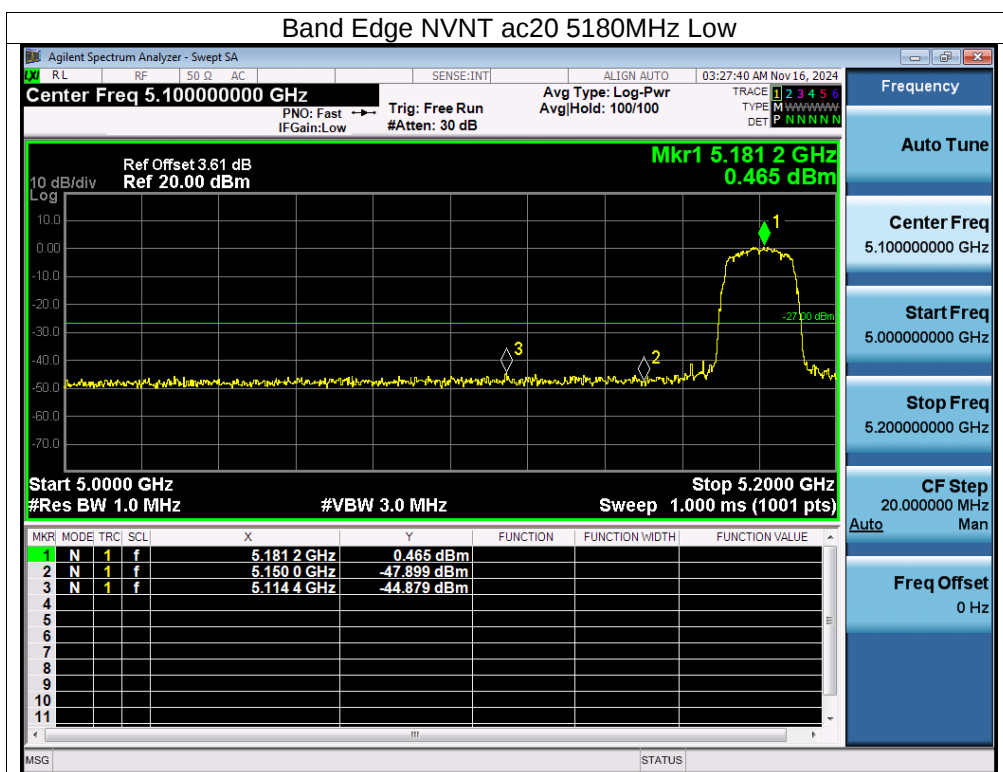
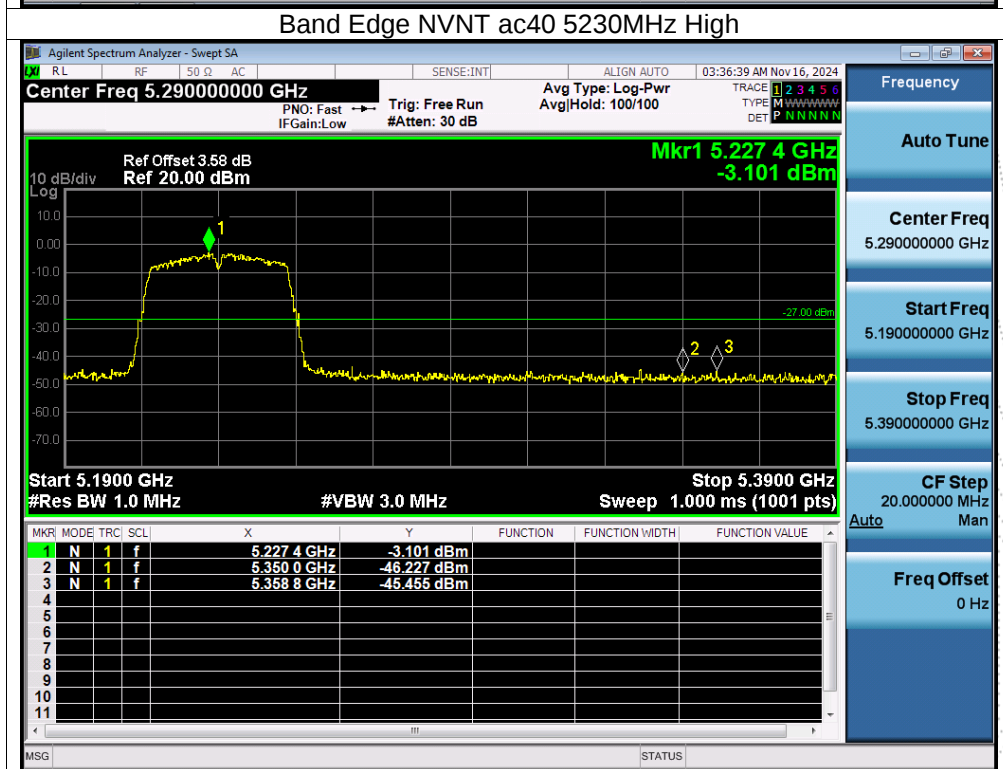
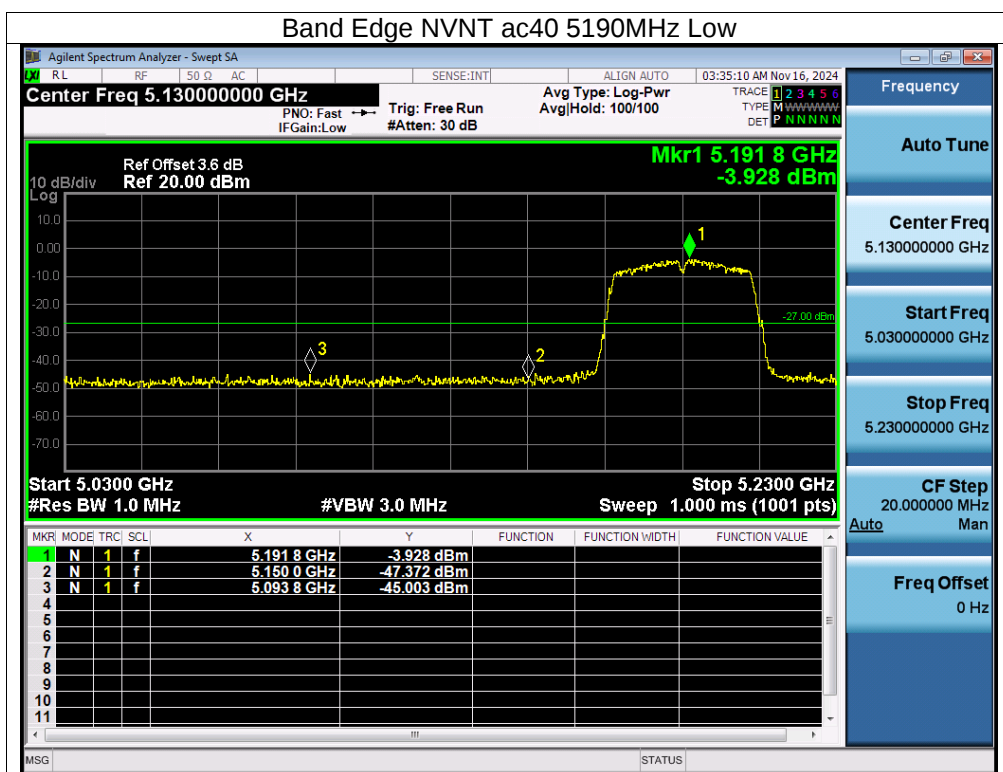
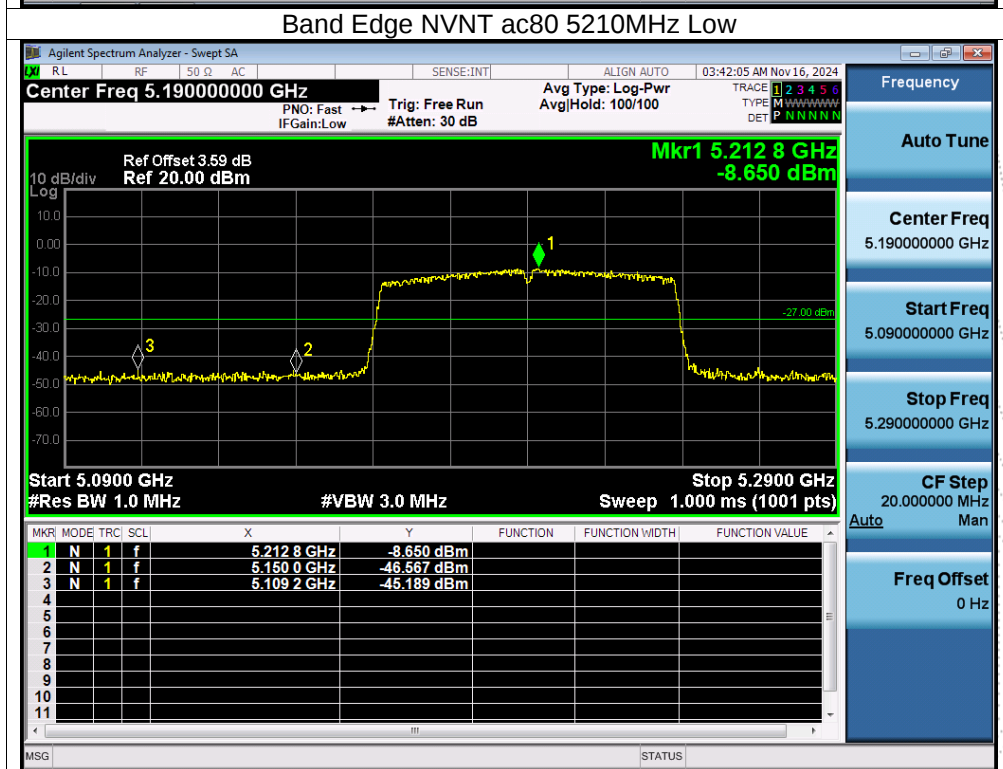



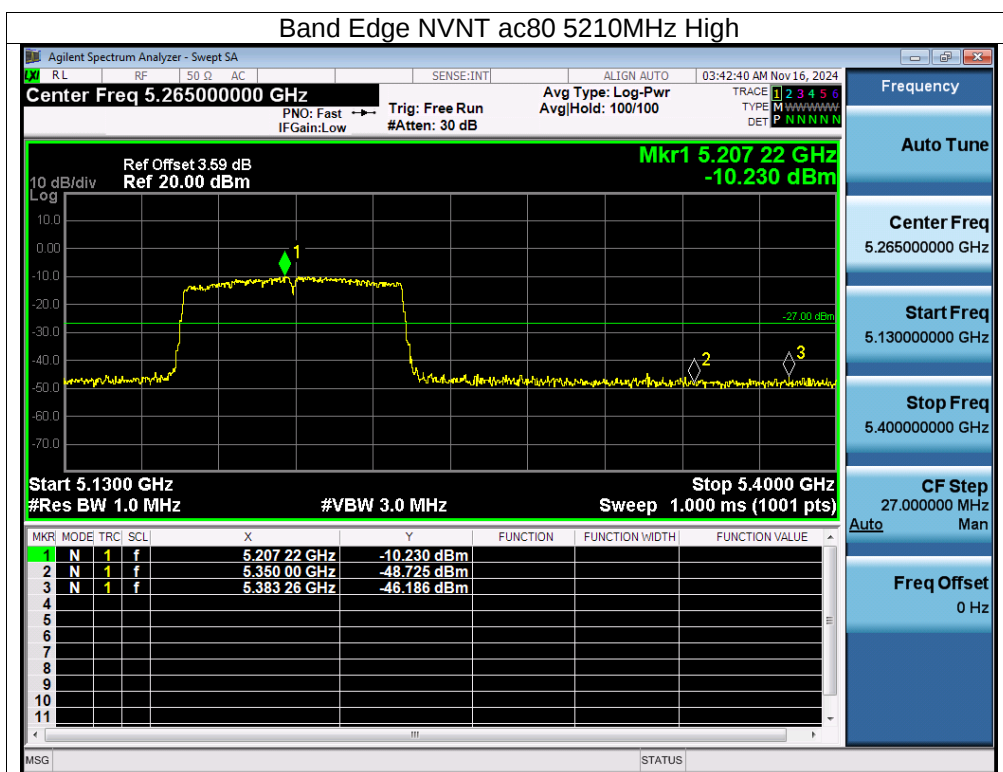



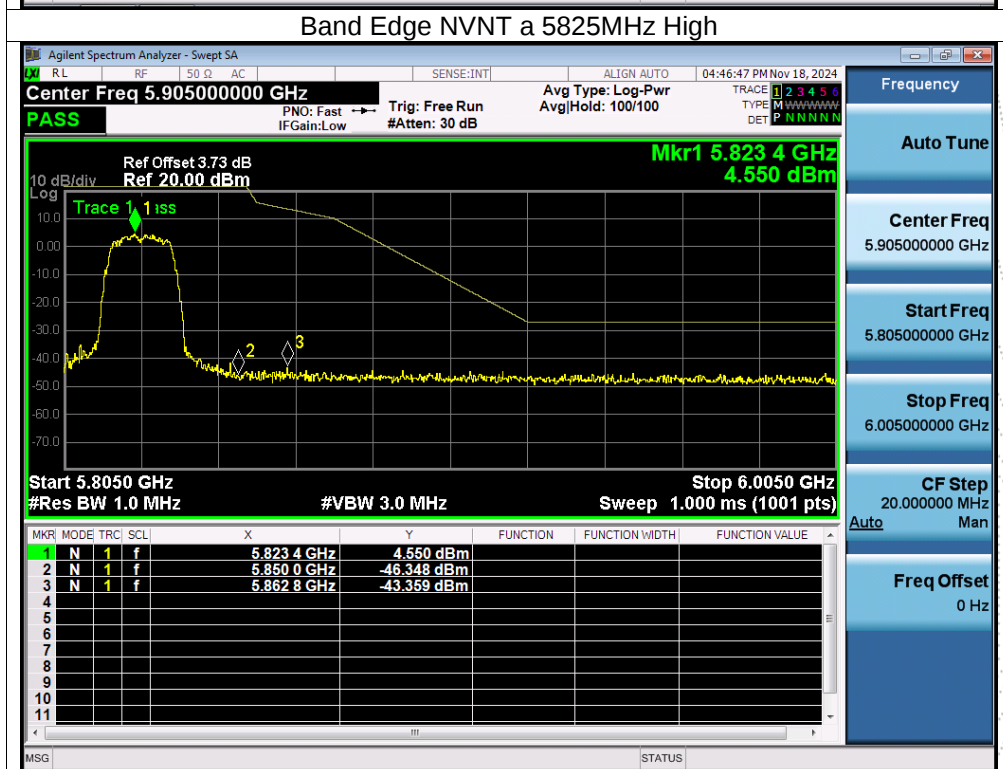



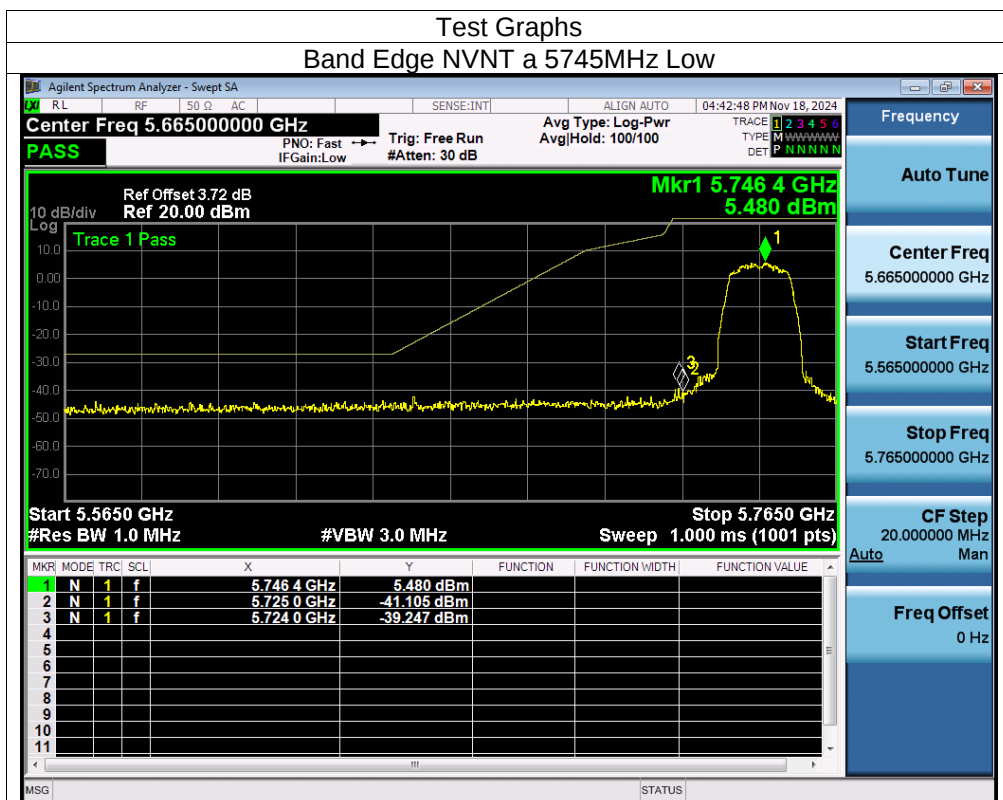



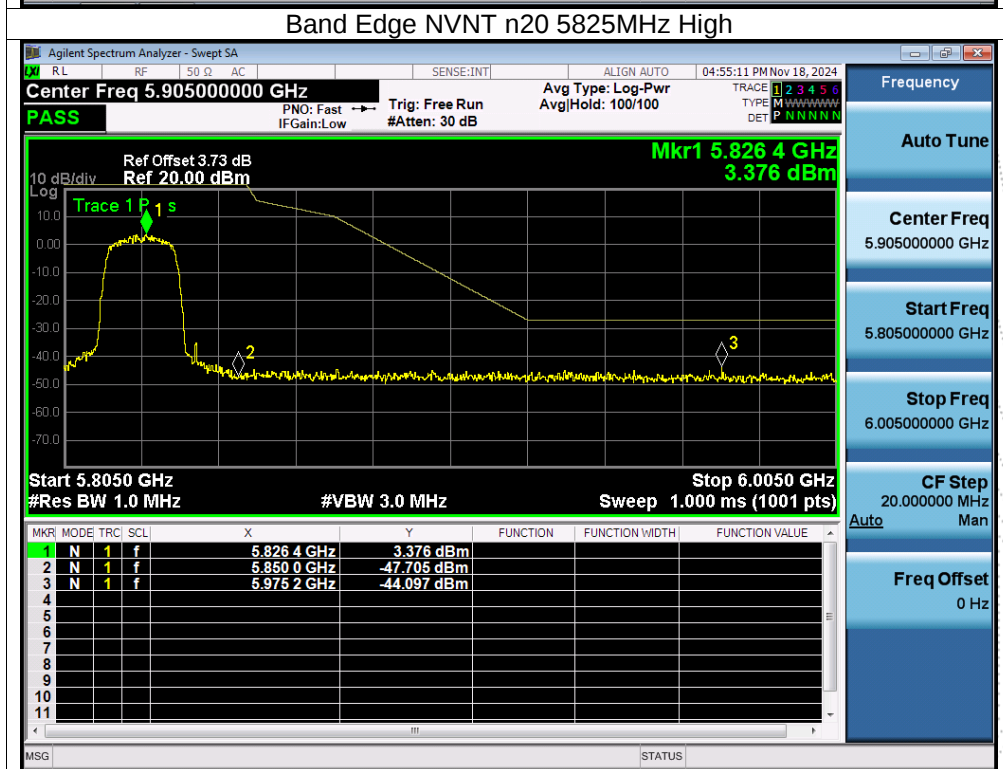


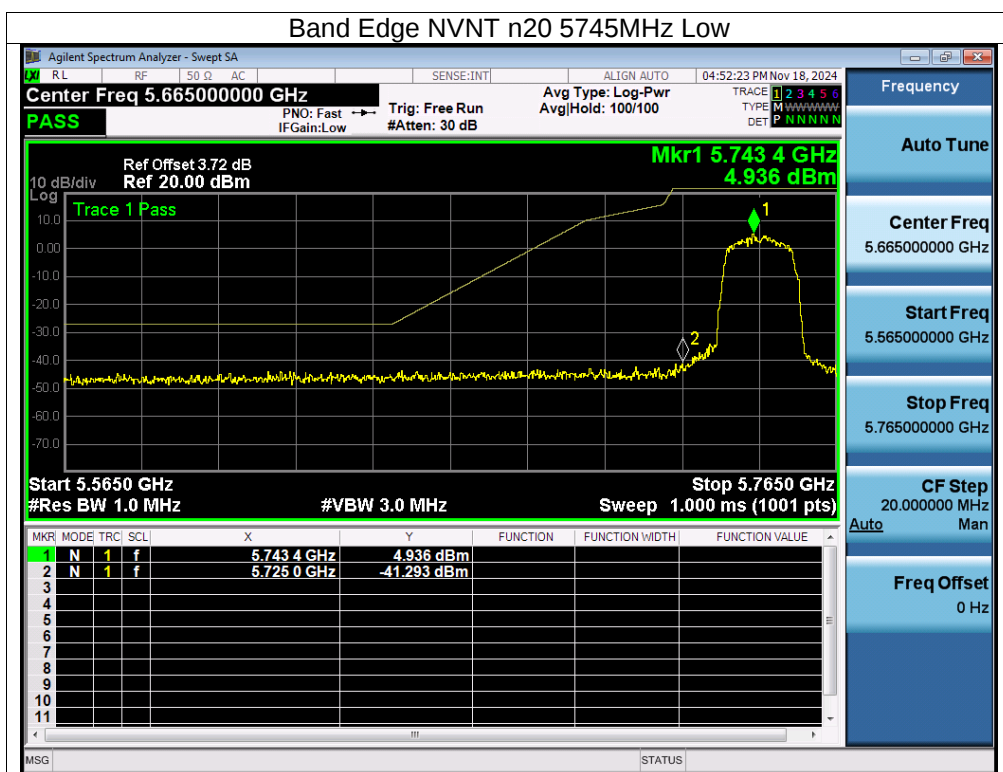

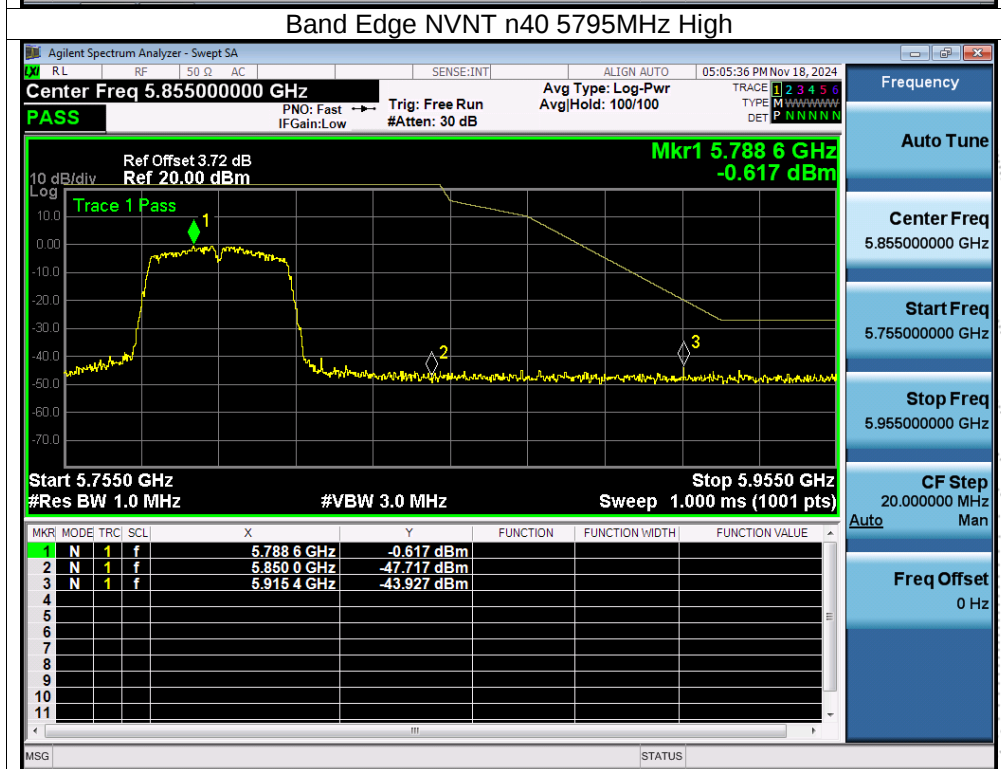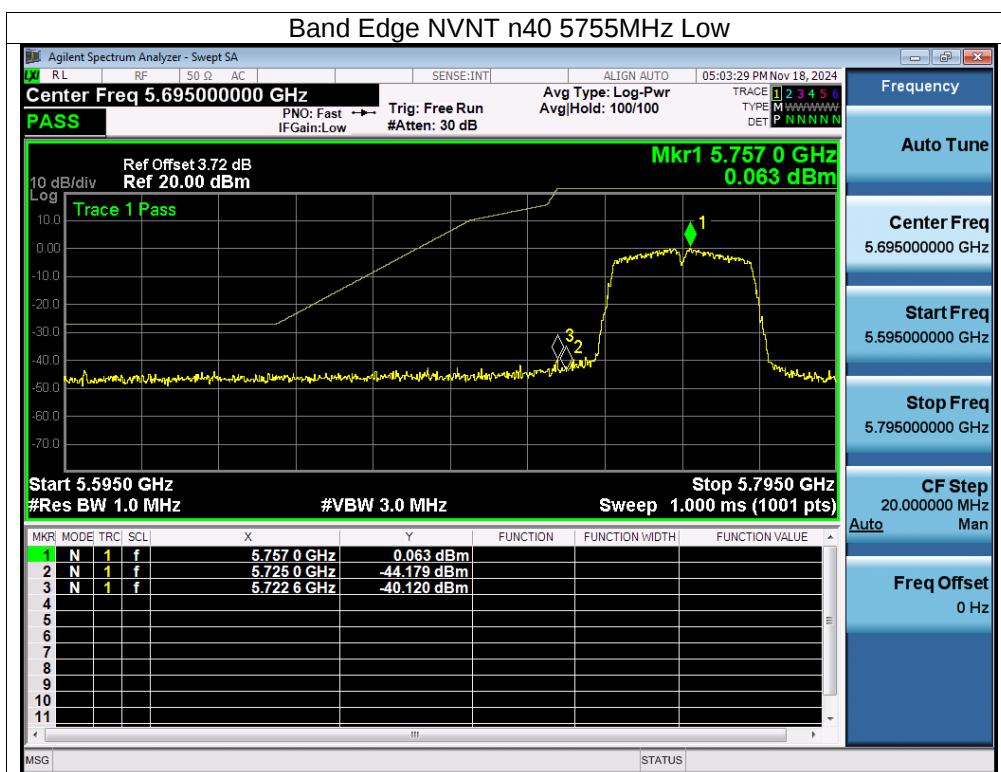

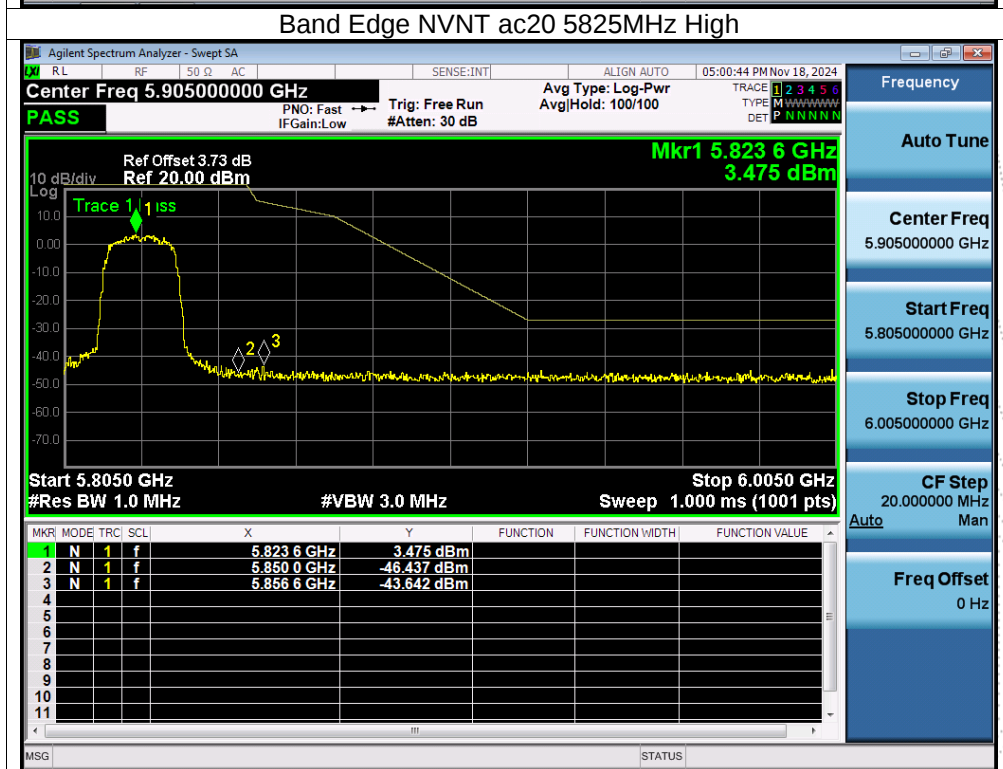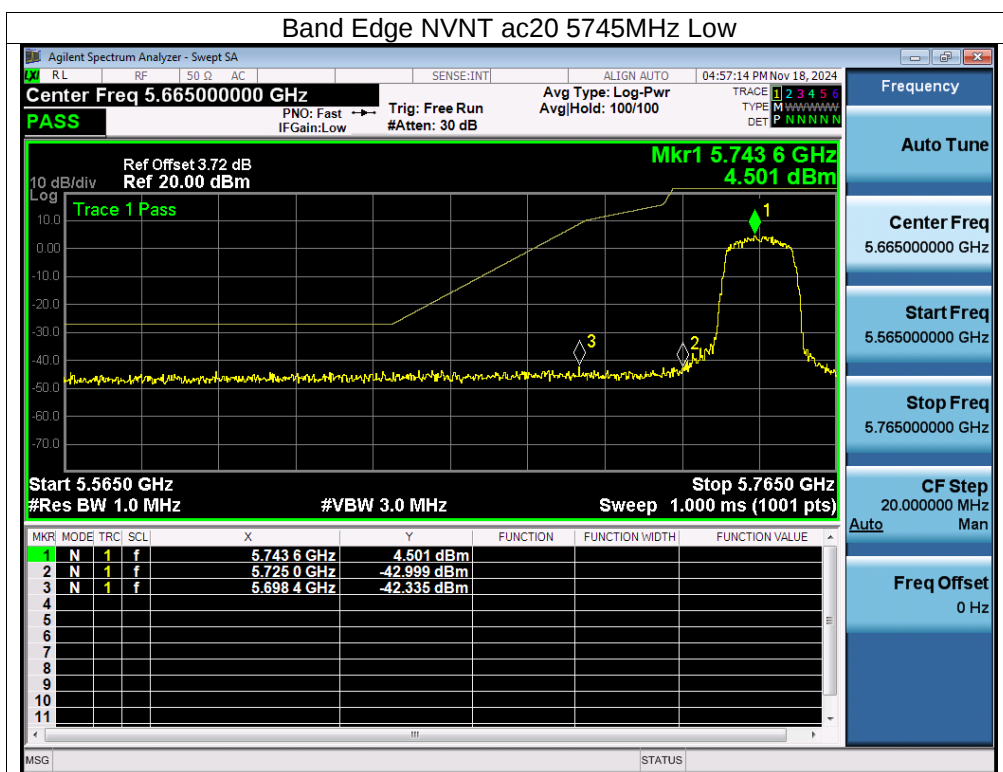

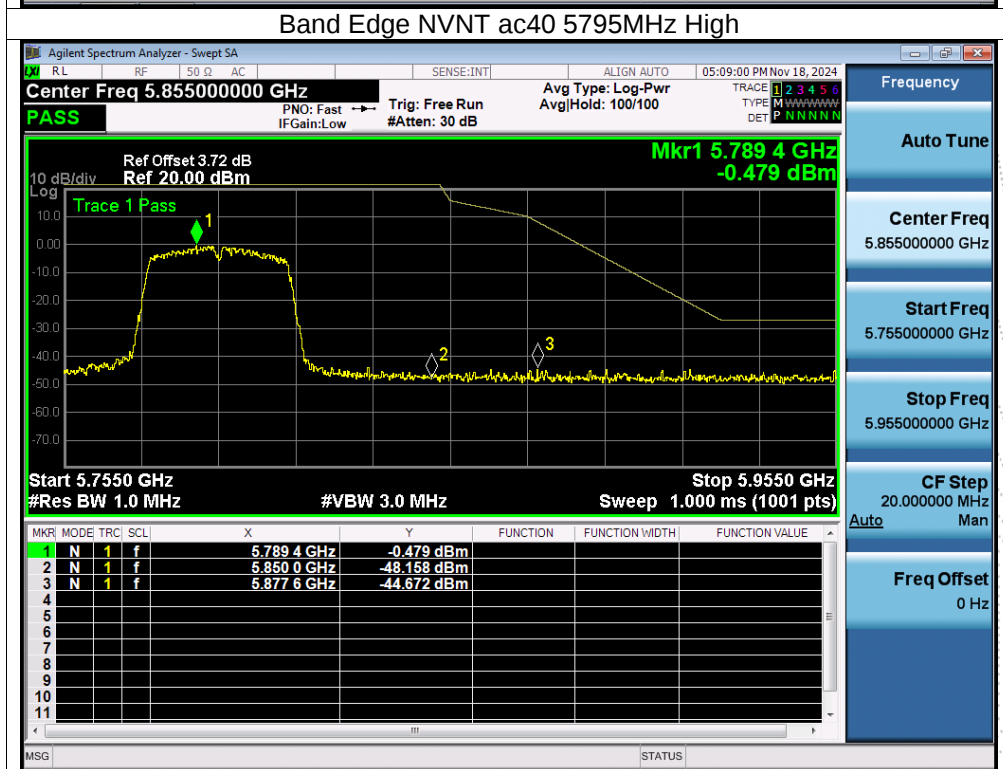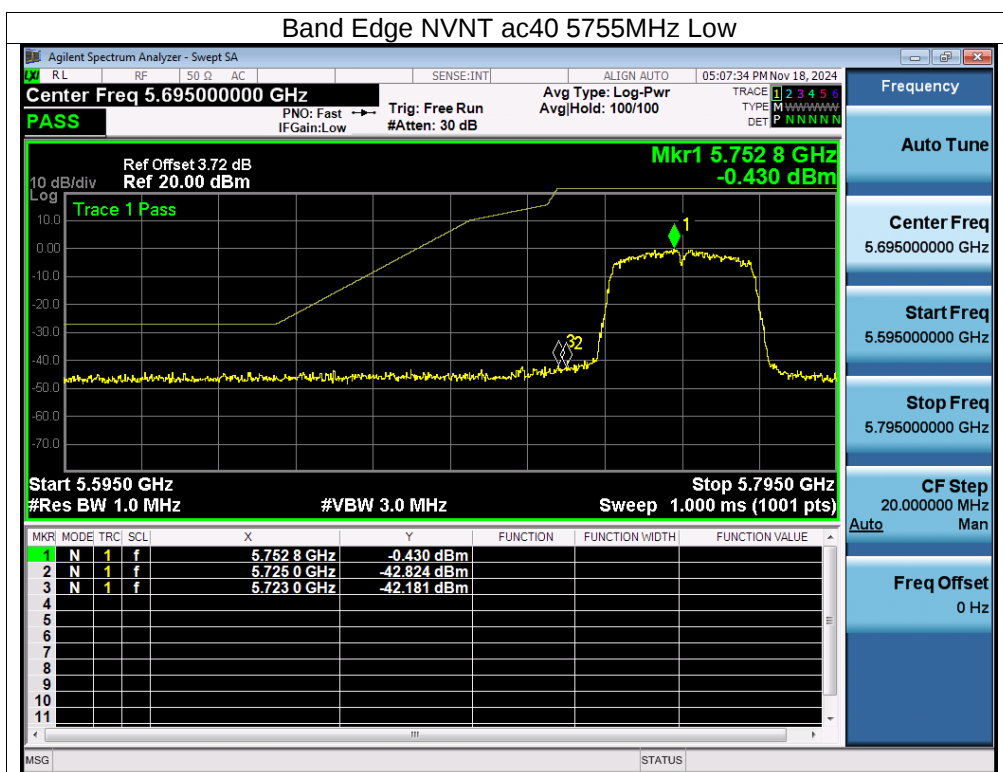

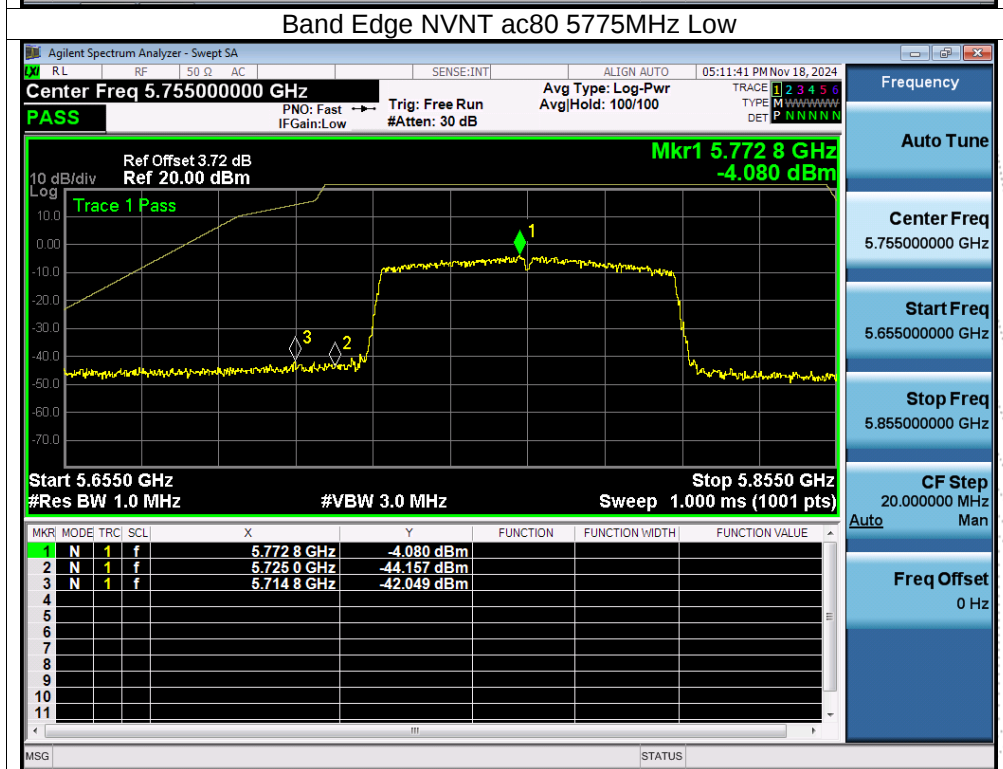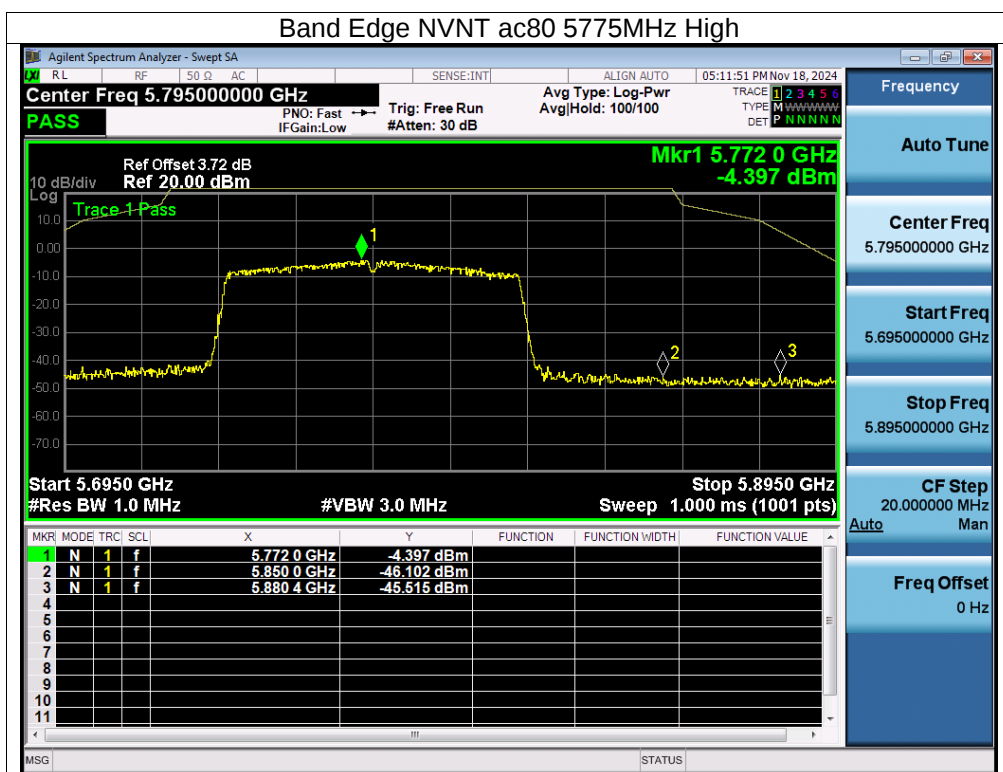

12. Spurious RF Conducted Emissions

12.1 Block Diagram Of Test Setup



12.2 Limit

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.725-5.85 GHz band(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge..

12.3 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.


12.4 Test Result

Remark: The measurement frequency range is from 9KHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.


About: 26.5GHz-40GHz, The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



Test Graphs



Tx. Spurious NVNT a 5180MHz Emission


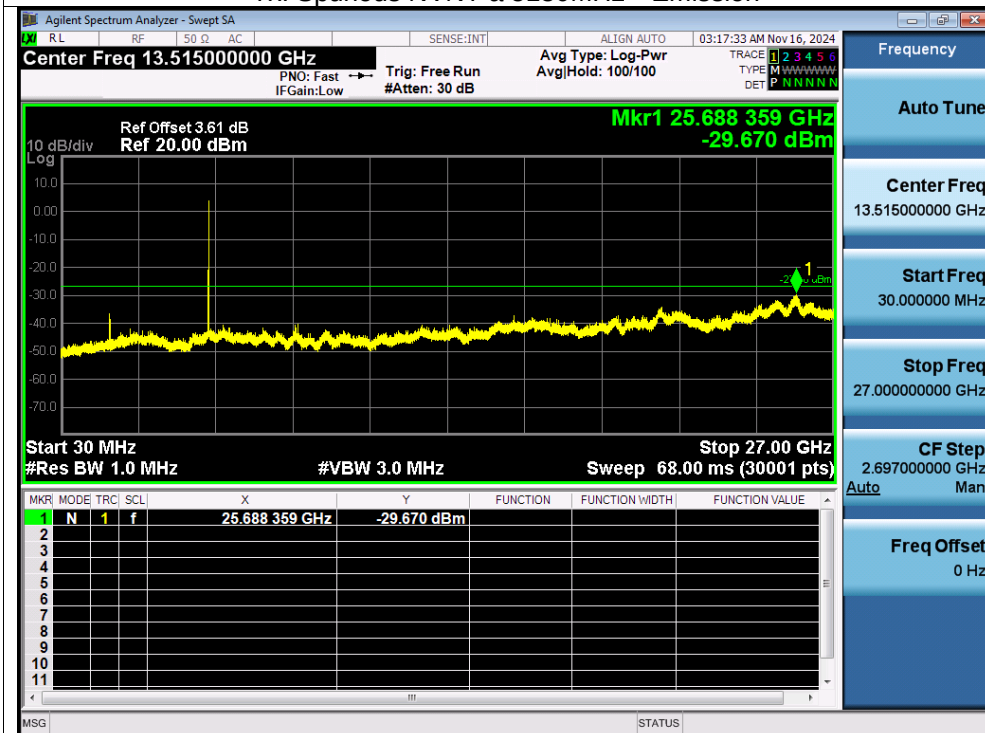




Tx. Spurious NVNT a 5200MHz Emission


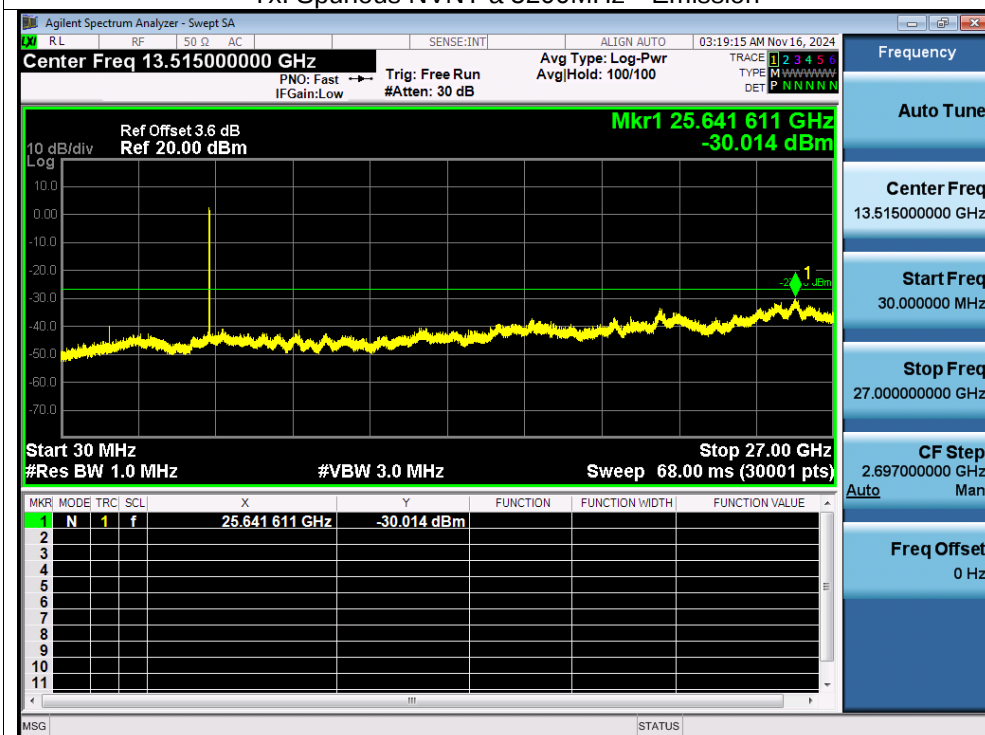


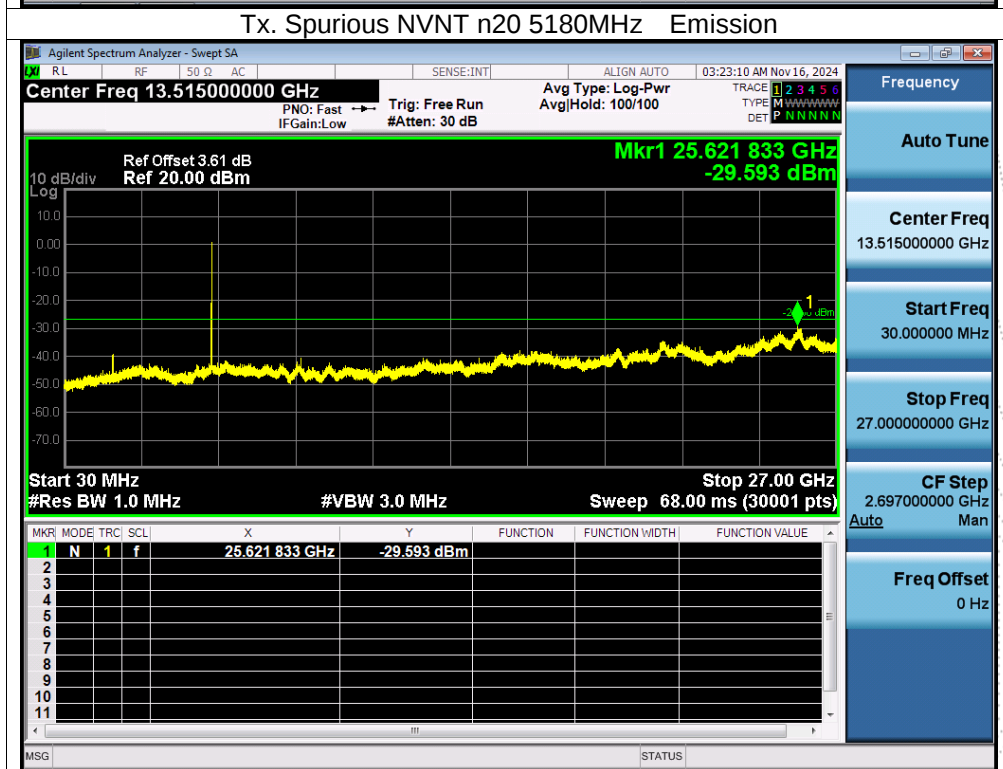
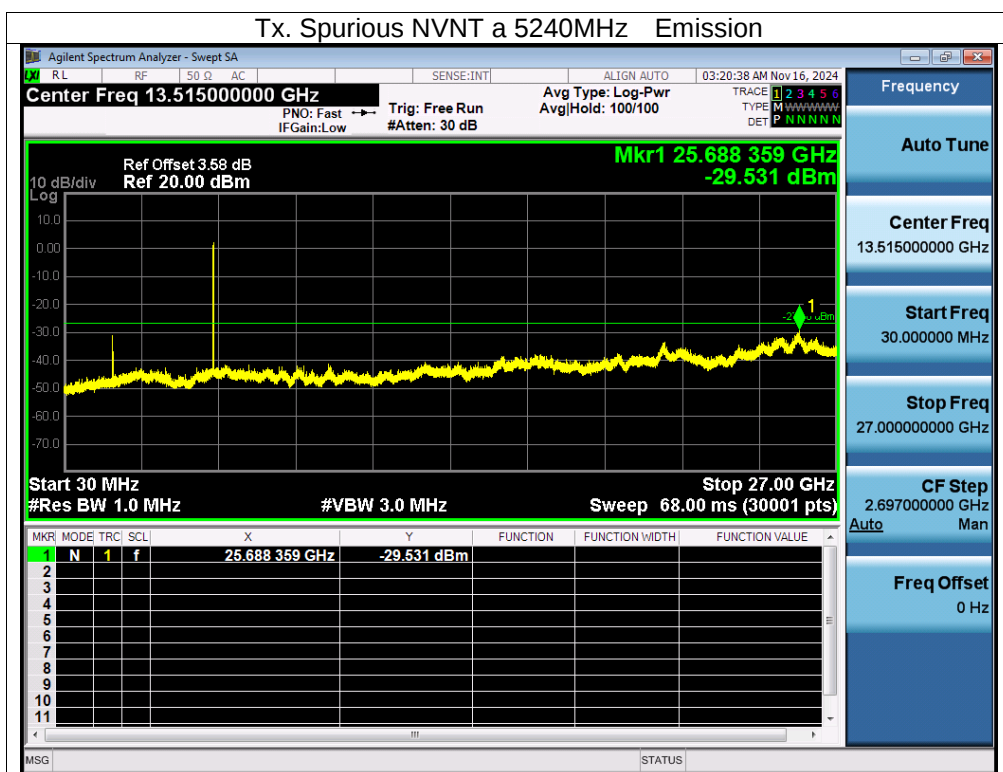


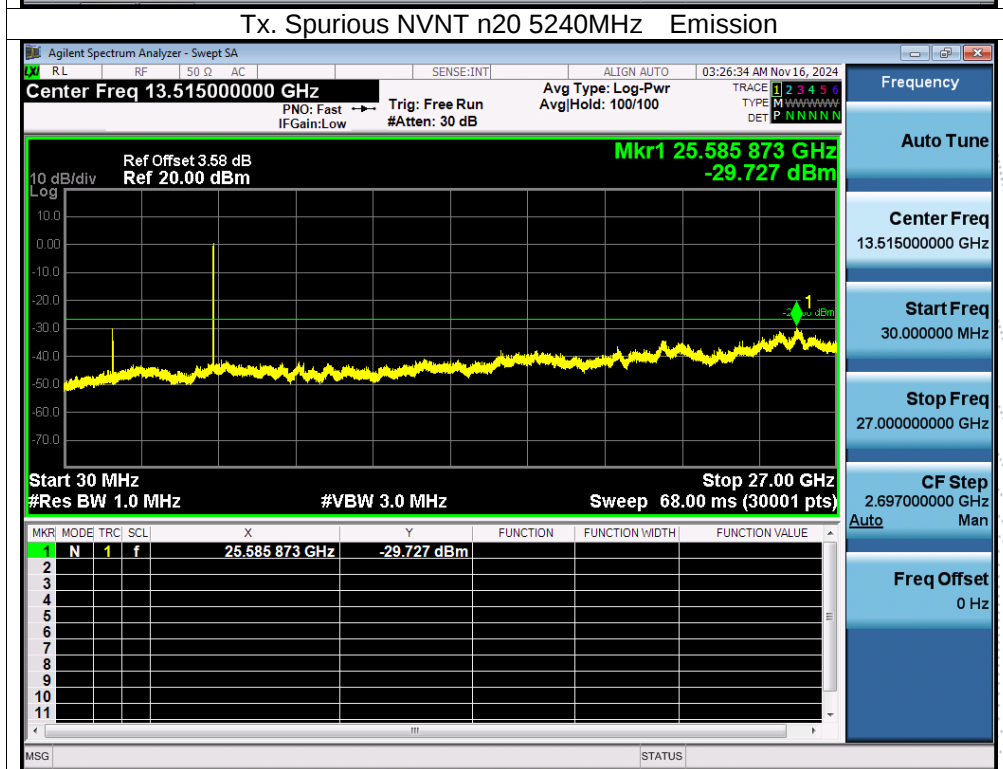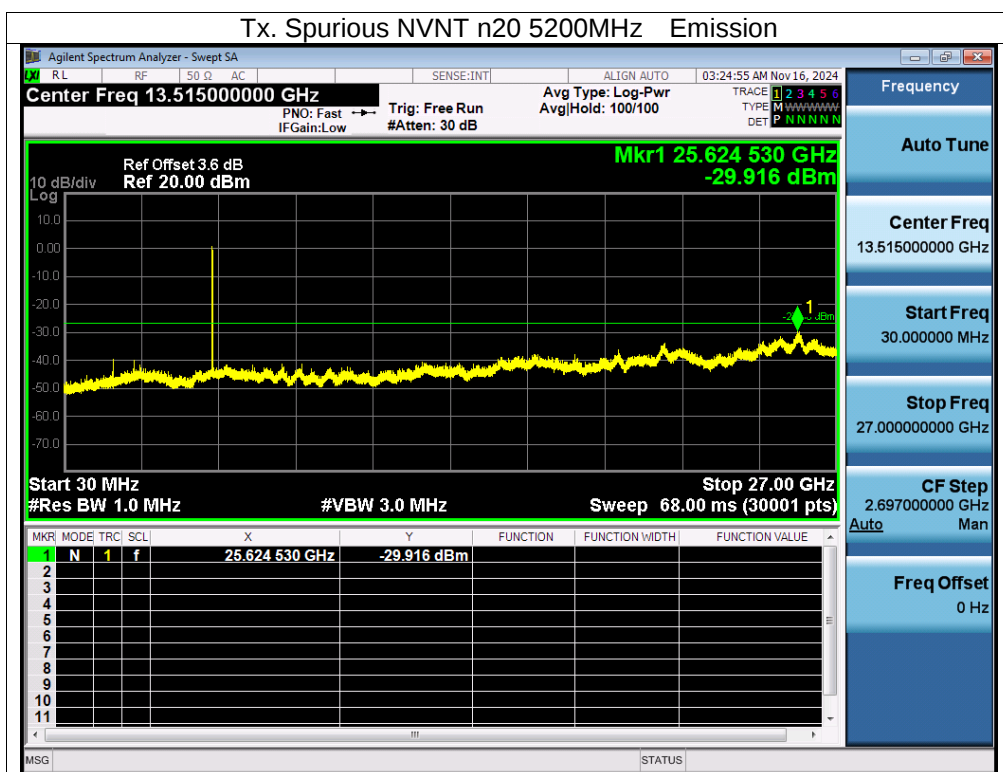

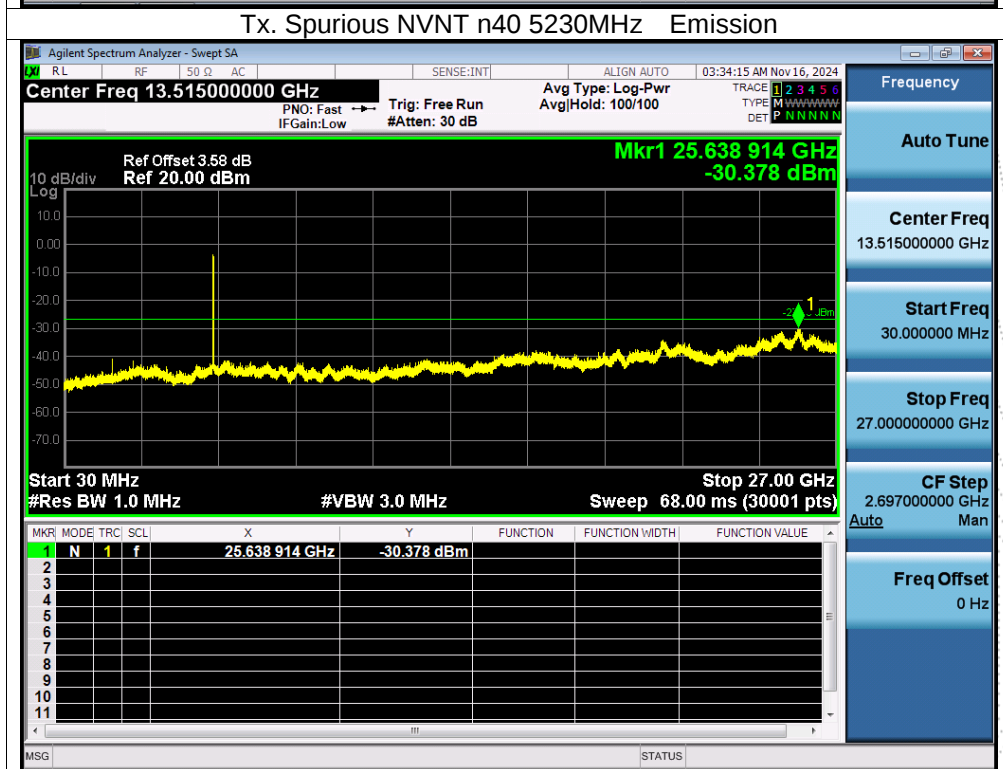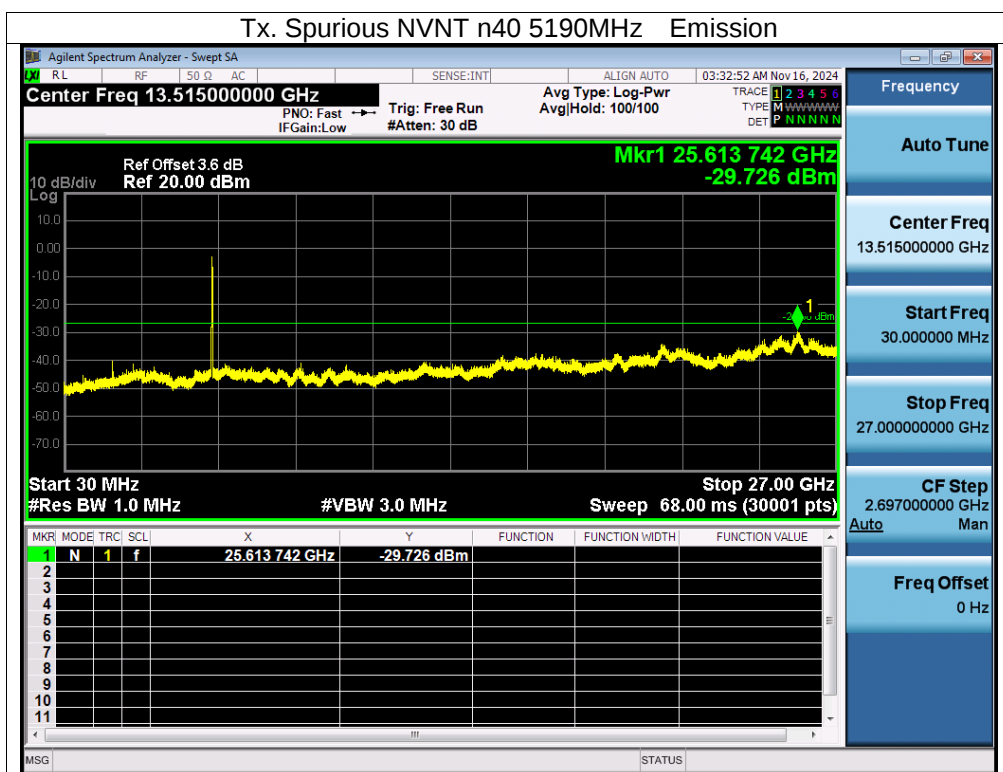

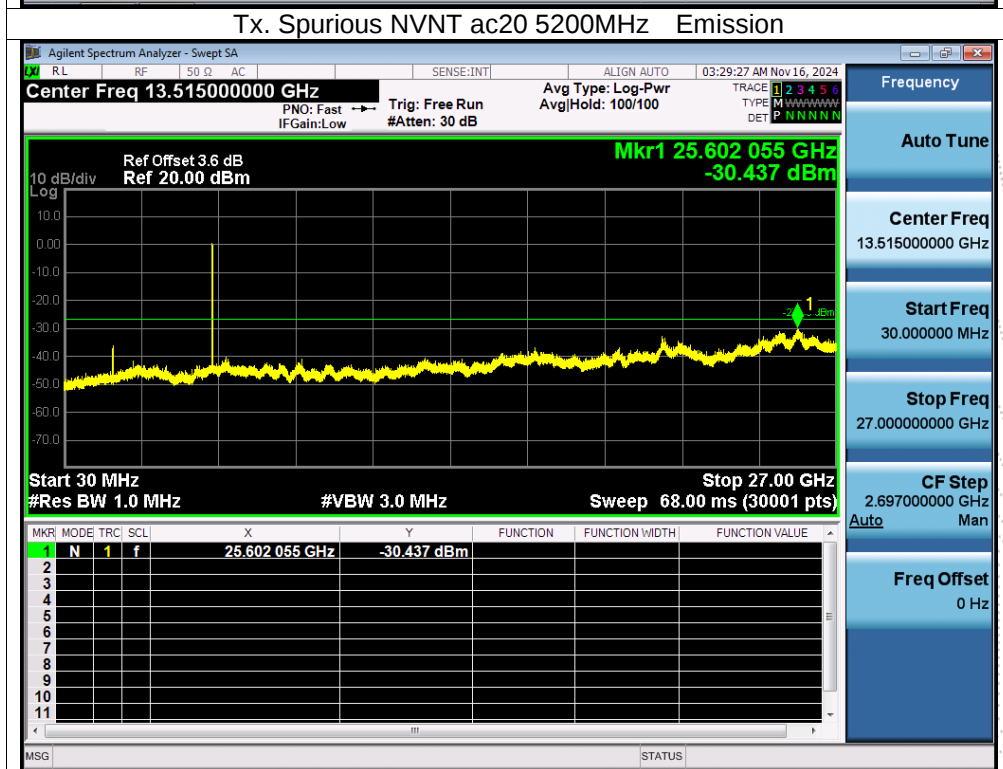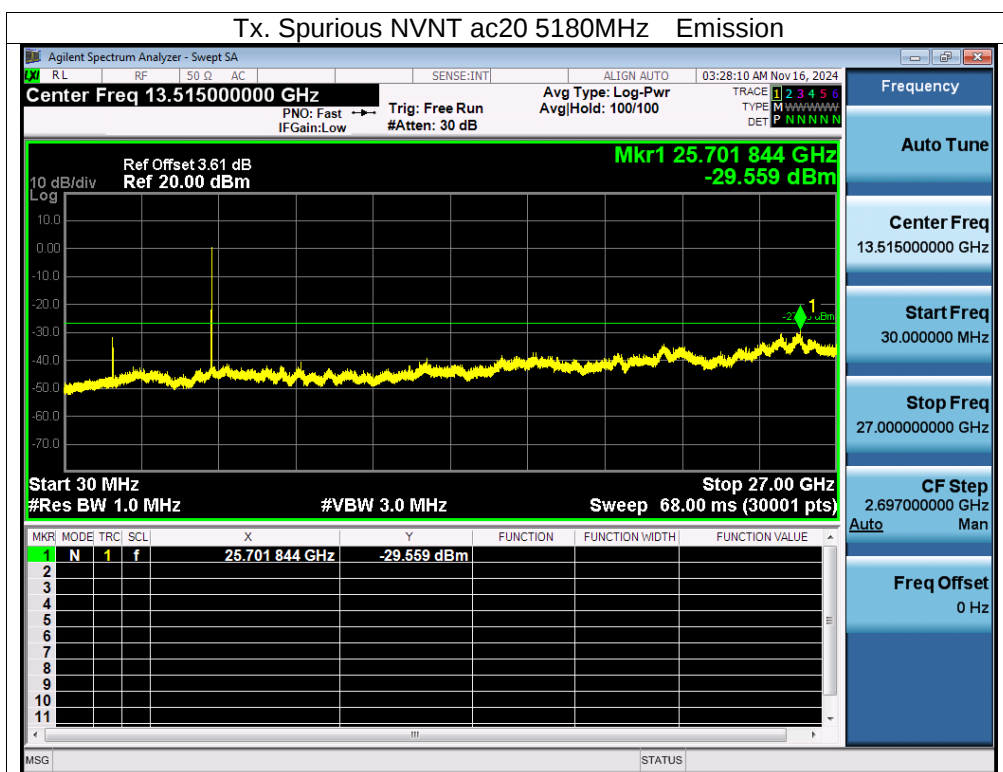


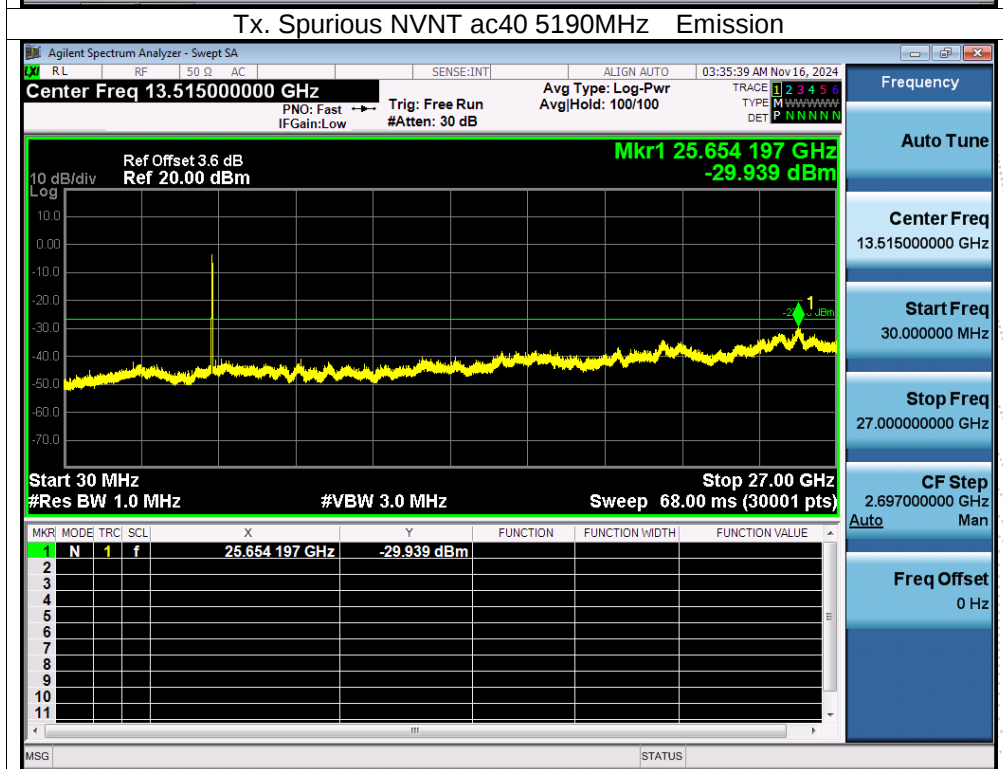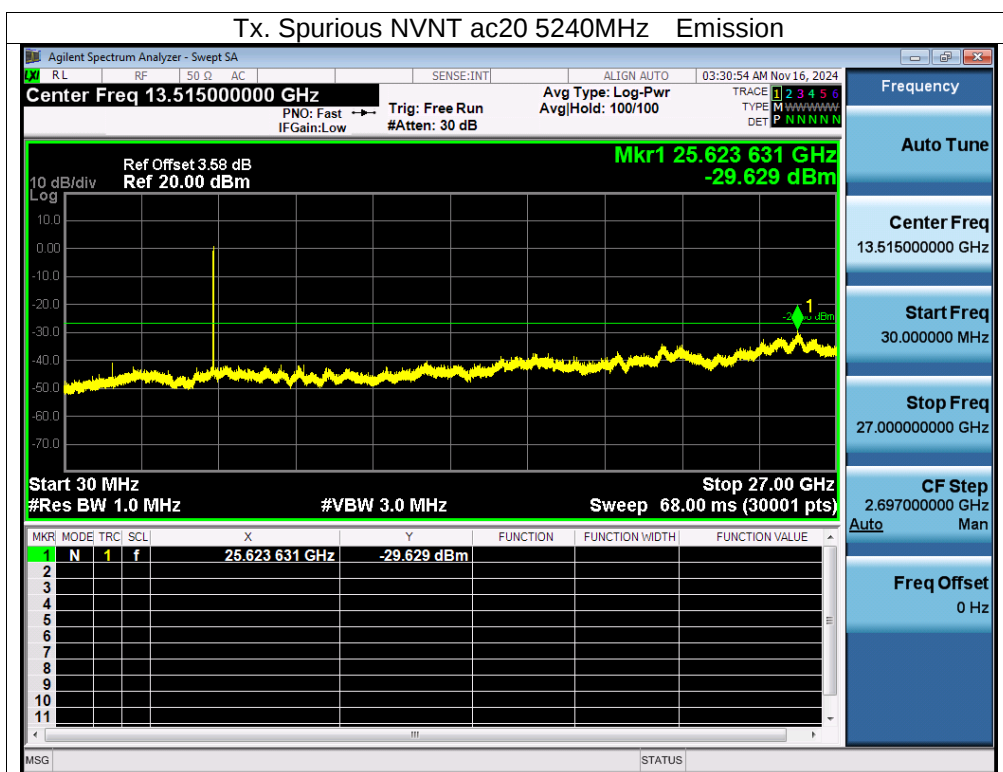

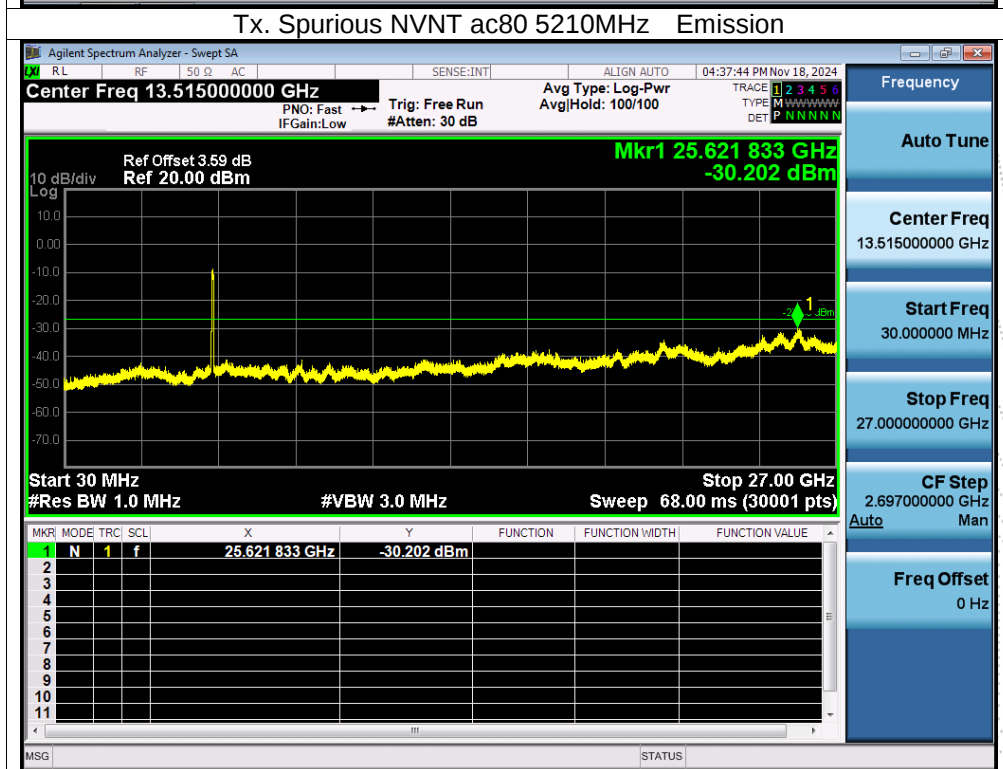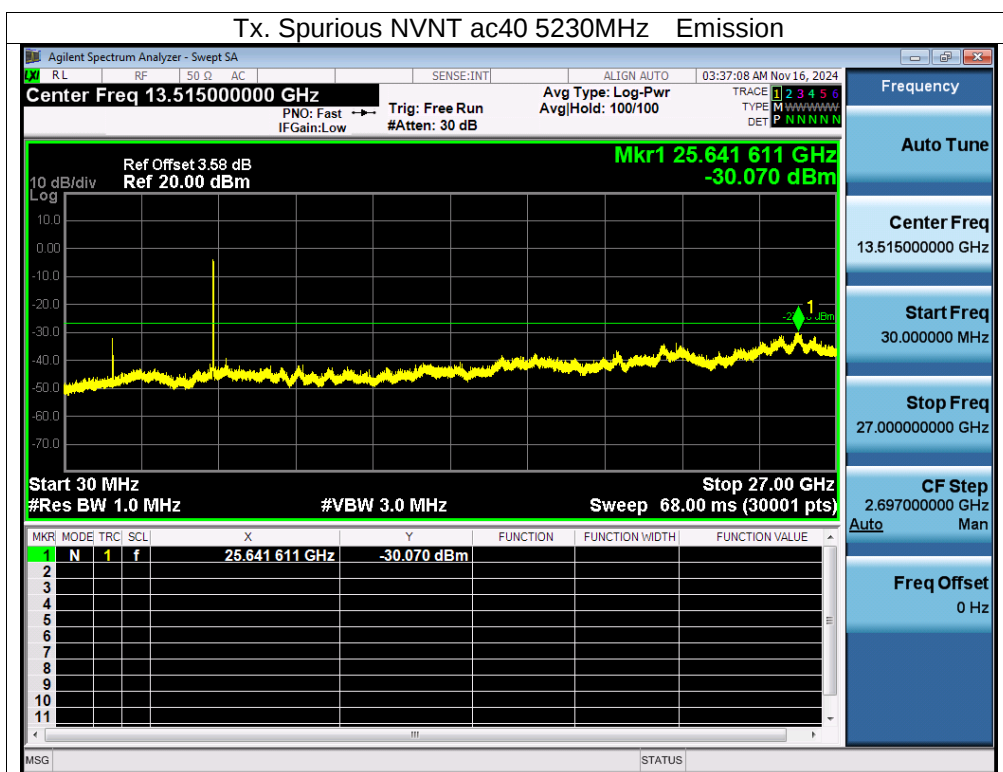




Test Graphs



Tx. Spurious NVNT a 5745MHz Emission


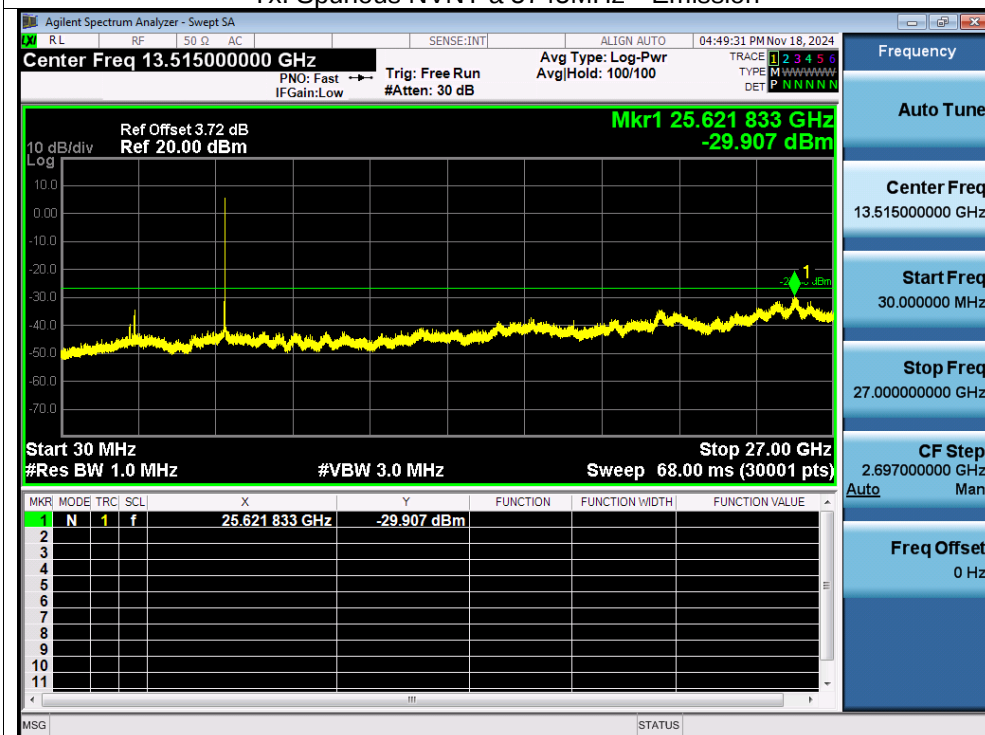




Tx. Spurious NVNT a 5785MHz Emission


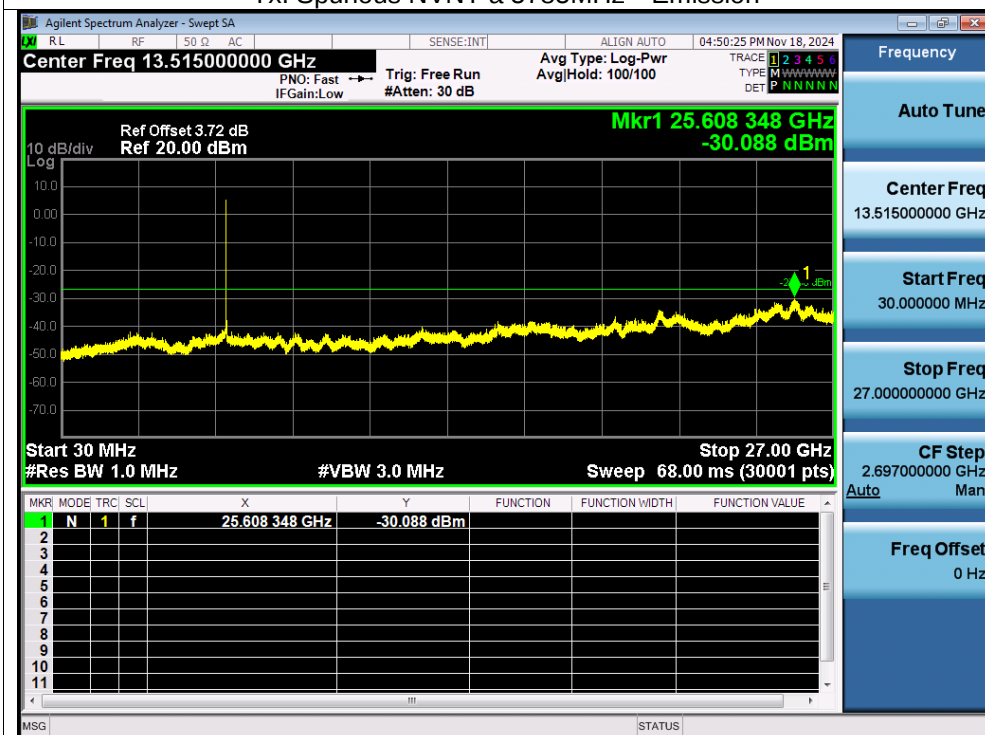


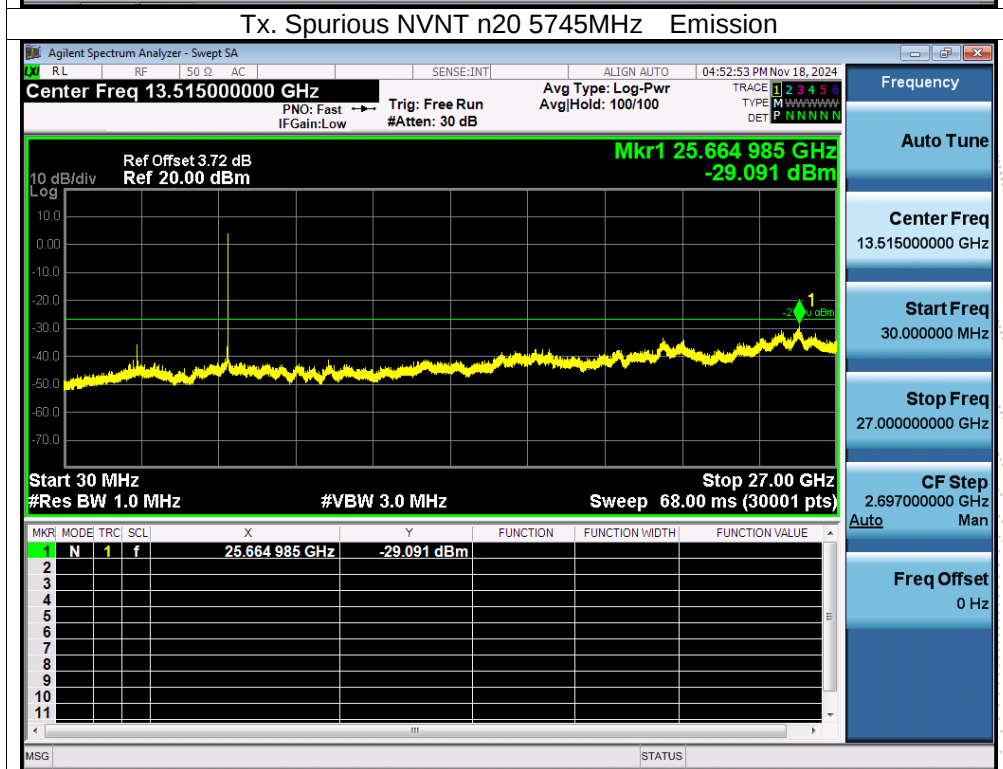
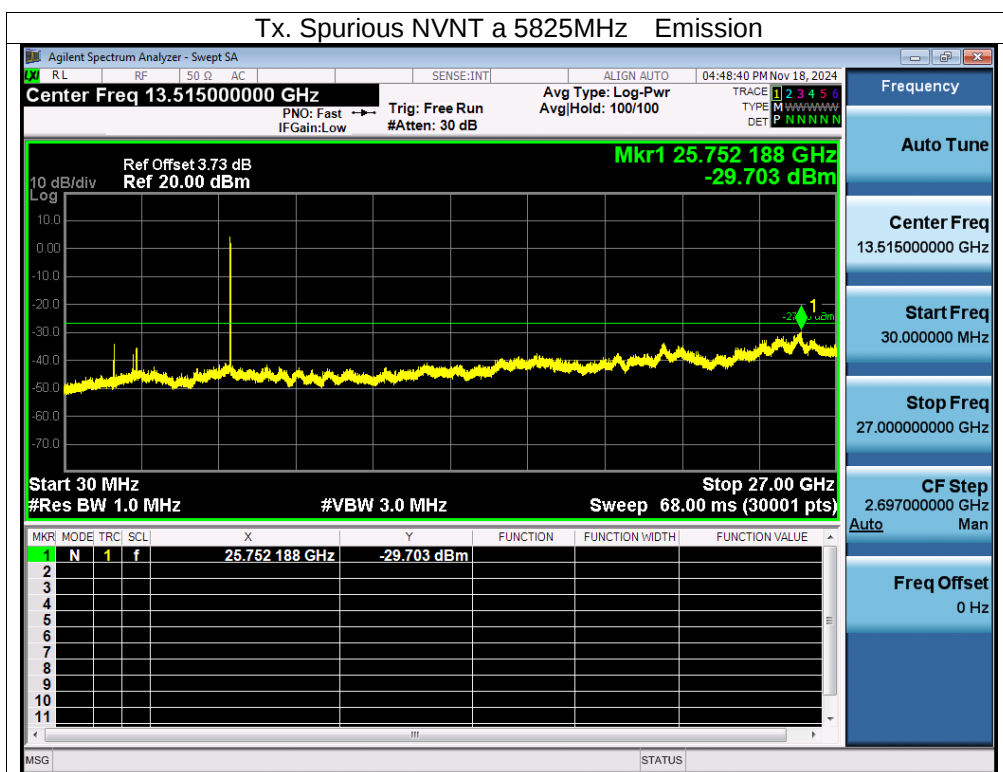


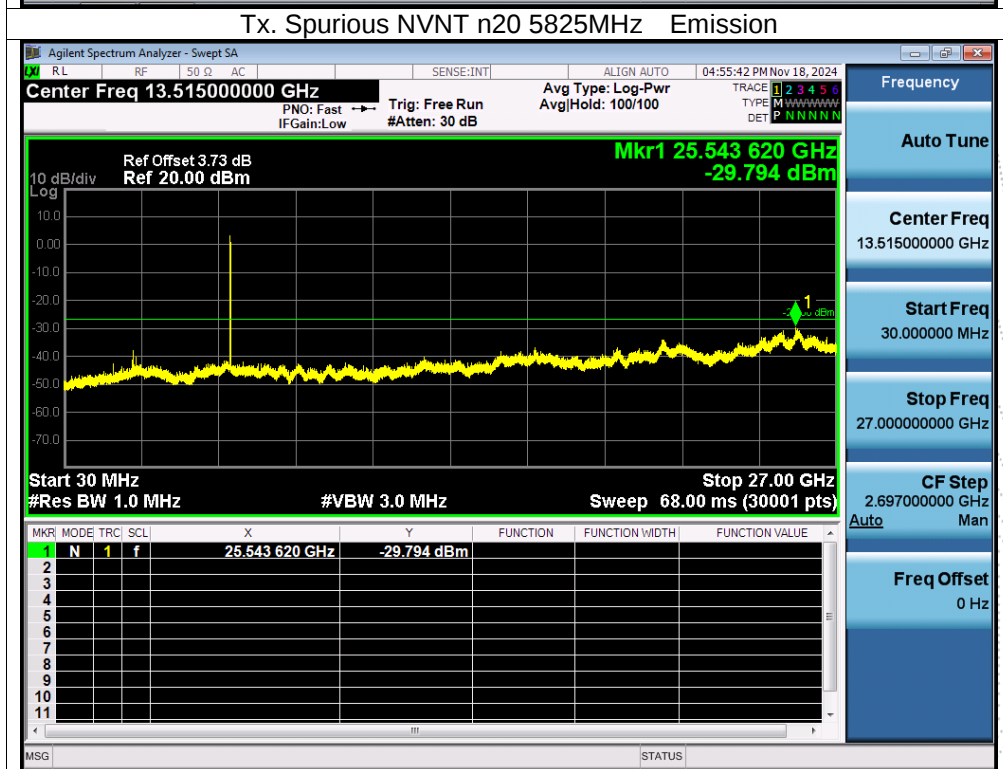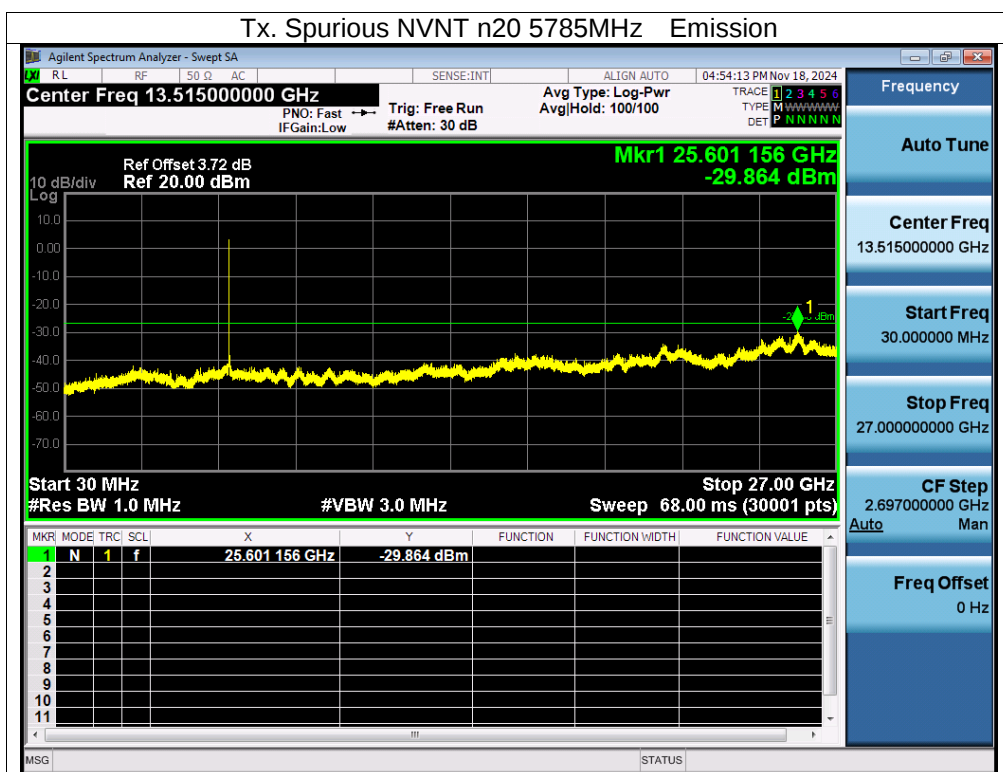

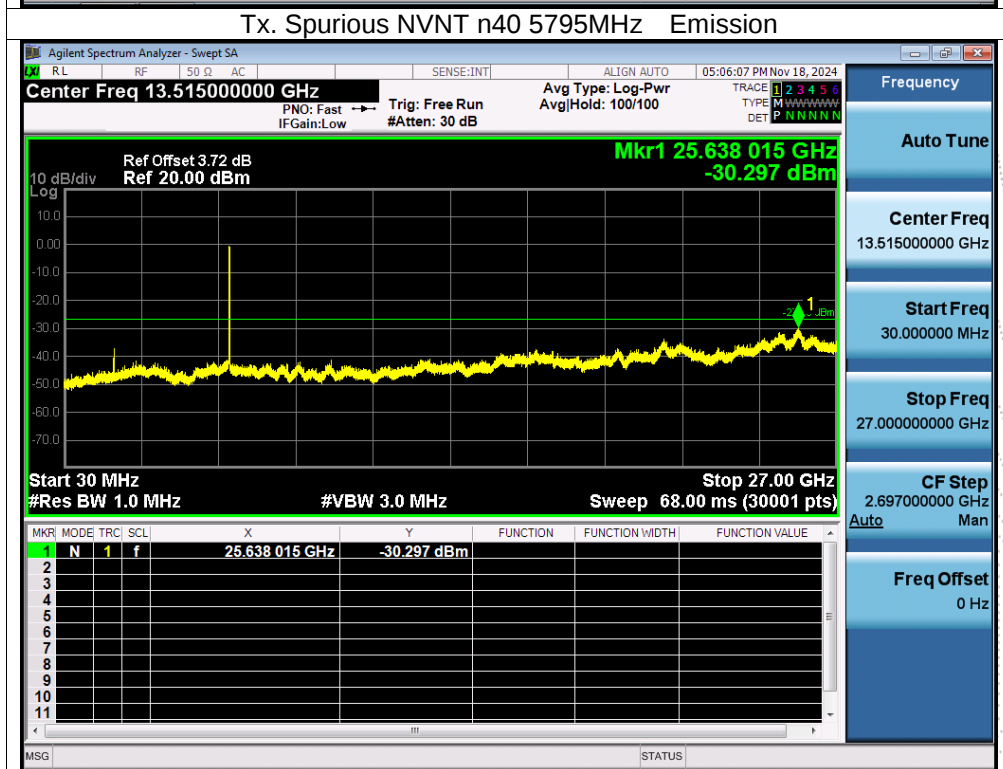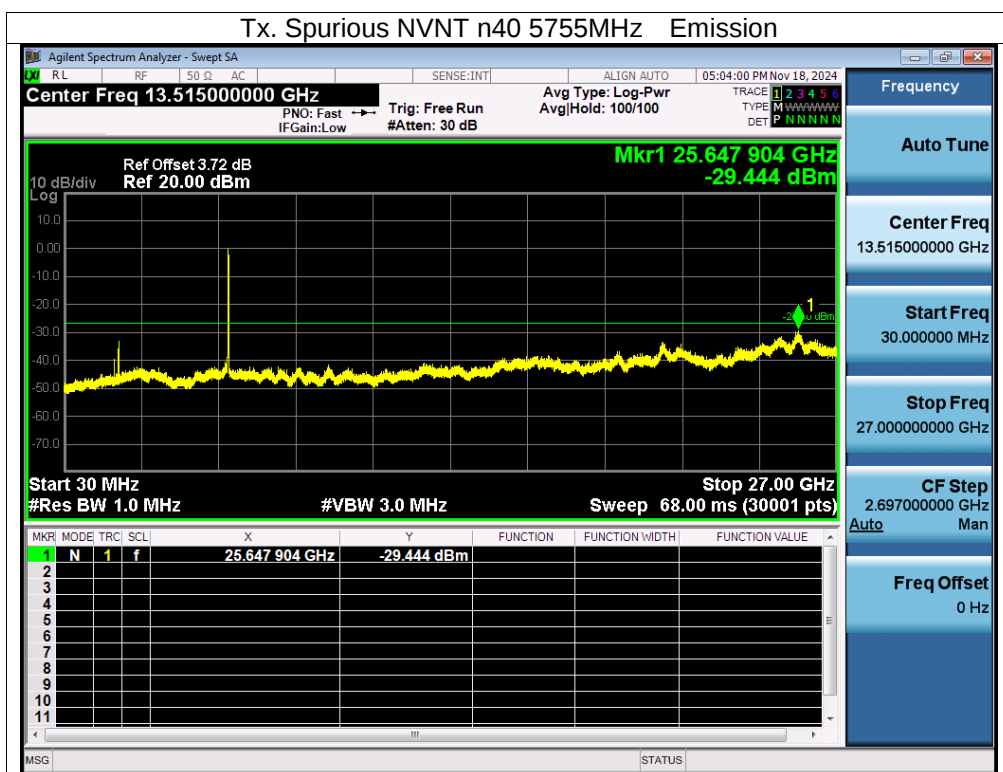

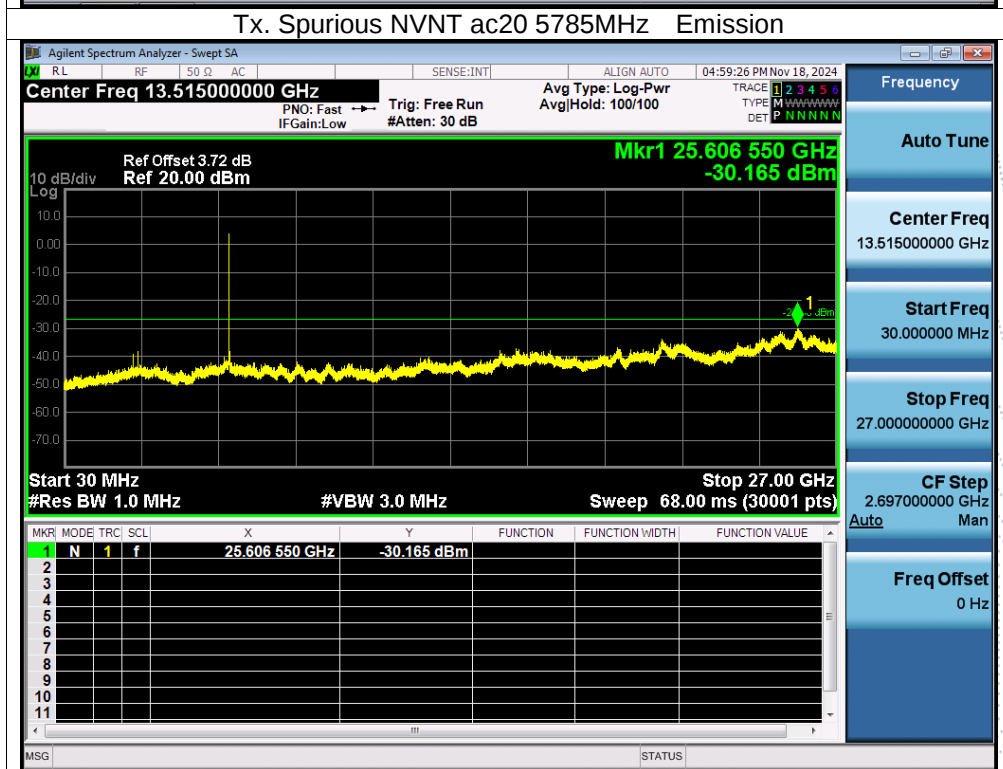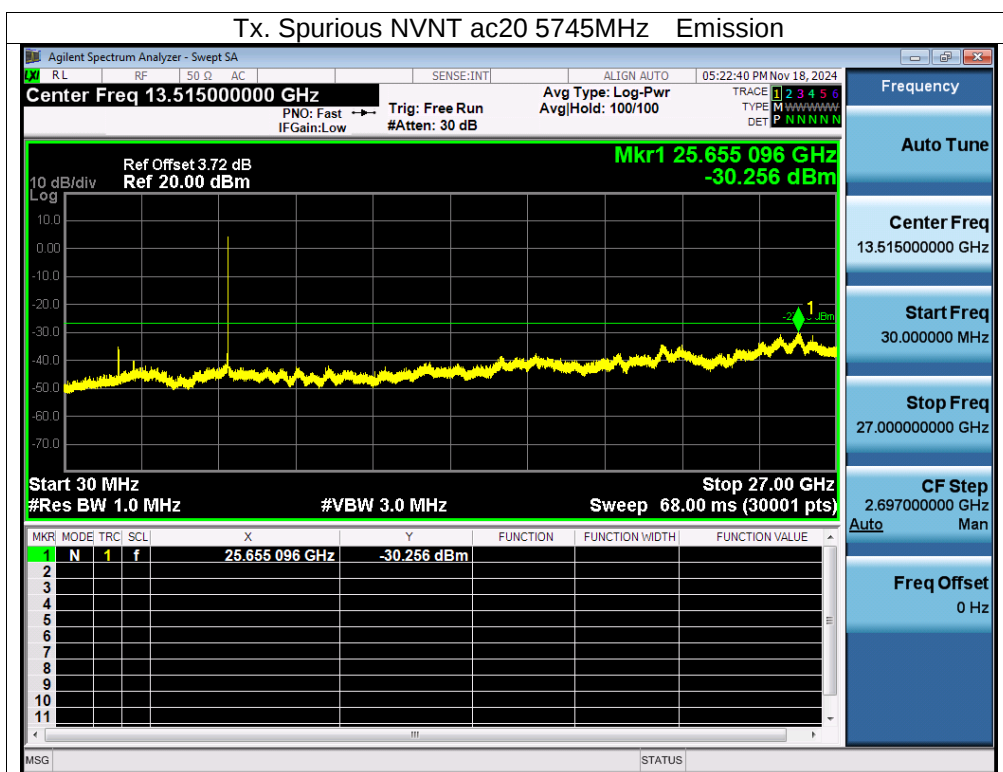


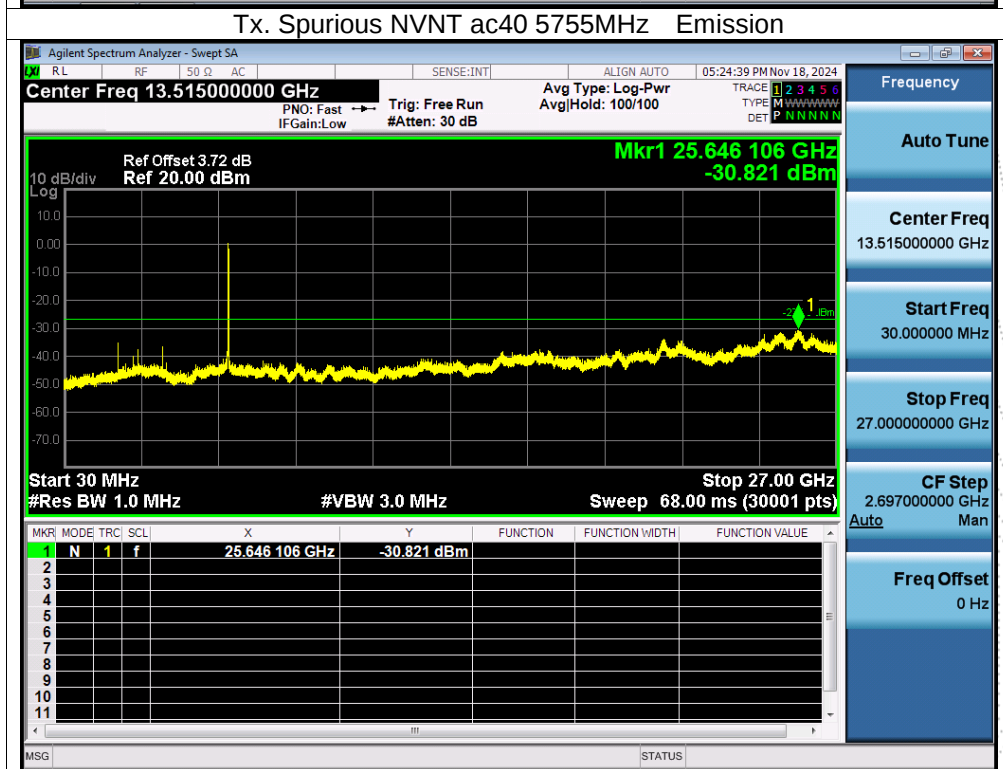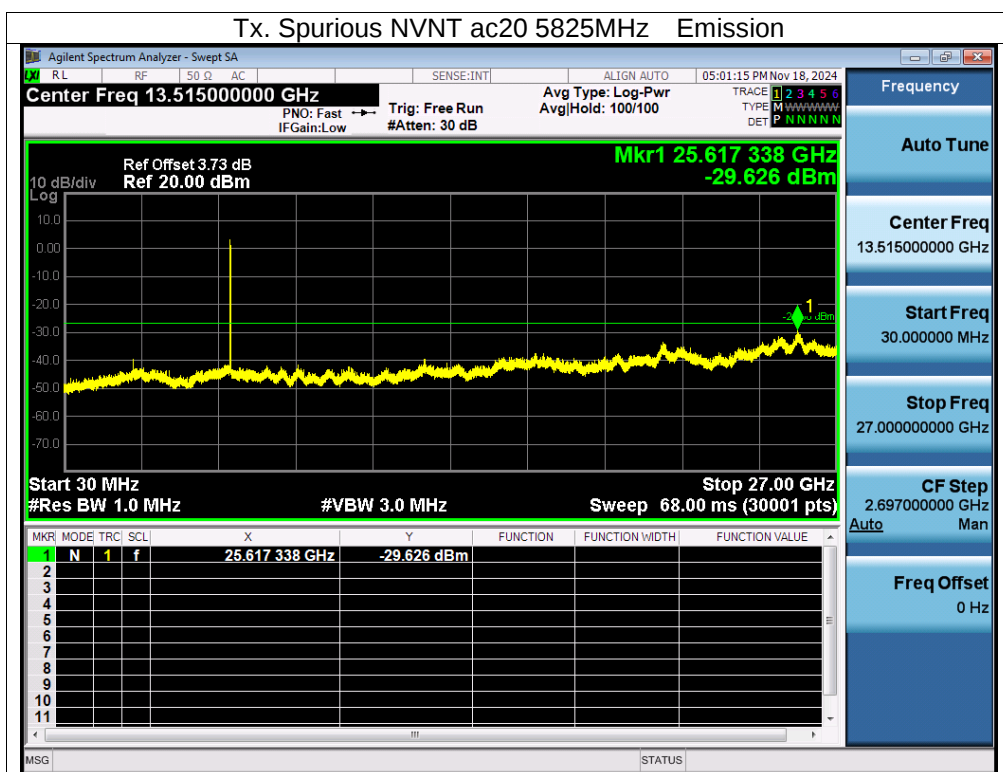

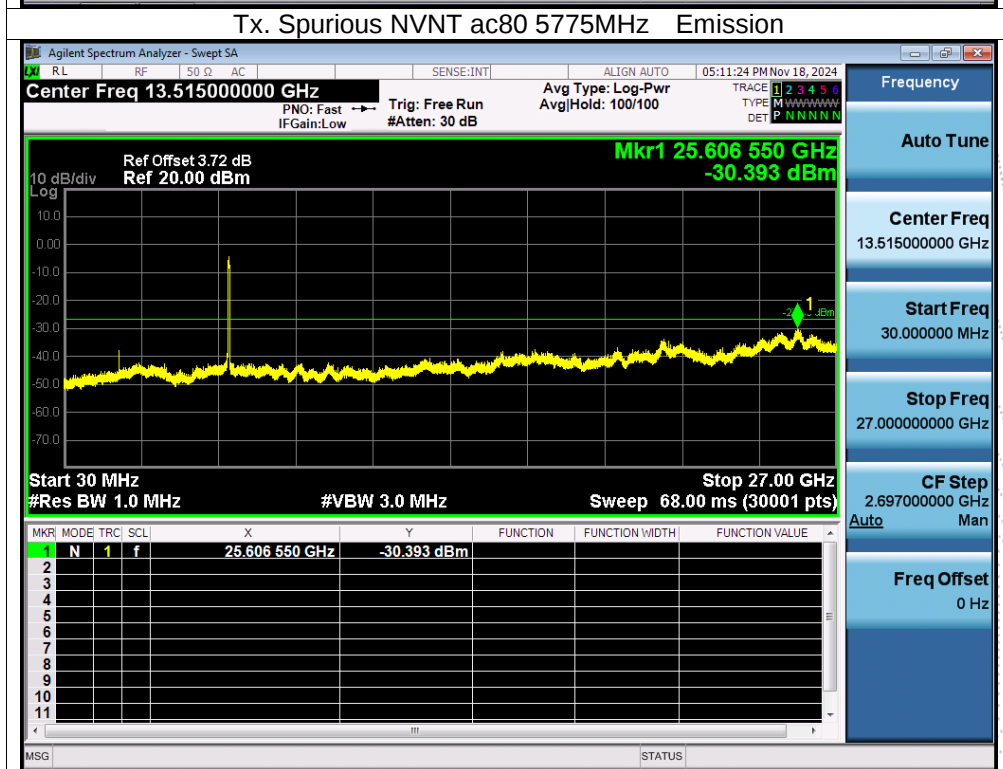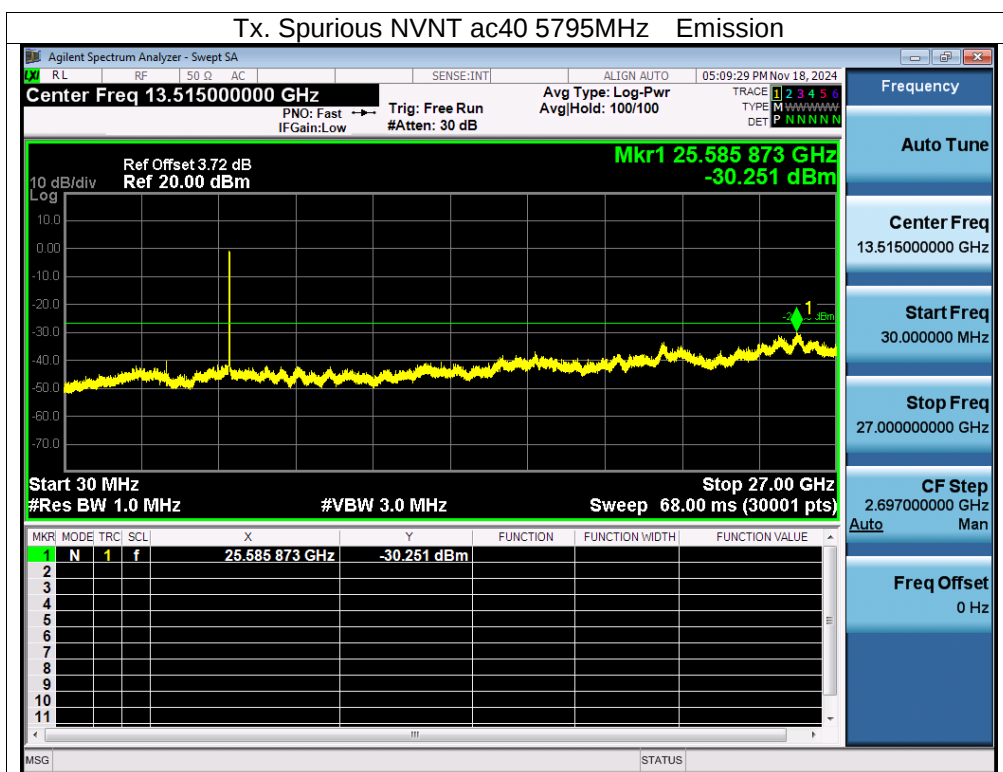

13. Frequency Stability Measurement

13.1 Block Diagram Of Test Setup

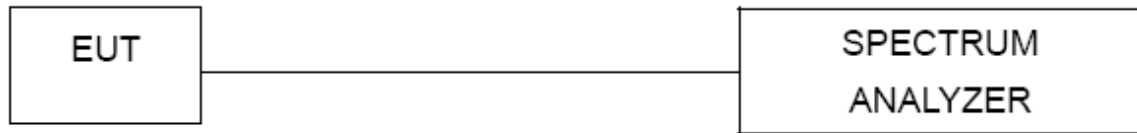

13.2 Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification)..

13.3 Test Procedure

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and he limit is less than ± 20 ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is -20°C ~ 70°C .

13.4 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Test Voltage:	DC 3.8V
Test Mode:	TX Frequency U-NII-1 (5180-5240MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency : 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.8	5180.0077	5180	0.0077	1.4865
		V max (V)	4.37	5180.0018	5180	0.0018	0.3475
		V min (V)	3.23	5180.0081	5180	0.0081	1.5637
Limits				5150-5250 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.8	T (°C)	-20	5180.0023	5180	0.0023	0.4440
		T (°C)	-10	5180.0033	5180	0.0033	0.6371
		T (°C)	0	5180.0124	5180	0.0124	2.3938
		T (°C)	10	5180.0047	5180	0.0047	0.9073
		T (°C)	20	5180.0030	5180	0.0030	0.5792
		T (°C)	30	5180.0024	5180	0.0024	0.4633
		T (°C)	40	5180.0102	5180	0.0102	1.9691
		T (°C)	50	5180.0103	5180	0.0103	1.9884
		T (°C)	60	5180.0029	5180	0.0029	0.5598
		T (°C)	70	5180.0077	5180	0.0077	1.4865
Limits				5150-5250 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.8	5200.0040	5200	0.0040	0.7692
		V max (V)	4.37	5200.0019	5200	0.0019	0.3654
		V min (V)	3.23	5200.0075	5200	0.0075	1.4423
Limits				5150-5250 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.8	T (°C)	-20	5200.01240	5200	0.01240	2.3846
		T (°C)	-10	5200.01270	5200	0.01270	2.4423
		T (°C)	0	5200.01310	5200	0.01310	2.5192
		T (°C)	10	5200.00720	5200	0.00720	1.3846
		T (°C)	20	5200.01230	5200	0.01230	2.3654
		T (°C)	30	5200.00480	5200	0.00480	0.9231
		T (°C)	40	5200.01110	5200	0.01110	2.1346
		T (°C)	50	5200.01220	5200	0.01220	2.3462
		T (°C)	60	5200.00590	5200	0.00590	1.1346
		T (°C)	70	5200.01270	5200	0.01270	2.4423
Limits				5150-5250 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.8	5240.0089	5240	0.0089	1.6985
		V max (V)	4.37	5240.0068	5240	0.0068	1.2977
		V min (V)	3.23	5240.0107	5240	0.0107	2.0420
Limits				5150-5250 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.8	T (°C)	-20	5240.0019	5240	0.0019	0.3626
		T (°C)	-10	5240.0118	5240	0.0118	2.2519
		T (°C)	0	5240.0135	5240	0.0135	2.5763
		T (°C)	10	5240.0092	5240	0.0092	1.7557
		T (°C)	20	5240.0108	5240	0.0108	2.0611
		T (°C)	30	5240.0104	5240	0.0104	1.9847
		T (°C)	40	5240.0093	5240	0.0093	1.7748
		T (°C)	50	5240.0007	5240	0.0007	0.1336
		T (°C)	60	5240.0095	5240	0.0095	1.8130
		T (°C)	70	5240.0094	5240	0.0094	1.7939
Limits				5150-5250 MHz			
Result				Complies			

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Test Voltage:	DC 3.8V
Test Mode:	TX Frequency(5745-5825MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.8	5745.00840	5745	0.00840	1.4621
		V max (V)	4.37	5745.00460	5745	0.00460	0.8007
		V min (V)	3.23	5745.00590	5745	0.00590	1.0270
Limits				5725-5850 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.8	T (°C)	-20	5745.00370	5745	0.00370	0.6440
		T (°C)	-10	5745.00100	5745	0.00100	0.1741
		T (°C)	0	5745.00050	5745	0.00050	0.0870
		T (°C)	10	5745.01200	5745	0.01200	2.0888
		T (°C)	20	5745.00720	5745	0.00720	1.2533
		T (°C)	30	5745.00580	5745	0.00580	1.0096
		T (°C)	40	5745.01160	5745	0.01160	2.0191
		T (°C)	50	5745.00660	5745	0.00660	1.1488
		T (°C)	60	5745.01230	5745	0.01230	2.1410
		T (°C)	70	5745.00500	5745	0.00500	0.8703
Limits				5725-5850 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.8	5785.00700	5785	0.00700	1.2100
		V max (V)	4.37	5785.00600	5785	0.00600	1.0372
		V min (V)	3.23	5785.00830	5785	0.00830	1.4347
Limits				5725-5850 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.8	T (°C)	-20	5785.00570	5785	0.00570	0.9853
		T (°C)	-10	5785.00430	5785	0.00430	0.7433
		T (°C)	0	5785.00780	5785	0.00780	1.3483
		T (°C)	10	5785.00450	5785	0.00450	0.7779
		T (°C)	20	5785.01320	5785	0.01320	2.2818
		T (°C)	30	5785.00610	5785	0.00610	1.0545
		T (°C)	40	5785.00130	5785	0.00130	0.2247
		T (°C)	50	5785.00380	5785	0.00380	0.6569
		T (°C)	60	5785.01100	5785	0.01100	1.9015
		T (°C)	70	5785.00850	5785	0.00850	1.4693
Limits				5725-5850 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.8	5825.01220	5825	0.01220	2.0944
		V max (V)	4.37	5825.00450	5825	0.00450	0.7725
		V min (V)	3.23	5825.00400	5825	0.00400	0.6867
Limits				5725-5850 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.8	T (°C)	-20	5825.01100	5825	0.01100	1.8884
		T (°C)	-10	5825.00810	5825	0.00810	1.3906
		T (°C)	0	5825.00300	5825	0.00300	0.5150
		T (°C)	10	5825.00890	5825	0.00890	1.5279
		T (°C)	20	5825.00750	5825	0.00750	1.2876
		T (°C)	30	5825.00500	5825	0.00500	0.8584
		T (°C)	40	5825.00370	5825	0.00370	0.6352
		T (°C)	50	5825.01180	5825	0.01180	2.0258
		T (°C)	60	5825.00970	5825	0.00970	1.6652
		T (°C)	70	5825.01140	5825	0.01140	1.9571
Limits				5725-5850 MHz			
Result				Complies			

14. Duty Cycle Of Test Signal

14.1 Standard Requirement

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle. All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

14.2 Formula

Duty Cycle = $T_{on} / (T_{on} + T_{off})$


14.3 Test Procedure



1. Set span = Zero
2. RBW = 8MHz
3. VBW = 8MHz,
4. Detector = Peak



14.4 Test Result

5.1G

Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5180	100	0	0
NVNT	n20	5180	100	0	0
NVNT	n40	5190	100	0	0
NVNT	ac20	5180	100	0	0
NVNT	ac40	5190	100	0	0
NVNT	ac80	5210	100	0	0

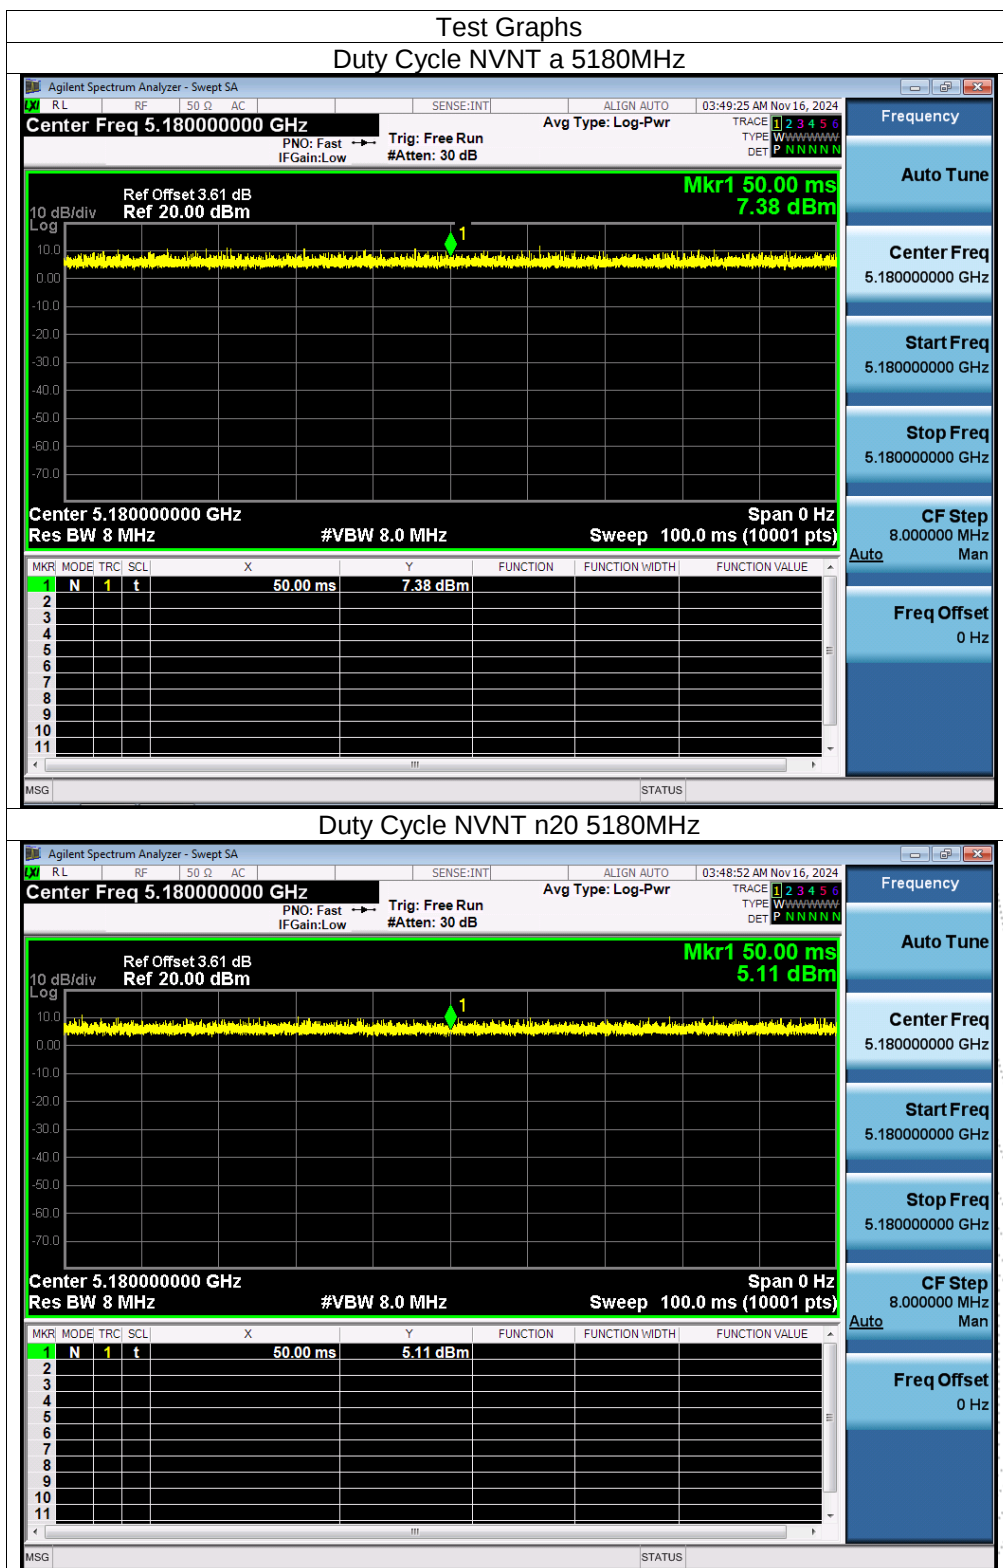


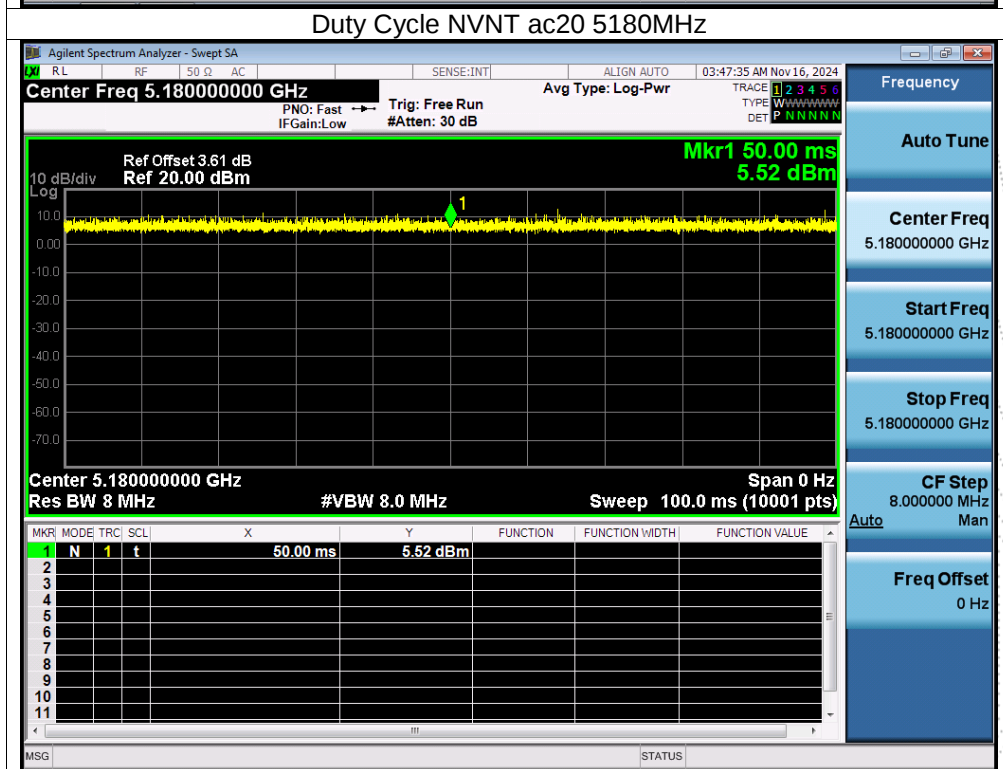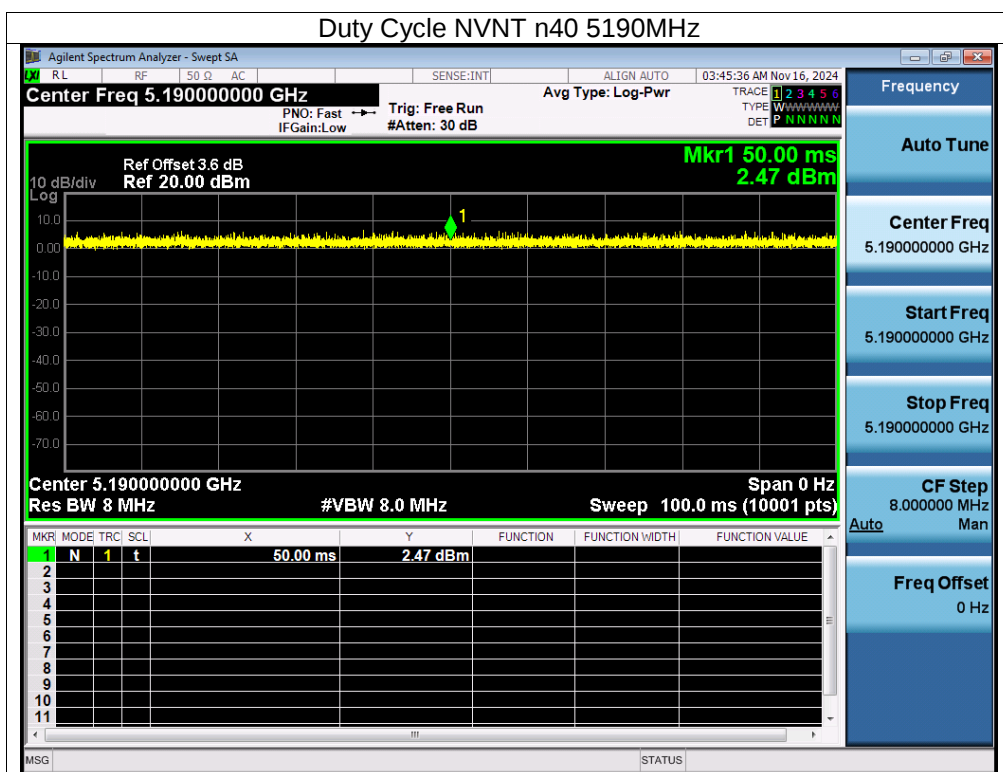


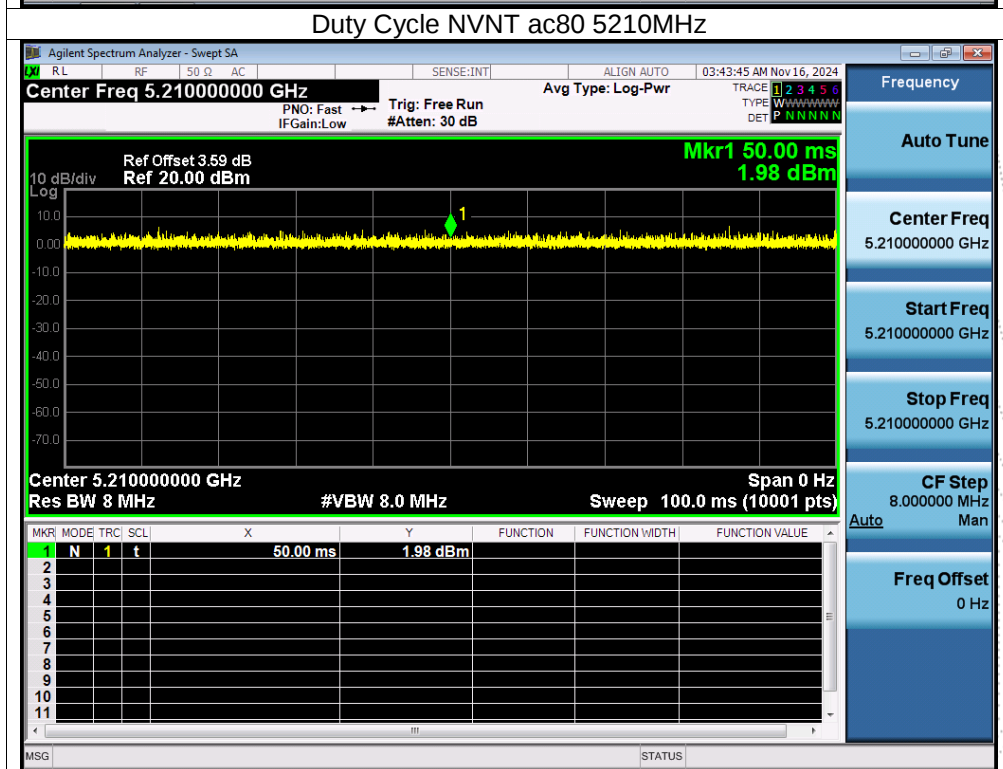
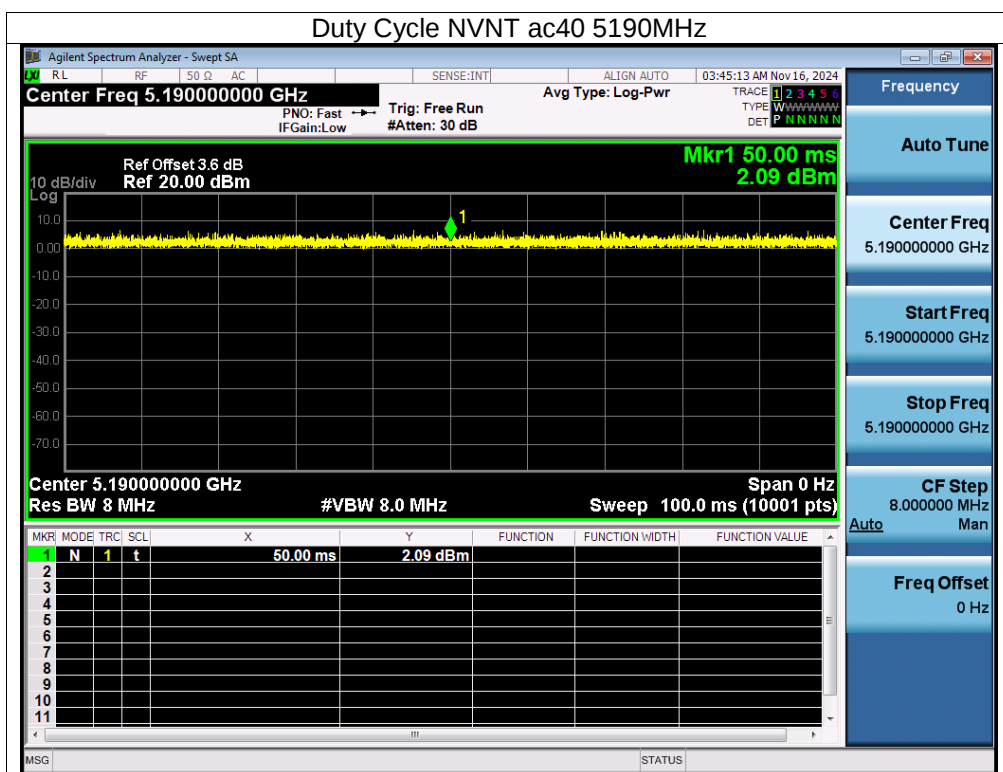




5.8G

Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5745	100	0	0
NVNT	n20	5745	100	0	0
NVNT	n40	5755	100	0	0
NVNT	ac20	5745	100	0	0
NVNT	ac40	5755	100	0	0
NVNT	ac80	5775	100	0	0

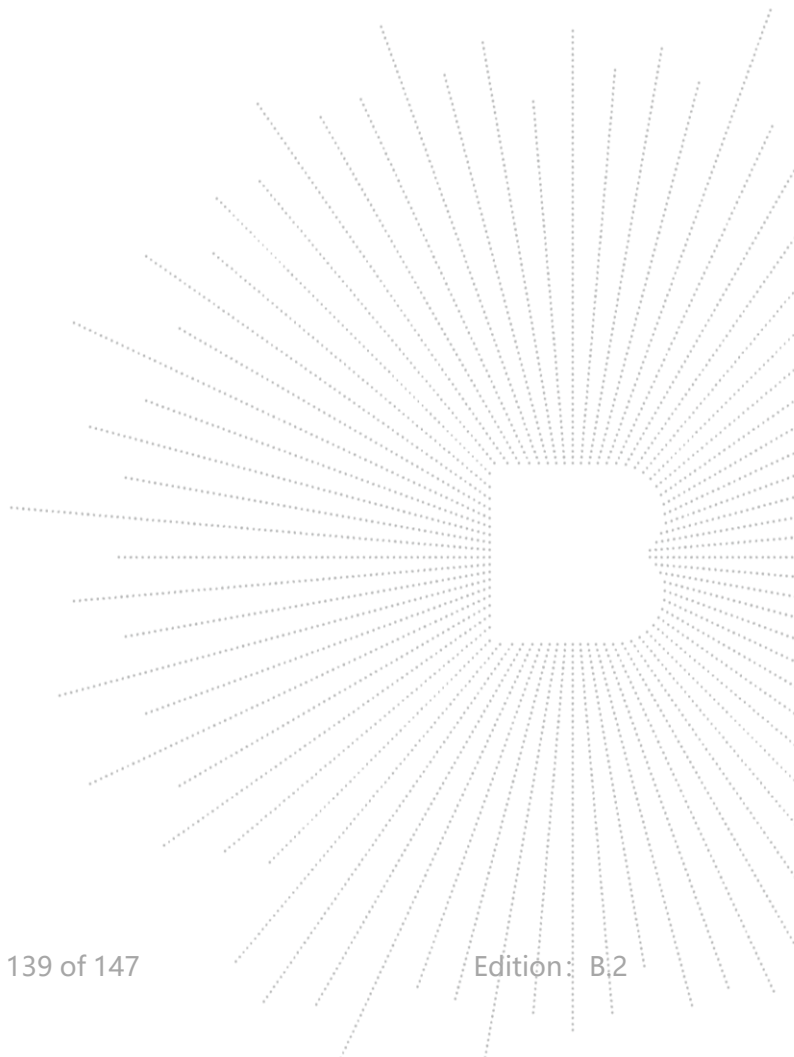

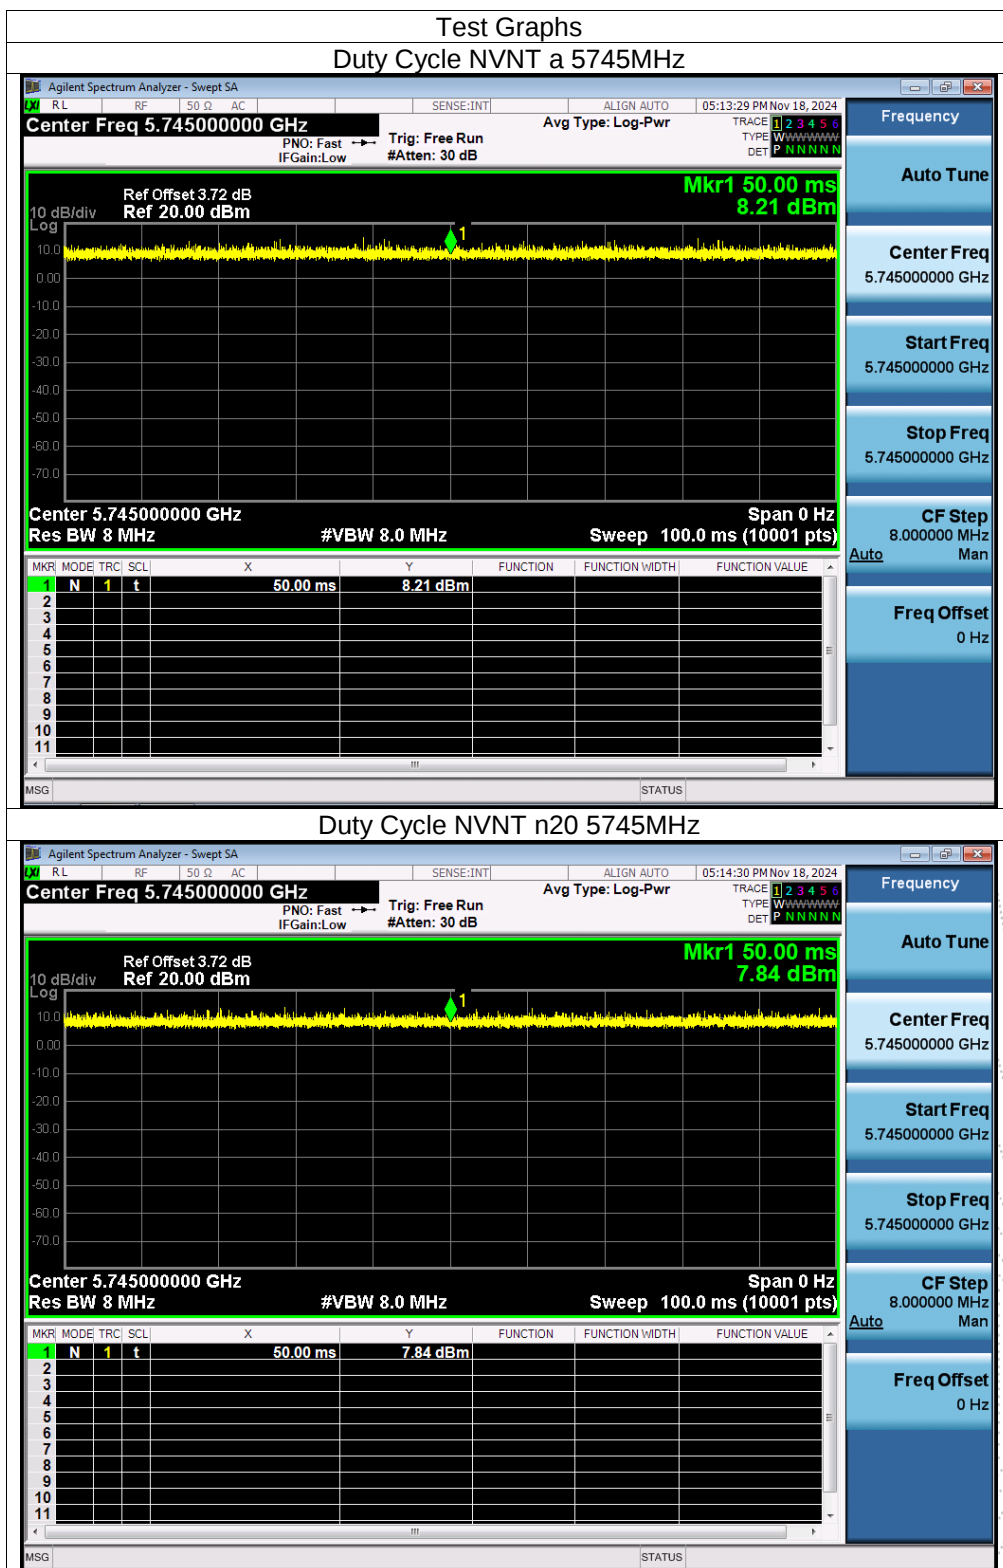

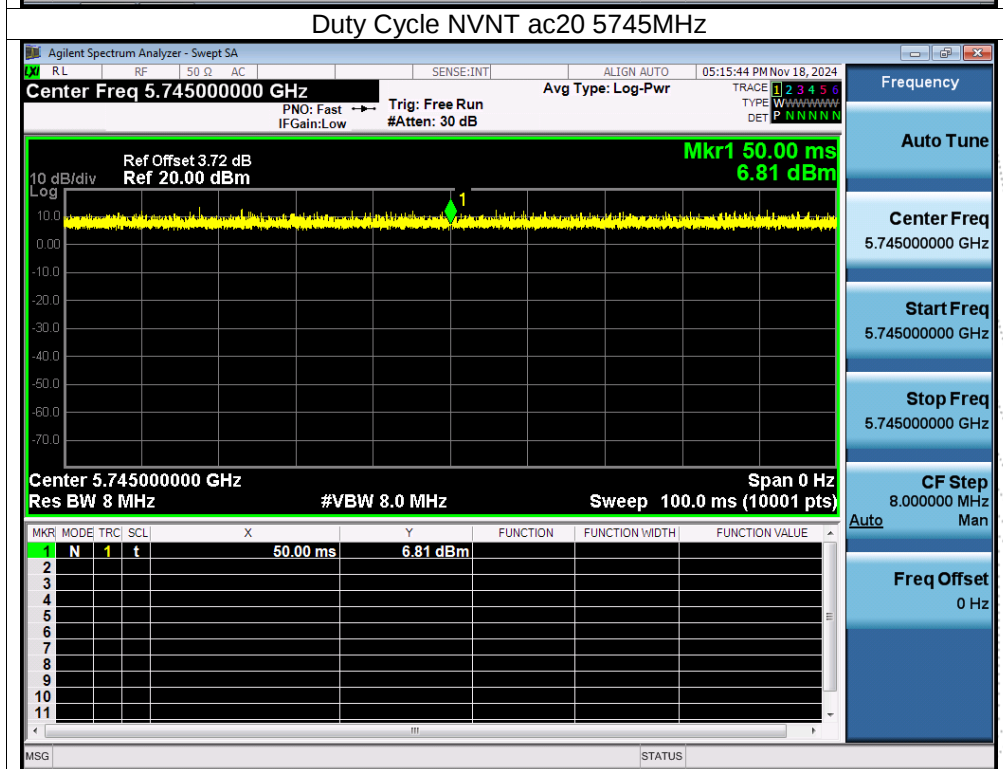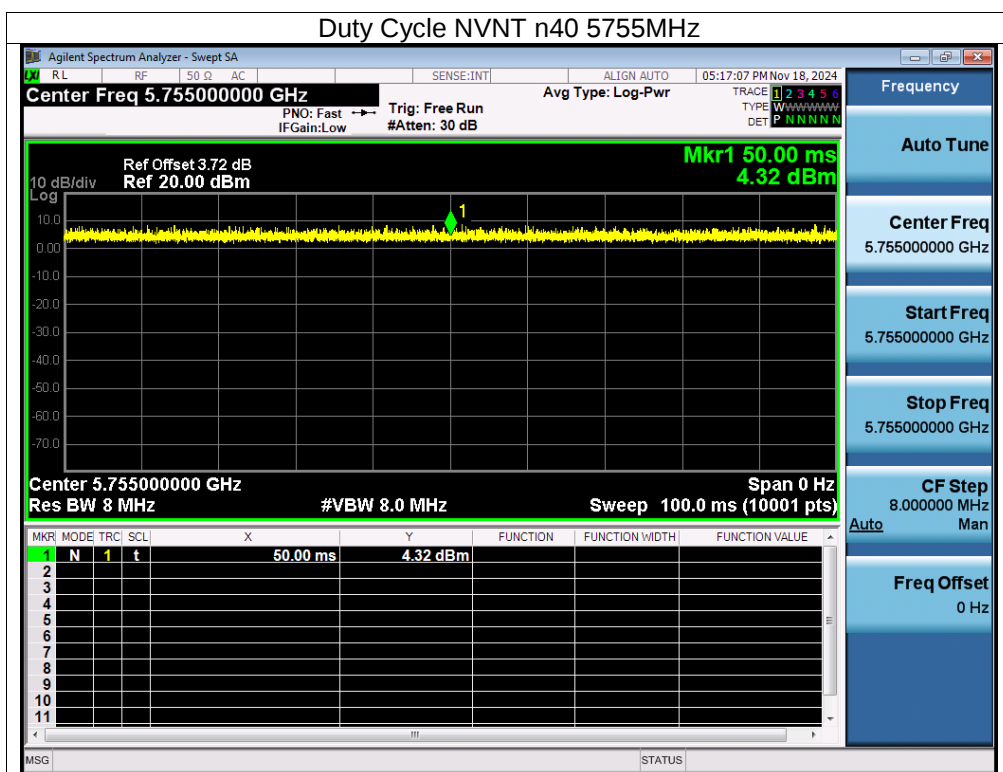

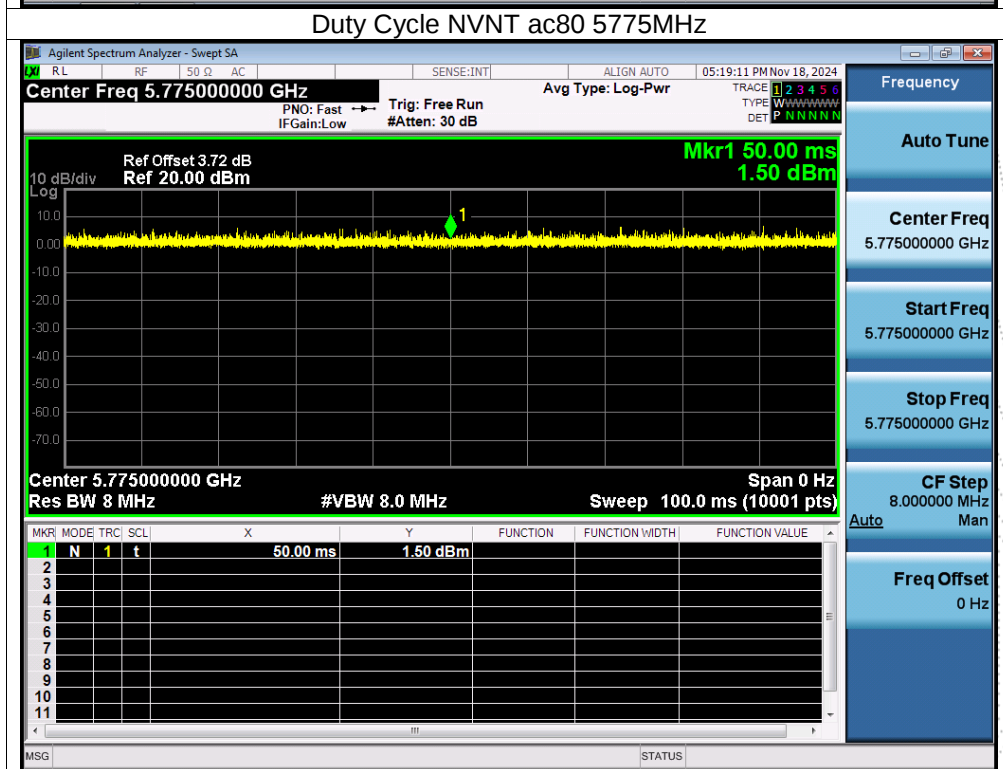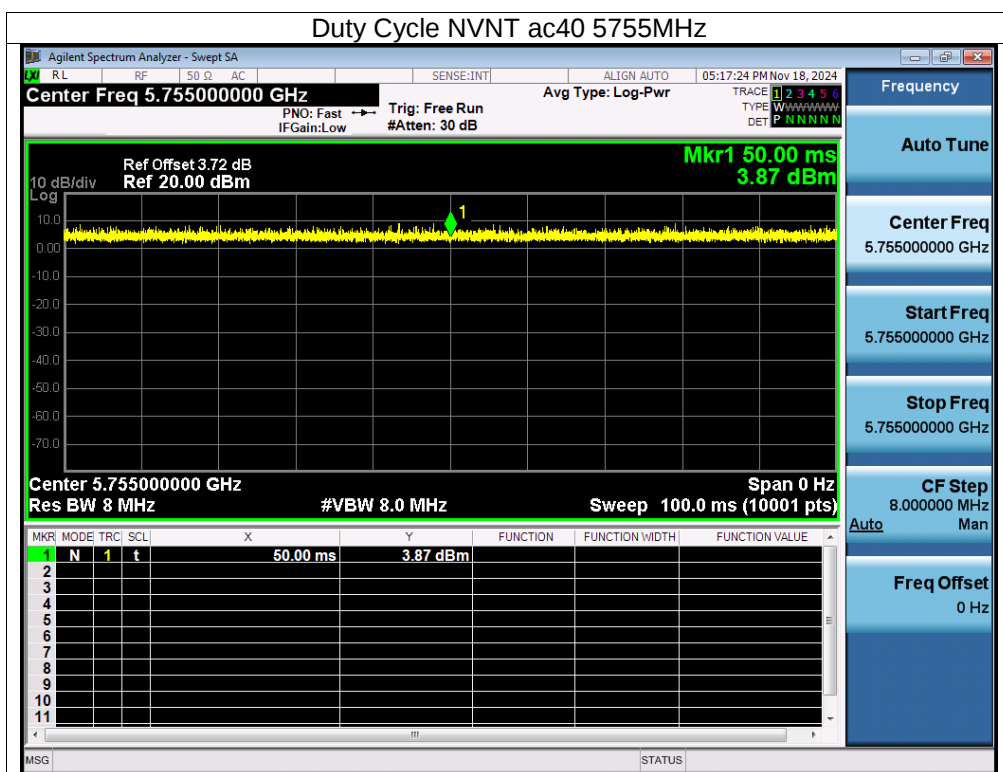

15. Antenna Requirement

15.1 Limit

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

15.2 Test Result

The EUT antenna is Internal antenna (antenna gain: 2.78 dBi). It comply with the standard requirement.

