


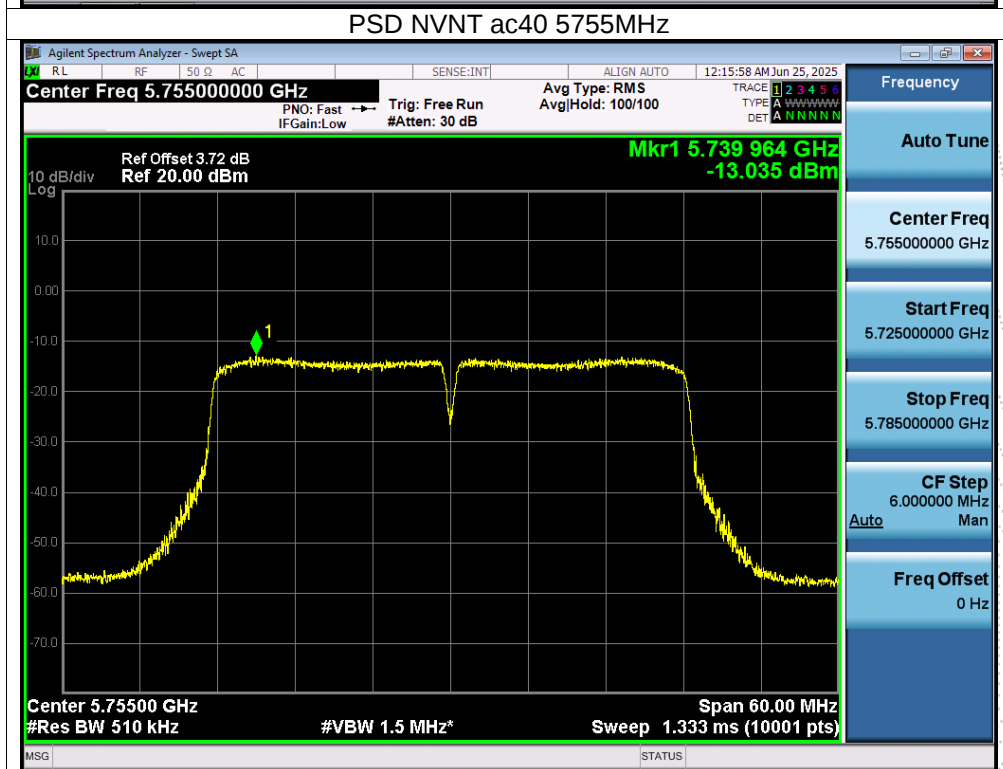
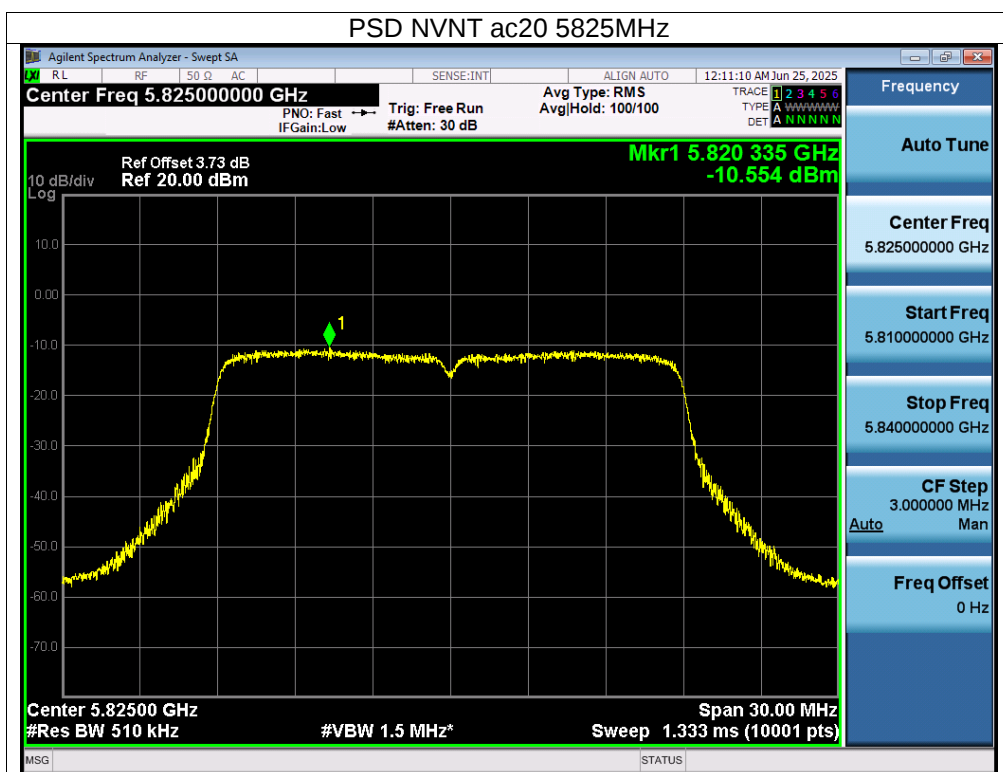


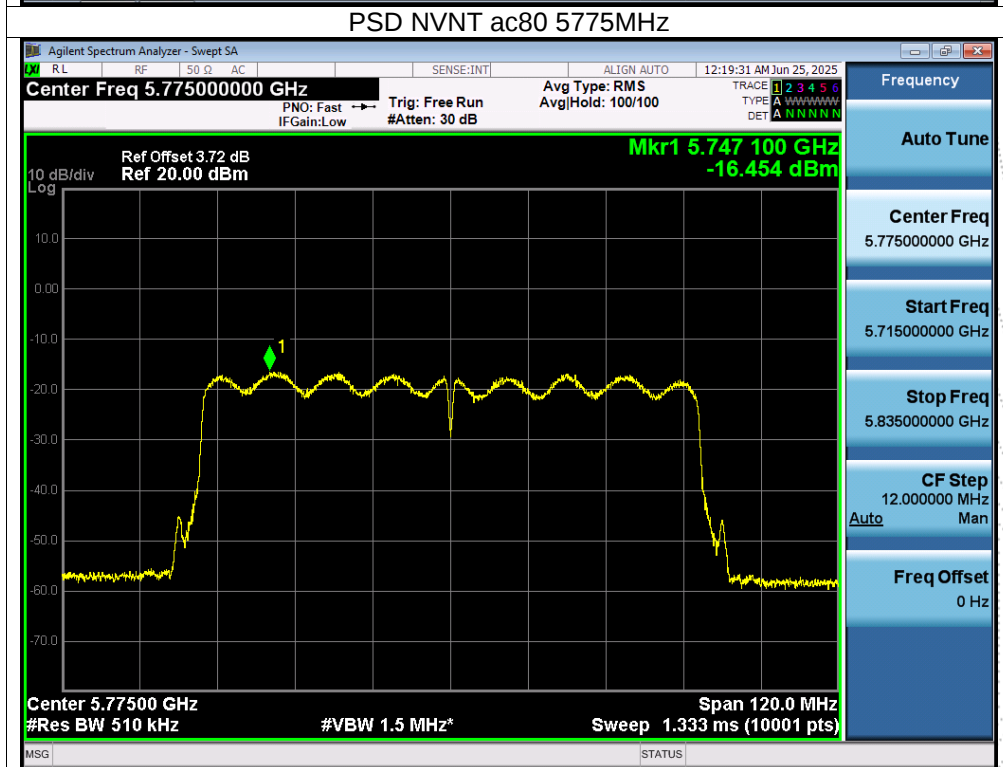

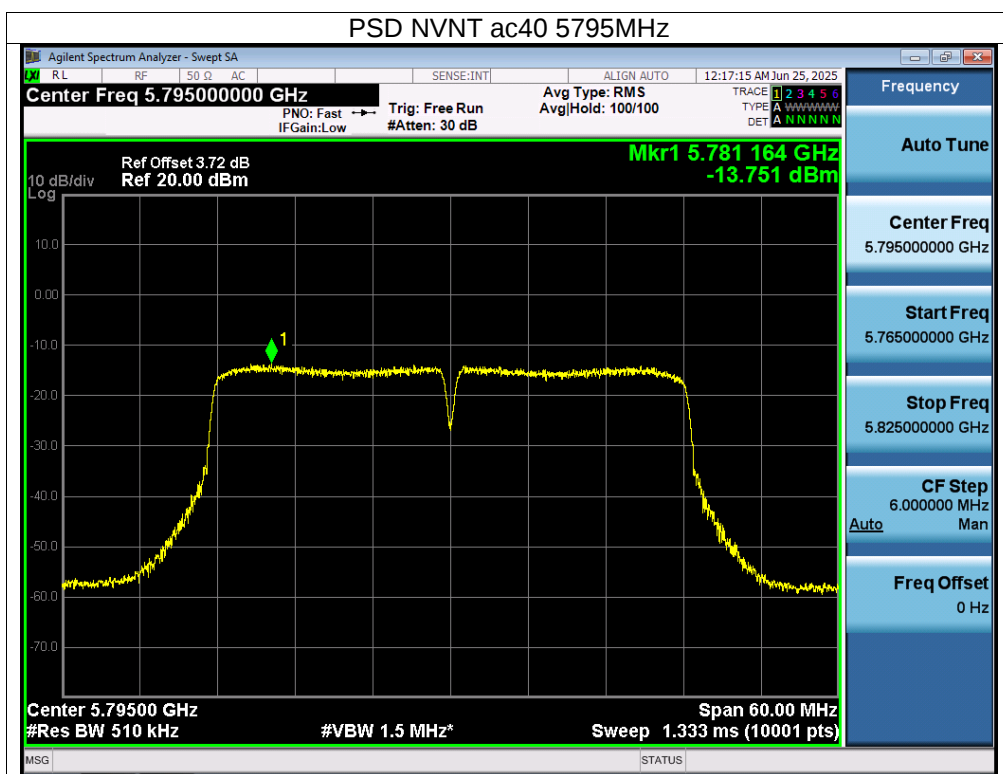

9. 26dB & 6dB & 99% Emission Bandwidth

9.1 Block Diagram Of Test Setup

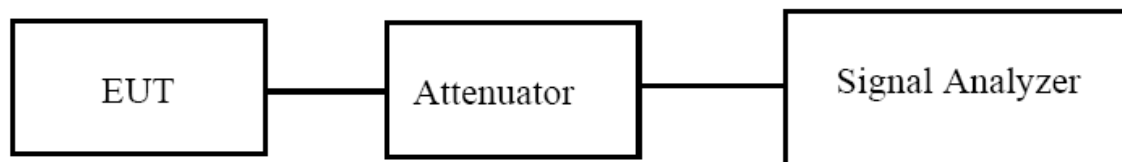

9.2 Limit

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.
(6dB bandwidth)>500kHz

9.3 Test Procedure

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth:

- Set center frequency to the nominal EUT channel center frequency.
- Set span = 1.5 times to 5.0 times the OBW.
- Set RBW = 1 % to 5 % of the OBW
- Set $VBW \geq 3 \cdot RBW$
- Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- Use the 99 % power bandwidth function of the instrument (if available).
- If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

6dB


- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times RBW$.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.

6. Allow the trace to stabilize.

7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

9.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

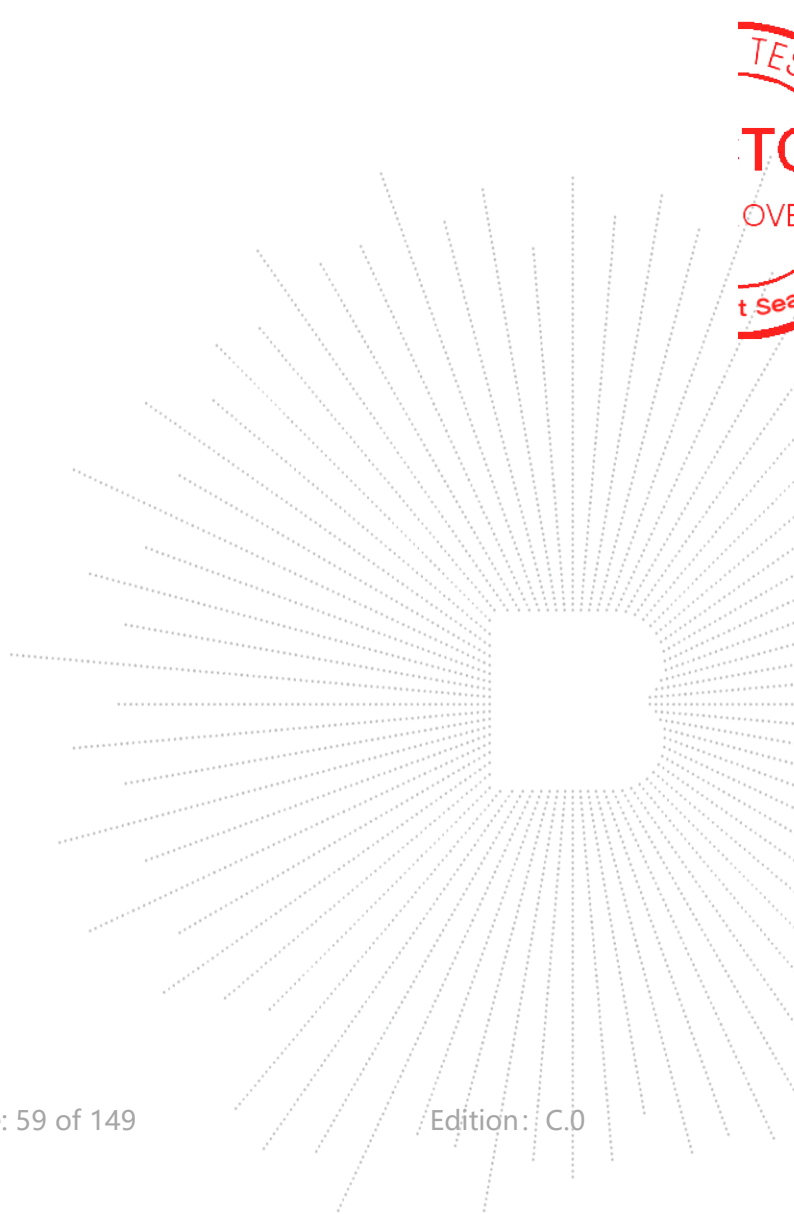




9.5 Test Result



Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101kPa	Test Voltage:	DC 11.4V
Test Mode:	TX Frequency U-NII-1 (5180-5240MHz)		



Mode	Channel	Frequency (MHz)	99% OBW (MHz)		26dB bandwidth (MHz)		Result
			ANT A	ANT B	ANT A	ANT B	
NVNT	a	5180	16.519	16.519	20.111	20.022	Pass
NVNT	a	5200	16.495	16.509	20.011	20.008	Pass
NVNT	a	5240	16.495	16.520	19.999	20.149	Pass
NVNT	n20	5180	17.634	17.642	20.852	21.016	Pass
NVNT	n20	5200	17.656	17.642	20.857	21.100	Pass
NVNT	n20	5240	17.648	17.627	21.032	21.051	Pass
NVNT	n40	5190	36.108	36.084	41.698	41.722	Pass
NVNT	n40	5230	36.129	36.118	41.049	41.348	Pass
NVNT	ac20	5180	17.632	17.655	21.067	21.012	Pass
NVNT	ac20	5200	17.659	17.654	20.817	20.972	Pass
NVNT	ac20	5240	17.644	17.680	20.676	20.996	Pass
NVNT	ac40	5190	36.093	36.118	41.360	41.838	Pass
NVNT	ac40	5230	36.113	36.112	41.581	41.538	Pass
NVNT	ac80	5210	75.360	75.422	81.651	81.412	Pass



Note: A(B) Represent the value of antenna A and B. The worst data is Antenna A, only shown Antenna A Plot.


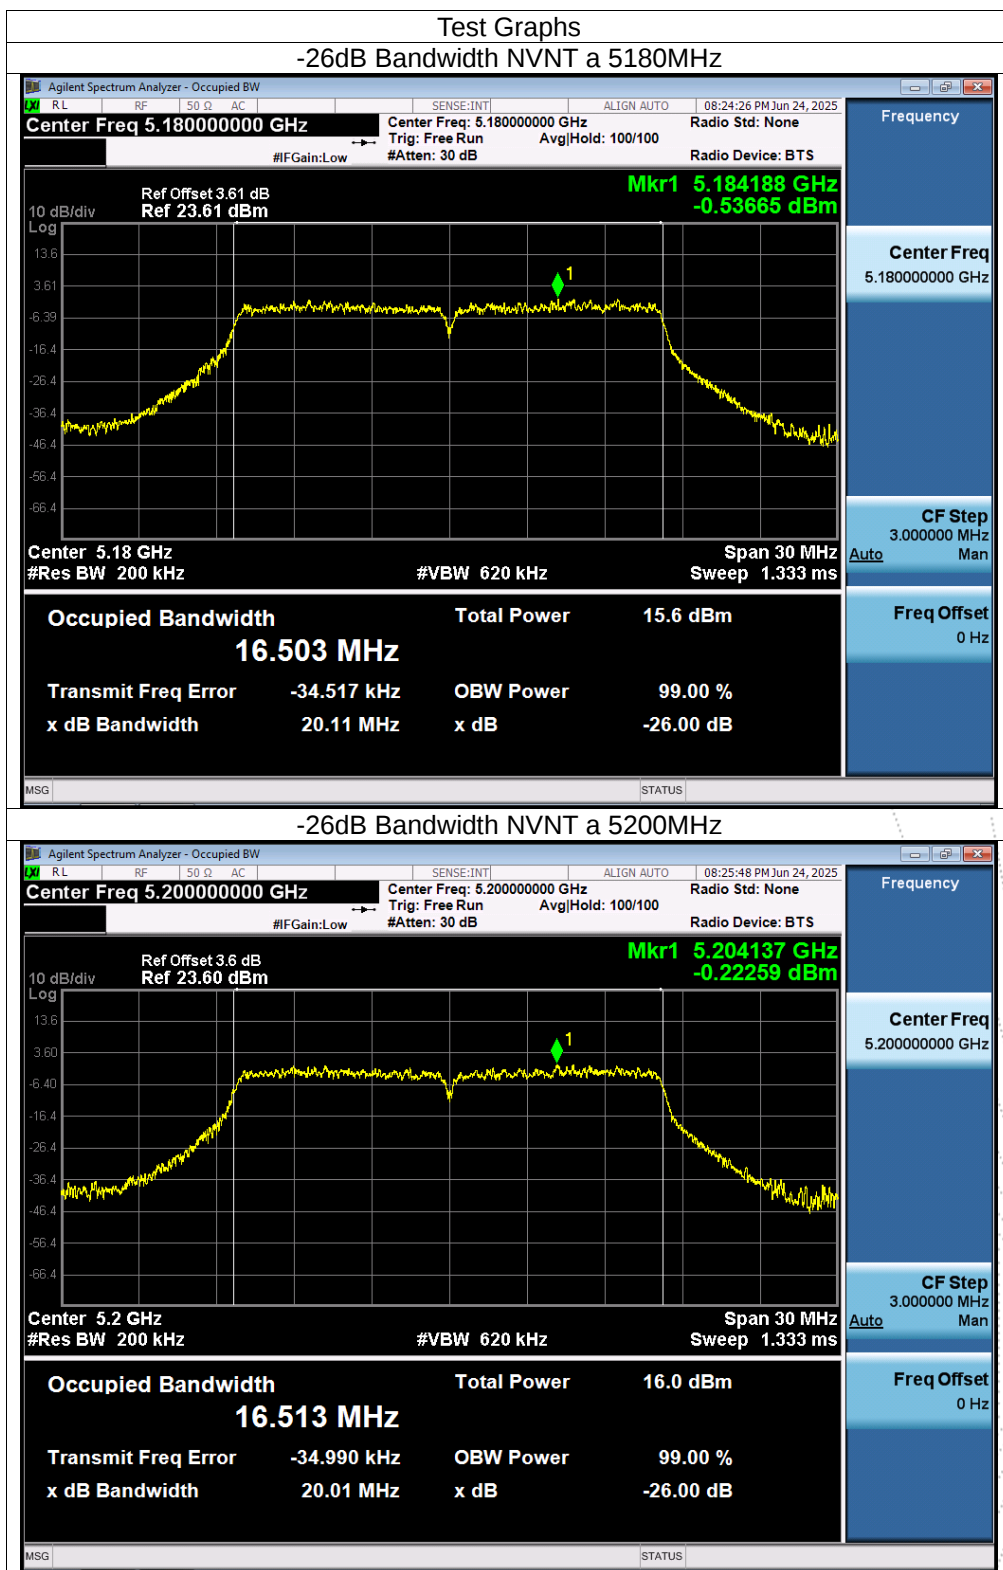


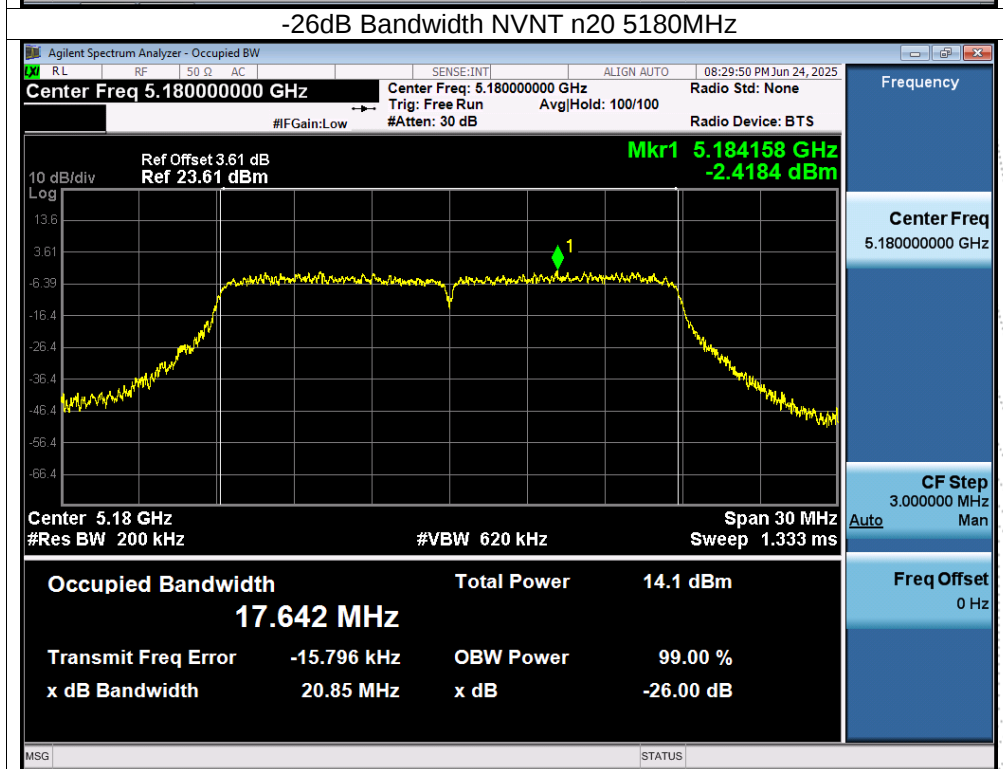
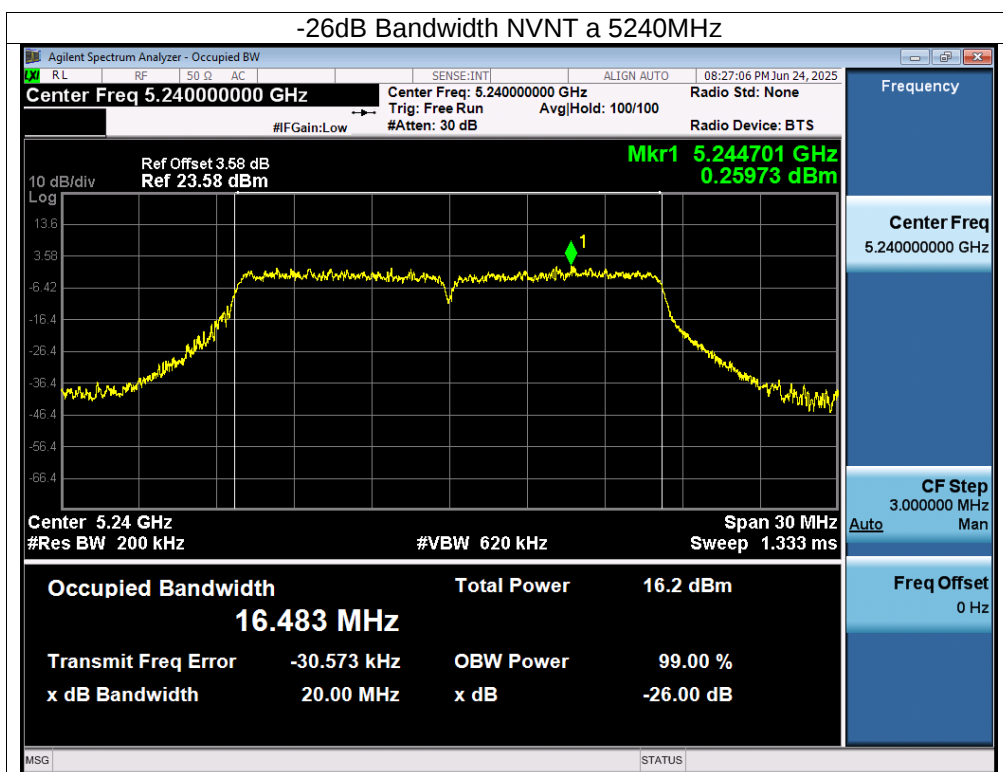


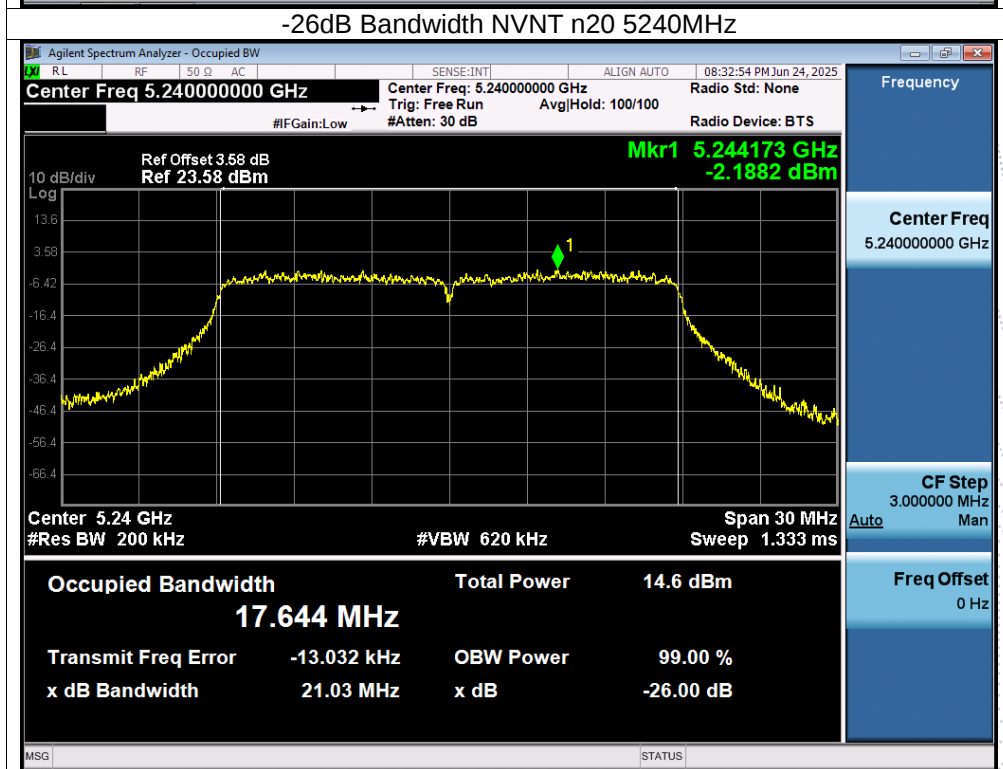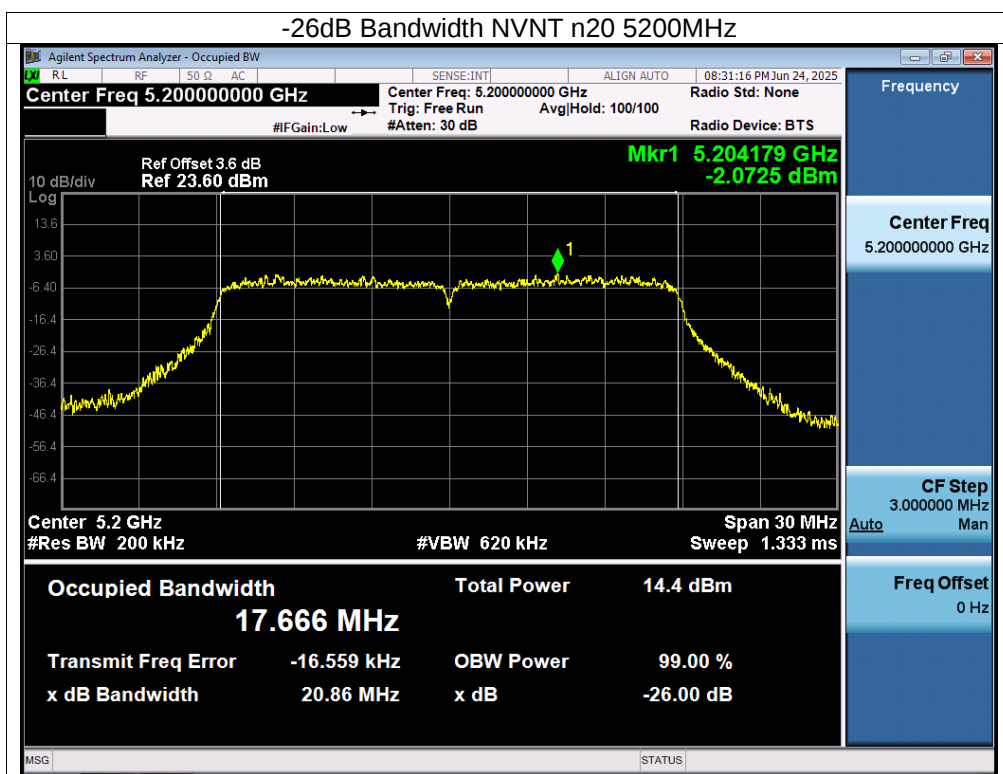


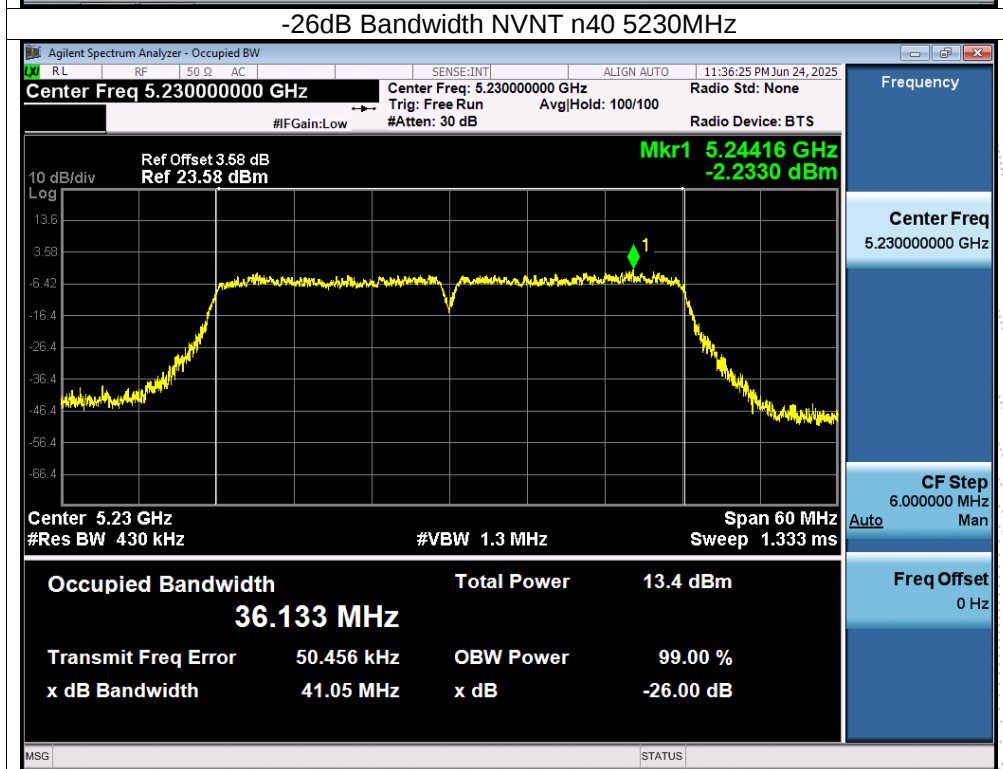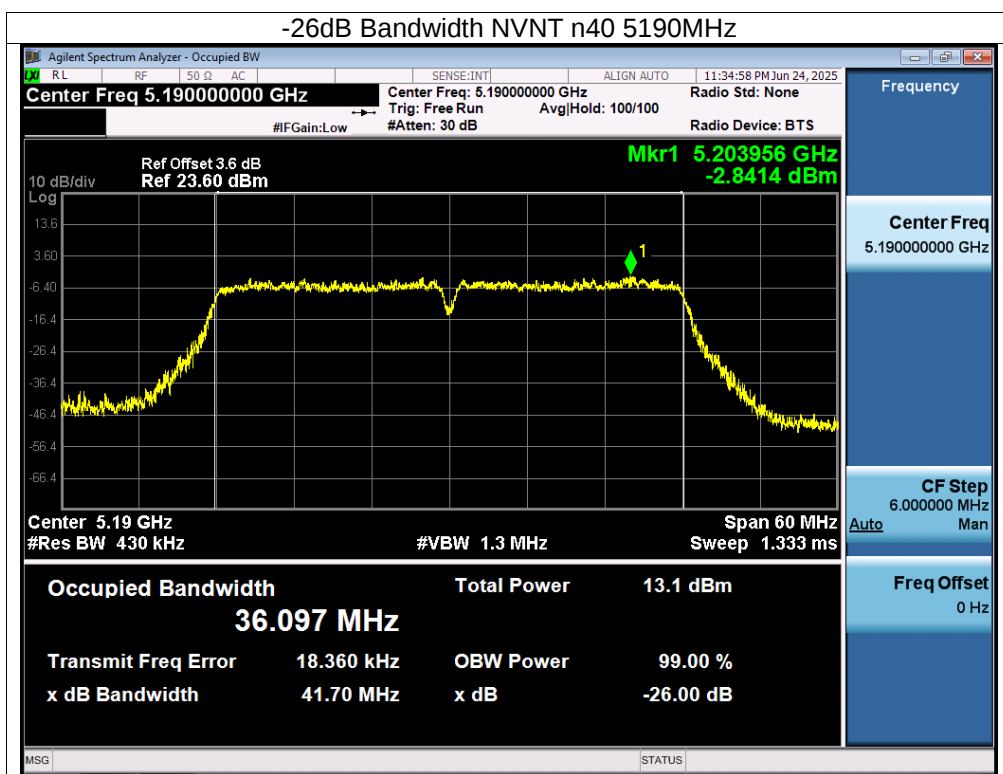


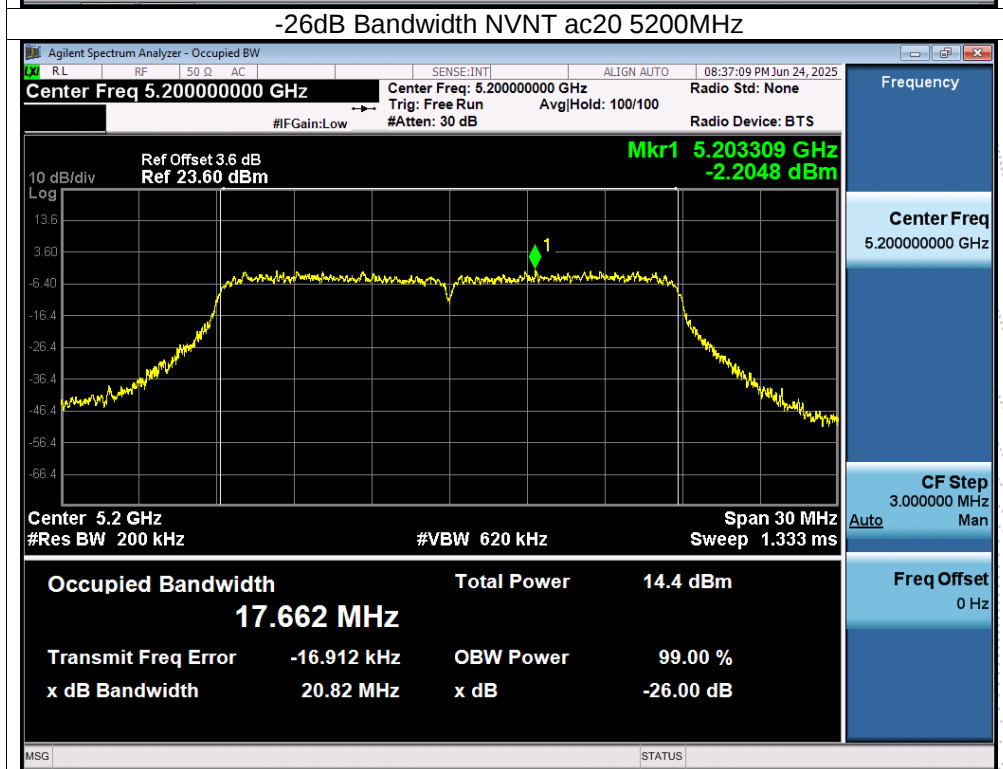
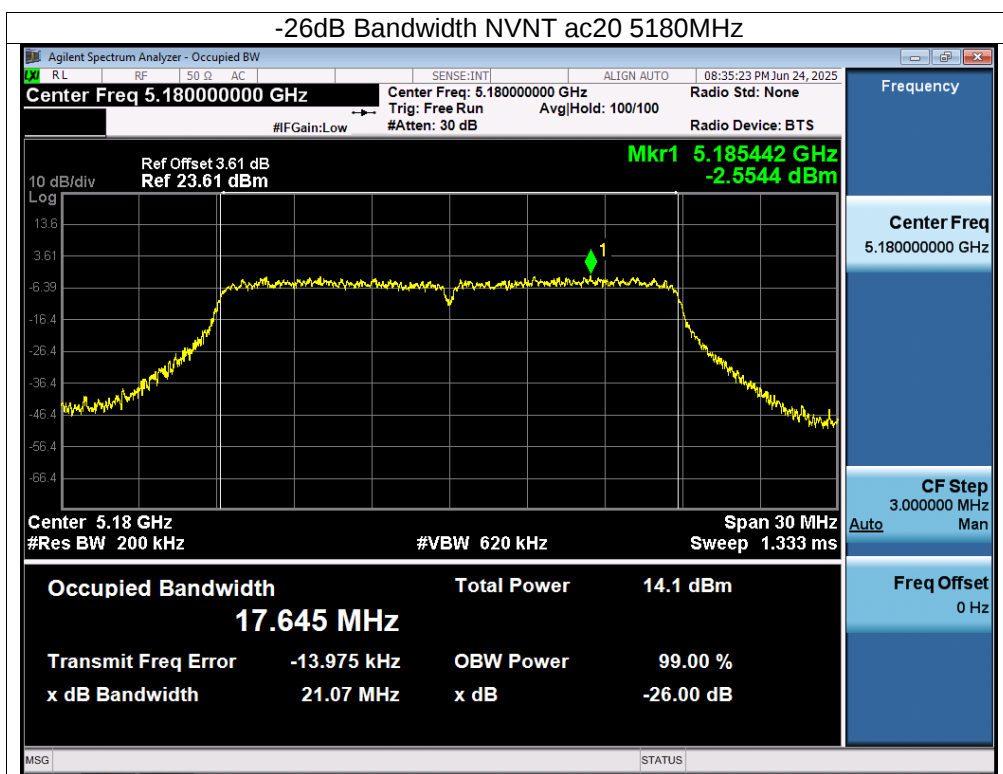


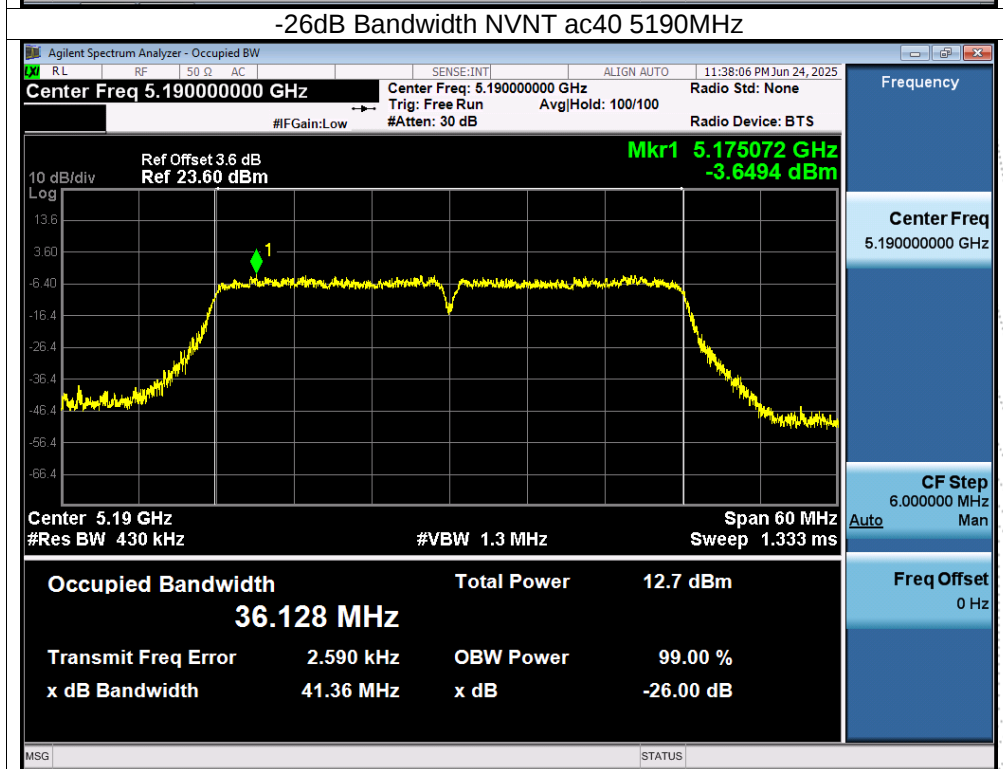
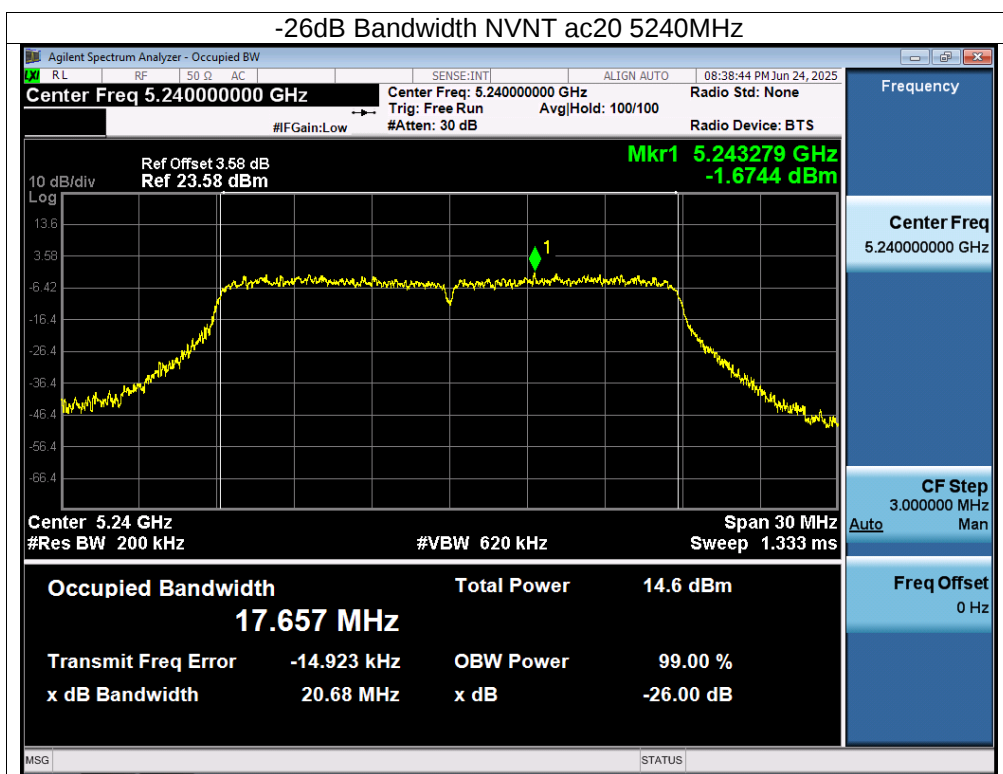


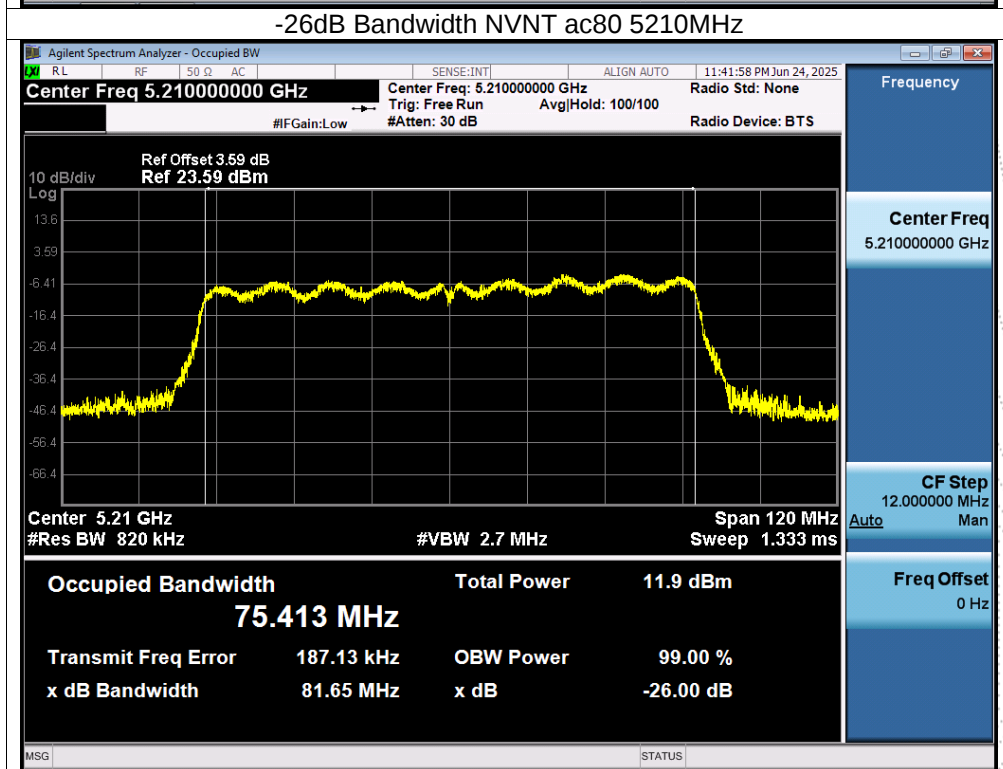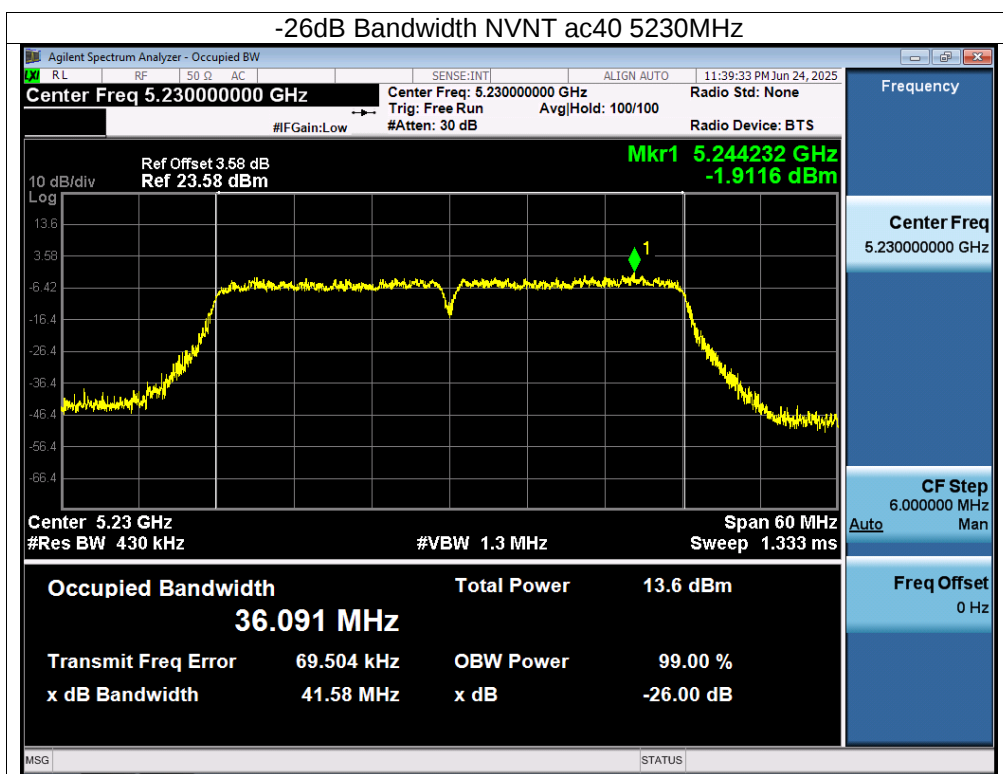


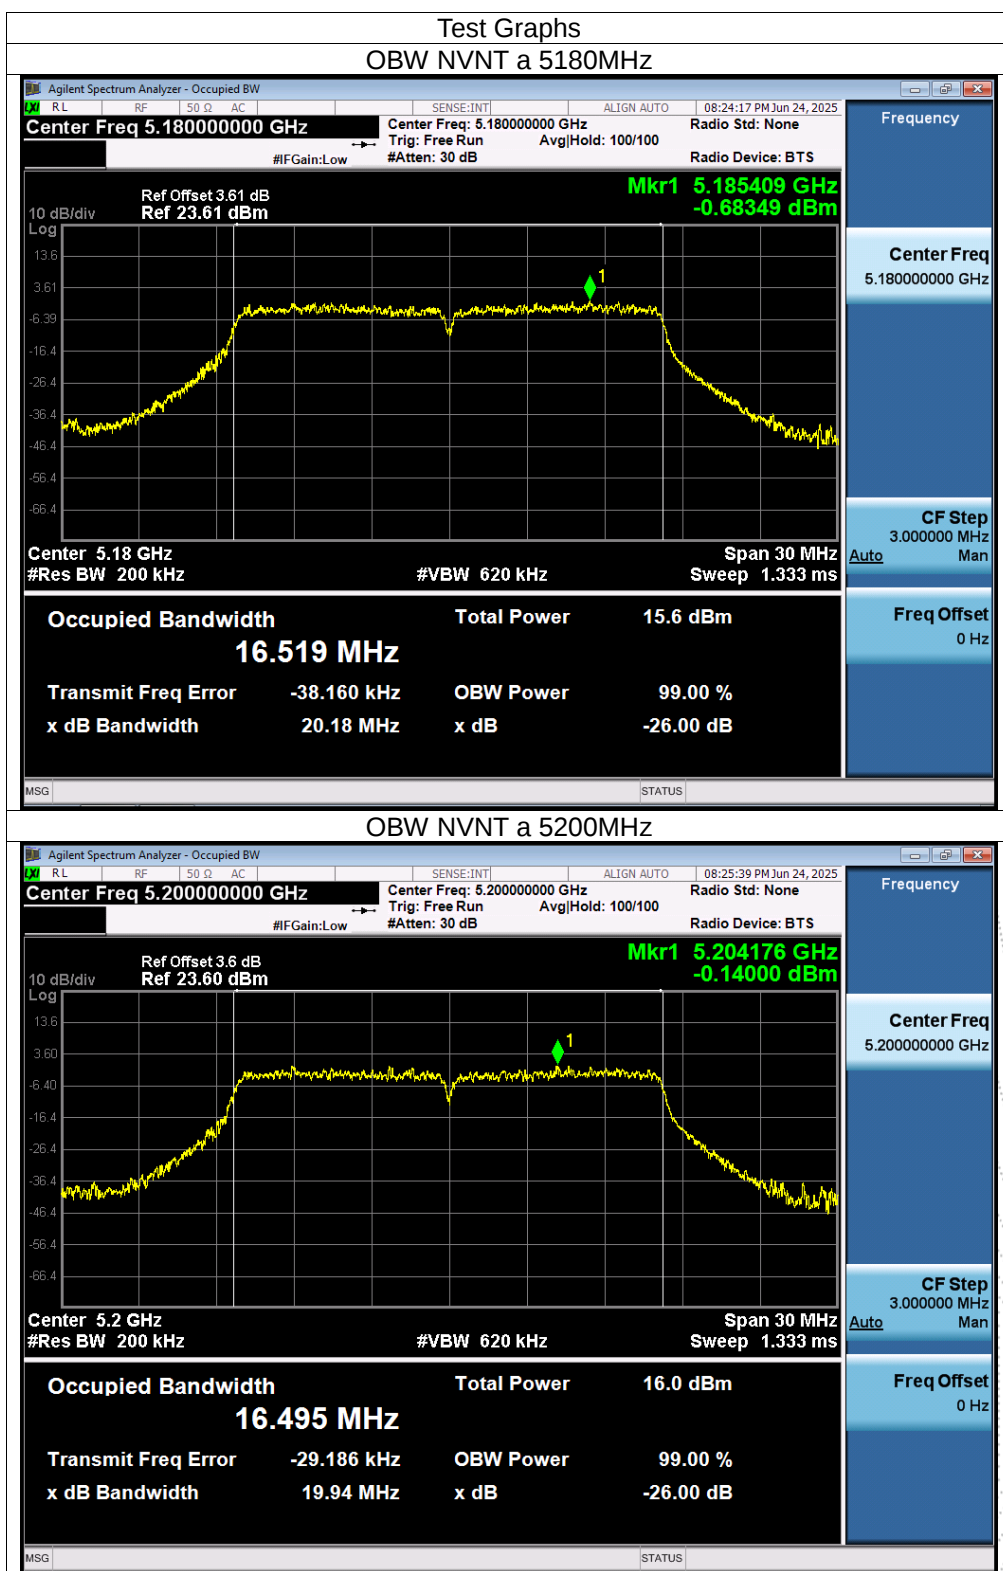


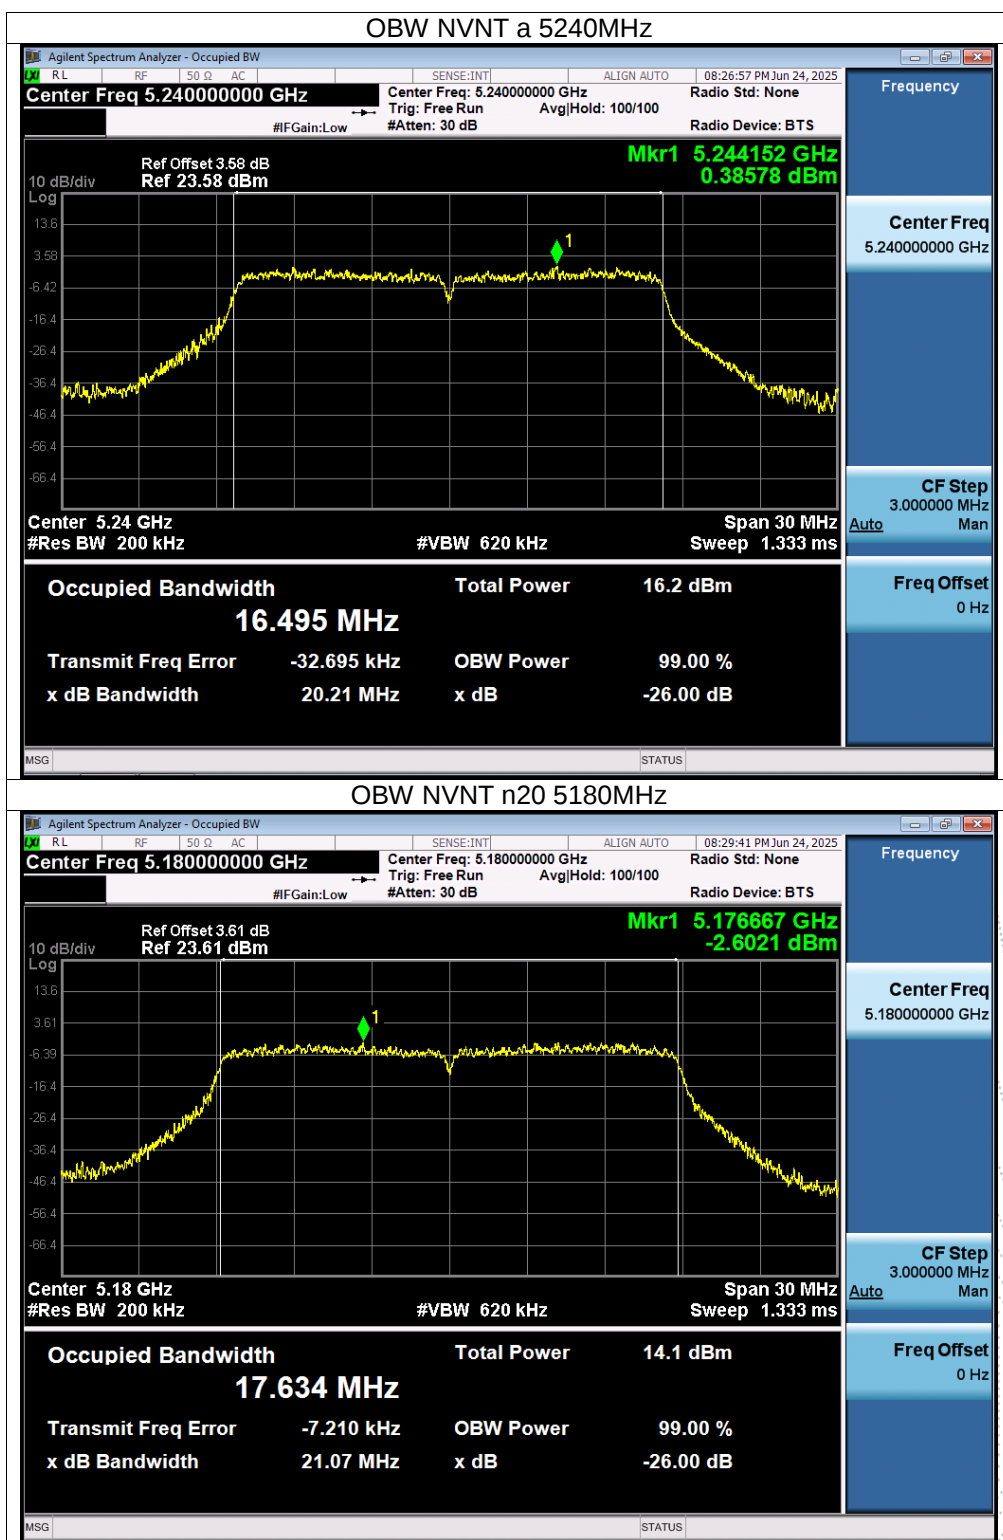


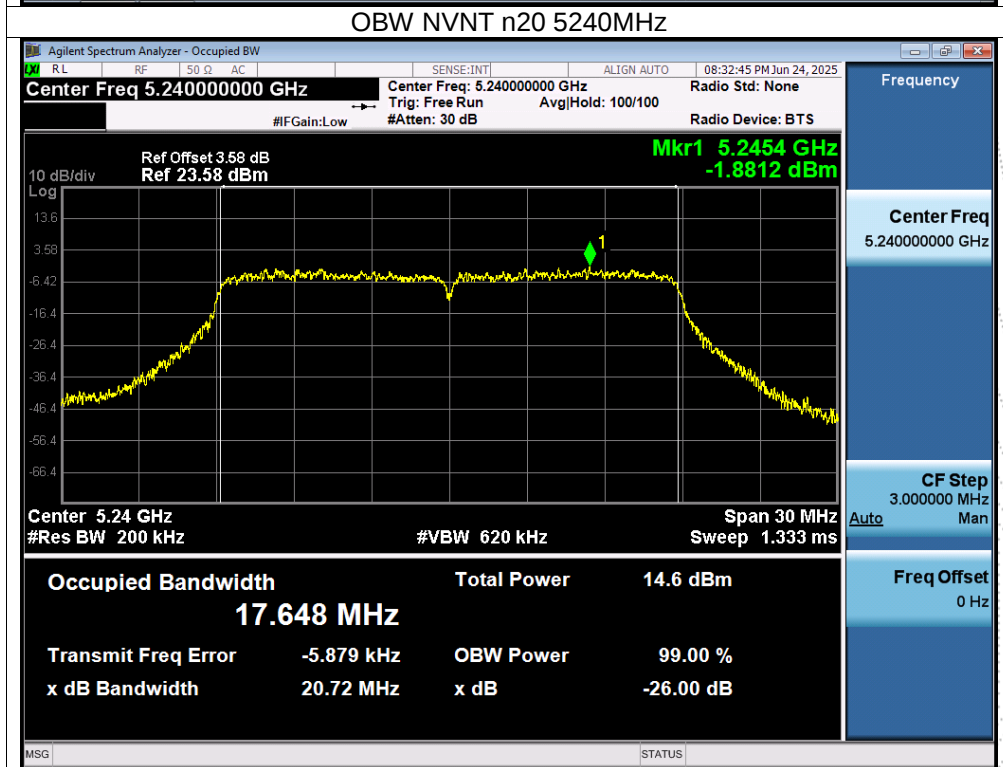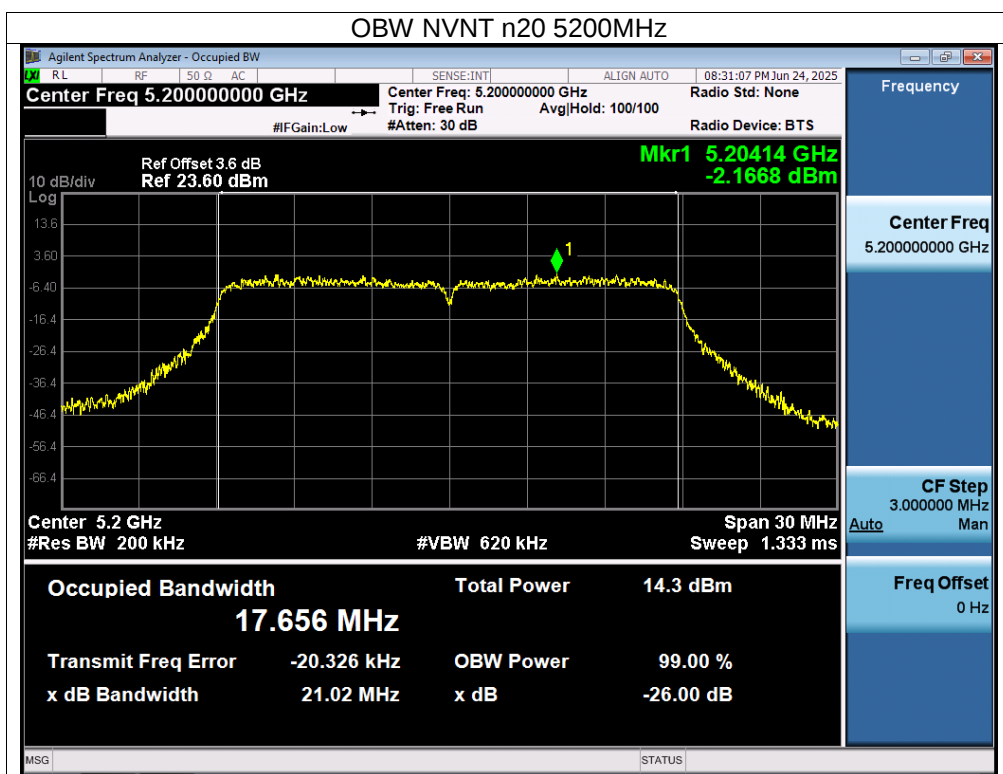

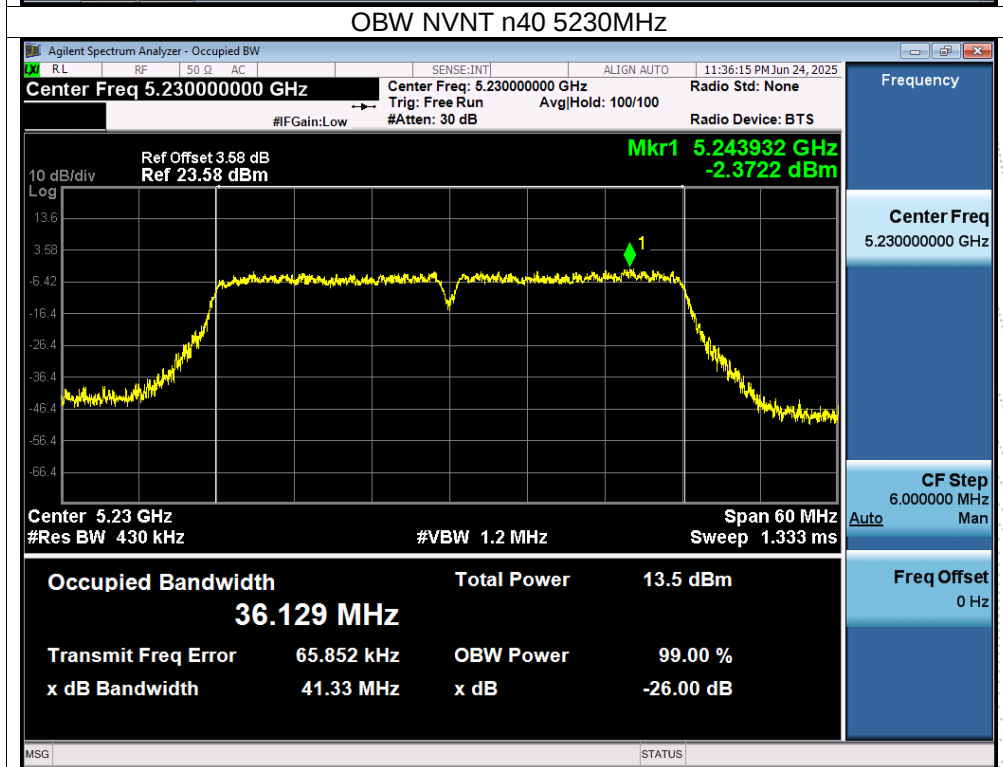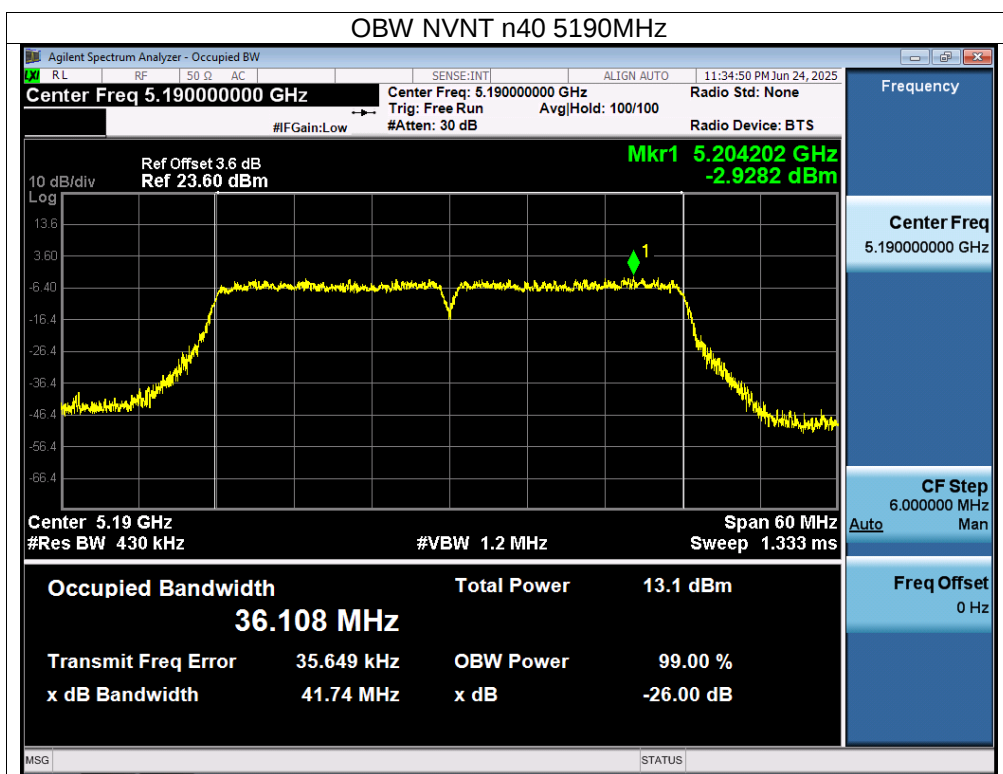

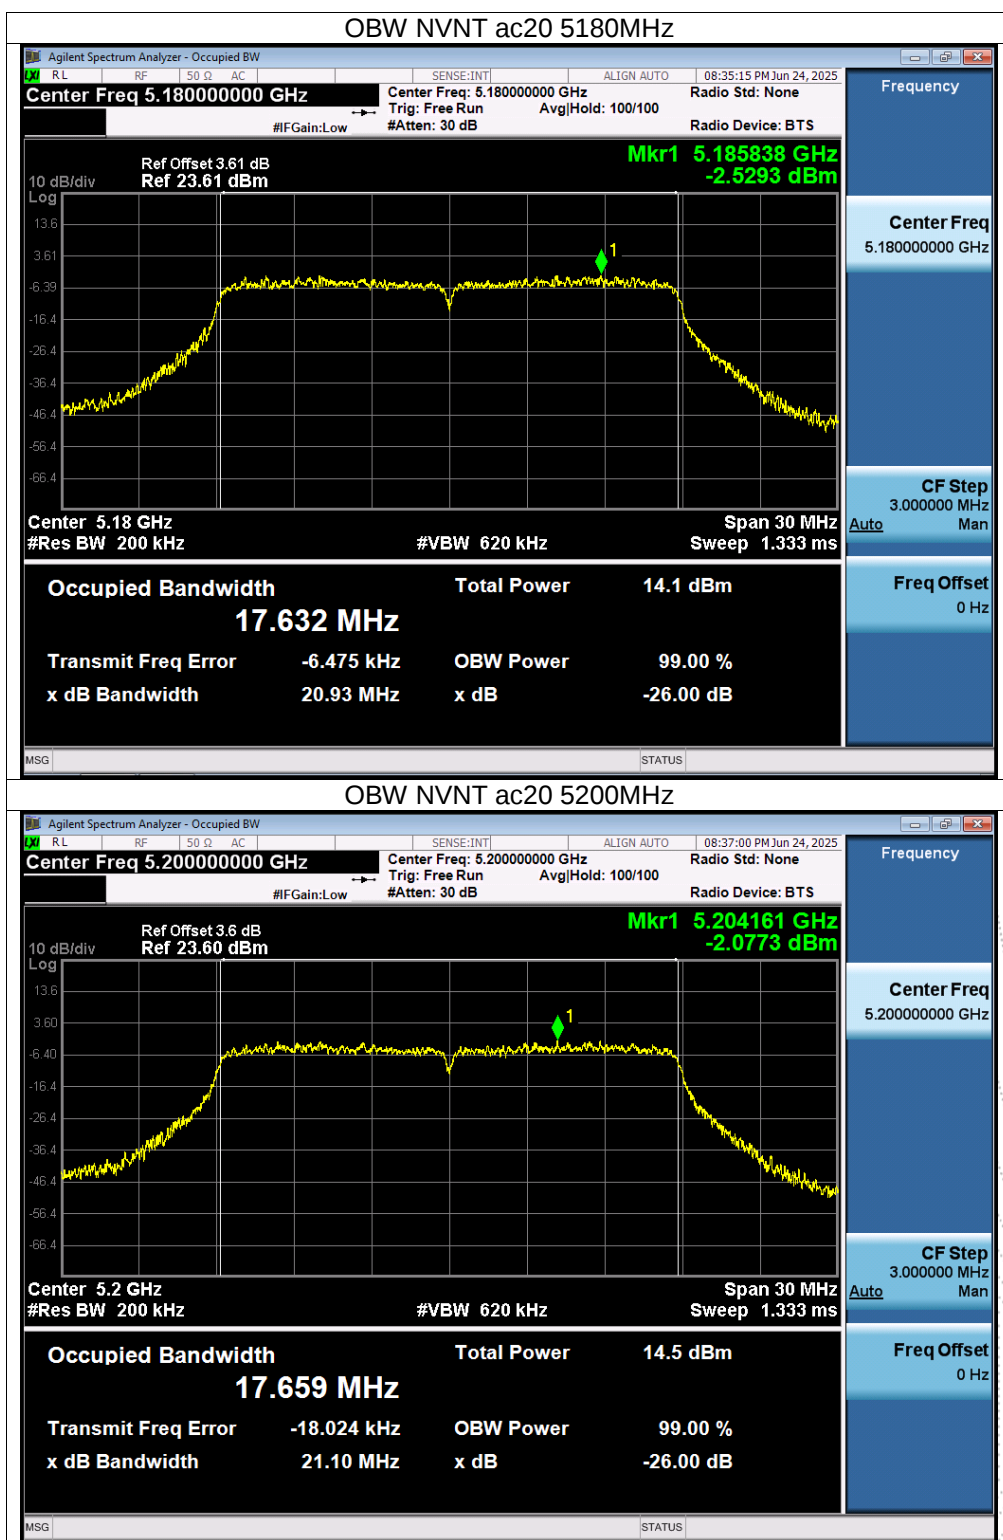

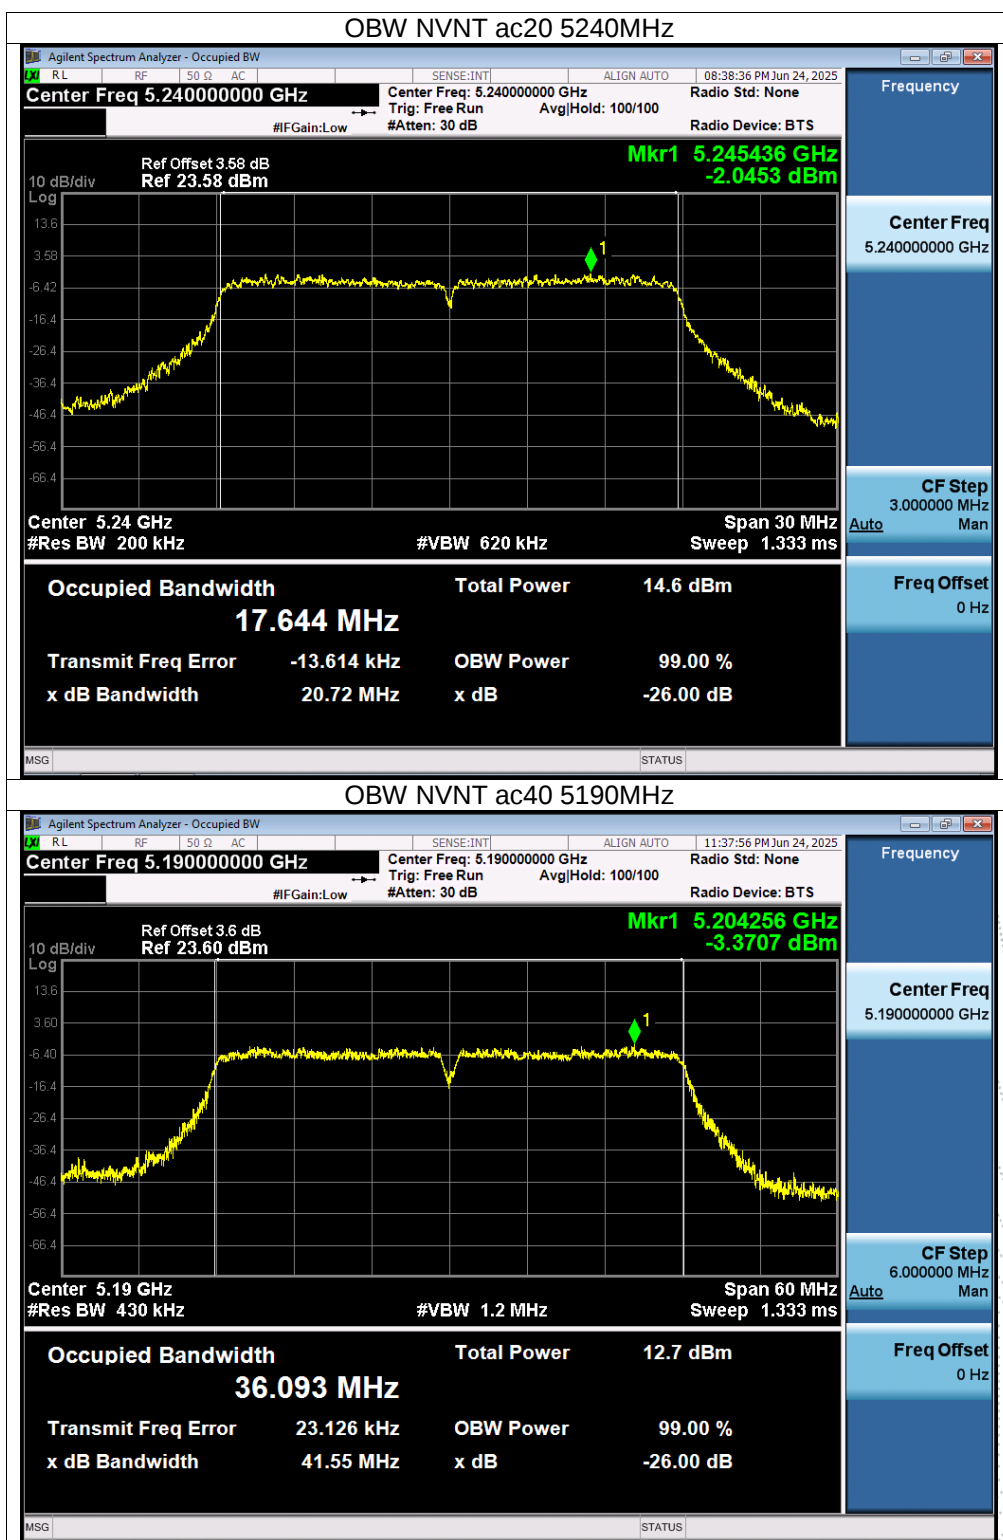



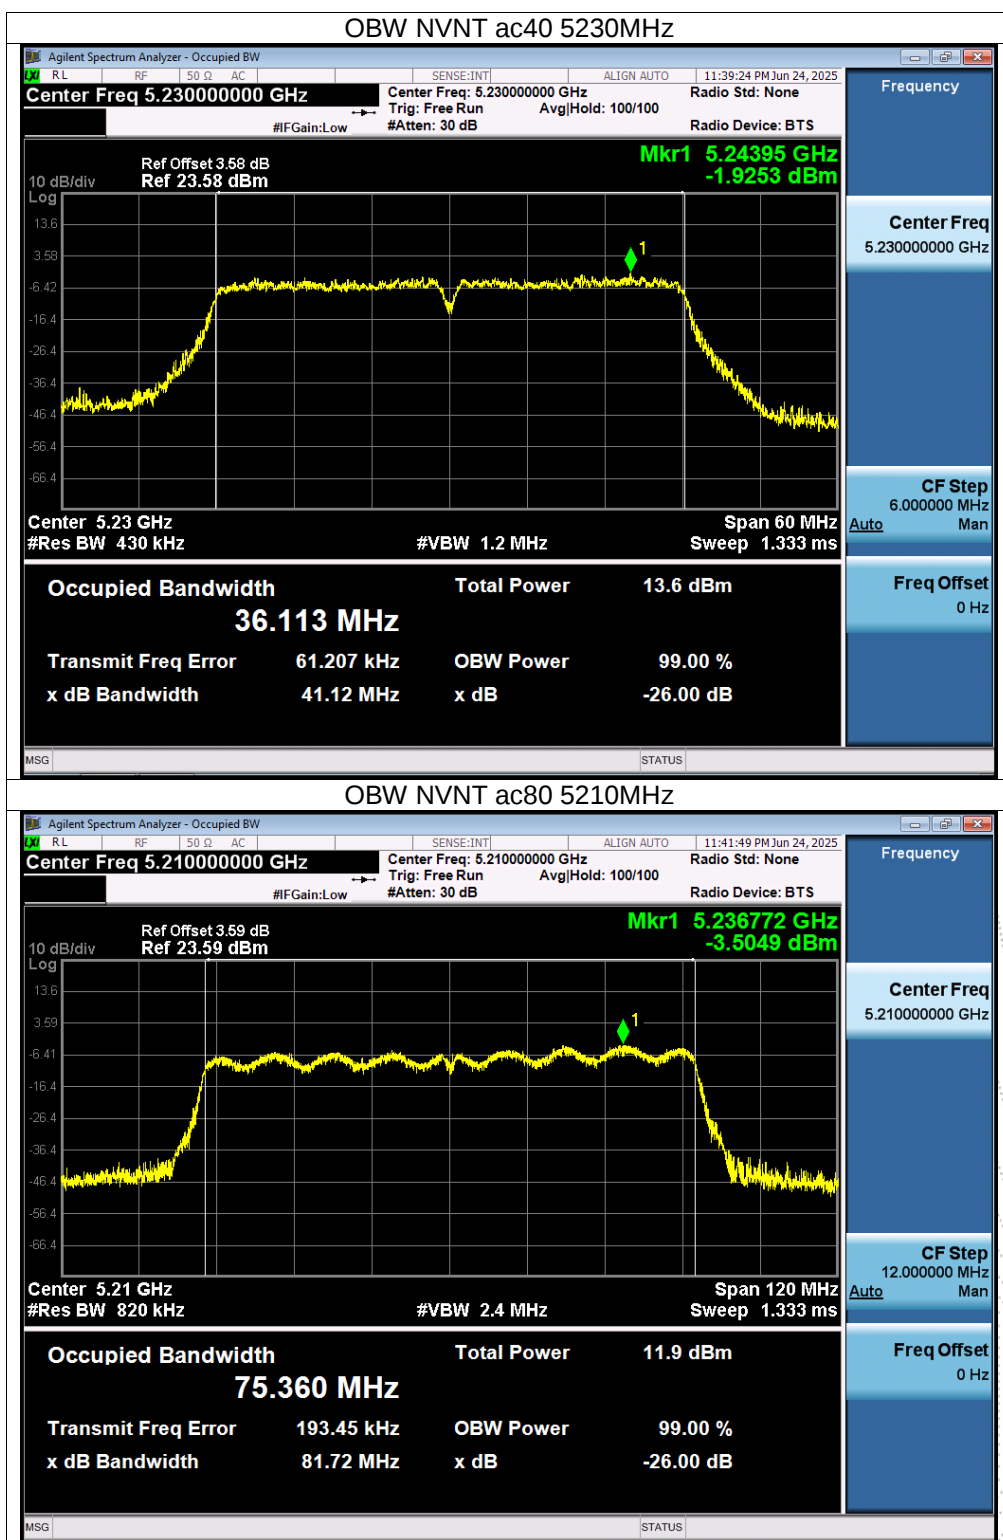




Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101kPa	Test Voltage:	DC 11.4V
Test Mode:	TX Frequency U-NII-3 (5745-5825MHz)		



Mode	Channel	Frequency (MHz)	99% OBW (MHz)		-6dB bandwidth (MHz)		Limit -6dB bandwidth MHz	Result
			ANT A	ANT B	ANT A	ANT B		
NVNT	a	5745	16.499	16.499	16.522	16.491	0.5	Pass
NVNT	a	5785	16.546	16.508	16.504	16.524	0.5	Pass
NVNT	a	5825	16.513	16.519	16.509	16.512	0.5	Pass
NVNT	n20	5745	17.629	17.625	17.631	17.642	0.5	Pass
NVNT	n20	5785	17.652	17.647	17.700	17.674	0.5	Pass
NVNT	n20	5825	17.640	17.640	17.622	17.666	0.5	Pass
NVNT	n40	5755	36.145	36.132	36.426	36.424	0.5	Pass
NVNT	n40	5795	36.133	36.121	36.386	36.381	0.5	Pass
NVNT	ac20	5745	17.656	17.659	17.668	17.650	0.5	Pass
NVNT	ac20	5785	17.663	17.661	17.655	17.636	0.5	Pass
NVNT	ac20	5825	17.651	17.658	17.637	17.630	0.5	Pass
NVNT	ac40	5755	36.126	36.101	36.410	36.387	0.5	Pass
NVNT	ac40	5795	36.121	36.112	36.376	36.395	0.5	Pass
NVNT	ac80	5775	75.450	75.438	76.069	76.072	0.5	Pass



Note: A(B) Represent the value of antenna A and B. The worst data is Antenna B, only shown Antenna B Plot.


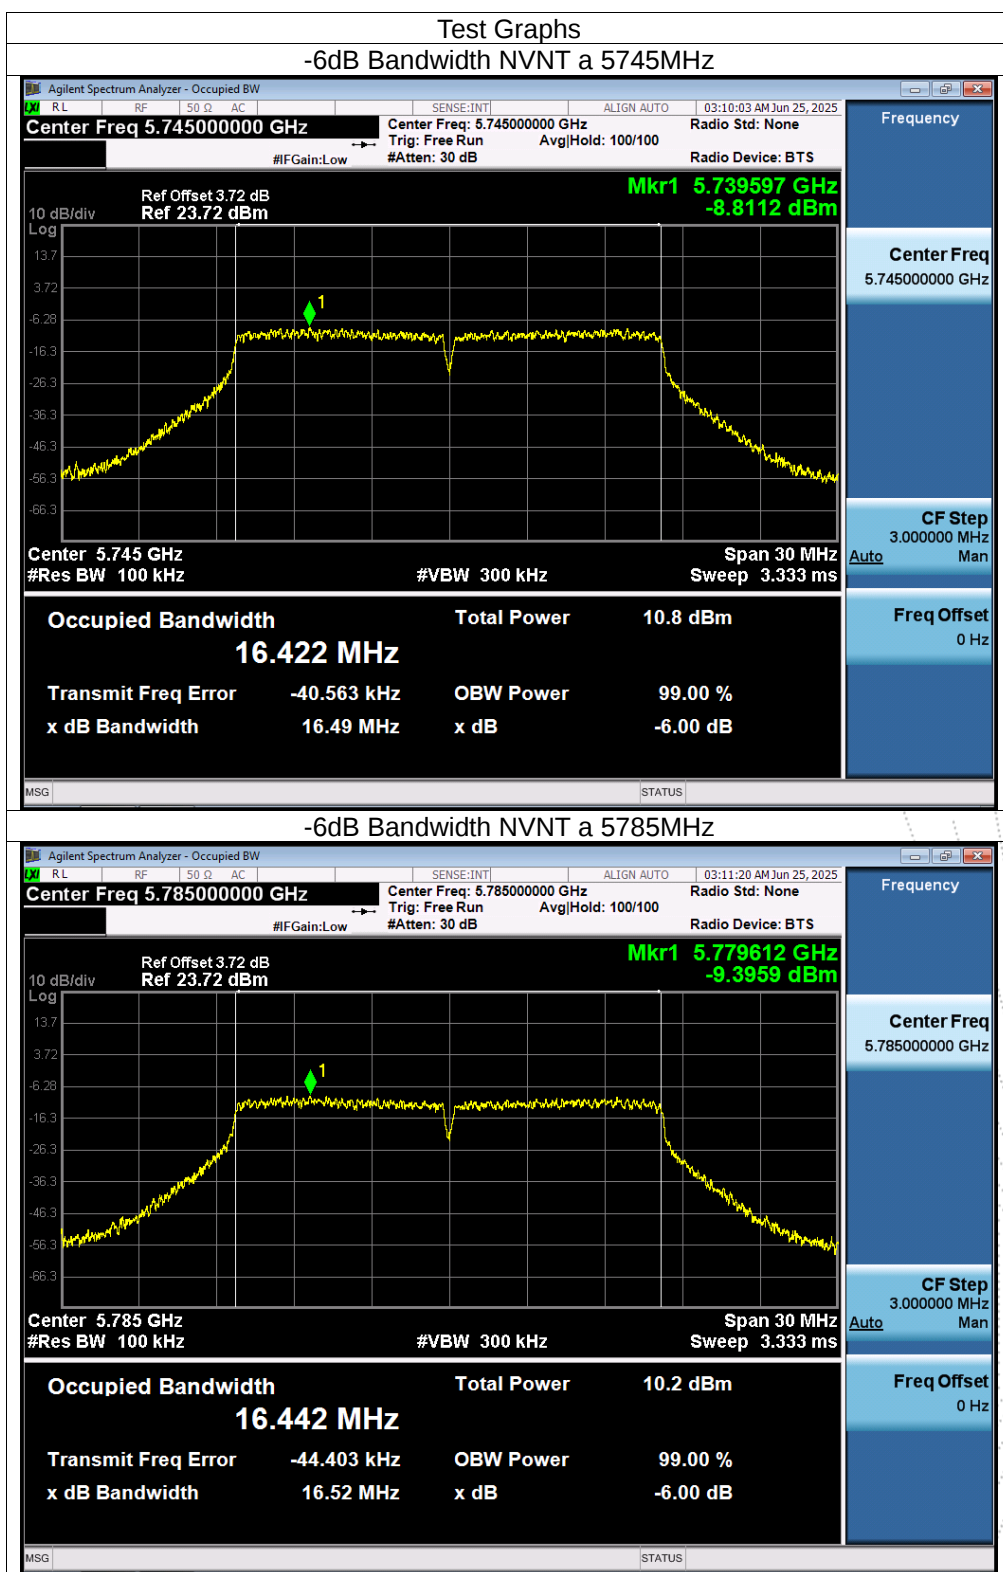


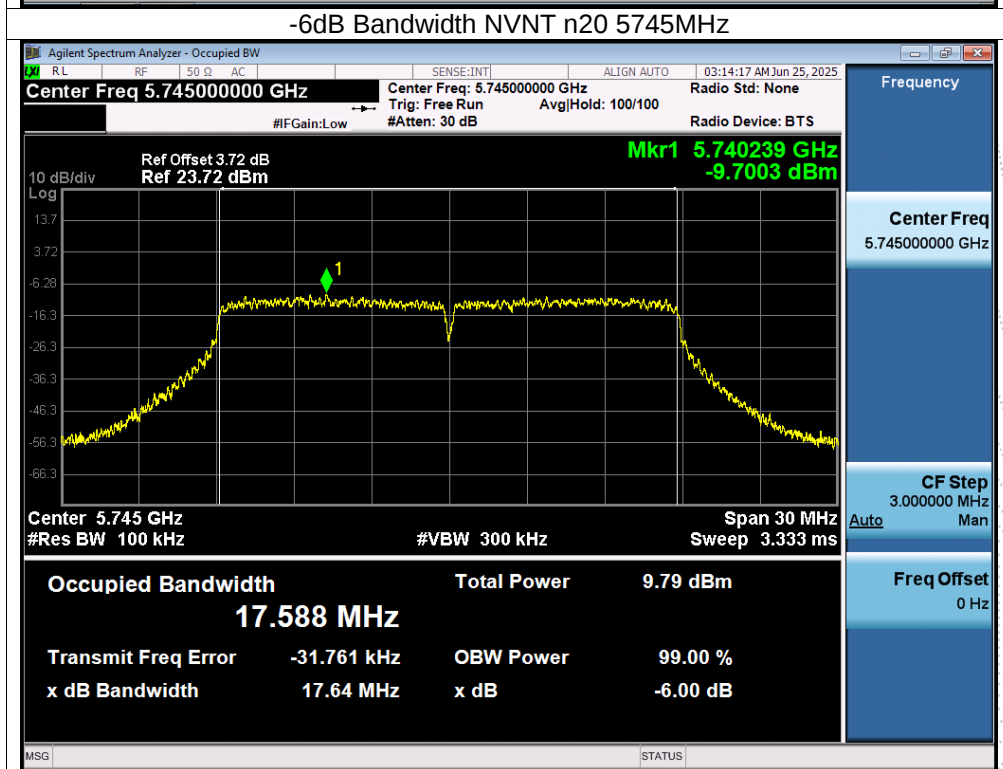
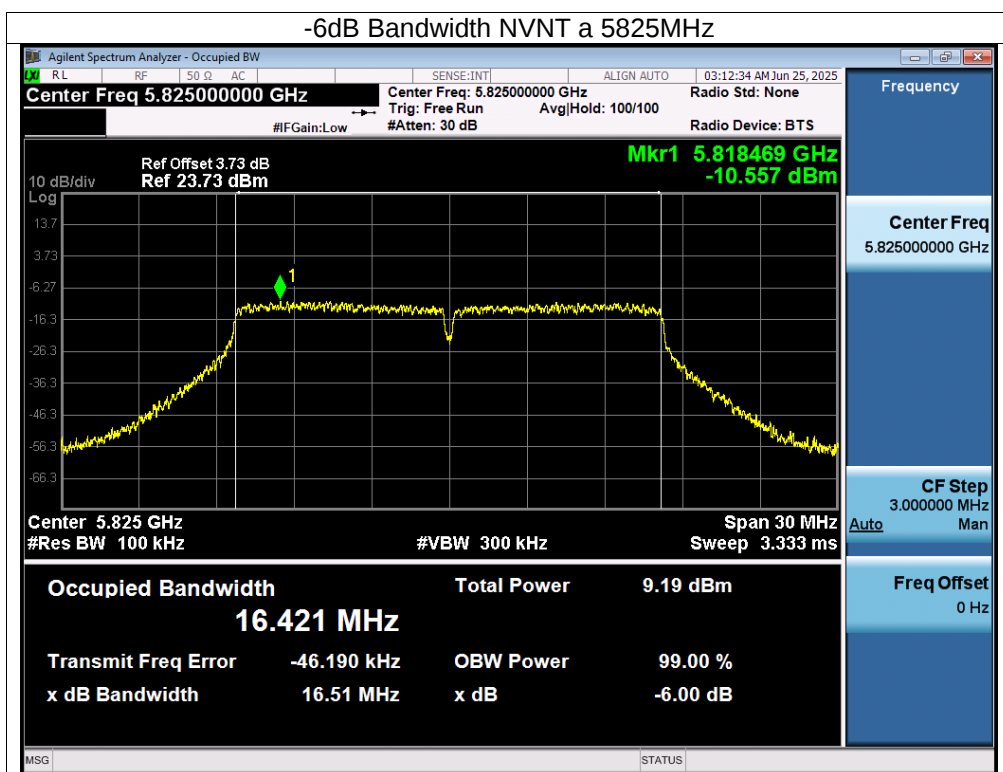


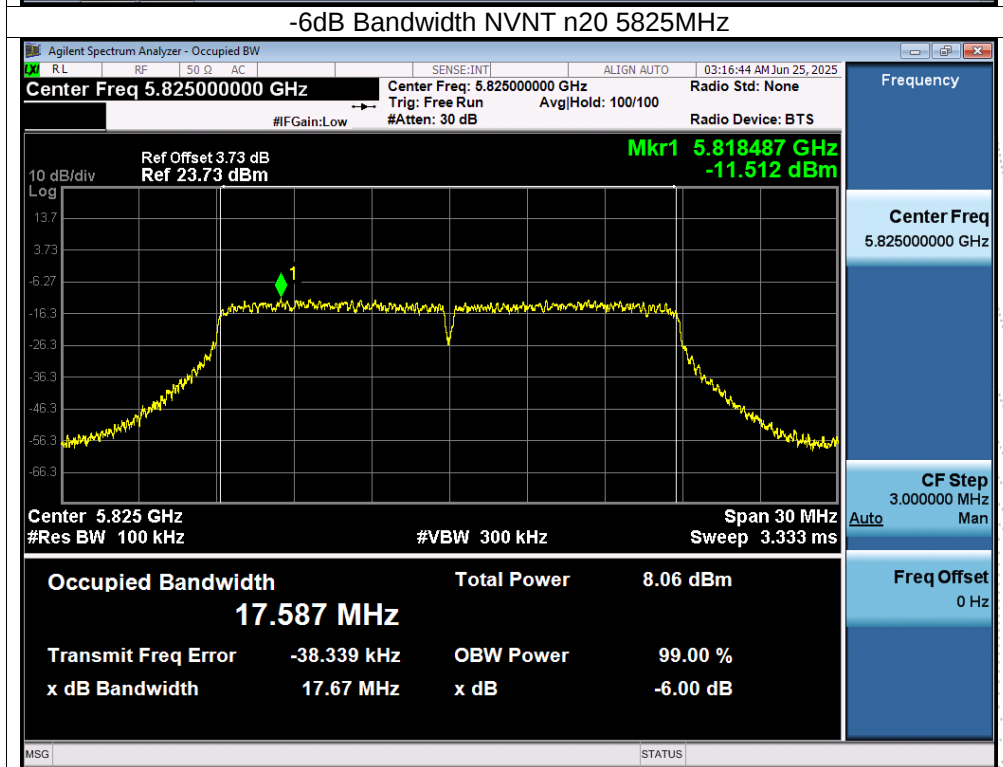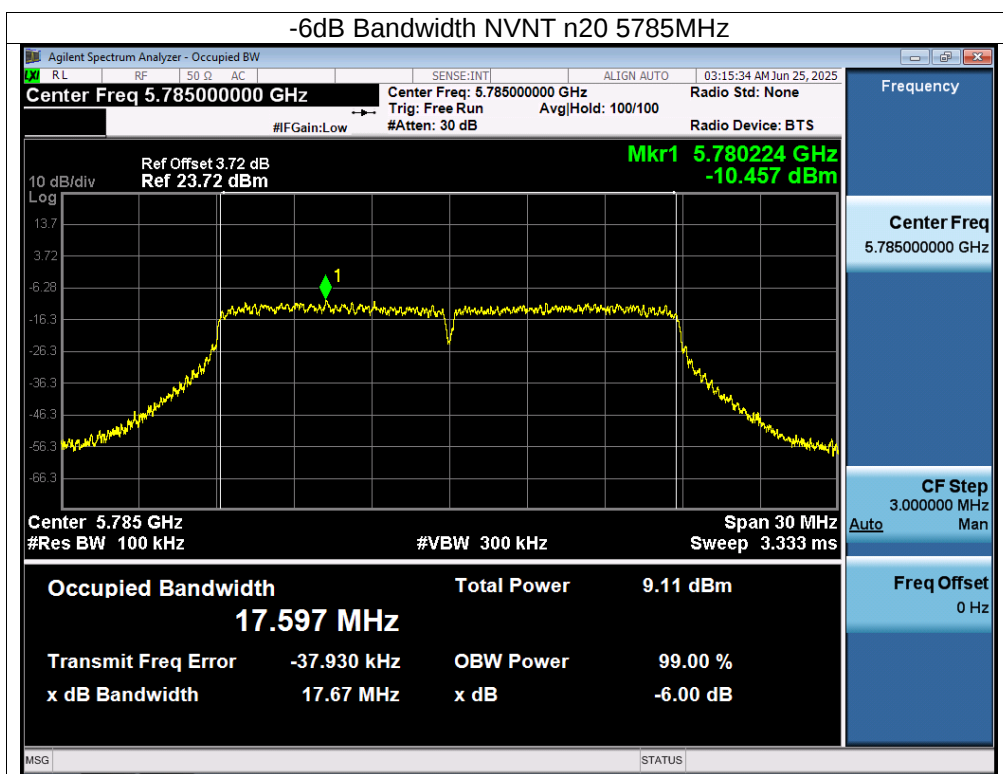


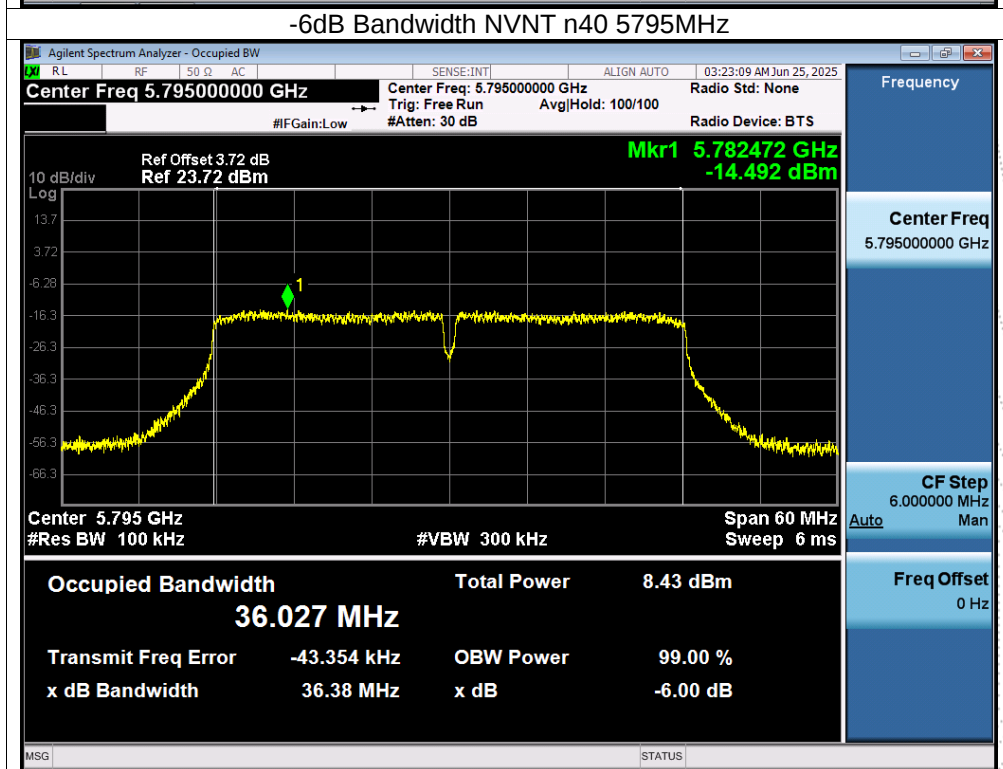
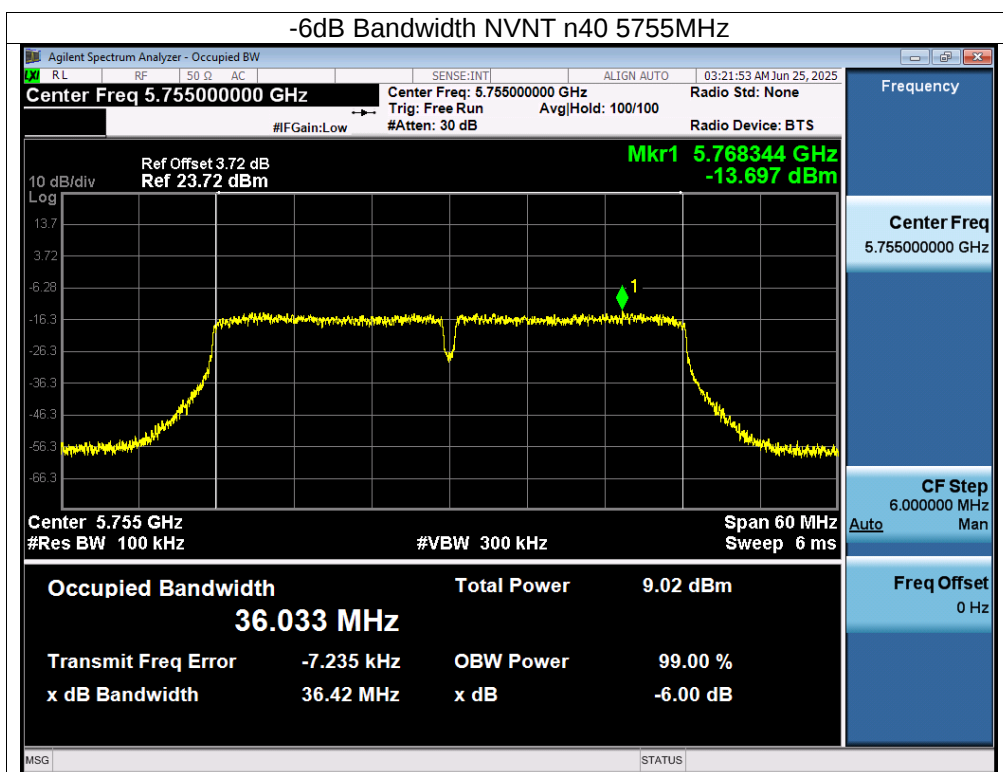


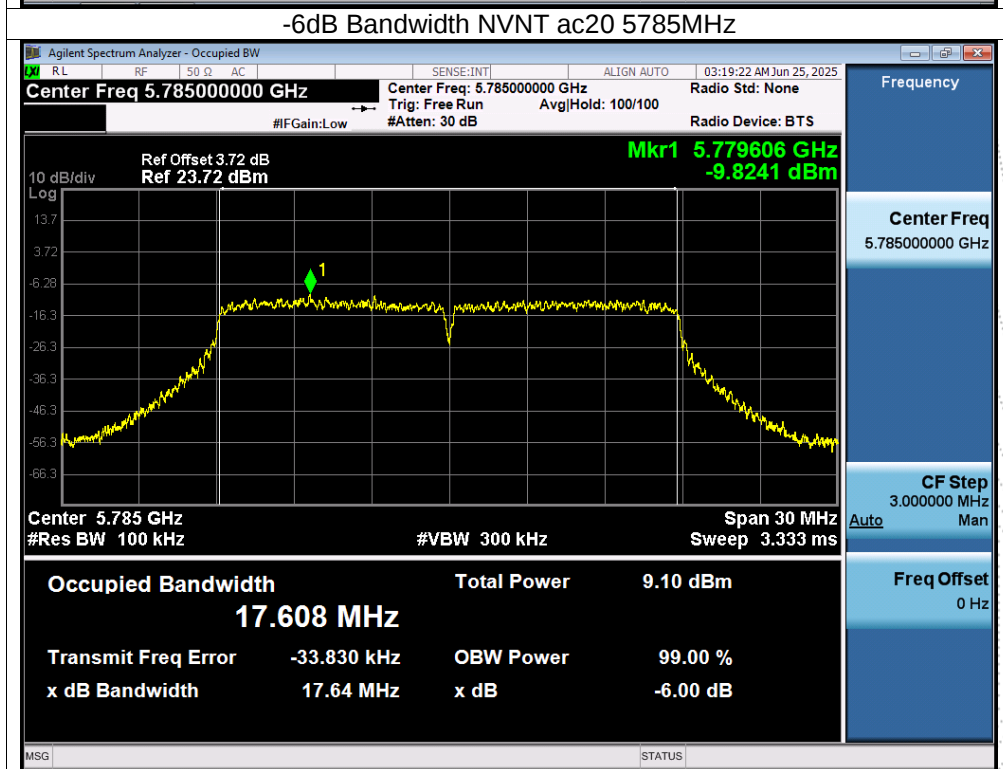
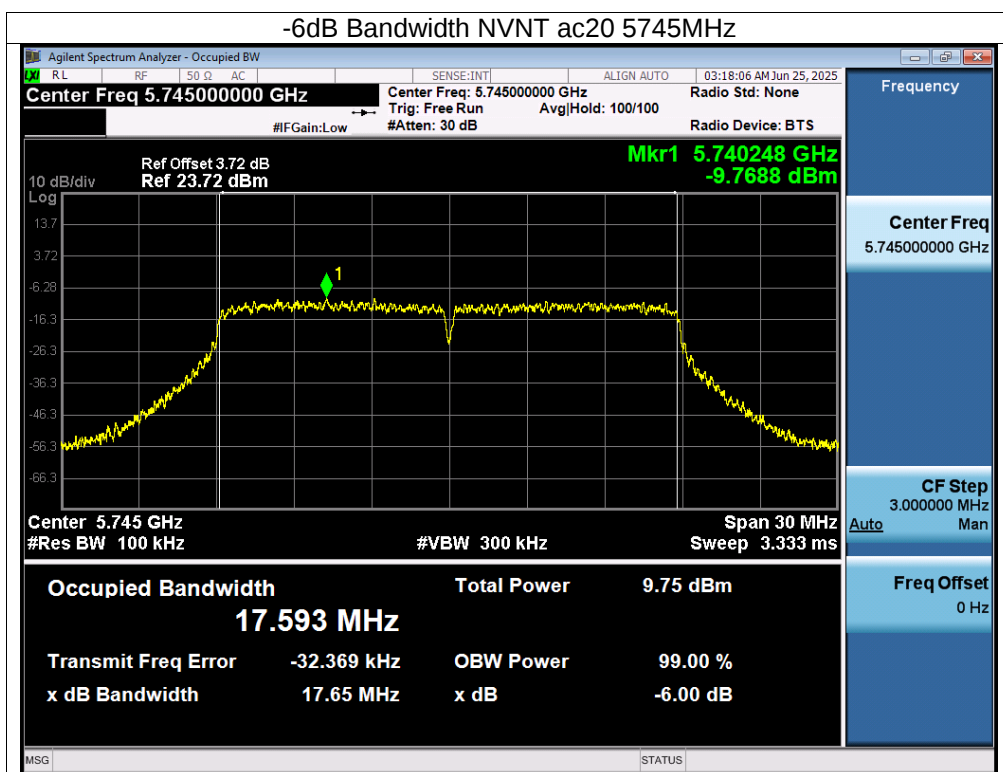


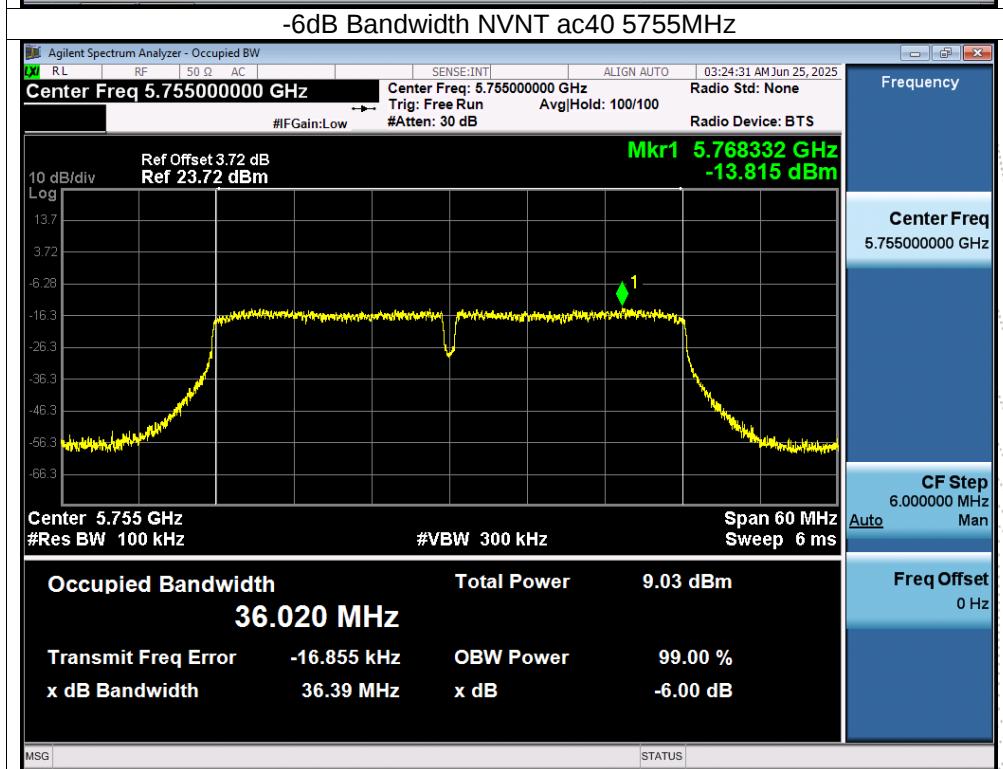
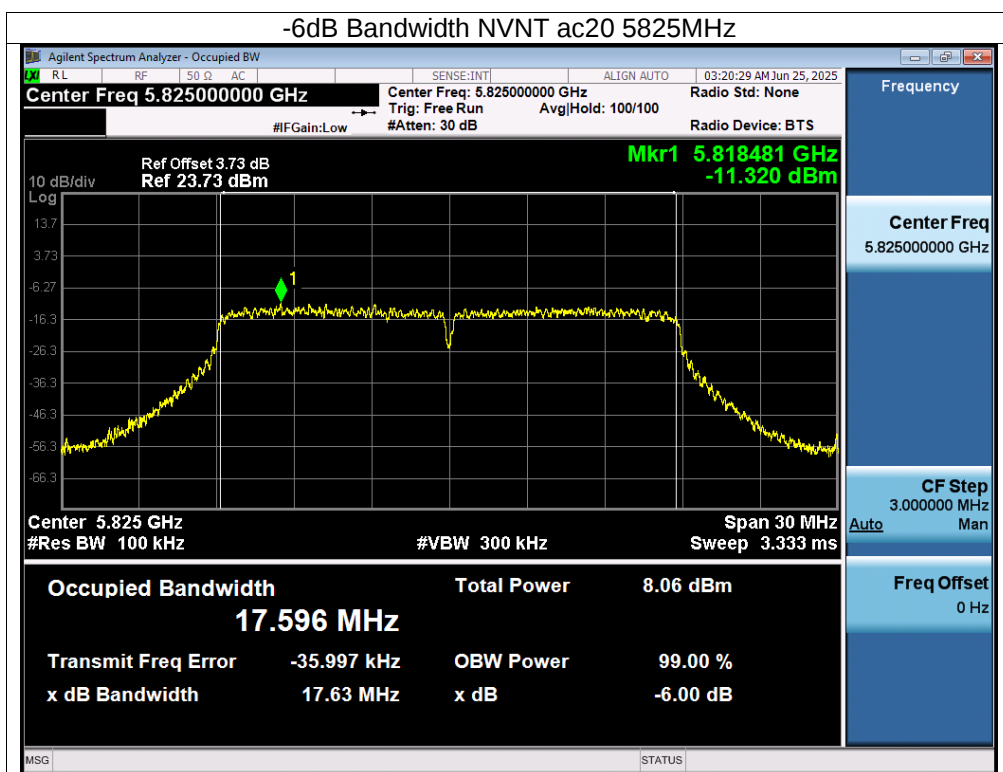


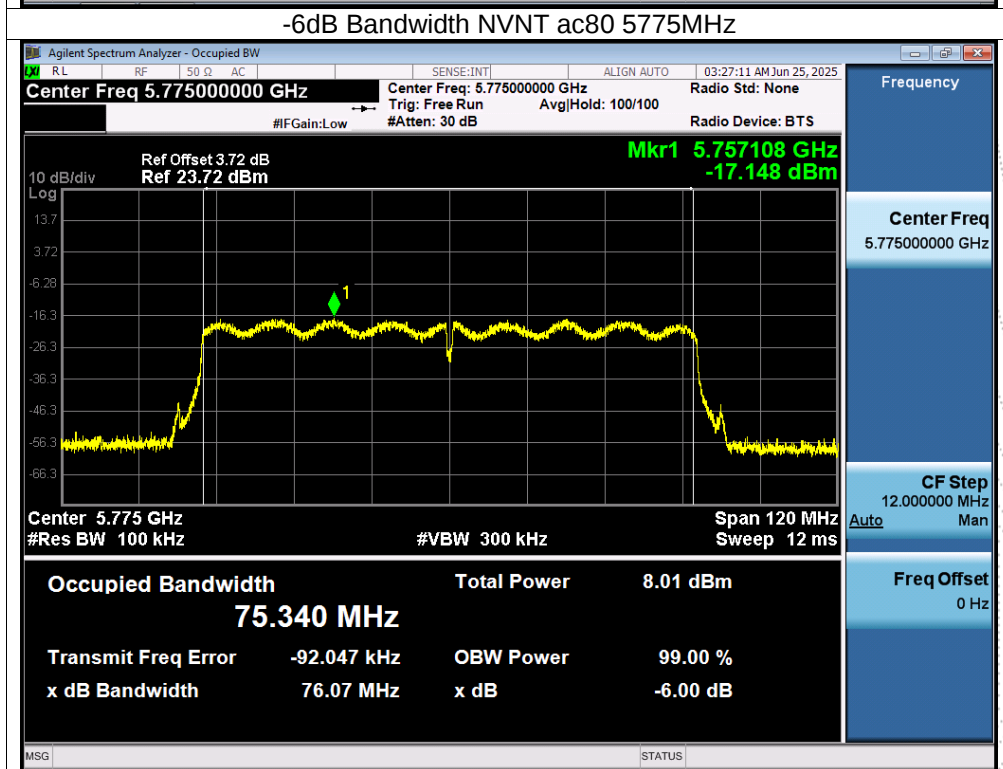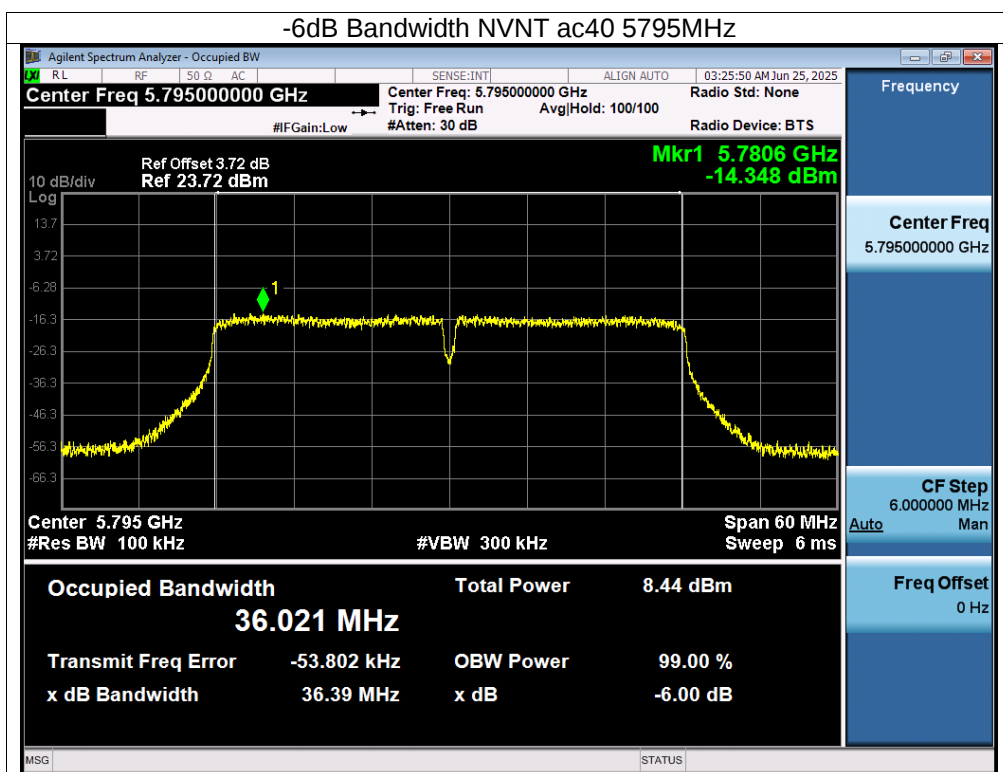



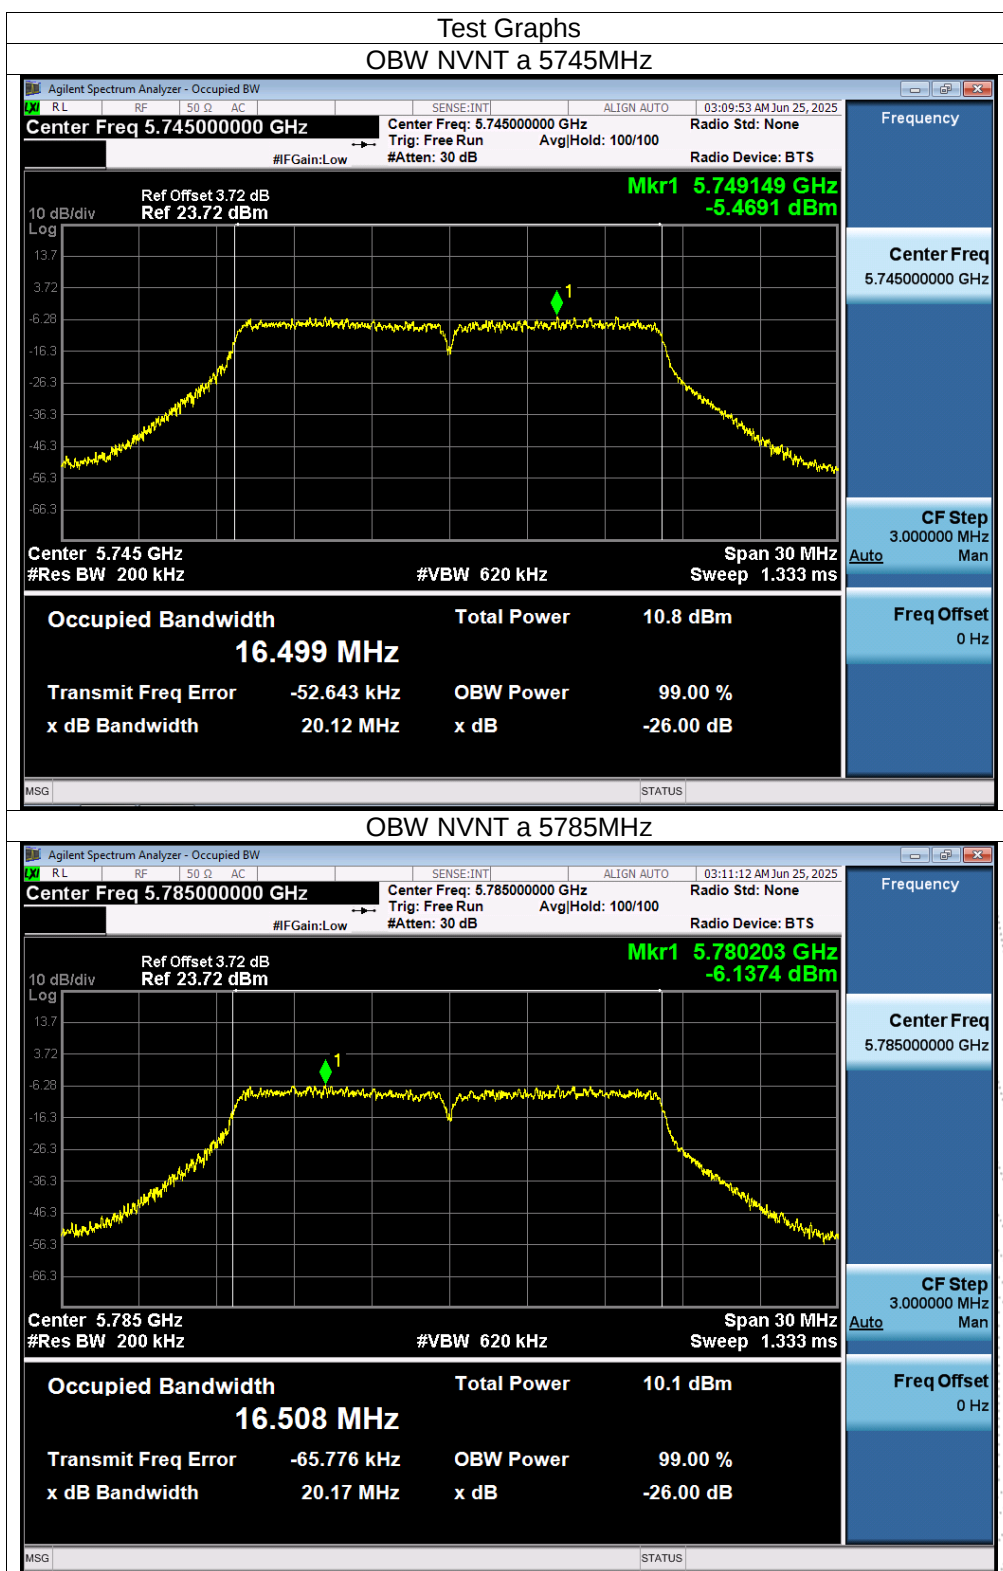


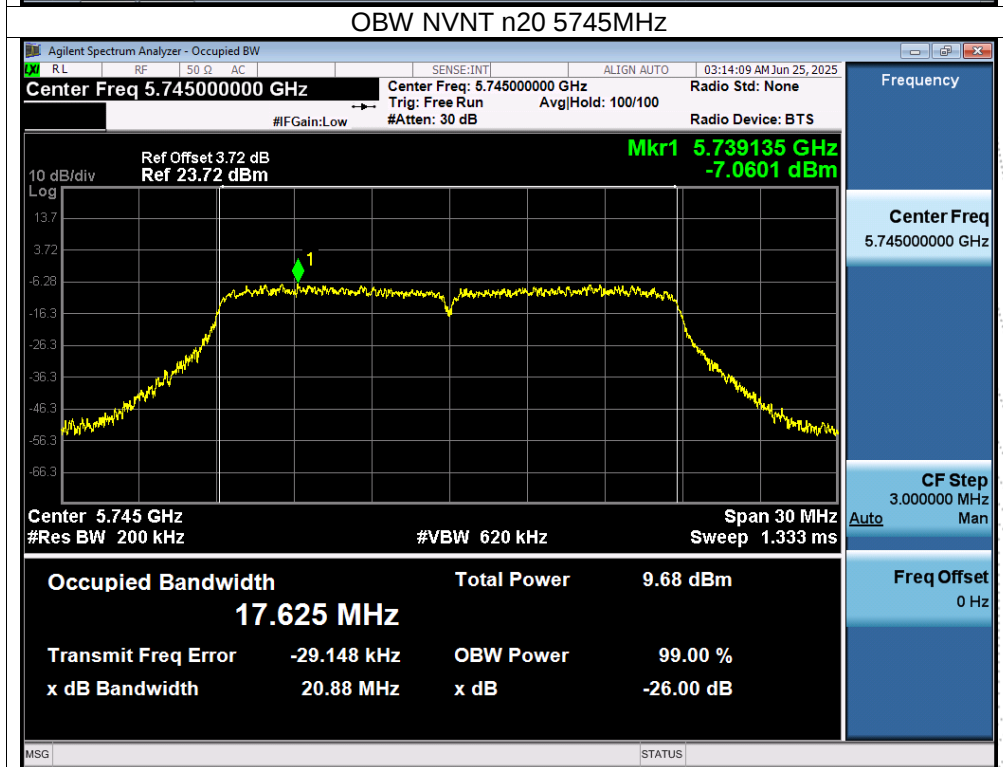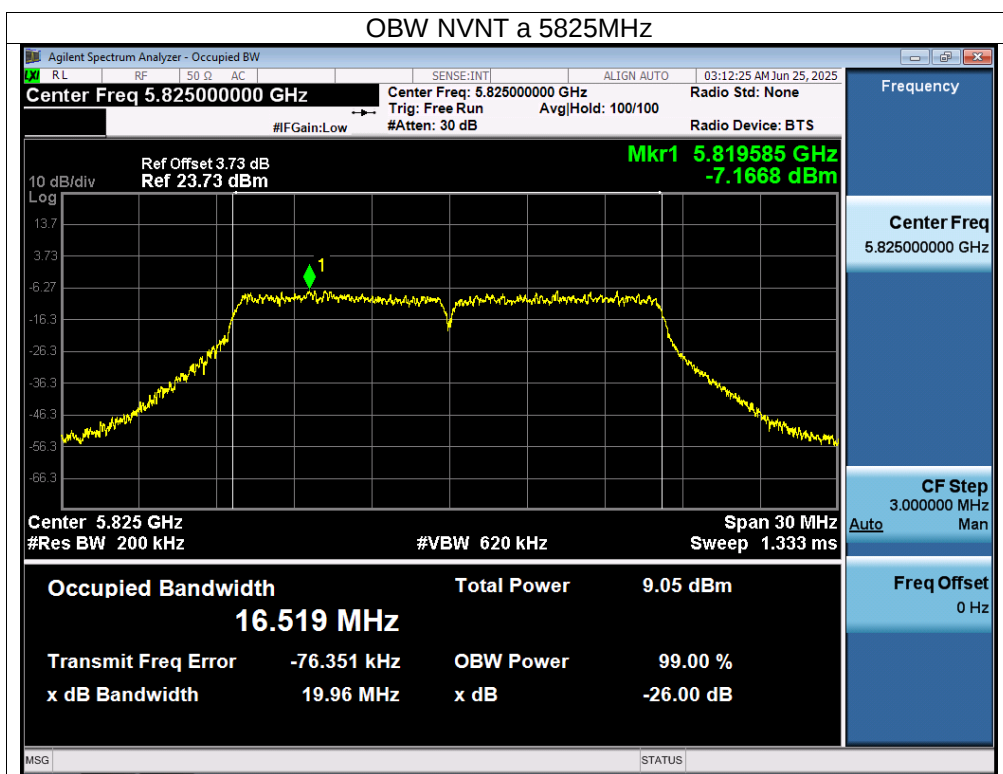


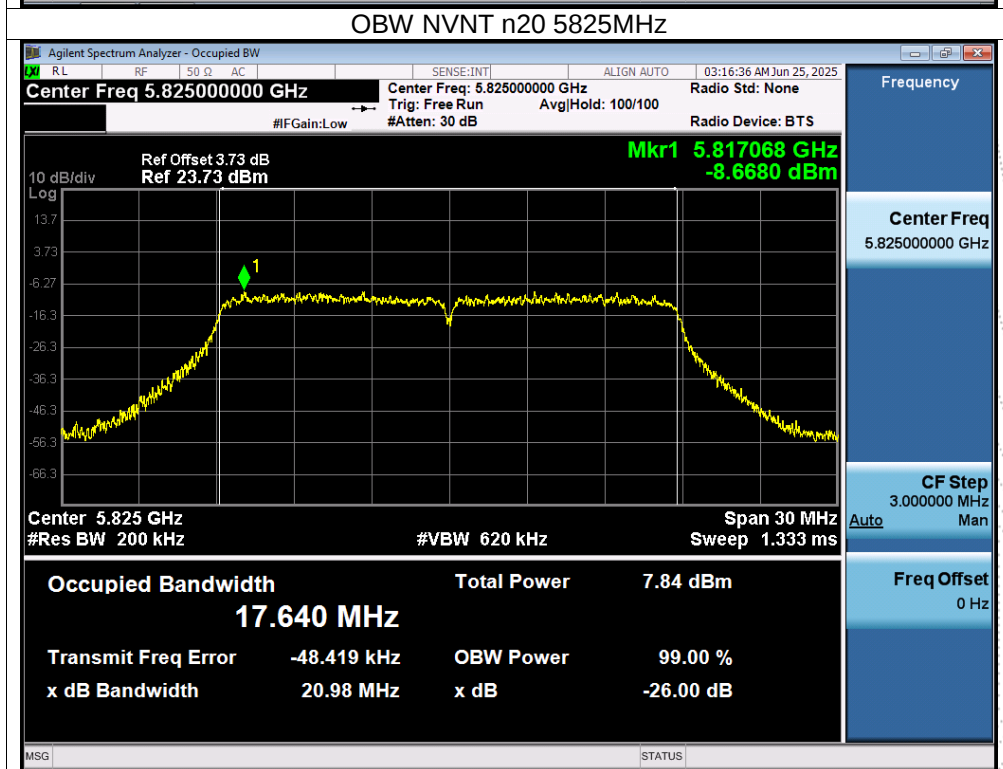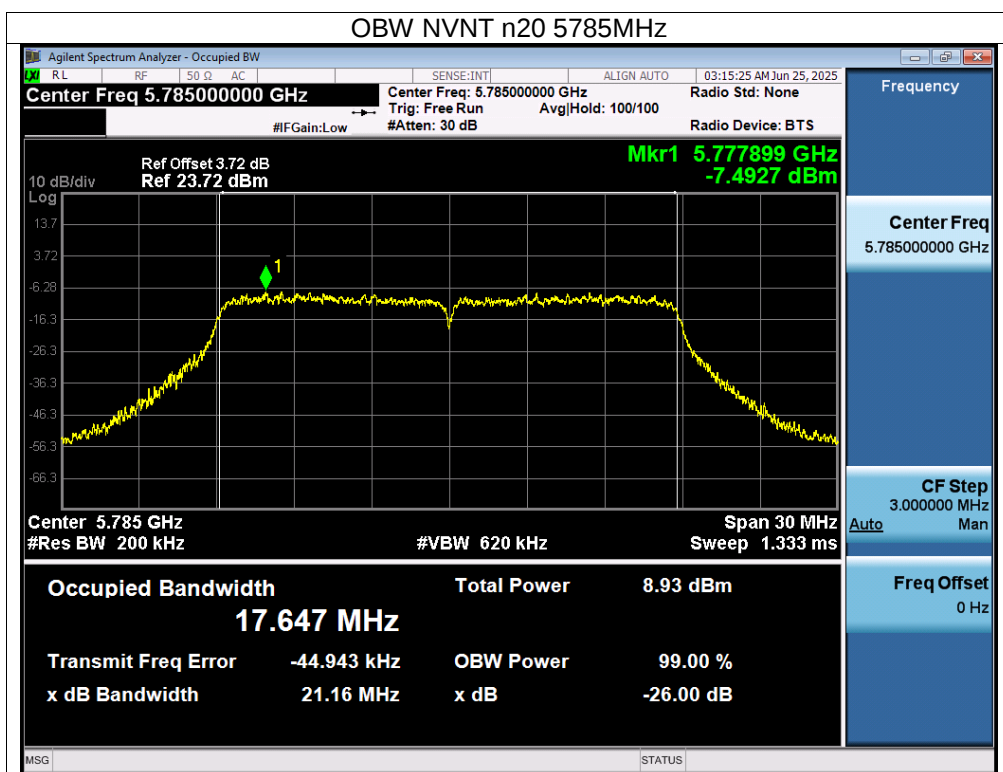

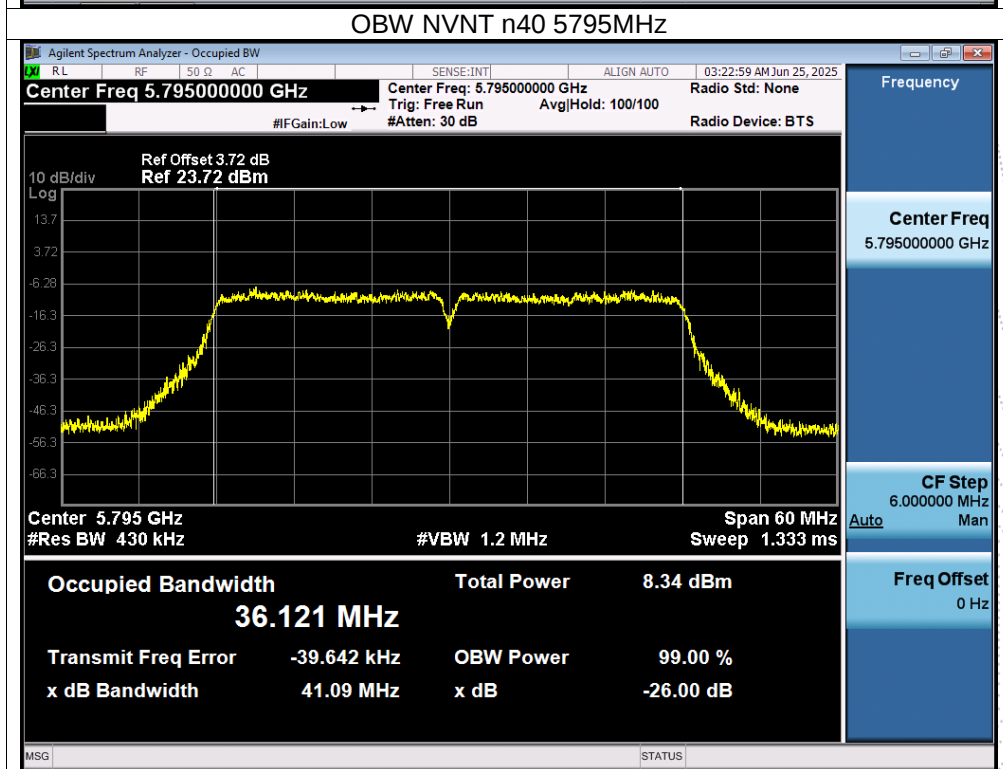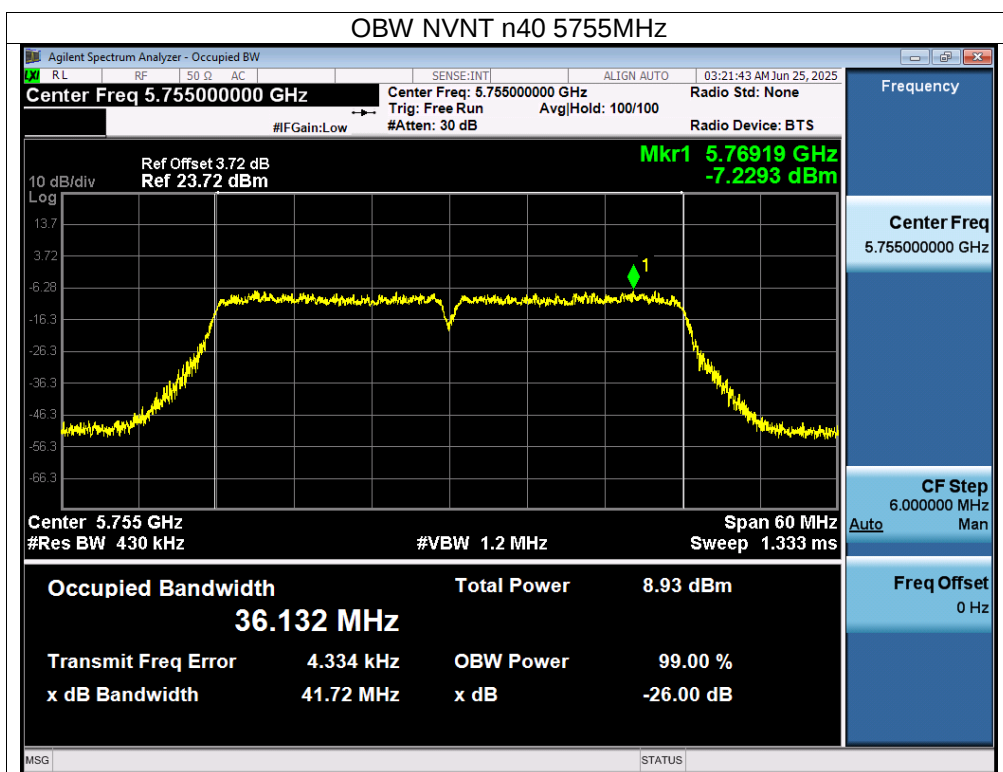

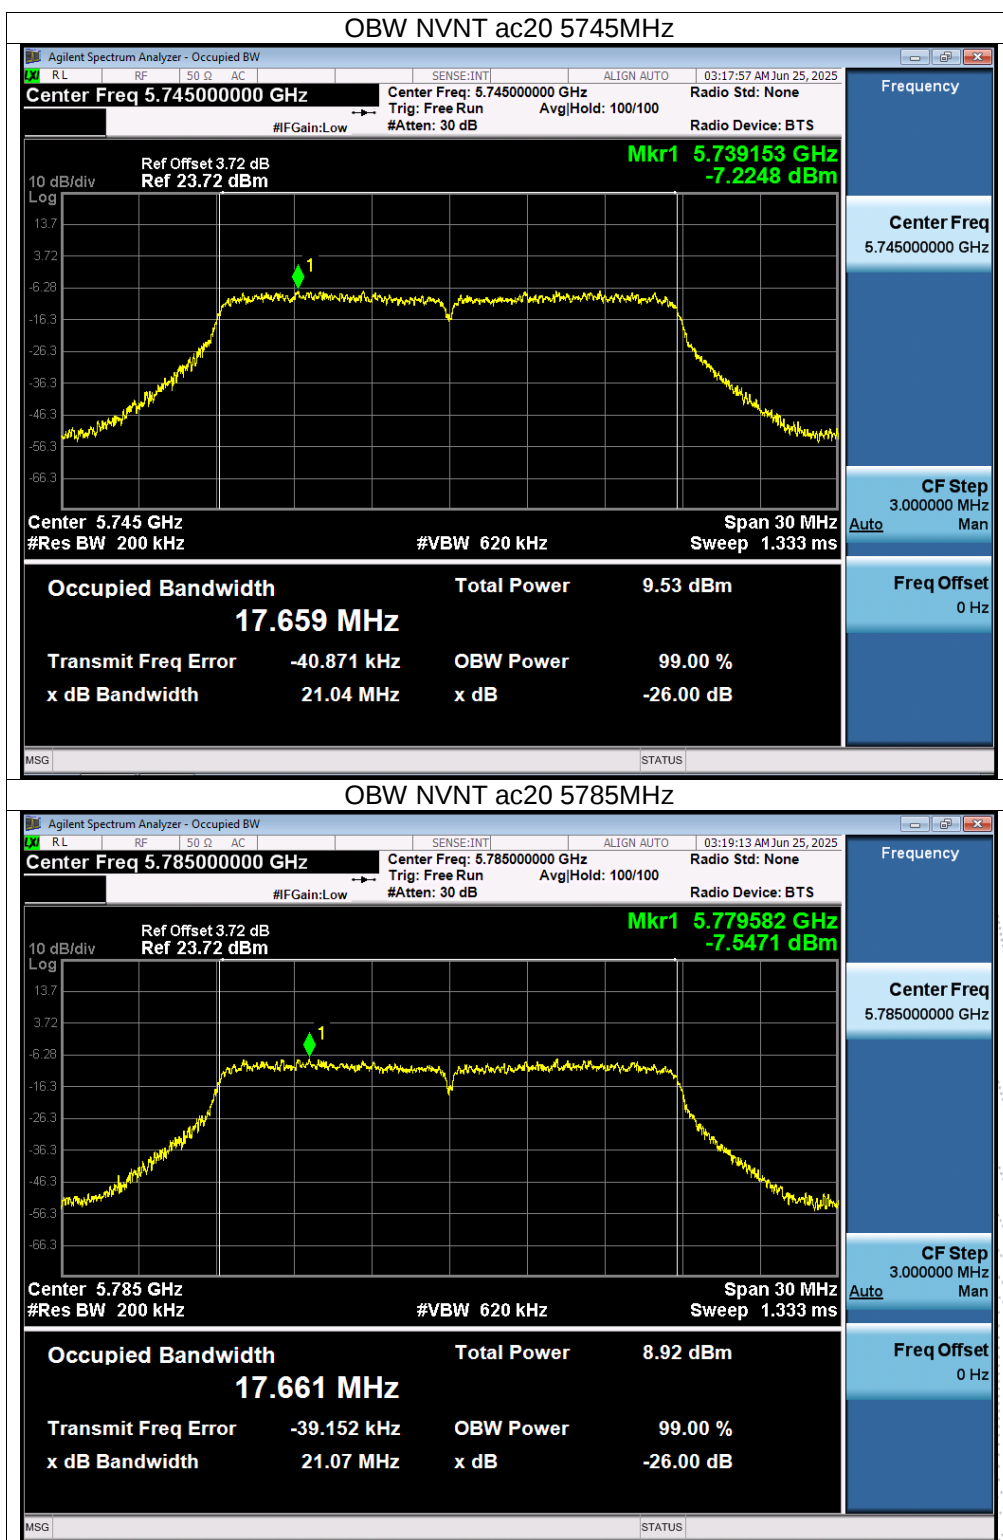

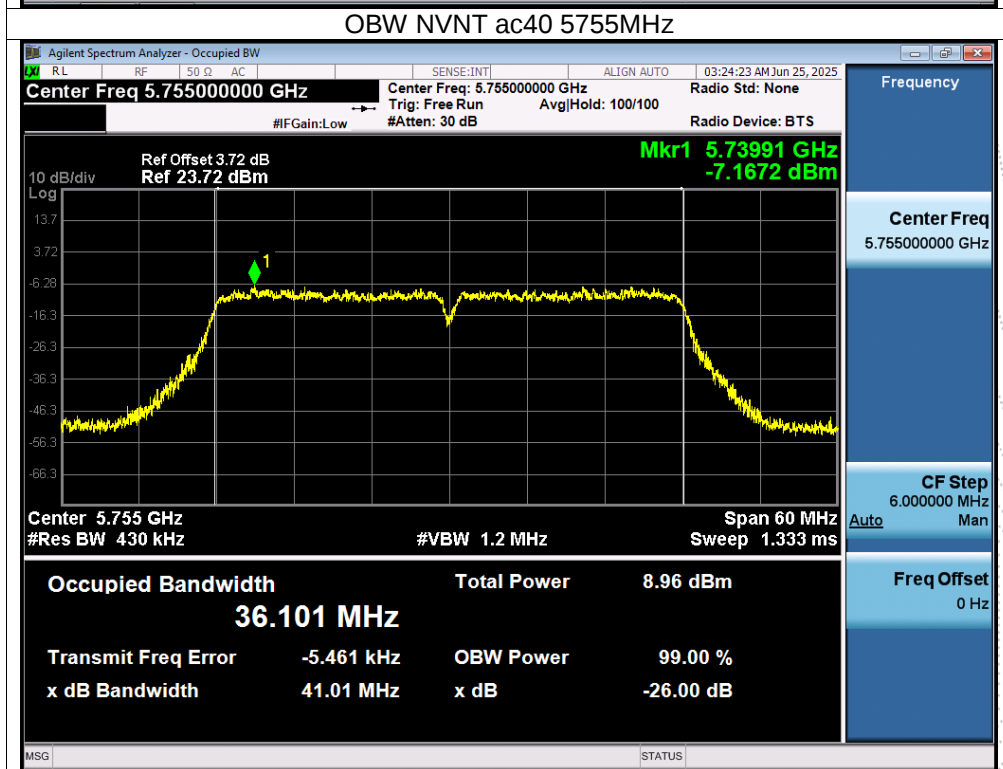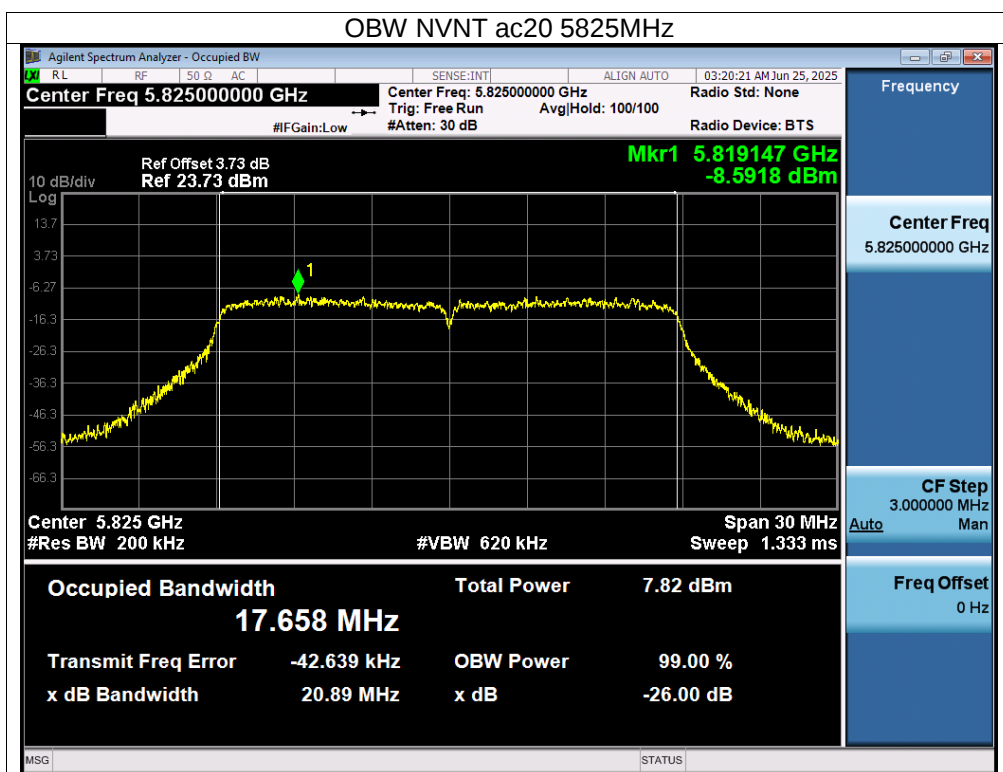

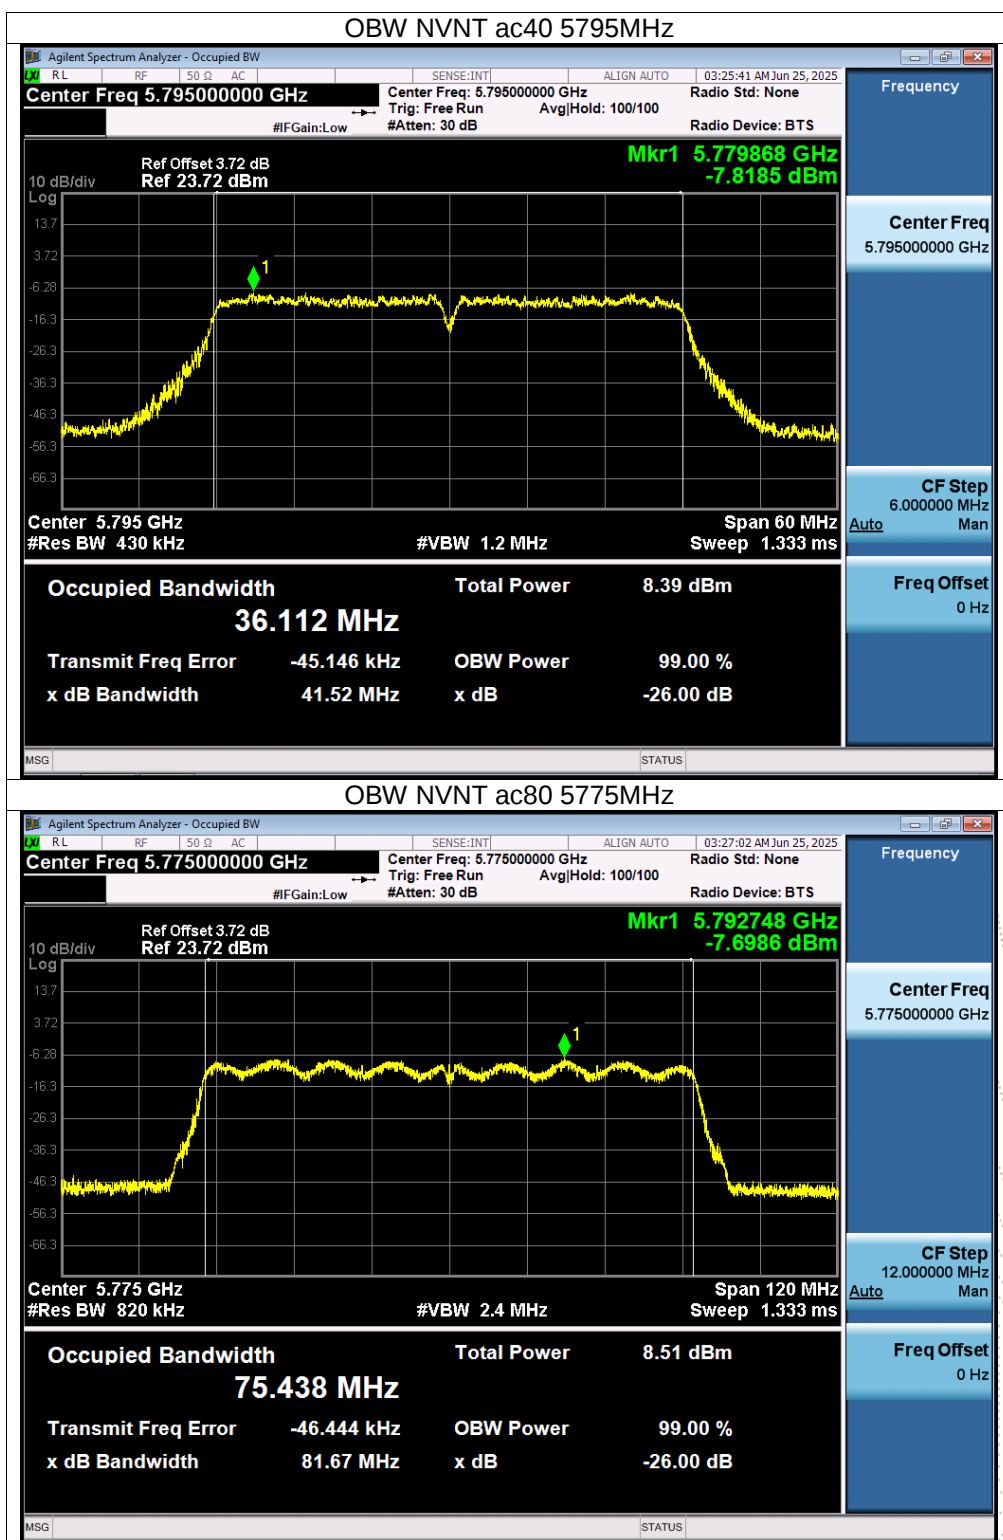

10. Maximum Conducted Output Power

10.1 Block Diagram Of Test Setup



10.2 Limit

According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	250mW
5725~5850	1W

10.3 Test Procedure

Maximum conducted output power may be measured using a spectrum analyzer/EMI receiver or an RF power meter.

1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal.¹ However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).

a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle ≥ 98 percent).
 - Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration T of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.
- (ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than ± 2 percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW $\geq$ 3 MHz.

(iv) Number of points in sweep $\geq$ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq$ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

10.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

10.5 Test Result


Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101kPa	Test Voltage:	DC 11.4V
Test Mode:	TX Frequency U-NII-1 (5180-5240MHz)		

Mode	Channel	Frequency (MHz)	Conducted Power (dBm)			Limit (dBm)	Result
			ANT A	ANT B	Total		
NVNT	a	5180	12.87	13.53	/	24	Pass
NVNT	a	5200	13.41	13.54	/	24	Pass
NVNT	a	5240	13.55	13.61	/	24	Pass
NVNT	n20	5180	11.65	11.90	14.79	24	Pass
NVNT	n20	5200	11.91	11.91	14.92	24	Pass
NVNT	n20	5240	12.14	12.31	15.24	24	Pass
NVNT	n40	5190	10.58	9.96	13.29	24	Pass
NVNT	n40	5230	10.98	11.28	14.14	24	Pass
NVNT	ac20	5180	11.59	11.77	14.69	24	Pass
NVNT	ac20	5200	11.94	11.56	14.76	24	Pass
NVNT	ac20	5240	12.09	12.36	15.24	24	Pass
NVNT	ac40	5190	9.74	9.85	12.81	24	Pass
NVNT	ac40	5230	11.21	11.25	14.24	24	Pass
NVNT	ac80	5210	9.17	9.30	12.25	24	Pass



Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101kPa	Test Voltage:	DC 11.4V
Test Mode:	TX Frequency U-NII-3 (5745-5825MHz)		

Mode	Channel	Frequency (MHz)	Conducted Power (dBm)			Limit (dBm)	Result
			ANT A	ANT B	Total		
NVNT	a	5745	8.60	8.20	/	30	Pass
NVNT	a	5785	7.81	7.51	/	30	Pass
NVNT	a	5825	6.93	6.46	/	30	Pass
NVNT	n20	5745	7.42	7.19	10.32	30	Pass
NVNT	n20	5785	6.53	6.45	9.50	30	Pass
NVNT	n20	5825	5.68	5.39	8.55	30	Pass
NVNT	n40	5755	6.60	6.26	9.44	30	Pass
NVNT	n40	5795	5.80	5.69	8.76	30	Pass
NVNT	ac20	5745	7.37	7.06	10.23	30	Pass
NVNT	ac20	5785	6.60	6.42	9.52	30	Pass
NVNT	ac20	5825	5.72	5.36	8.55	30	Pass
NVNT	ac40	5755	6.54	6.23	9.40	30	Pass
NVNT	ac40	5795	5.78	5.69	8.75	30	Pass
NVNT	ac80	5775	5.33	5.24	8.30	30	Pass

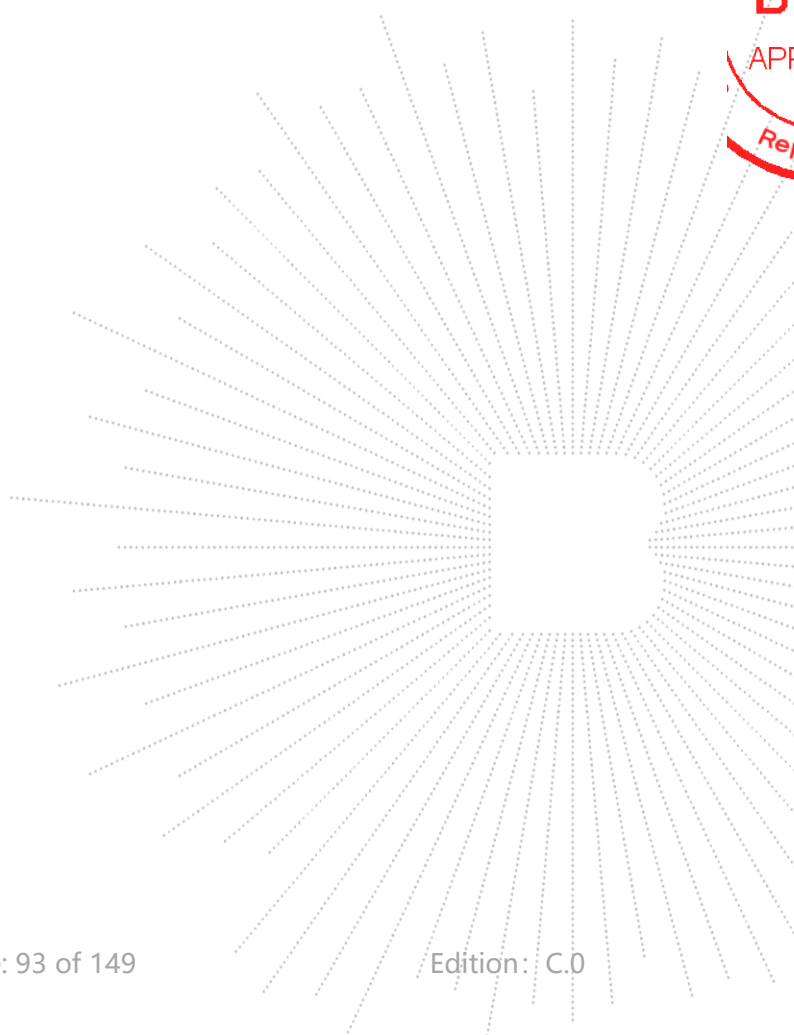

11. Out Of Band Emissions

11.1 Block Diagram Of Test Setup



11.2 Limit

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

11.3 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

11.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data

11.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101kPa	Test Voltage:	DC 11.4V

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A .
Plot. Antenna A: 5180-5240MHz

