



Appendix A: Test Results of Bluetooth BR & EDR mode

APPENDIX A: TEST RESULTS OF BLUETOOTH BR & EDR MODE	1
APPENDIX A.1: TEST RESULTS OF 99% BANDWIDTH.....	2
APPENDIX A.2: TEST RESULTS OF 20dB BANDWIDTH	5
APPENDIX A.3: TEST RESULTS OF CARRIER FREQUENCY SEPARATION	8
APPENDIX A.4: TEST RESULTS OF NUMBER OF HOPPING FREQUENCY	9
APPENDIX A.5: TEST RESULTS OF TIME OF OCCUPANCY.....	10
APPENDIX A.6: TEST RESULTS OF CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 kHz BANDWIDTH	15
<i>Band Edge</i>	15
<i>Conducted Spurious Emission</i>	18
APPENDIX A.7: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS	25
30 MHz - 1GHz.....	25
1GHz - 18GHz.....	27
APPENDIX A.8: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS.....	39
APPENDIX A.9: TEST RESULTS OF CONDUCTED EMISSION ON AC MAINS.....	43

Appendix A.1: Test Results of 99% Bandwidth

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.75063	2401.6254	2402.3760	---	PASS
		2441	0.76082	2440.6191	2441.3800	---	PASS
		2480	0.76100	2479.6194	2480.3804	---	PASS
3DH5	Ant1	2402	1.1526	2401.4240	2402.5766	---	PASS
		2441	1.1623	2440.4156	2441.5779	---	PASS
		2480	1.1712	2479.4083	2480.5795	---	PASS

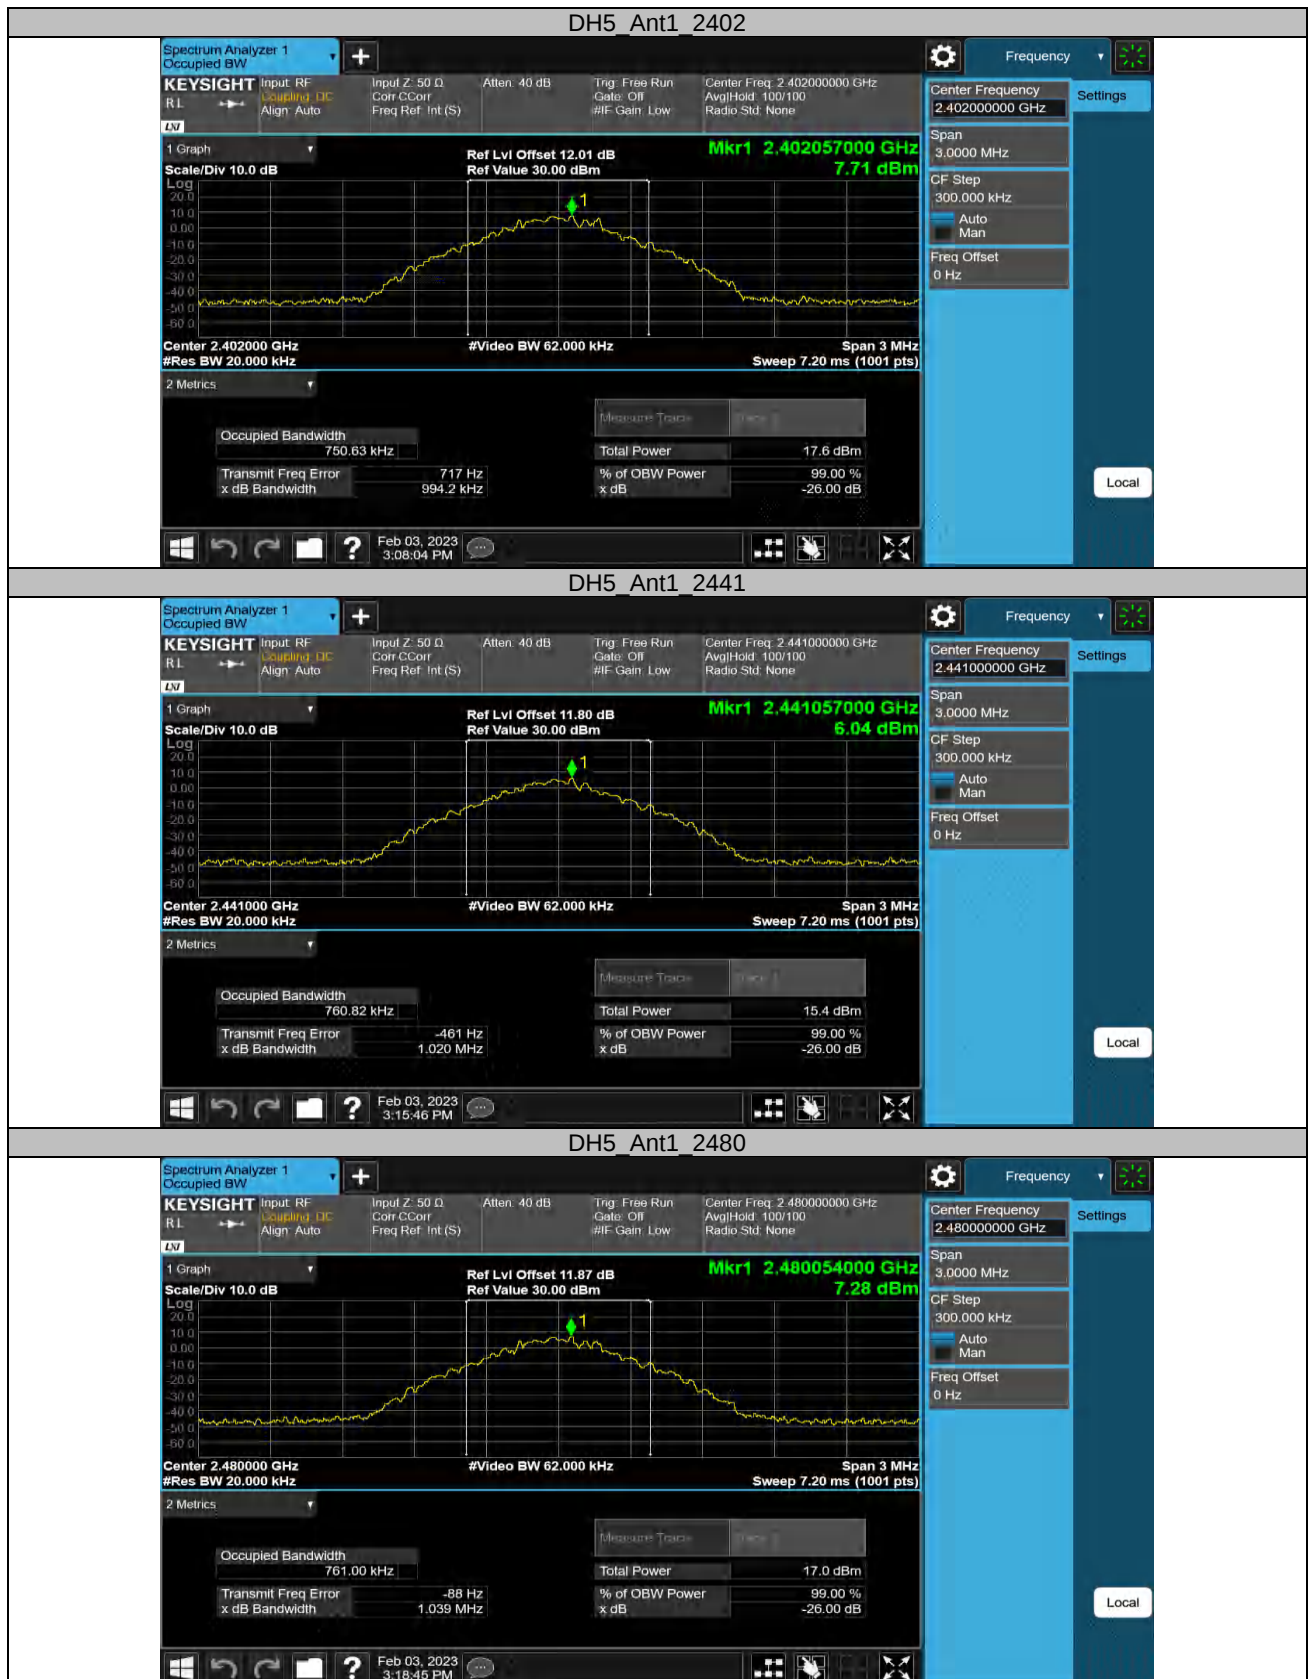

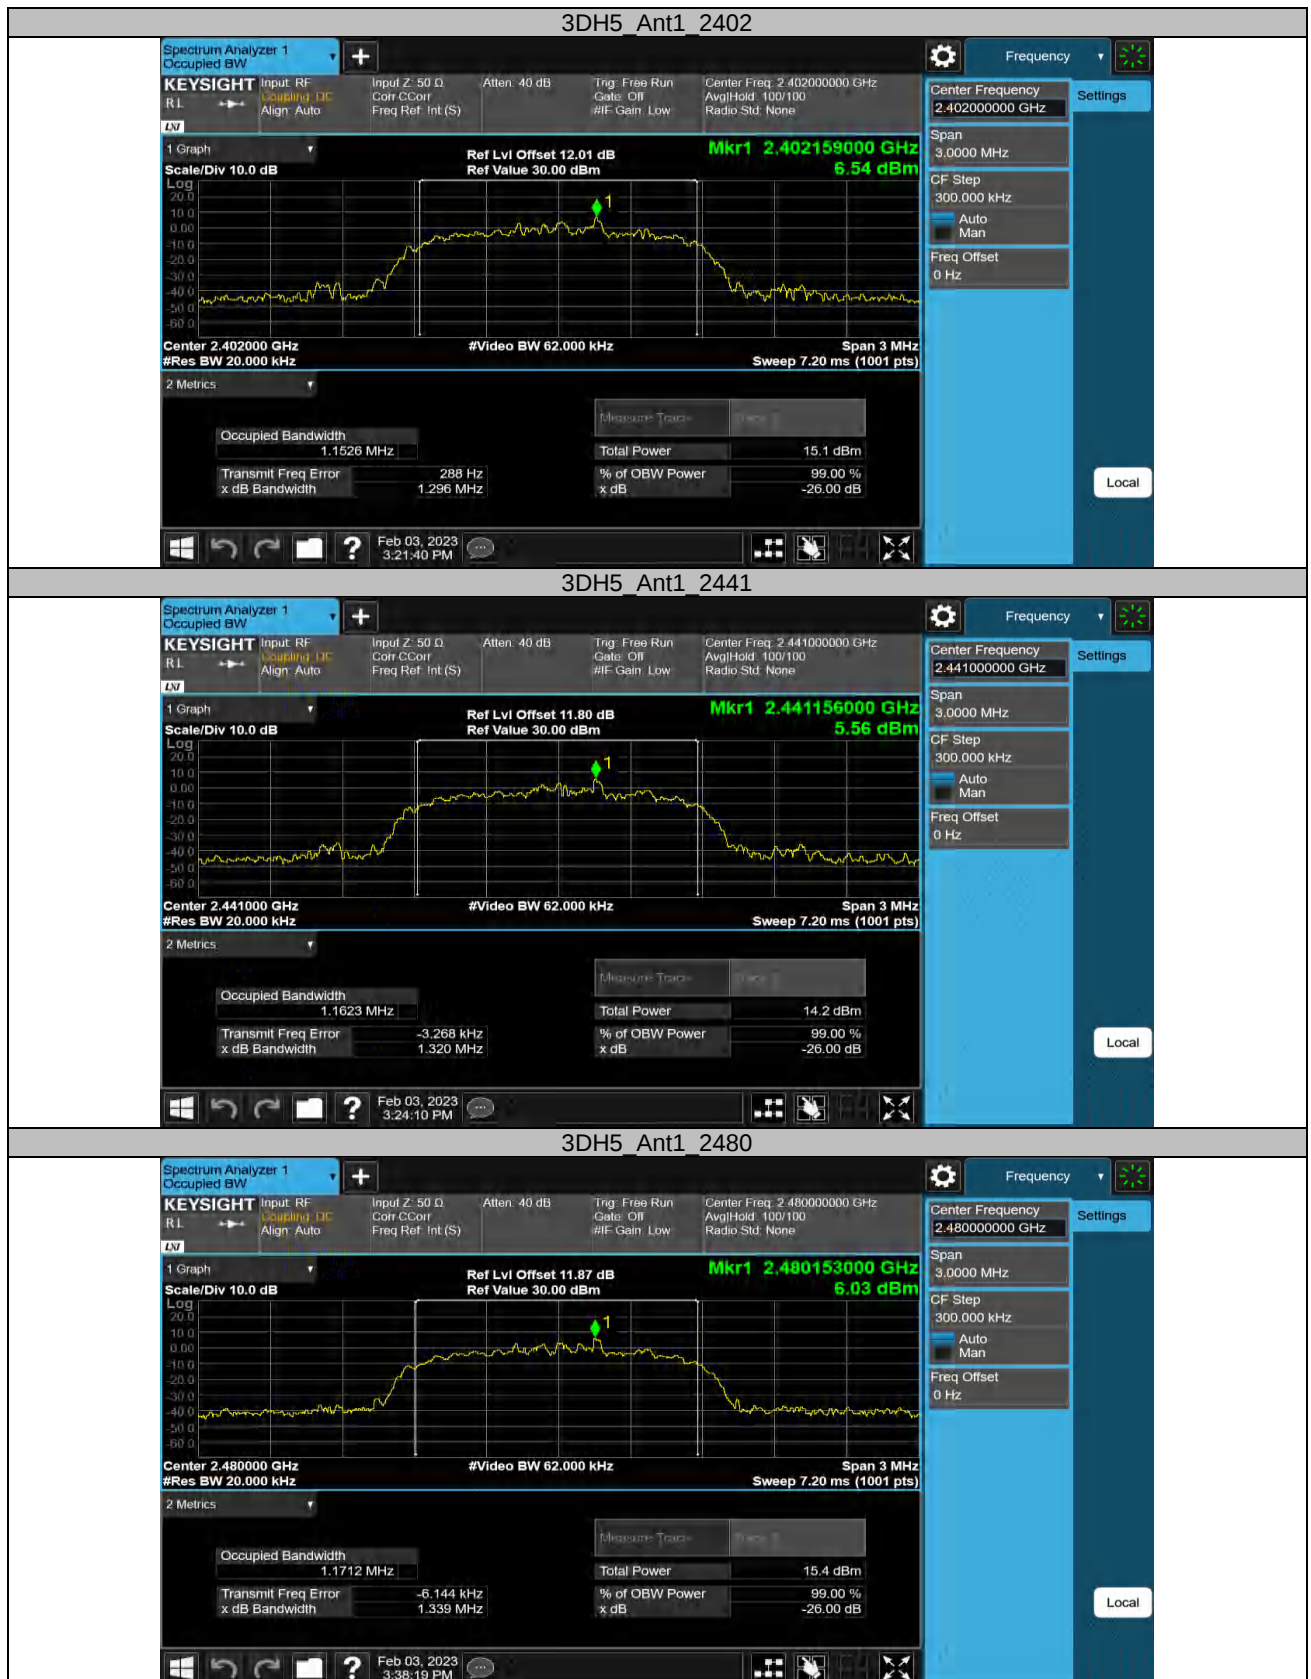

Appendix A.2: Test Results of 20dB Bandwidth

TestMode	Antenna	Channel	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.807	2401.592	2402.399	---	PASS
		2441	0.804	2440.595	2441.399	---	PASS
		2480	0.804	2479.595	2480.399	---	PASS
3DH5	Ant1	2402	1.248	2401.361	2402.609	---	PASS
		2441	1.248	2440.367	2441.615	---	PASS
		2480	1.254	2479.358	2480.612	---	PASS


DH5_Ant1_2402




DH5_Ant1_2441



DH5_Ant1_2480

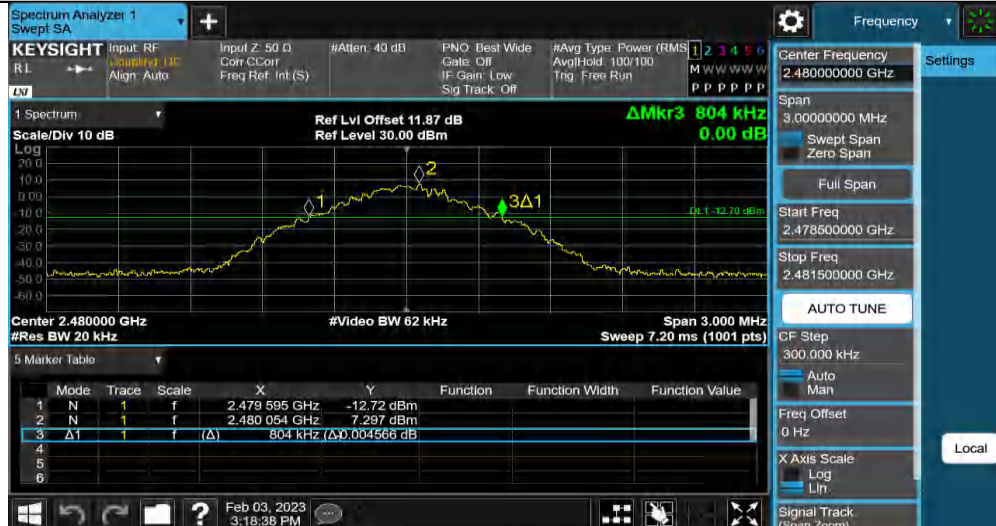

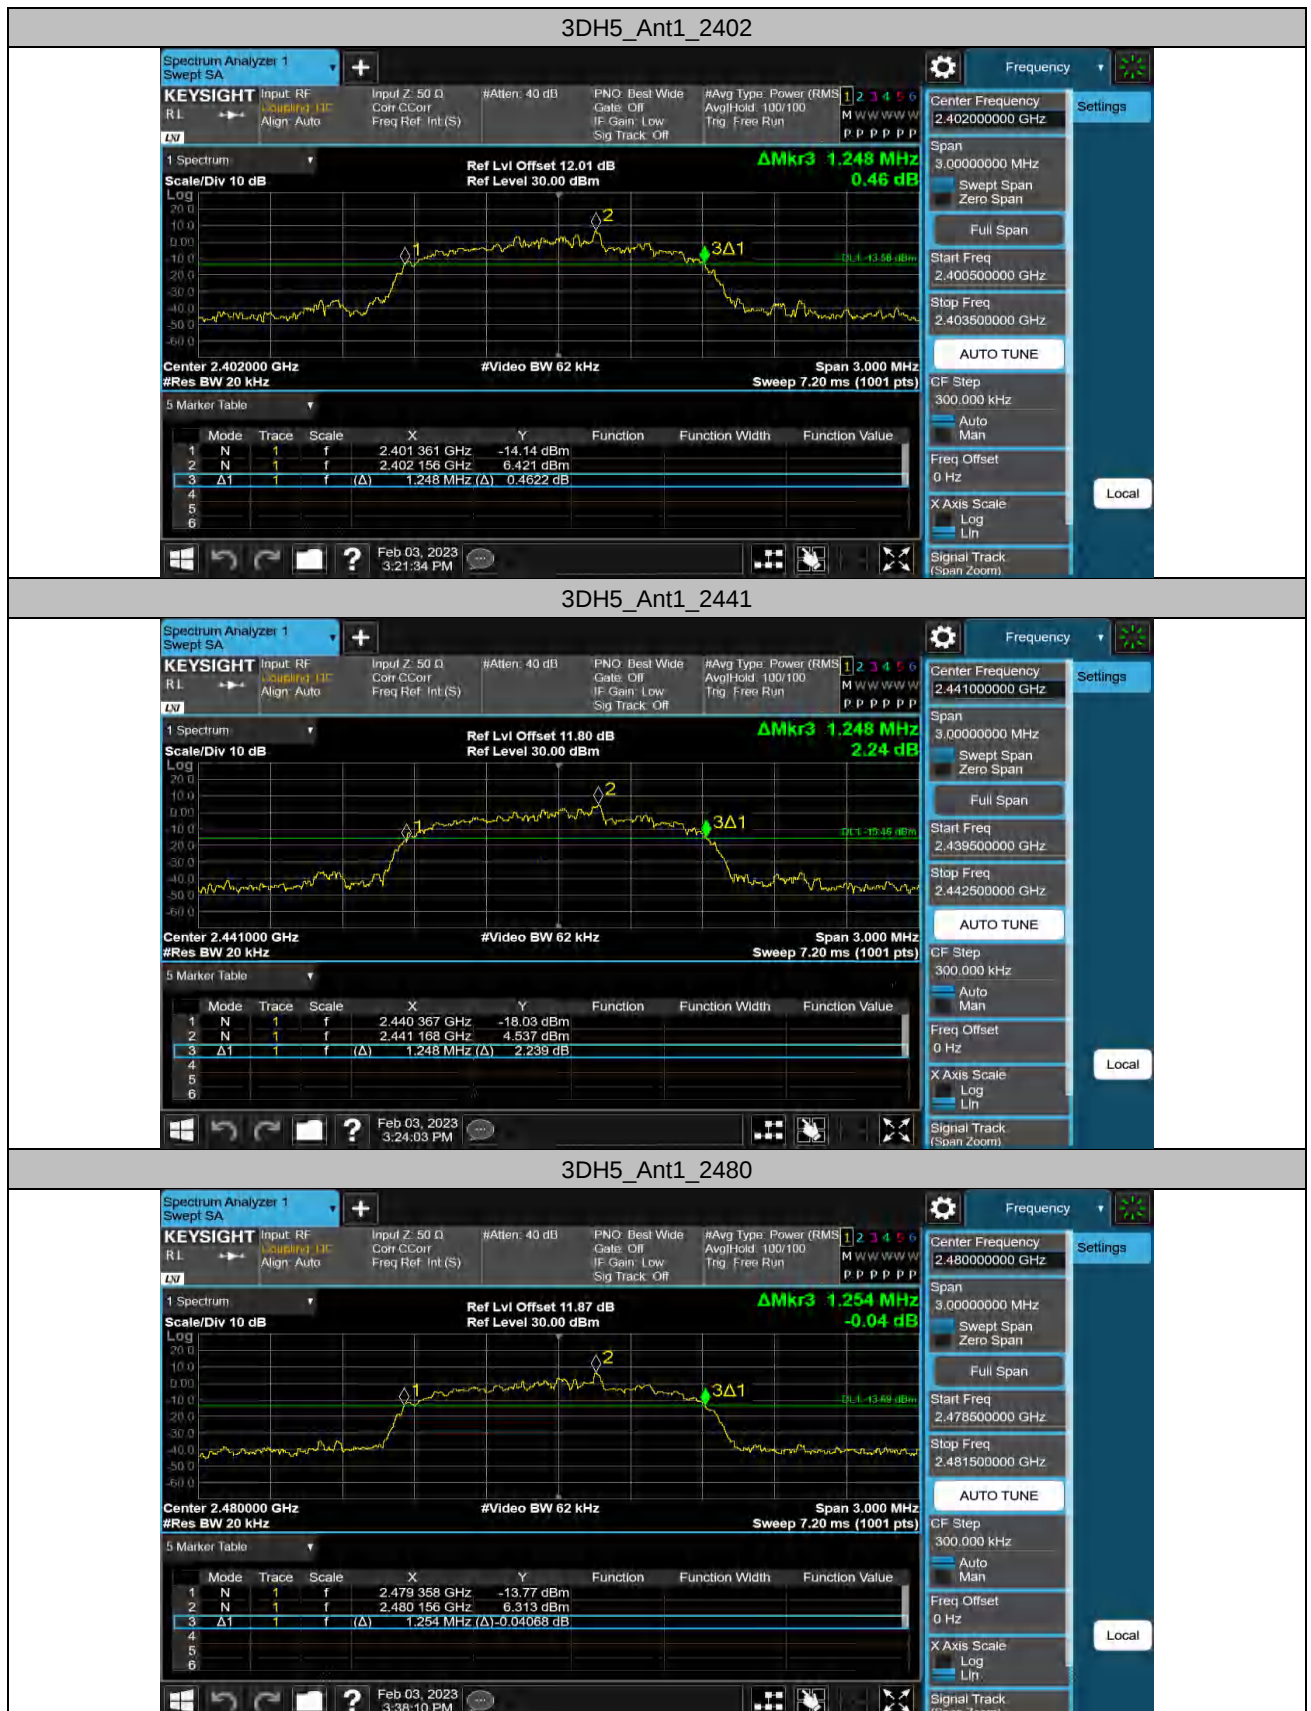

Appendix A.3: Test Results of Carrier Frequency Separation

TestMode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	0.832	≥0.807	PASS
3DH5	Ant1	Hop	1.036	≥0.836	PASS




Appendix A.4: Test Results of Number of Hopping Frequency


TestMode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS



Appendix A.5: Test Results of Time of Occupancy


TestMode	Antenna	Channel	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.377	312	0.118	≤0.4	PASS
DH3	Ant1	Hop	1.631	165	0.269	≤0.4	PASS
DH5	Ant1	Hop	2.882	95	0.274	≤0.4	PASS
3DH1	Ant1	Hop	0.384	312	0.12	≤0.4	PASS
3DH3	Ant1	Hop	1.635	157	0.257	≤0.4	PASS
3DH5	Ant1	Hop	2.885	102	0.294	≤0.4	PASS

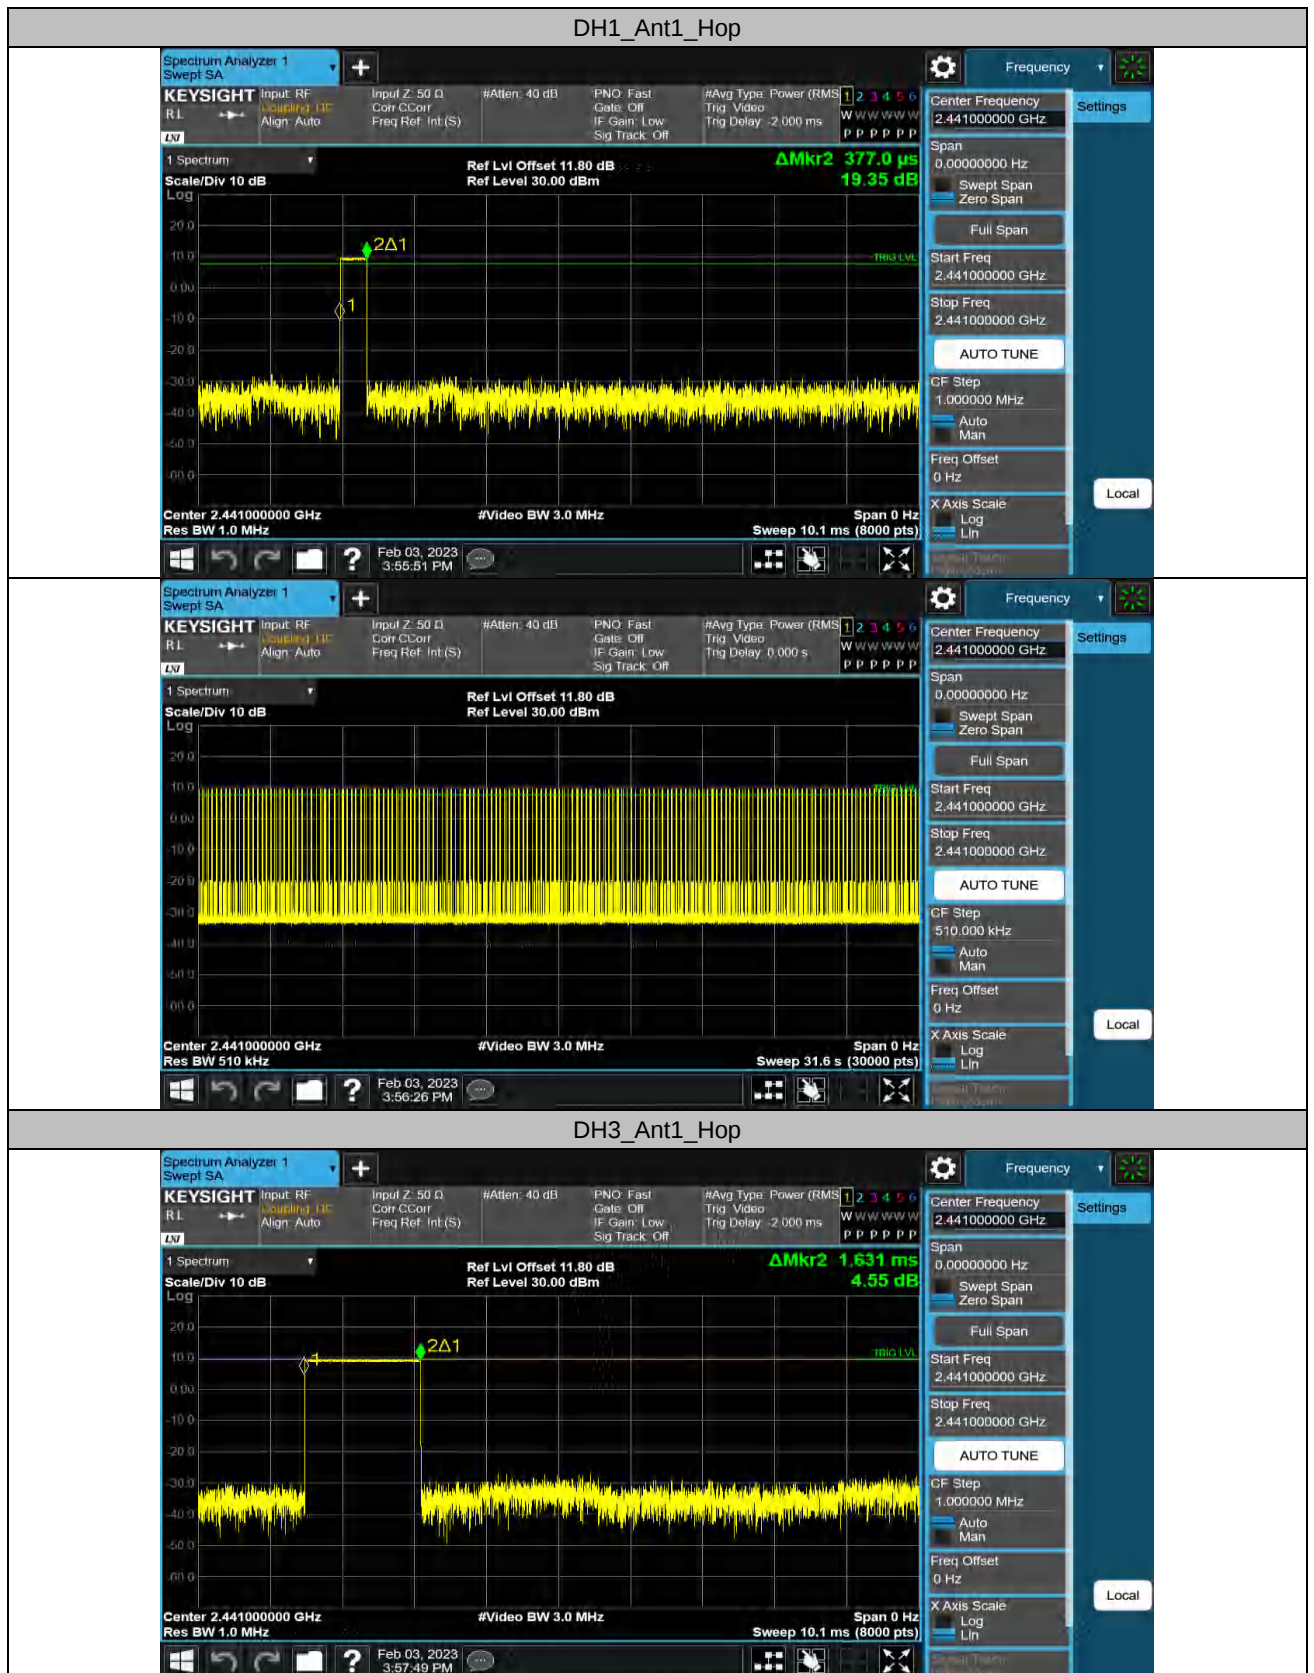

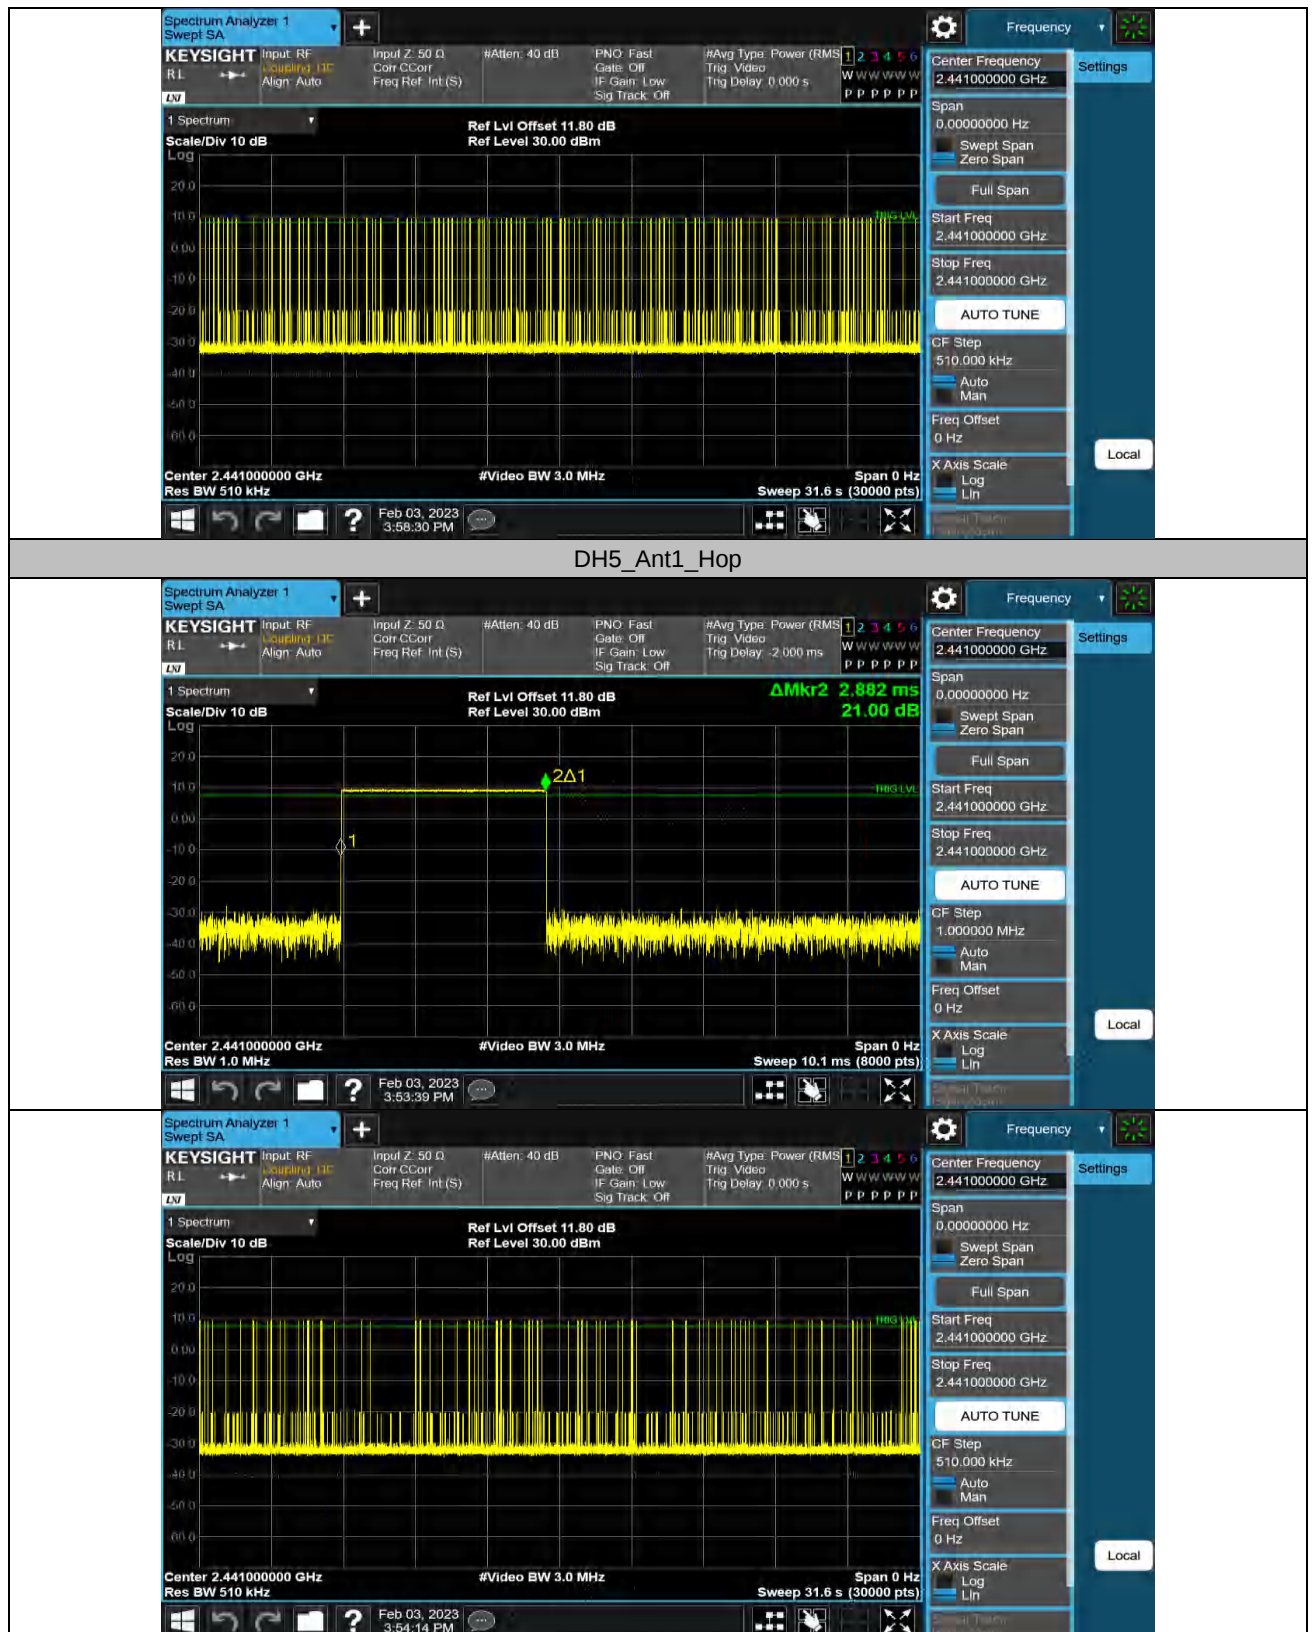





3DH5_Ant1_Hop

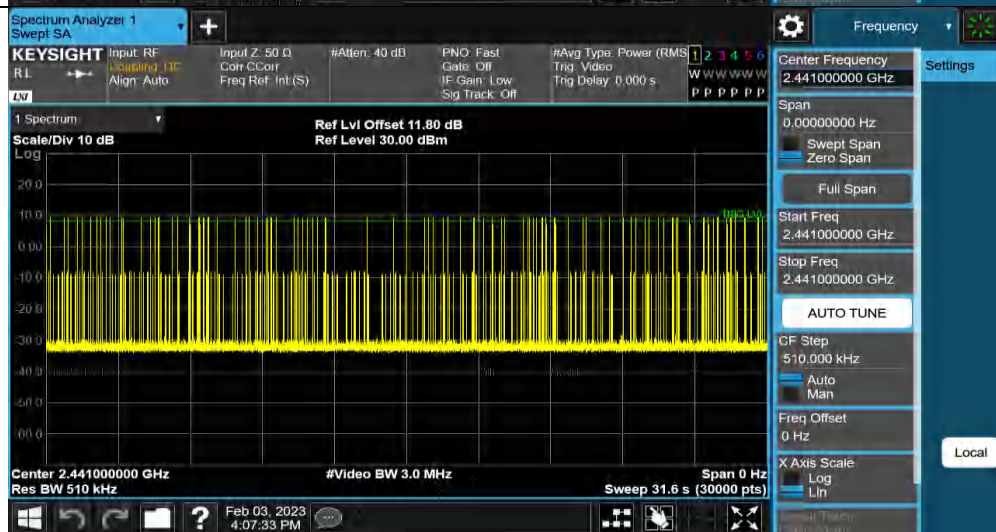

Appendix A.6: Test Results of Conducted Spurious Emissions Measured in 100 kHz Bandwidth

Band Edge


TestMode	Antenna	ChName	Channel	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	10.61	-46.38	≤-9.39	PASS
		High	2480	10.15	-46.55	≤-9.86	PASS
		Low	Hop_2402	9.40	-47.37	≤-10.60	PASS
		High	Hop_2480	9.98	-50.02	≤-10.02	PASS
3DH5	Ant1	Low	2402	8.46	-32.78	≤-11.54	PASS
		High	2480	9.52	-46.81	≤-10.48	PASS
		Low	Hop_2402	9.57	-38.86	≤-10.43	PASS
		High	Hop_2480	8.65	-49.98	≤-11.35	PASS

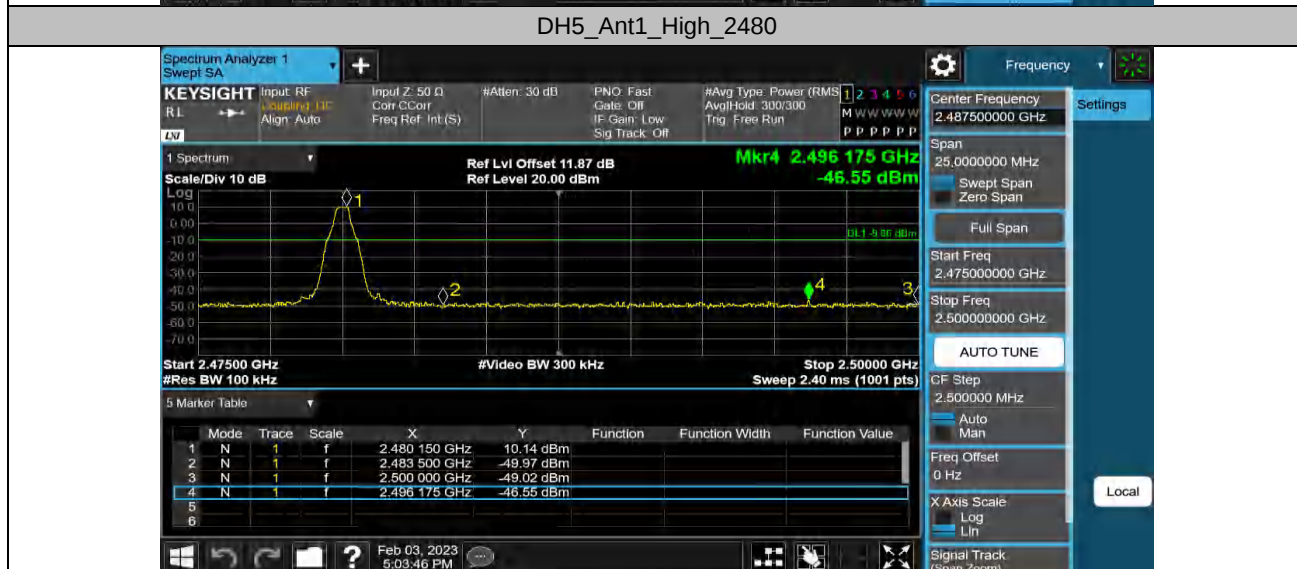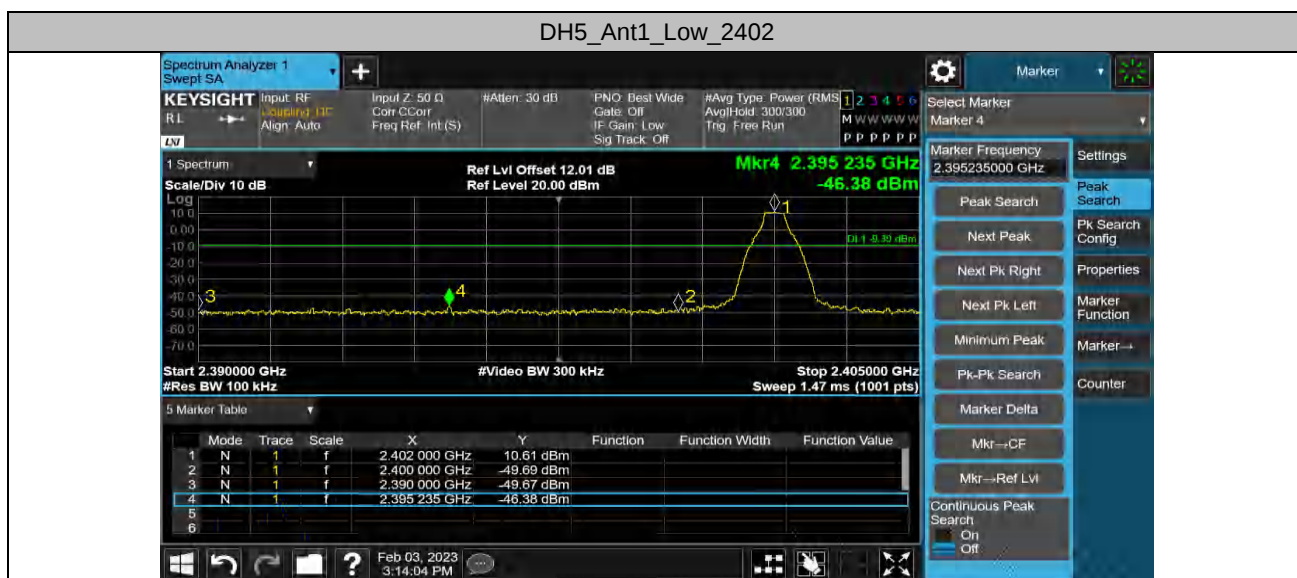


DH5_Ant1_Low_Hop_2402




DH5_Ant1_High_Hop_2480

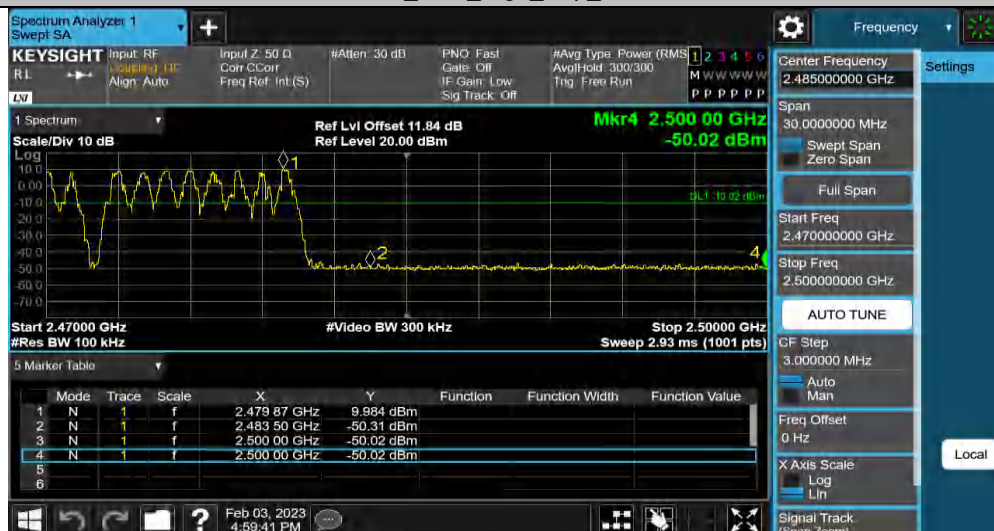


3DH5_Ant1_Low_2402

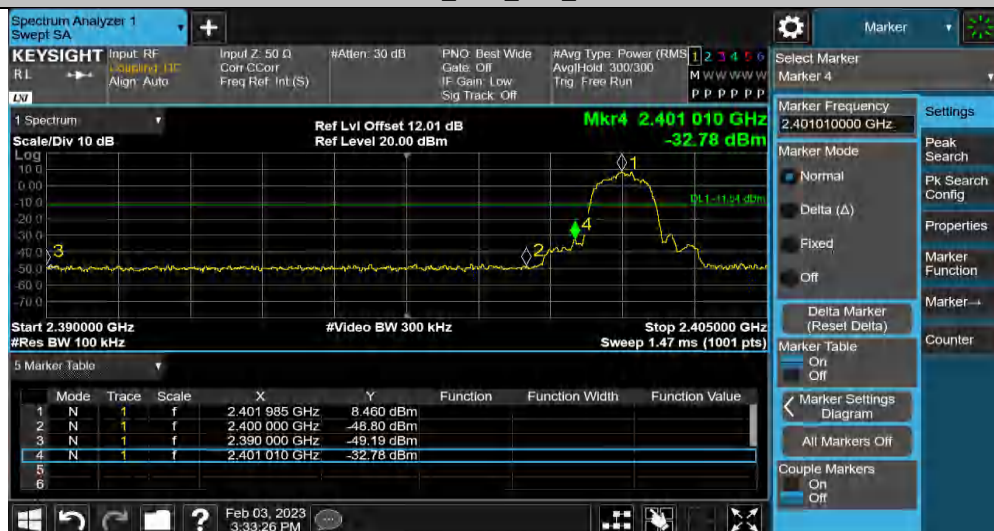


3DH5_Ant1_High_2480

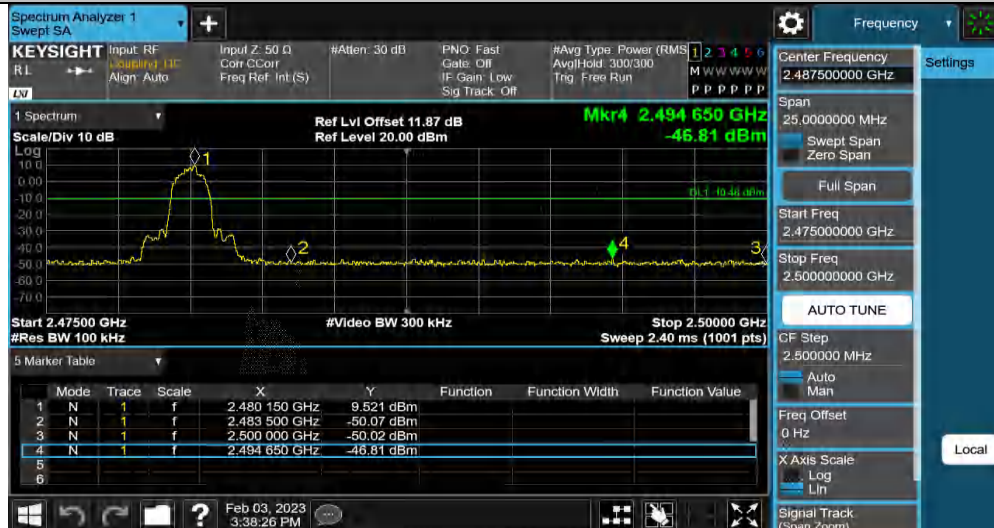

3DH5_Ant1_Low_Hop_2402

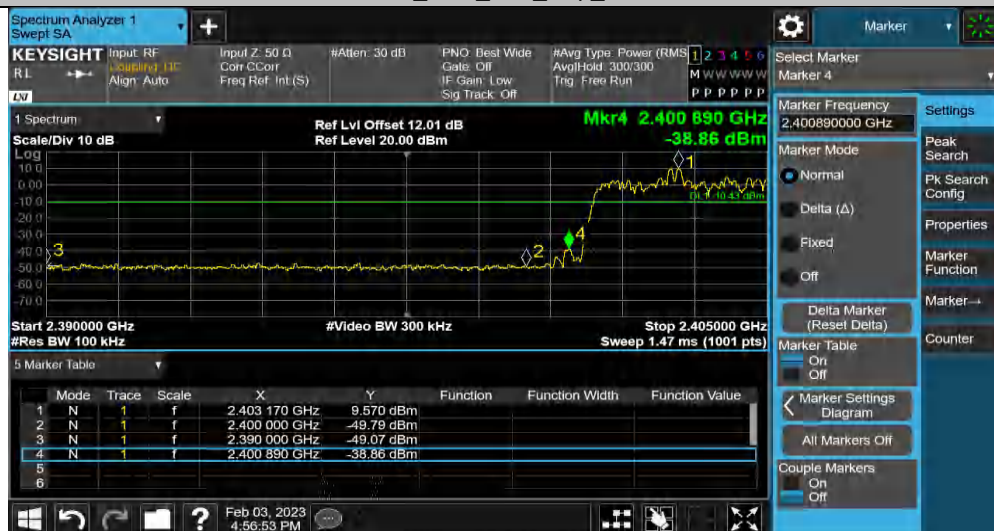

3DH5_Ant1_High_Hop_2480

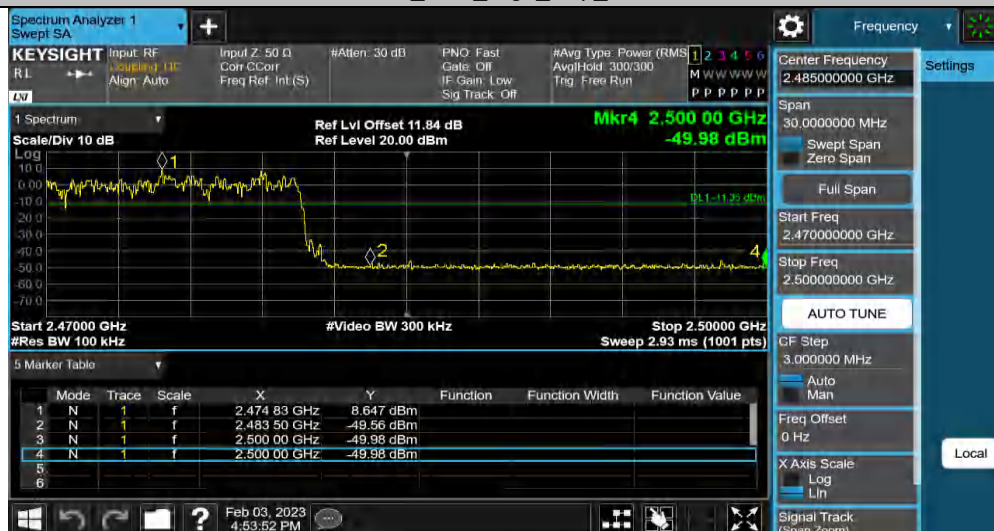


Conducted Spurious Emission

TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	Reference	10.20	10.20	---	PASS
			30~1000	10.20	-48.12	≤-9.8	PASS
			1000~26500	10.20	-38	≤-9.8	PASS
		2441	Reference	8.28	8.28	---	PASS
			30~1000	8.28	-48.14	≤-11.72	PASS
			1000~26500	8.28	-39.3	≤-11.72	PASS
		2480	Reference	9.54	9.54	---	PASS
			30~1000	9.54	-48.54	≤-10.46	PASS
			1000~26500	9.54	-38.46	≤-10.46	PASS
3DH5	Ant1	2402	Reference	9.63	9.63	---	PASS
			30~1000	9.63	-47.71	≤-10.37	PASS
			1000~26500	9.63	-38.57	≤-10.37	PASS
		2441	Reference	8.22	8.22	---	PASS
			30~1000	8.22	-48.82	≤-11.78	PASS
			1000~26500	8.22	-38.62	≤-11.78	PASS
		2480	Reference	8.21	8.21	---	PASS
			30~1000	8.21	-47.97	≤-11.79	PASS
			1000~26500	8.21	-39.34	≤-11.79	PASS


DH5_Ant1_2402_0-Reference





DH5_Ant1_2402_30-1000

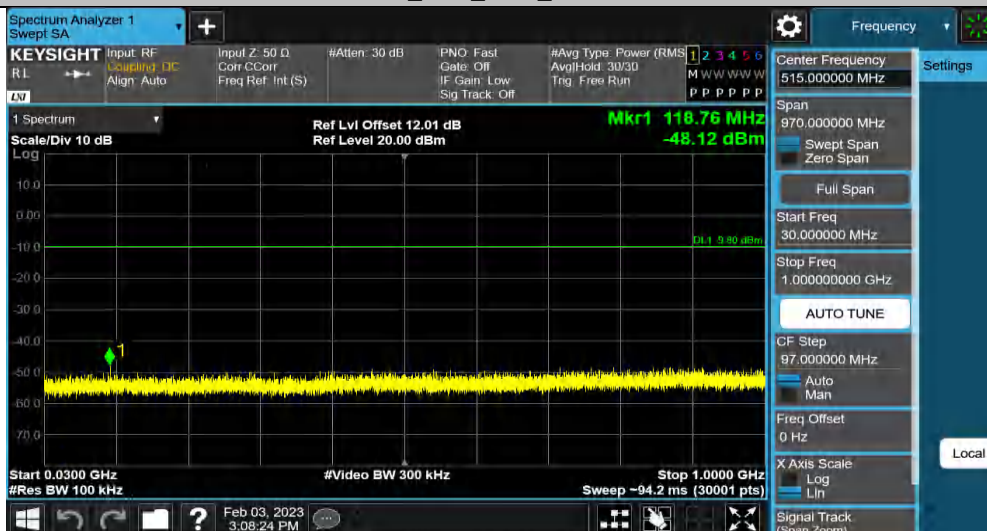

DH5_Ant1_2402_1000-26500

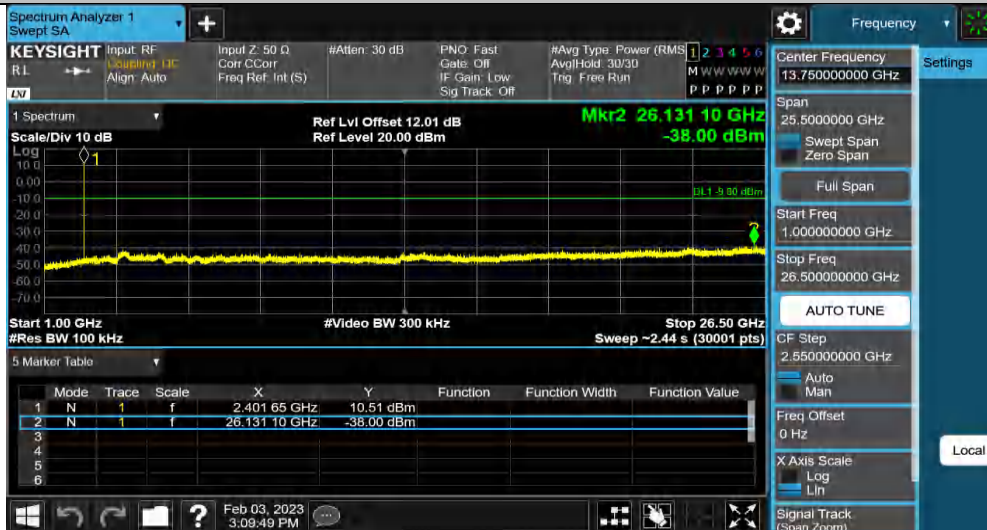

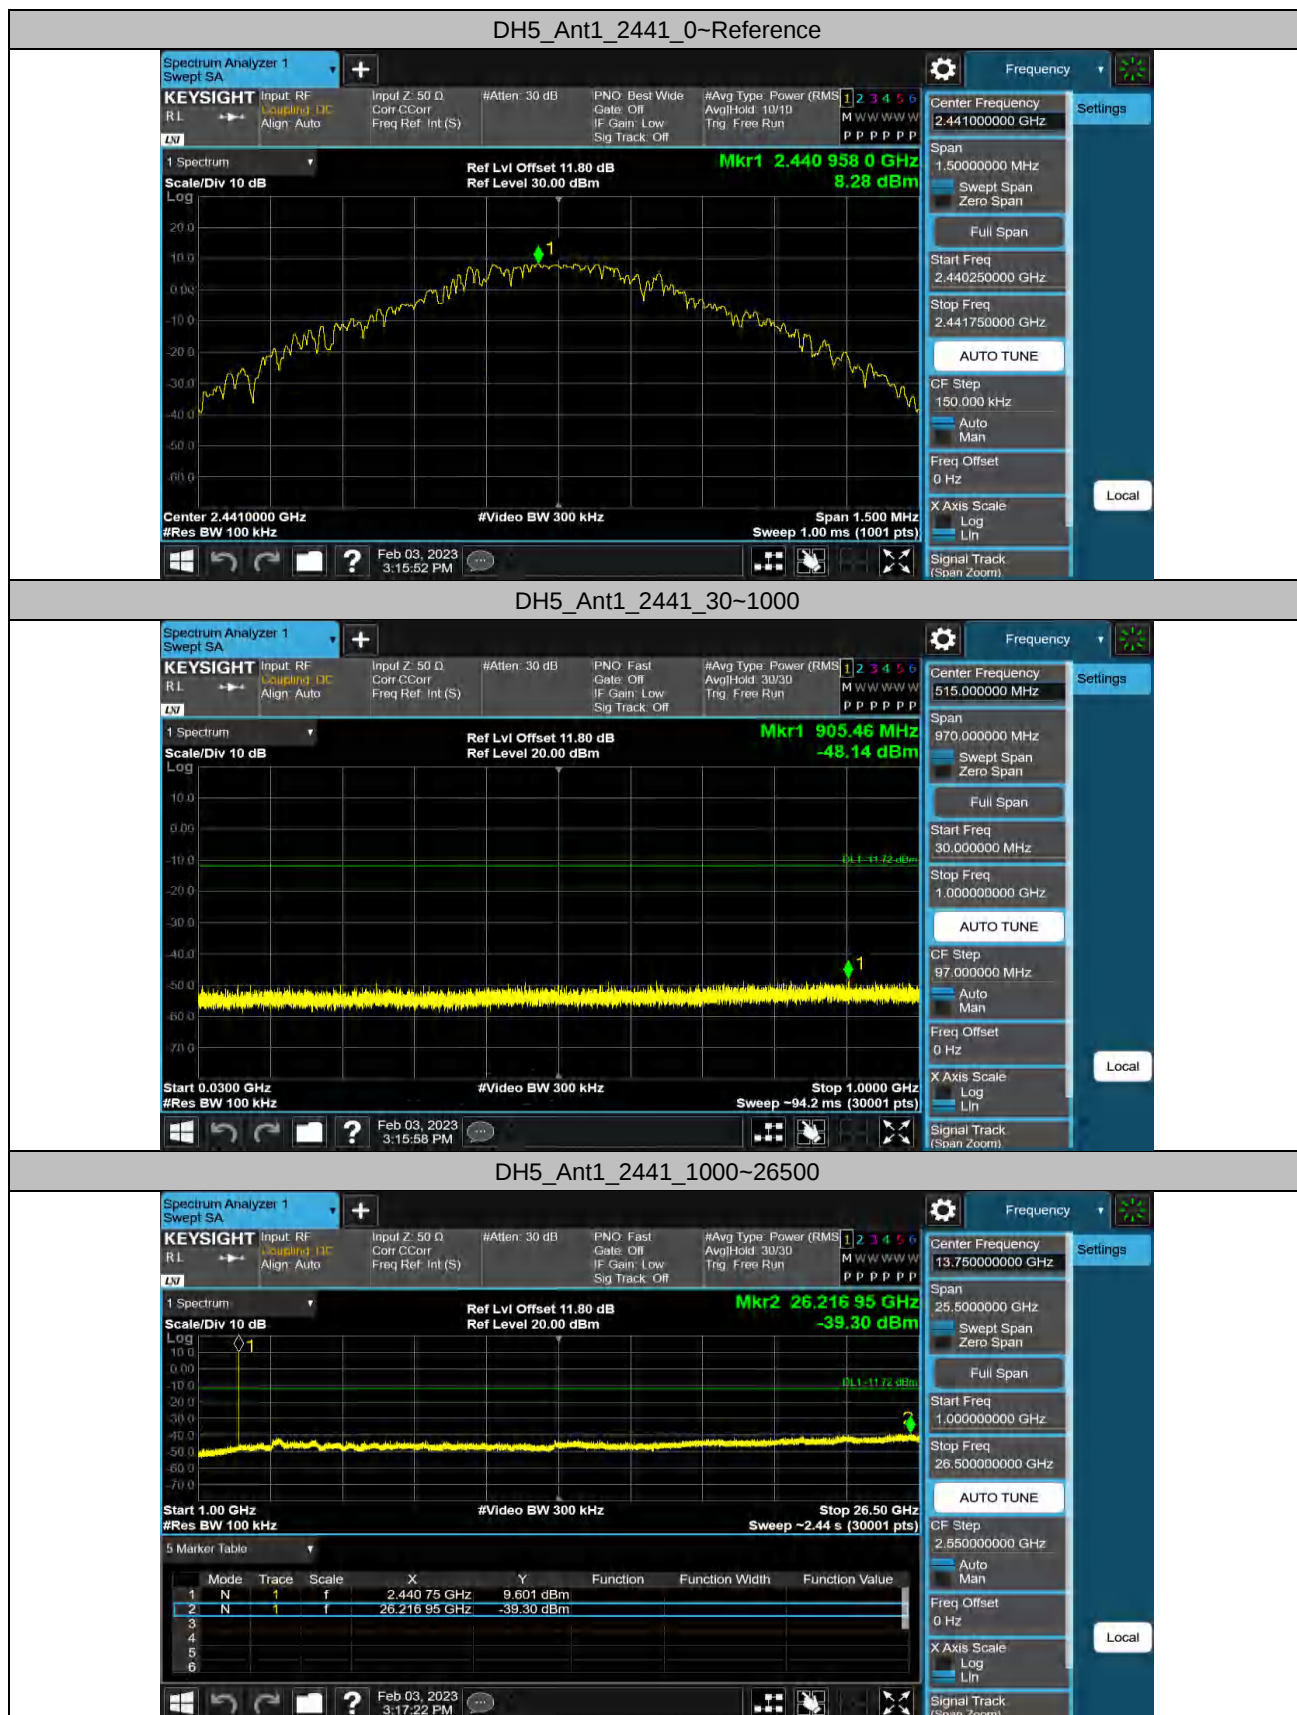

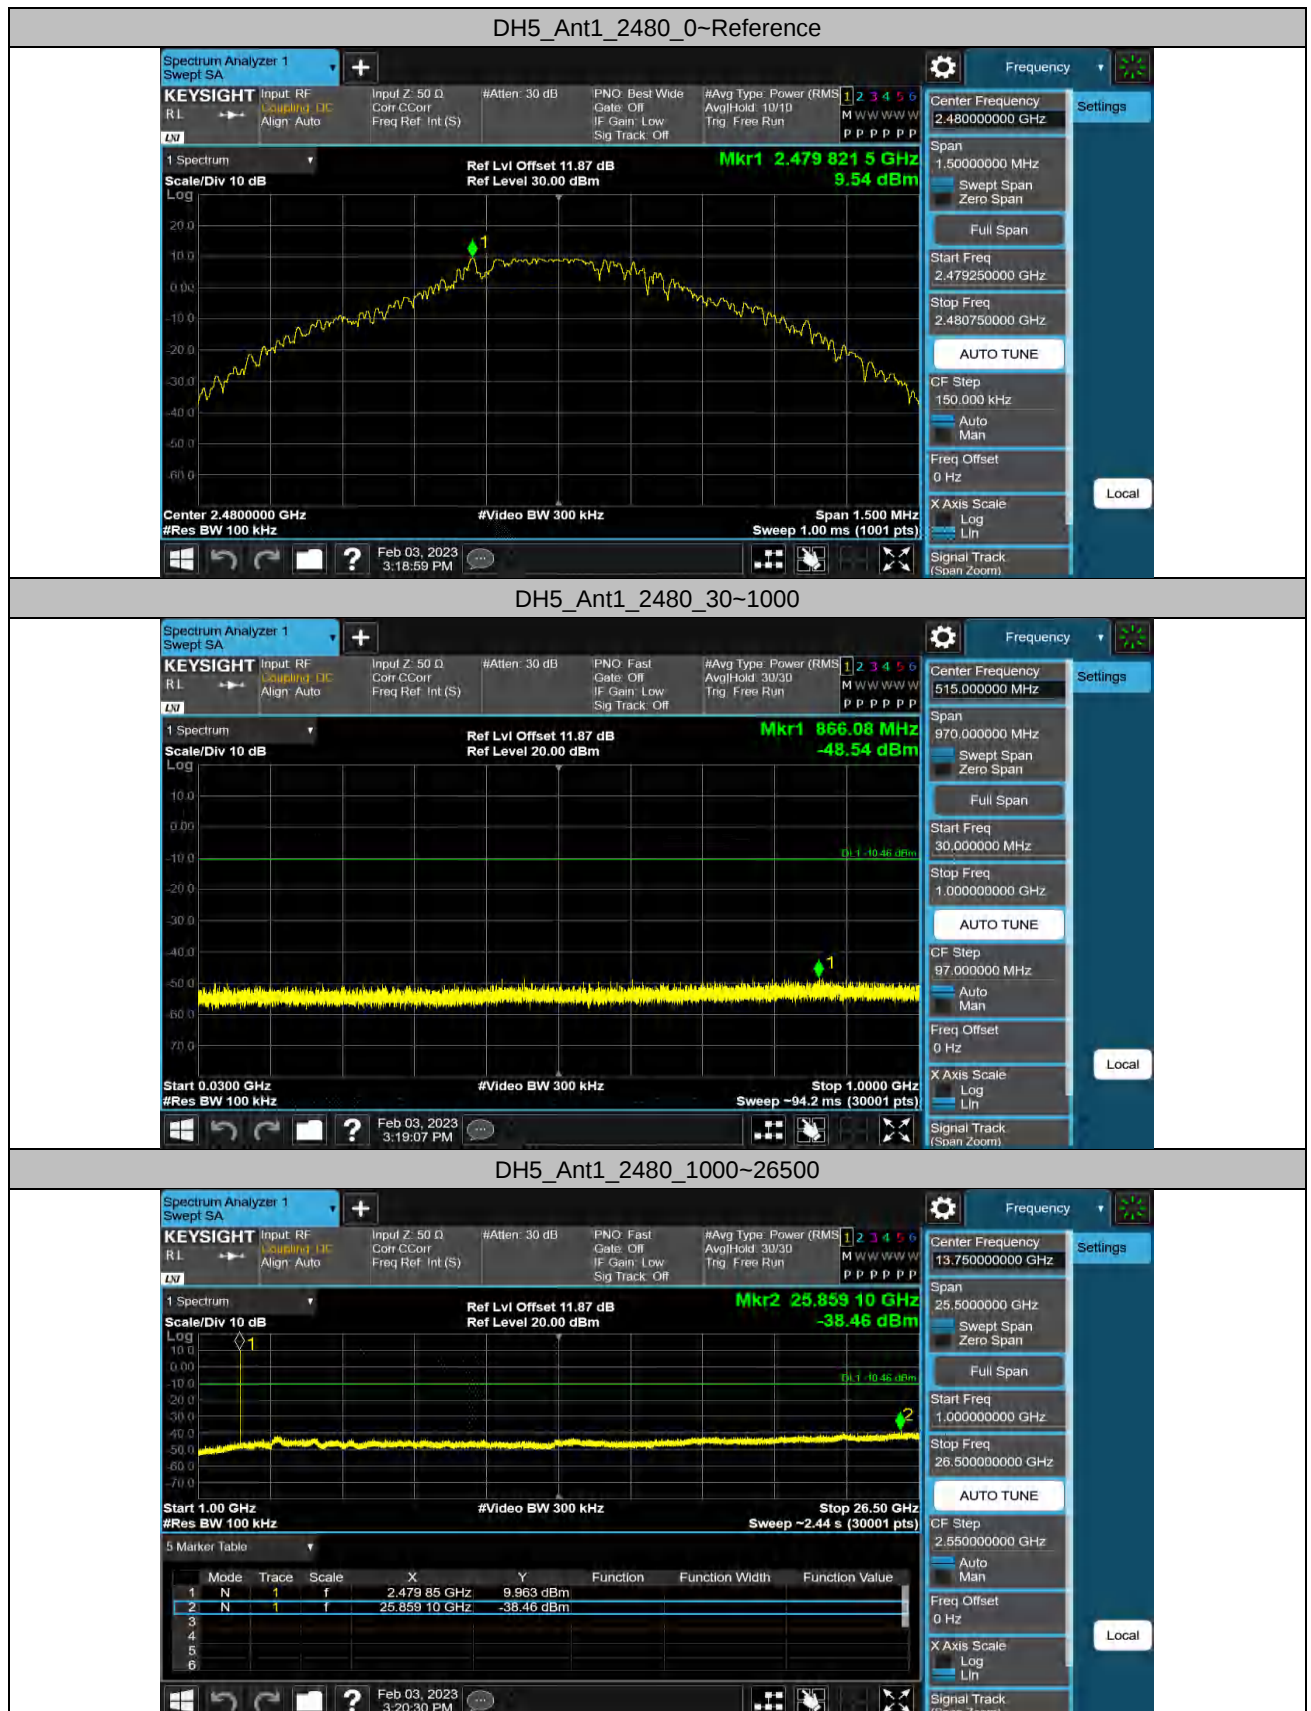

3DH5_Ant1_2402_0-Reference



3DH5_Ant1_2402_30-1000




3DH5_Ant1_2402_1000-26500



3DH5_Ant1_2441_0-Reference



3DH5_Ant1_2441_30-1000

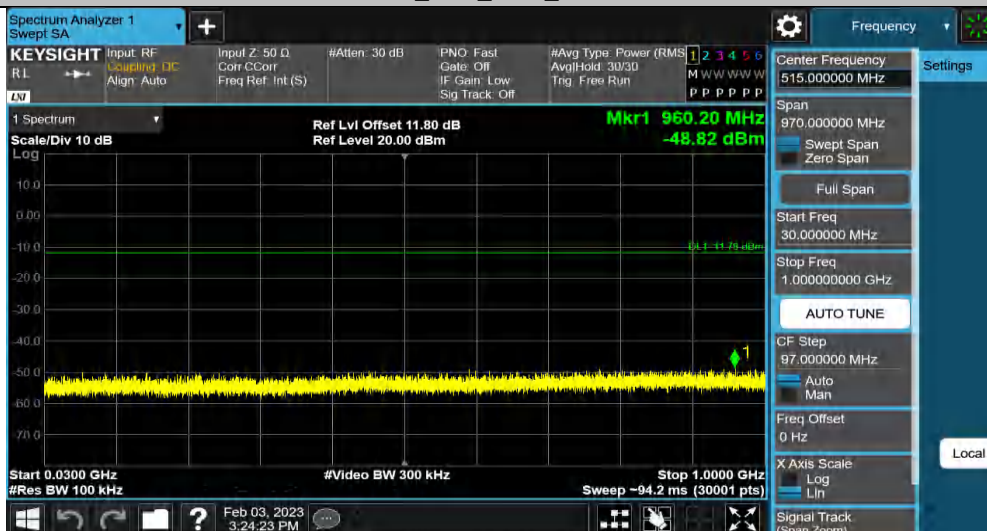


3DH5_Ant1_2441_1000-26500



3DH5_Ant1_2480_0~Reference



3DH5_Ant1_2480_30~1000

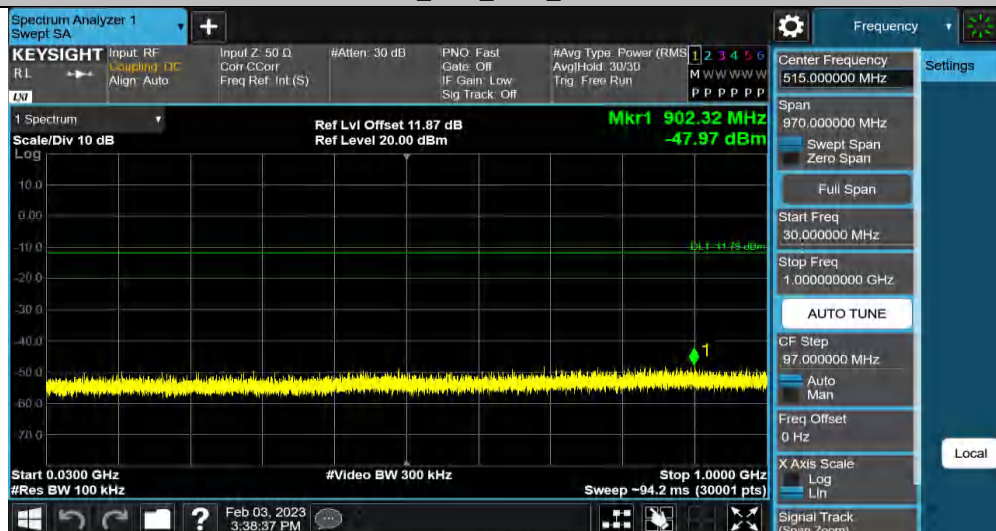

3DH5_Ant1_2480_1000~26500




Appendix A.7: Test Results of Radiated Spurious Emissions

Note: 1. Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported. 2. This testing was carried out on different modulations, but only the worst case (GFSK) was presented in this report.

30 MHz - 1GHz

EUT Information

EUT Name:	Jarvisen Translator 2
Model:	JT-2-BLACK
Test Mode:	BR_DH5_Mid channel
Order No/Sample No:	168405109/A003399272-002
Test Voltage:	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

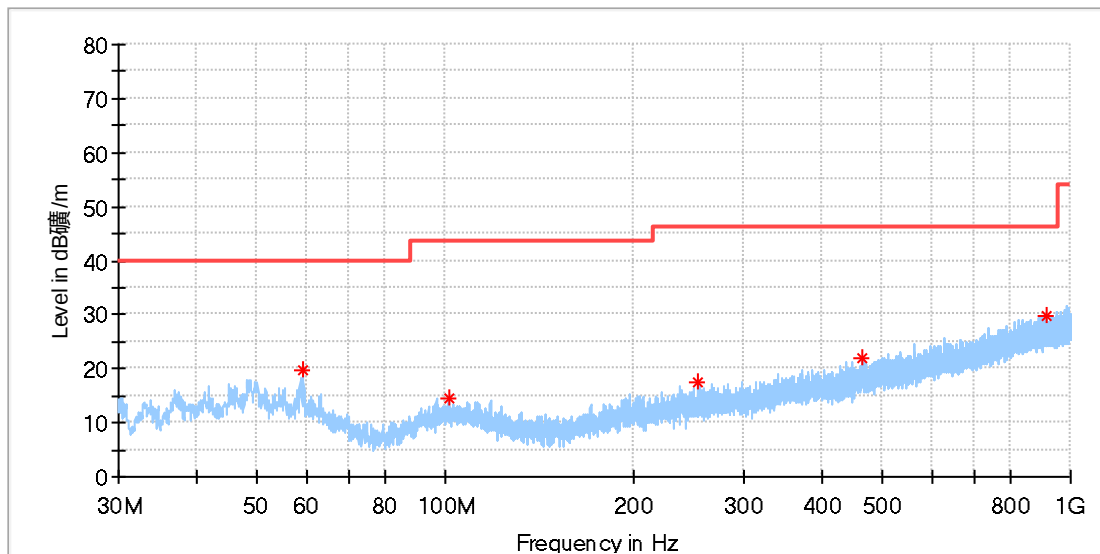


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
59.100000	19.88	40.00	20.12	100.0	H	312.0	-18.9
101.052500	14.69	43.50	28.81	100.0	H	38.0	-18.9
252.760500	17.40	46.00	28.60	100.0	H	187.0	-17.3
462.765500	22.06	46.00	23.94	100.0	H	0.0	-12.6
917.744000	29.93	46.00	16.07	100.0	H	17.0	-4.8

EUT Information

EUT Name:	Jarvisen Translator 2
Model:	JT-2-BLACK
Test Mode:	BR_DH5_Mid channel
Order No/Sample No:	168405109/A003399272-002
Test Voltage:	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

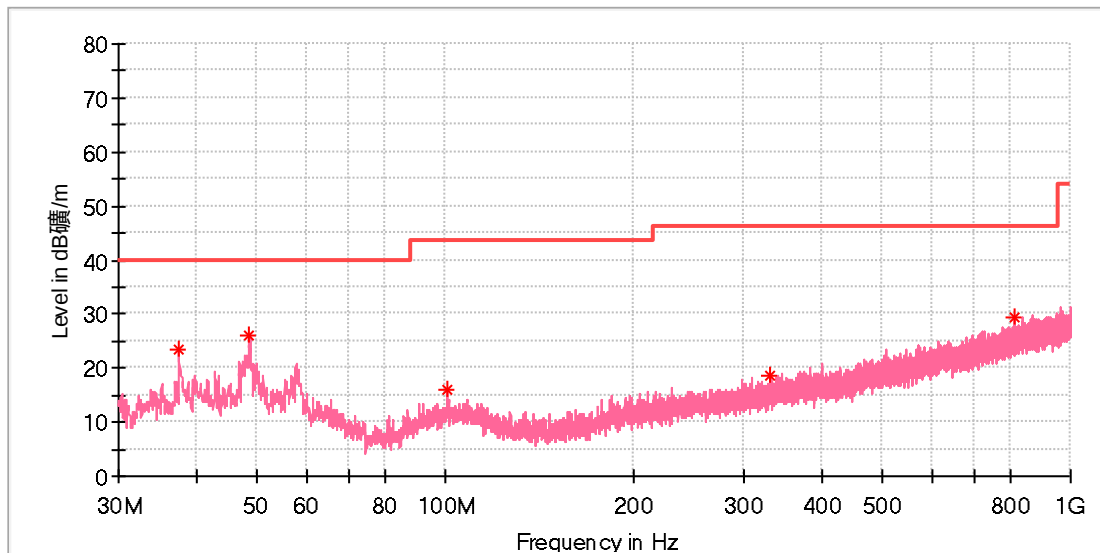

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
37.517500	23.29	40.00	16.71	100.0	V	215.0	-21.0
48.624000	25.89	40.00	14.11	100.0	V	215.0	-18.4
100.616000	15.99	43.50	27.51	100.0	V	192.0	-19.0
331.621500	18.76	46.00	27.24	100.0	V	35.0	-15.4
811.141000	29.29	46.00	16.71	100.0	V	271.0	-6.2

1GHz - 18GHz

Note: The highest waveform in the figure is Bluetooth Fundamental.

EUT Information

EUT Name:	Jarvisen Translator 2
Model:	JT-2-BLACK
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168405109/A003399272-002
Test Voltage:	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

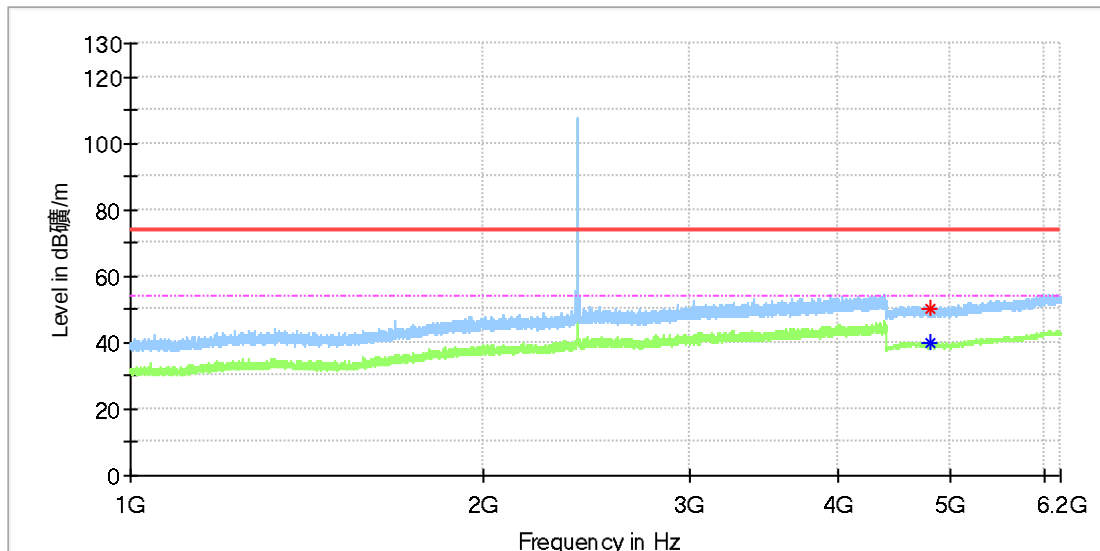

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4803.500000	---	39.73	54.00	14.27	100.0	H	46.0	11.8
4805.000000	50.36	---	74.00	23.64	100.0	H	154.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: BR_DH5_Low channel
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

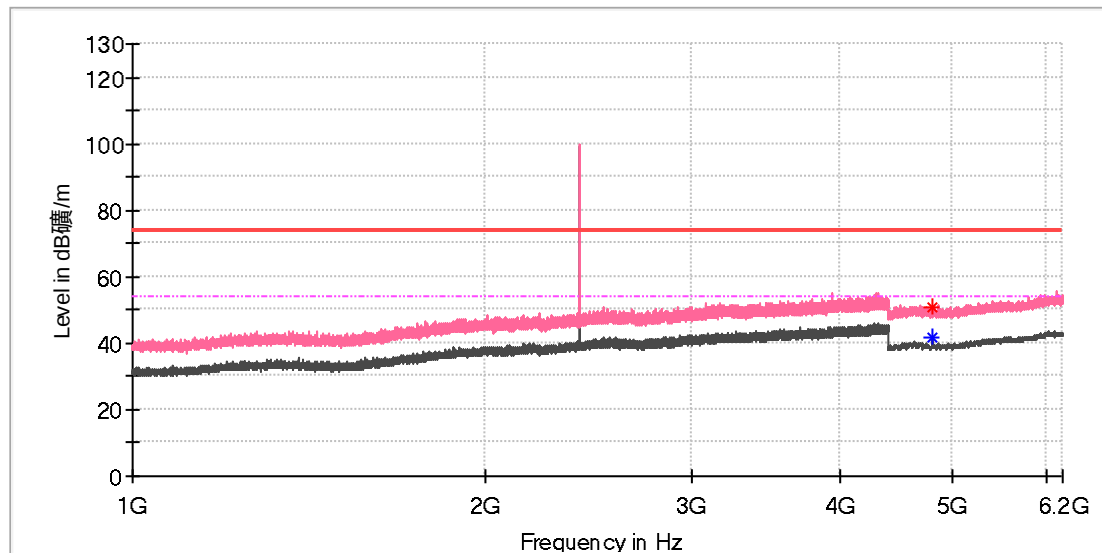

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4804.000000	---	41.63	54.00	12.37	100.0	V	99.0	11.8
4808.500000	51.03	---	74.00	22.97	100.0	V	164.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: BR_DH5_Low channel
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

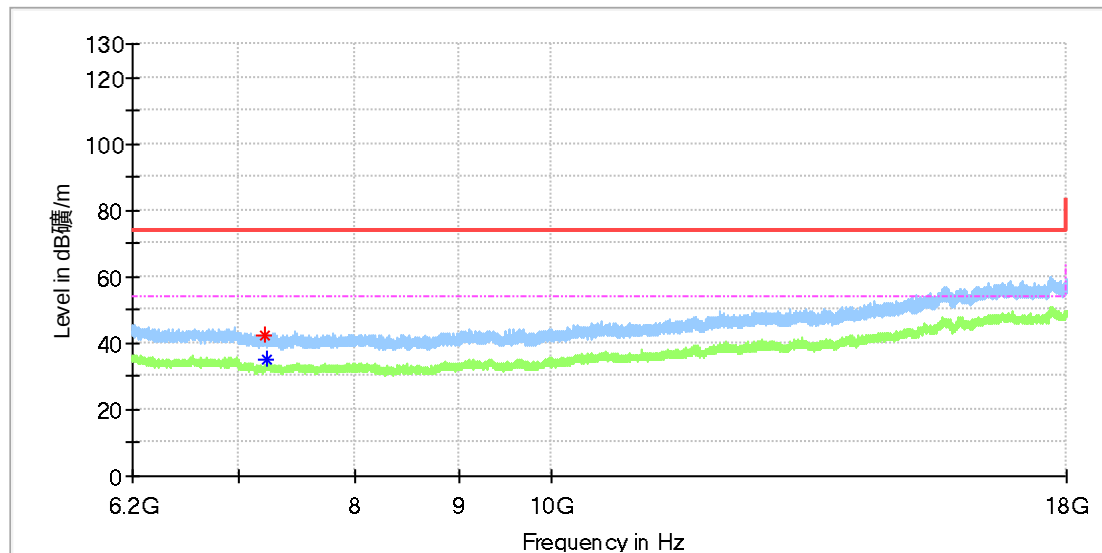

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7207.425000	42.39	---	74.00	31.61	100.0	H	298.0	8.8
7221.683333	---	34.77	54.00	19.23	100.0	H	22.0	8.7

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: BR_DH5_Low channel
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

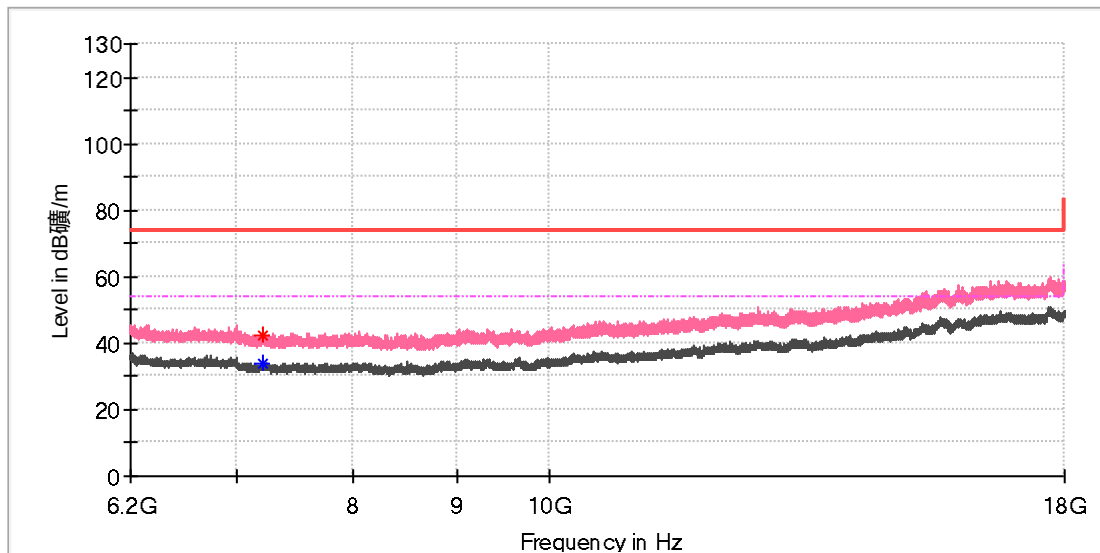

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7212.833333	42.46	---	74.00	31.54	100.0	V	218.0	8.7
7212.833333	---	34.09	54.00	19.91	100.0	V	218.0	8.7

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: BR_DH5_Mid channel
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

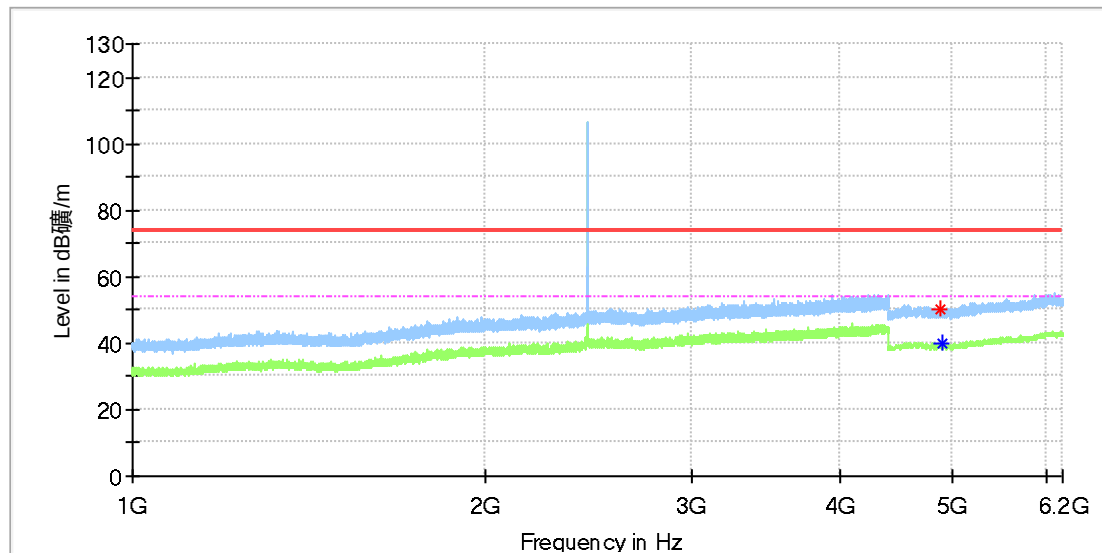

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4876.500000	50.08	---	74.00	23.92	100.0	H	163.0	11.8
4900.500000	---	39.64	54.00	14.36	100.0	H	252.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: BR_DH5_Mid channel
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

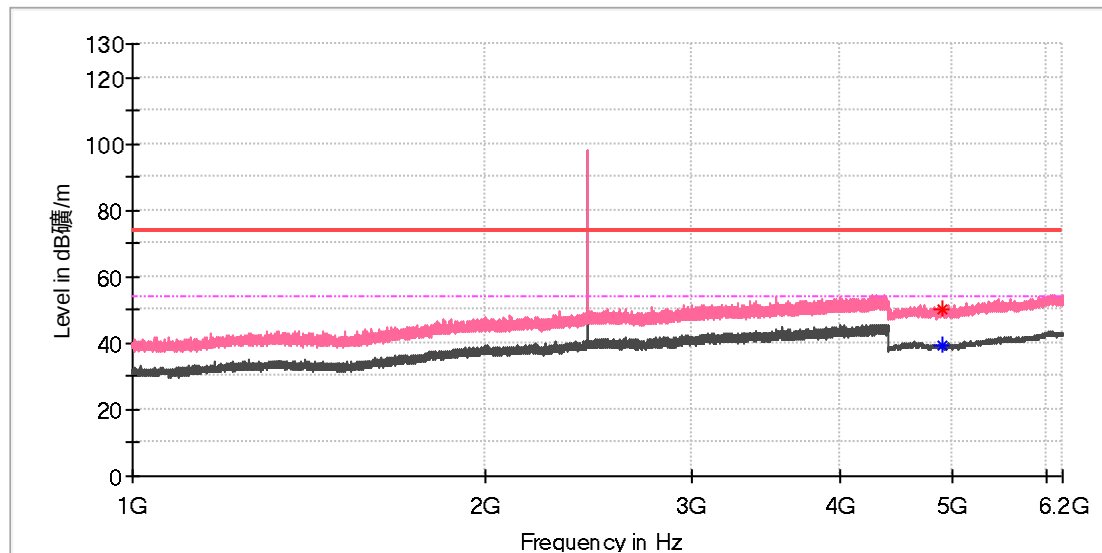

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4892.000000	---	39.52	54.00	14.48	100.0	V	275.0	11.8
4900.500000	50.43	---	74.00	23.57	100.0	V	46.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: BR_DH5_Mid channel
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

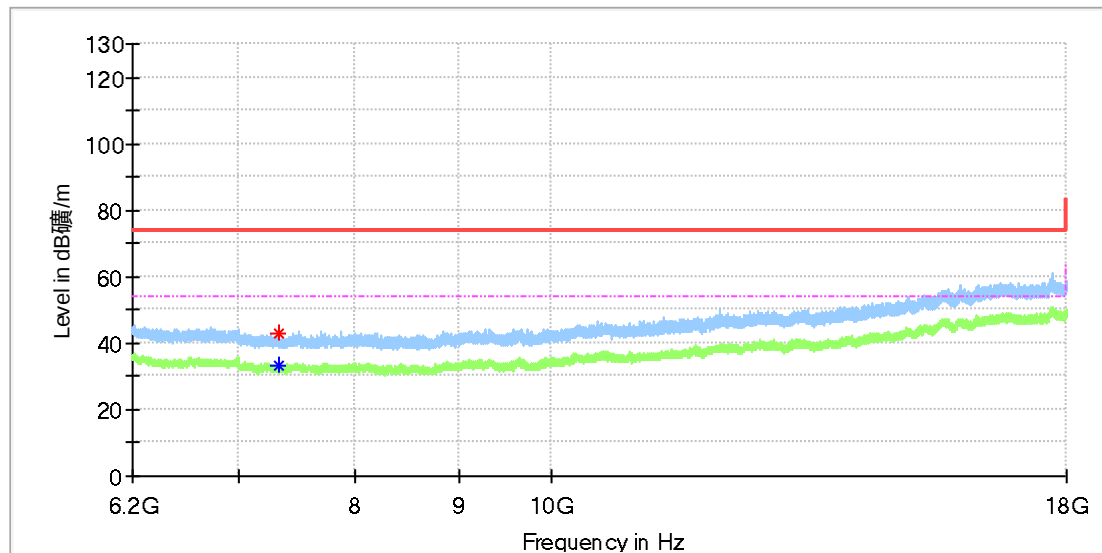

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7327.391667	42.76	---	74.00	31.24	100.0	H	179.0	8.1
7328.866667	---	33.10	54.00	20.90	100.0	H	192.0	8.1

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: BR_DH5_Mid channel
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

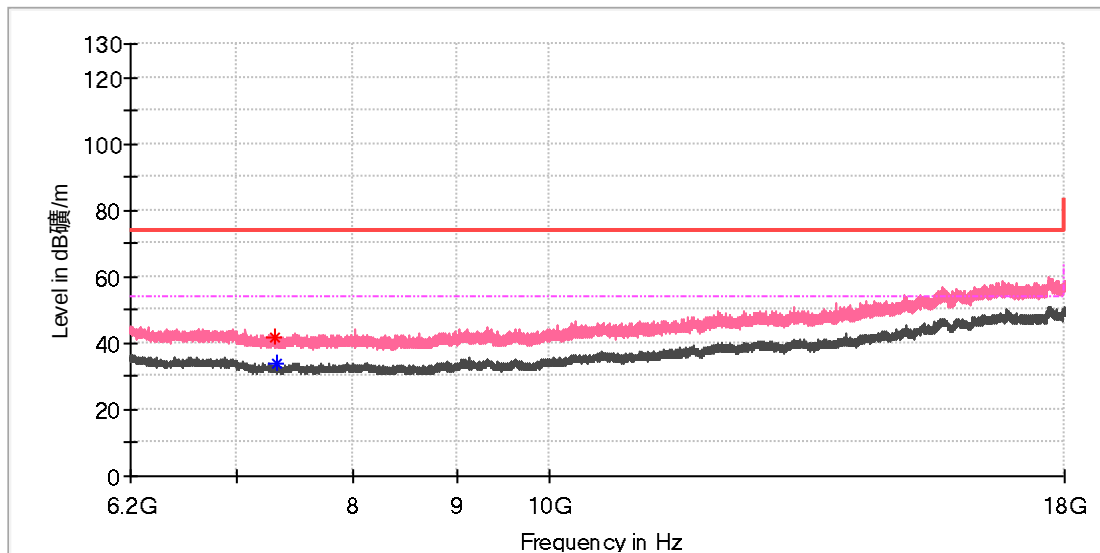

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7317.066667	41.92	---	74.00	32.08	100.0	V	0.0	8.2
7333.291667	---	33.74	54.00	20.26	100.0	V	0.0	8.1

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: BR_DH5_High channel
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

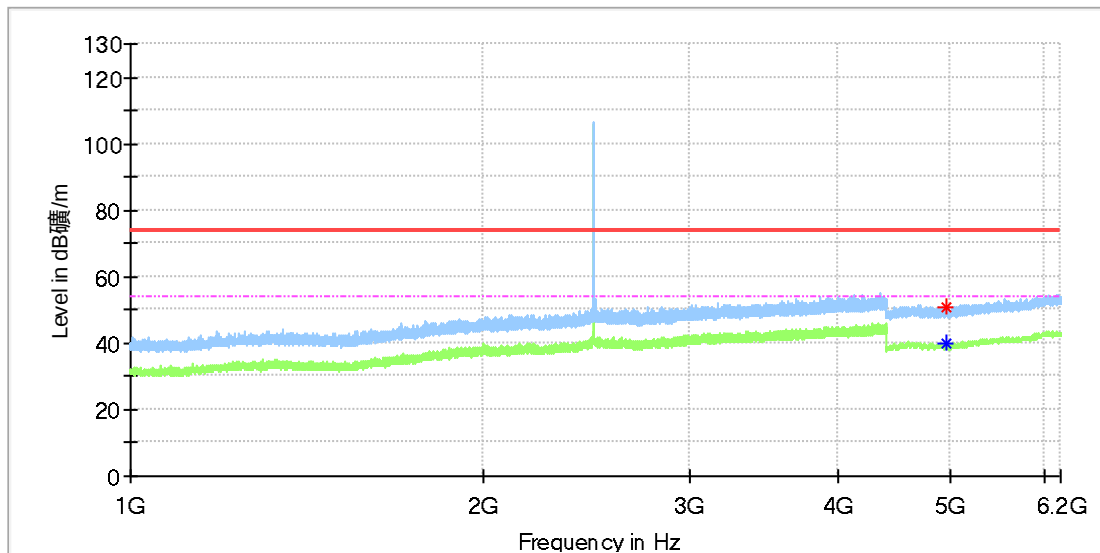

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4953.000000	50.79	---	74.00	23.21	100.0	H	274.0	11.8
4954.000000	---	39.95	54.00	14.05	100.0	H	1.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: BR_DH5_High channel
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

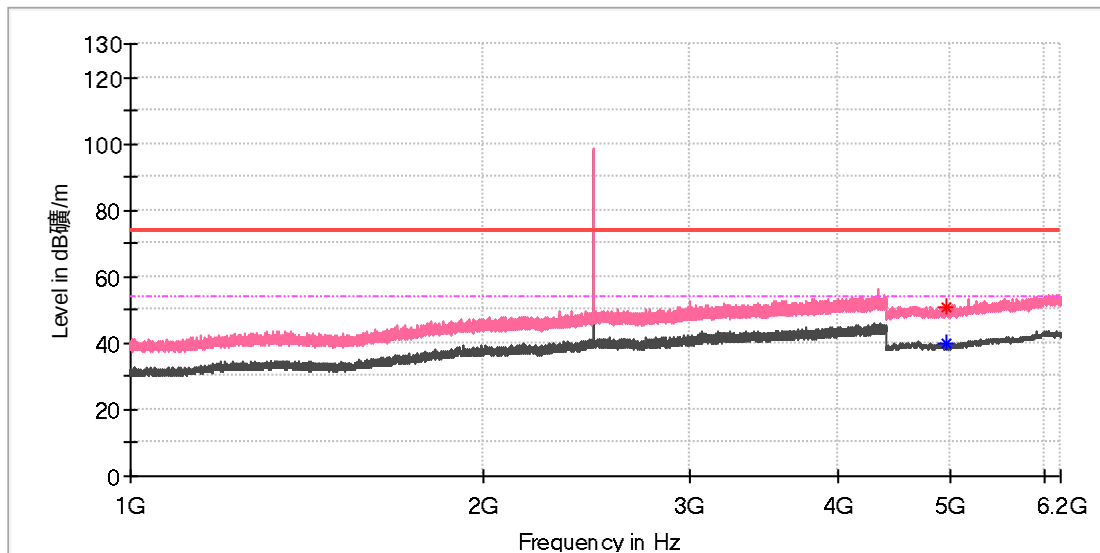

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4949.500000	---	40.03	54.00	13.97	100.0	V	28.0	11.8
4964.500000	50.82	---	74.00	23.18	100.0	V	144.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: BR_DH5_High channel
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

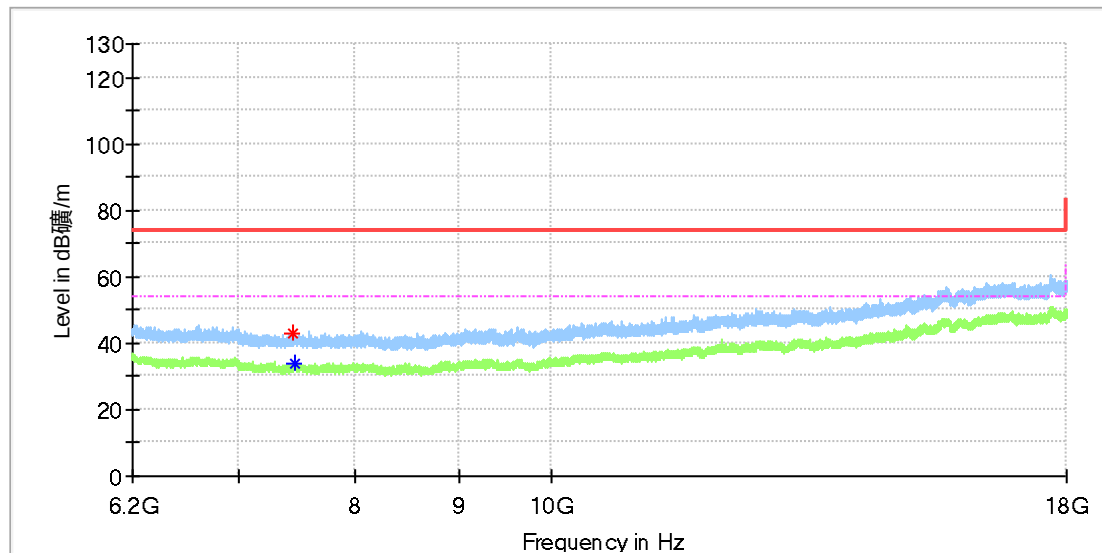

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7452.766667	42.92	---	74.00	31.08	100.0	H	245.0	8.5
7460.141667	---	33.98	54.00	20.02	100.0	H	308.0	8.5

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: BR_DH5_High channel
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

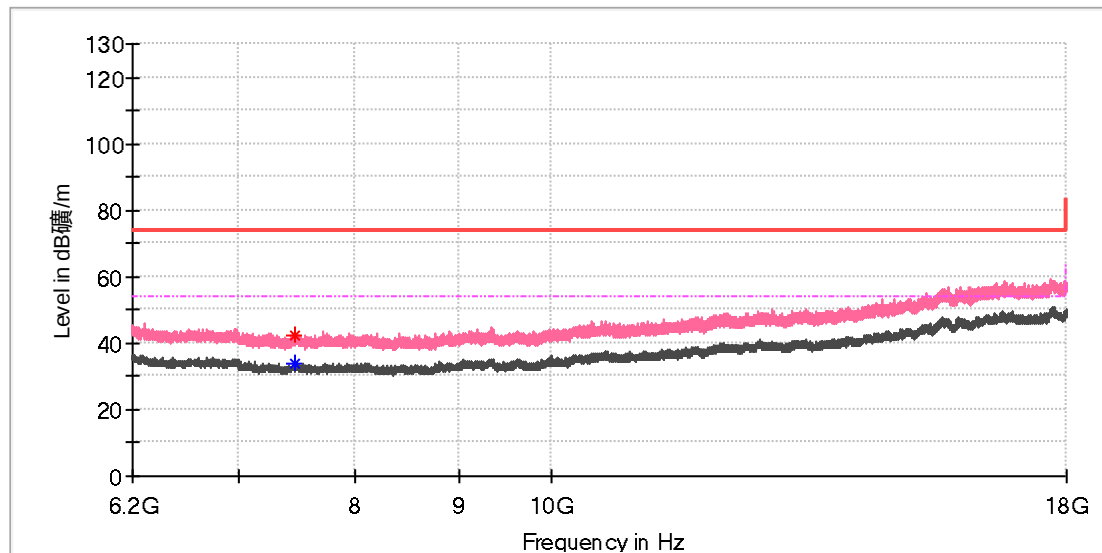

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7454.733333	42.53	---	74.00	31.47	100.0	V	63.0	8.5
7460.141667	---	33.75	54.00	20.25	100.0	V	123.0	8.5


Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Appendix A.8: Test Results of Radiated Emissions in Restricted Bands

EUT Information

EUT Name:	Jarvisen Translator 2
Model:	JT-2-BLACK
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168405109/A003399272-002
Test Voltage:	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

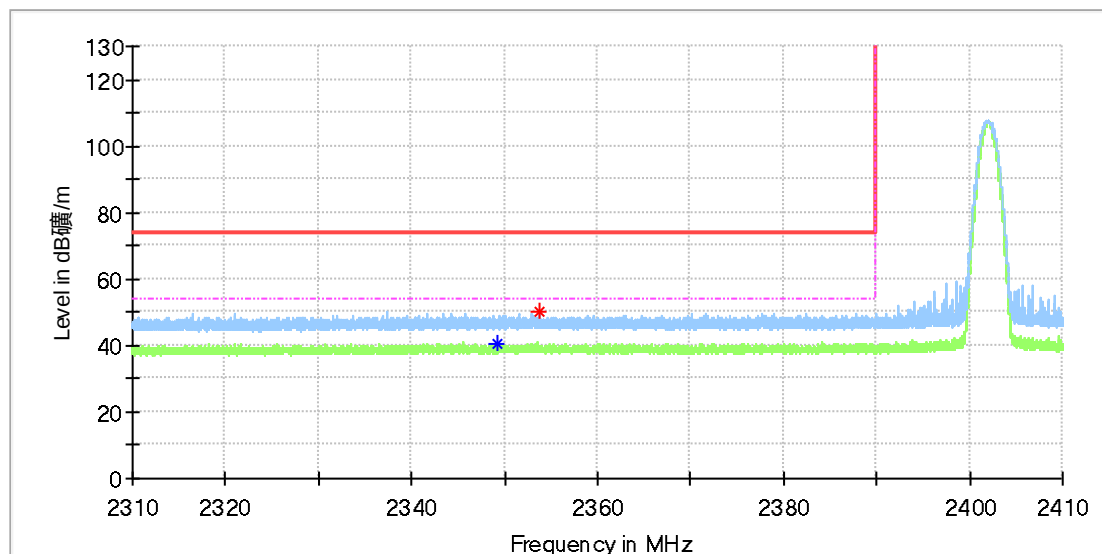

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2349.145000	---	40.26	54.00	13.74	100.0	H	99.0	6.9
2353.675000	50.22	---	74.00	23.78	100.0	H	234.0	6.9

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: BR_DH5_Low channel
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

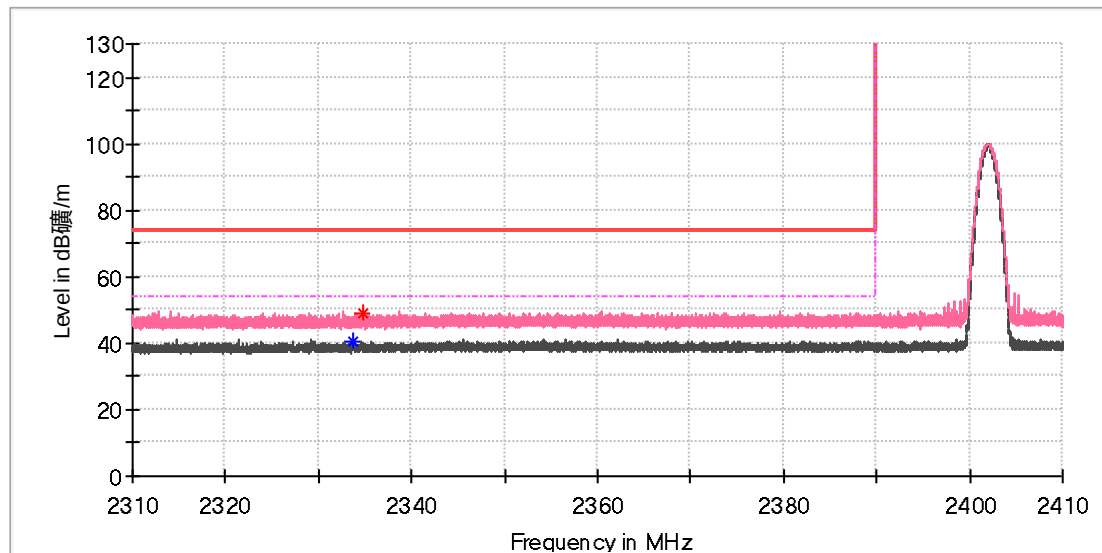

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2333.710000	---	40.68	54.00	13.32	100.0	V	107.0	6.7
2334.680000	49.02	---	74.00	24.98	100.0	V	219.0	6.8

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Jarvisen Translator 2
Model:	JT-2-BLACK
Test Mode:	BR_DH5_High channel
Order No/Sample No:	168405109/A003399272-002
Test Voltage:	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

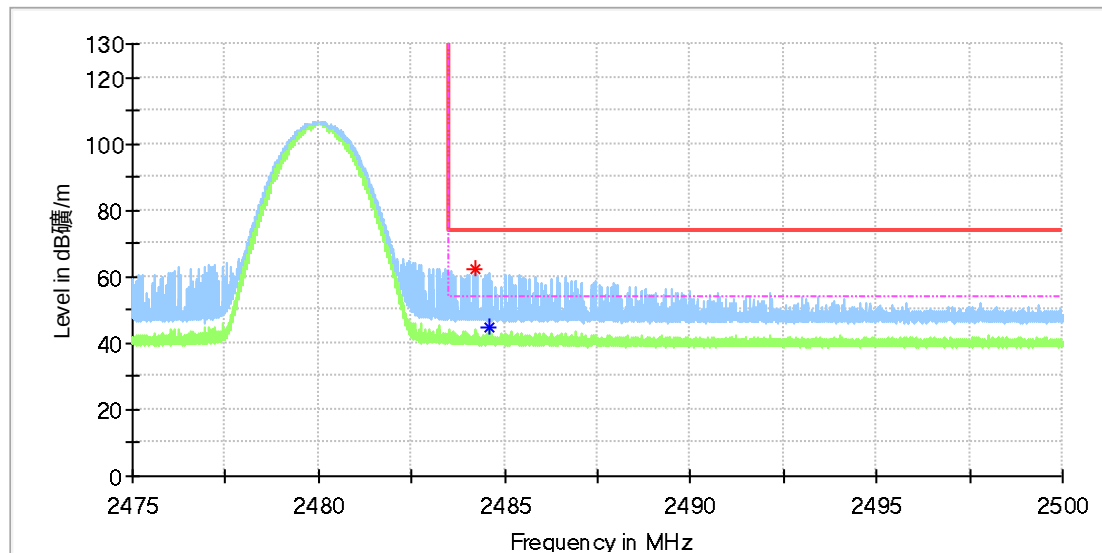

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2484.237500	62.05	---	74.00	11.95	100.0	H	316.0	7.4
2484.565000	---	44.60	54.00	9.40	100.0	H	246.0	7.4

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Jarvisen Translator 2
Model:	JT-2-BLACK
Test Mode:	BR_DH5_High channel
Order No/Sample No:	168405109/A003399272-002
Test Voltage:	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

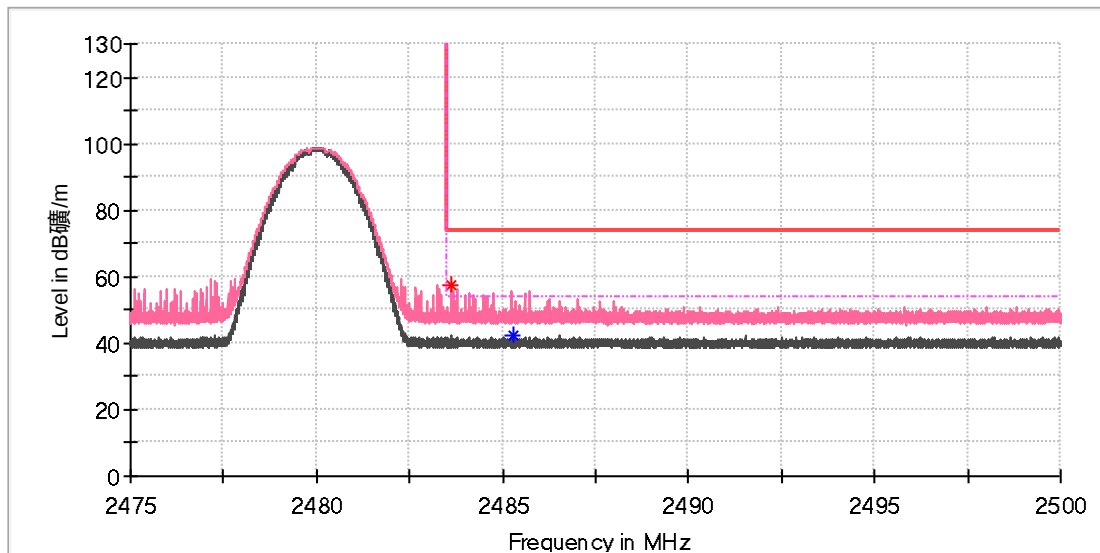

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.645000	57.60	---	74.00	16.40	100.0	V	284.0	7.4
2485.286250	---	42.17	54.00	11.83	100.0	V	273.0	7.4


Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Appendix A.9: Test Results of Conducted Emission on AC Mains

EUT Information

EUT Name:	Jarvisen Translator 2
Order Number:	168405109
Model:	JT-2-BLACK
Test Mode:	Normal operation +Bluetooth
Test Voltage:	AC 120V/60Hz
Test By:/Review By:	Shower Dai/Gary Chen
Tem./Hum./Pressure:	23.2°C/50.6%/101kPa
Remark:	SR2

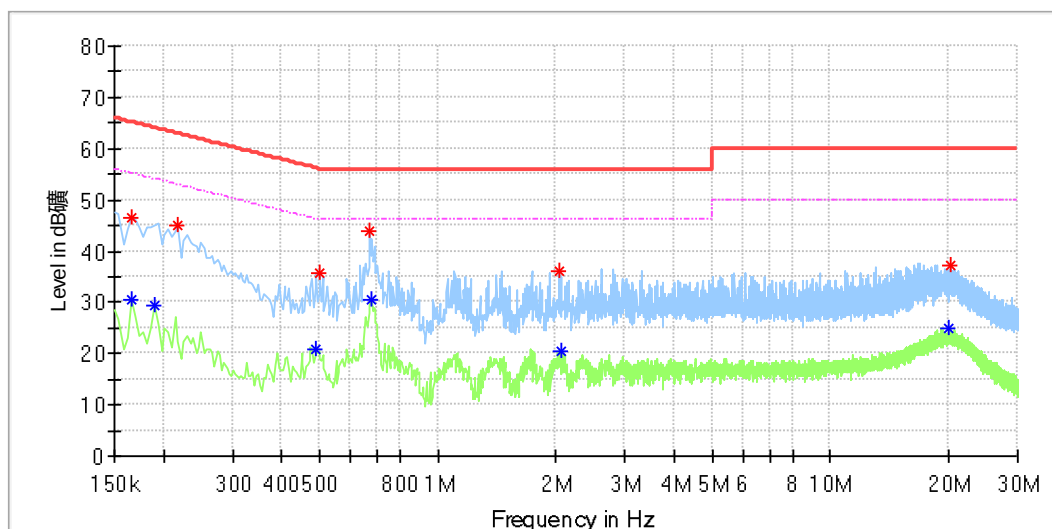

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.166000	---	30.39	55.16	24.77	L1	9.9
0.166000	46.50	---	65.16	18.66	L1	9.9
0.190000	---	29.50	54.04	24.53	L1	9.9
0.218000	44.87	---	62.90	18.03	L1	9.9
0.490000	---	20.97	46.17	25.20	L1	10.0
0.502000	35.69	---	56.00	20.31	L1	10.0
0.670000	43.86	---	56.00	12.14	L1	10.0
0.674000	---	30.48	46.00	15.52	L1	10.0
2.042000	36.20	---	56.00	19.80	L1	10.1
2.066000	---	20.44	46.00	25.56	L1	10.1
19.966000	---	24.97	50.00	25.03	L1	10.4
20.222000	37.37	---	60.00	22.63	L1	10.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
---	---	---	---	---	---	---		---

EUT Information

EUT Name:	Jarvisen Translator 2
Order Number:	168405109
Model:	JT-2-BLACK
Test Mode:	Normal operation +Bluetooth
Test Voltage:	AC 120V/60Hz
Test By:/Review By:	Shower Dai/Gary Chen
Tem./Hum./Pressure:	23.2°C/50.6%/101kPa
Remark:	SR2

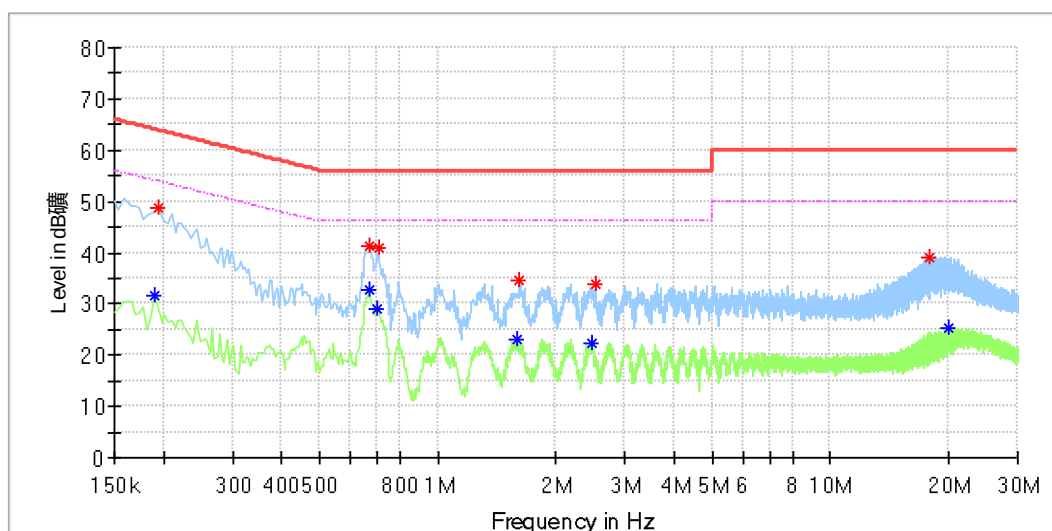

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.190000	---	31.78	54.04	22.26	N	9.8
0.194000	48.76	---	63.86	15.11	N	9.8
0.666000	---	32.80	46.00	13.20	N	9.8
0.670000	41.15	---	56.00	14.85	N	9.8
0.698000	---	28.96	46.00	17.04	N	9.8
0.706000	40.84	---	56.00	15.16	N	9.8
1.590000	---	23.00	46.00	23.00	N	9.8
1.614000	34.64	---	56.00	21.36	N	9.8
2.458000	---	22.26	46.00	23.74	N	9.9
2.526000	33.95	---	56.00	22.05	N	9.9
17.974000	39.11	---	60.00	20.89	N	10.2
20.046000	---	25.30	50.00	24.70	N	10.2

Final Result

[illegible]