


EUT Information

EUT Name:	Jarvisen Translator 2
Model:	JT-2-BLACK
Test Mode:	WIFI 5G_11ac80_Ch42
Order No/Sample No:	168405109/A003399272-002
Test Voltage:	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

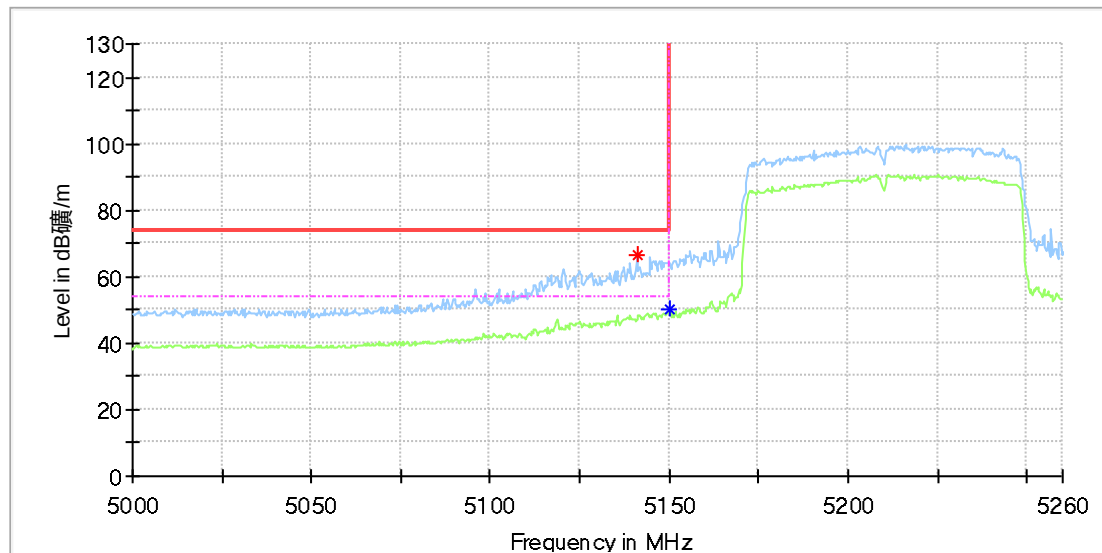

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5141.105556	66.29	---	74.00	7.71	100.0	H	51.0	12.4
5149.955556	---	50.36	54.00	3.64	100.0	H	24.0	12.4

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11ac80_Ch42
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

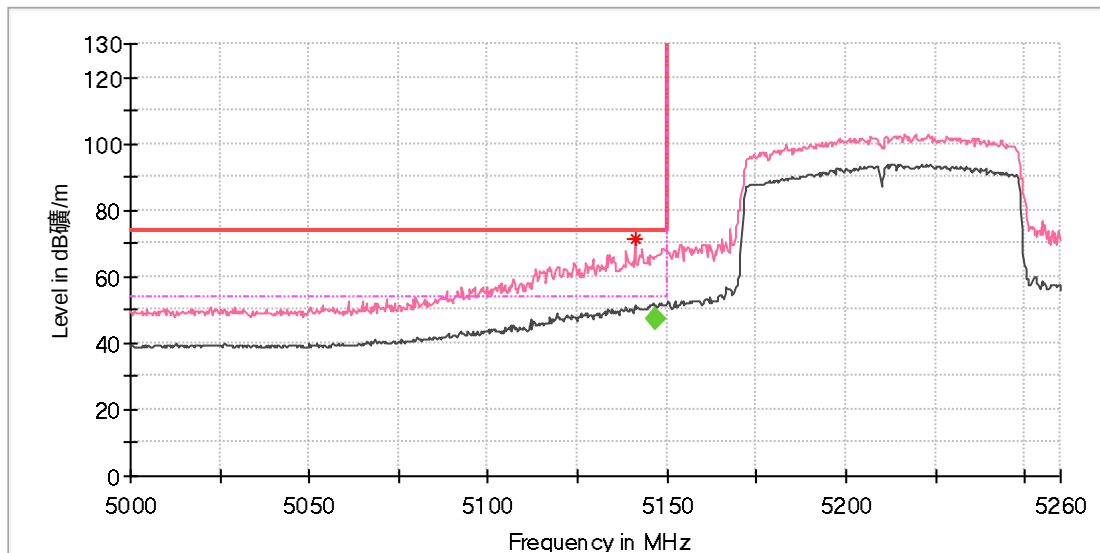

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5141.105556	71.16	---	74.00	2.84	100.0	V	101.0	12.4


Final_Result

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5146.569445	47.38	54.00	6.62	100.0	V	96.0	12.4

U-NII-2A Band

EUT Information

EUT Name: Jarvisen Translator 2
 Model: JT-2-BLACK
 Test Mode: WIFI 5G_11a_Ch52
 Order No/Sample No: 168405109/A003399272-002
 Test Voltage: Battery
 Remark: Temp 23 Humi:53%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

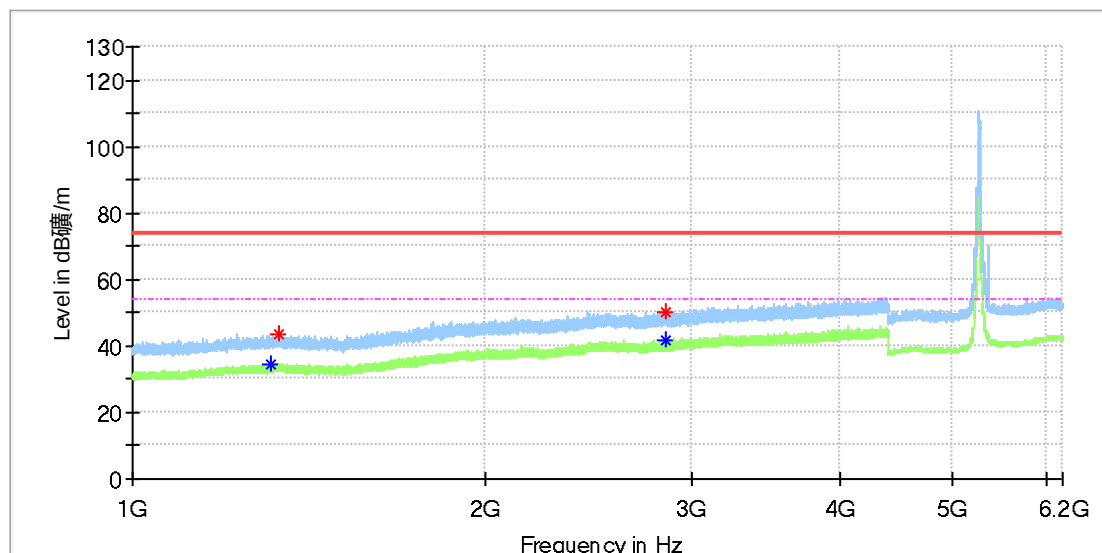

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1310.760000	---	34.44	54.00	19.56	100.0	H	340.0	2.0
1332.520000	43.71	---	74.00	30.29	100.0	H	183.0	2.1
2850.790000	50.47	---	74.00	23.53	100.0	H	1.0	8.1
2851.300000	---	42.02	54.00	11.98	100.0	H	8.0	8.1

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11a_Ch52
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

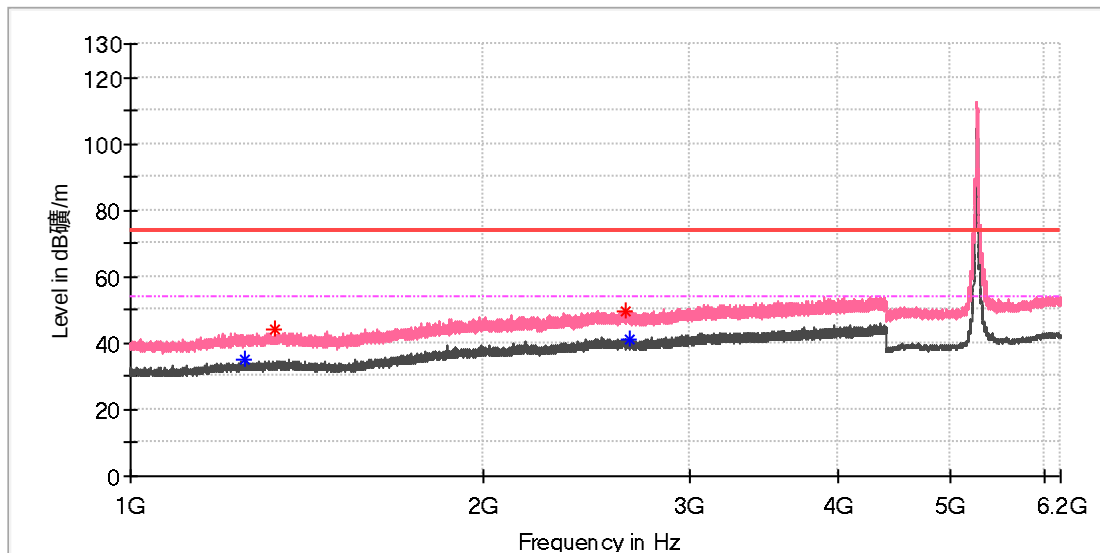

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1252.620000	---	34.97	54.00	19.03	100.0	V	81.0	1.9
1325.380000	44.25	---	74.00	29.75	100.0	V	309.0	2.0
2642.880000	49.80	---	74.00	24.20	100.0	V	122.0	7.6
2658.350000	---	41.17	54.00	12.83	100.0	V	101.0	7.6

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11a_Ch52
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

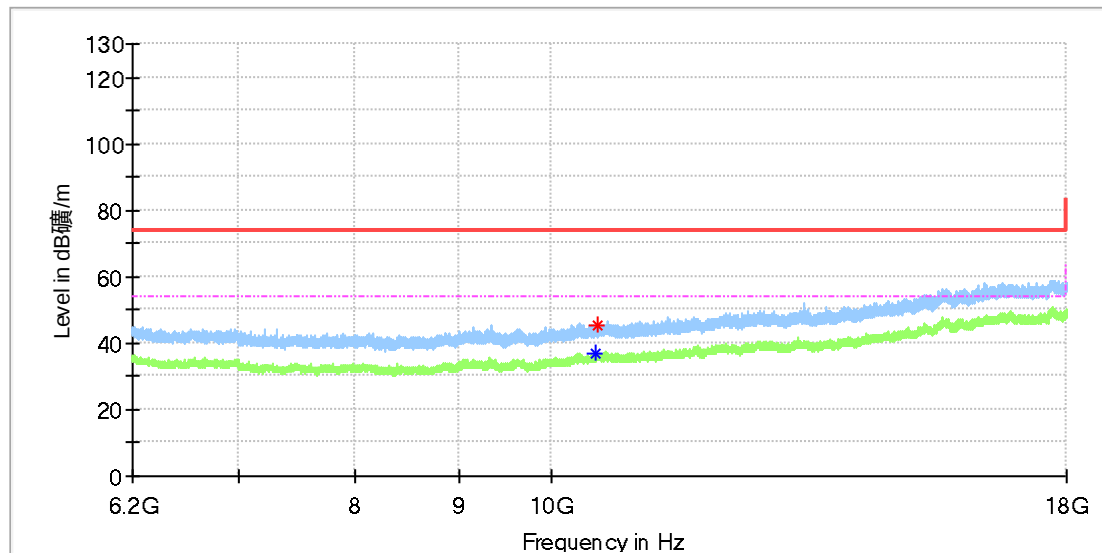

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
10510.933333	---	37.13	54.00	16.87	100.0	H	0.0	12.0
10528.633333	45.58	---	74.00	28.42	100.0	H	235.0	12.0

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Jarvisen Translator 2
Model:	JT-2-BLACK
Test Mode:	WIFI 5G_11a_Ch52
Order No/Sample No:	168405109/A003399272-002
Test Voltage:	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

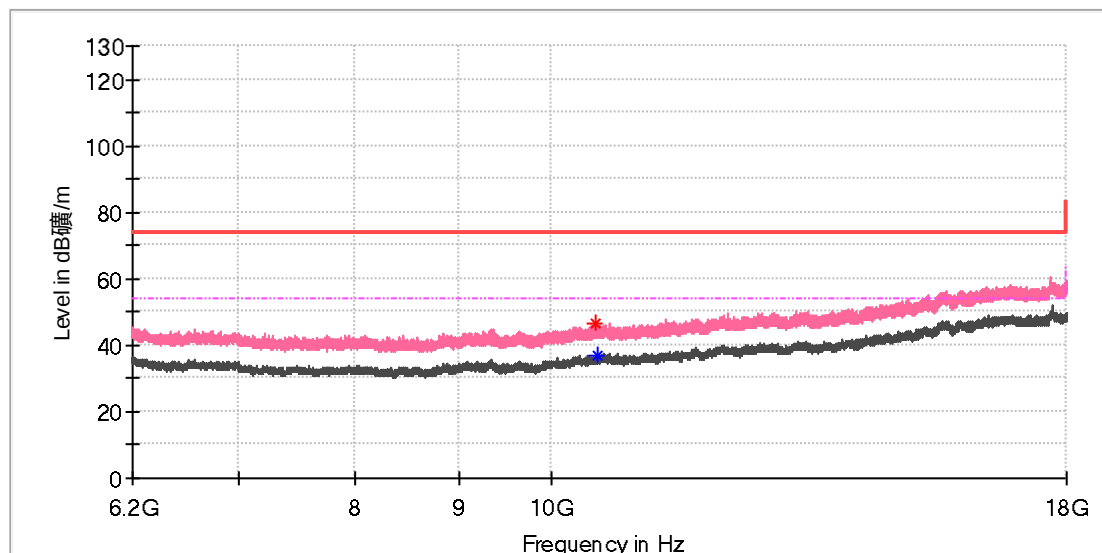

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
10525.191667	46.50	---	74.00	27.50	100.0	V	221.0	12.0
10536.500000	---	36.65	54.00	17.35	100.0	V	62.0	12.0

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11a_Ch64
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

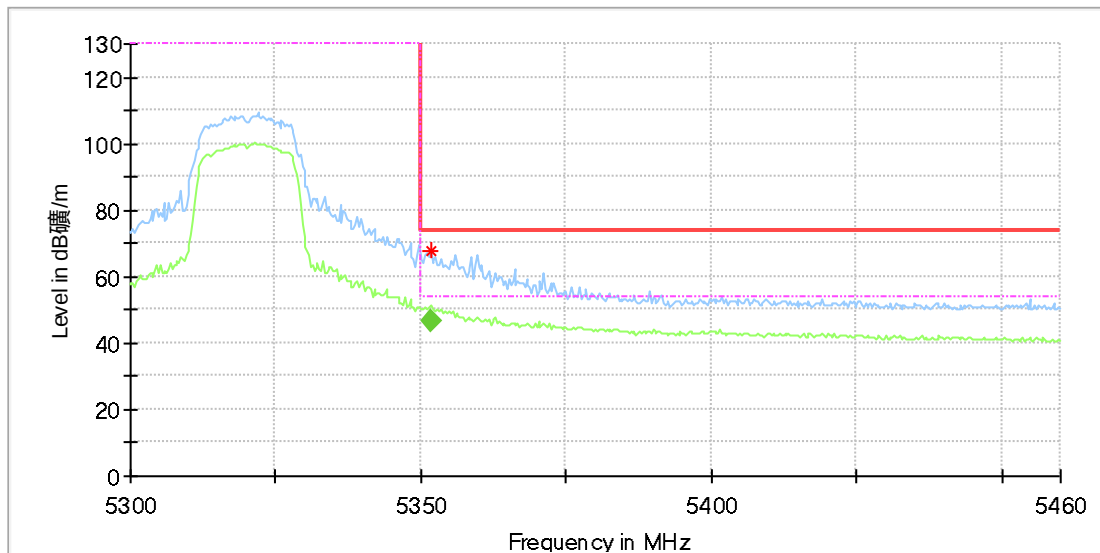

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5351.644445	67.93	---	74.00	6.07	100.0	H	46.0	13.3

Final_Result

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5351.894444	46.48	54.00	7.52	100.0	H	49.0	13.3

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11a_Ch64
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

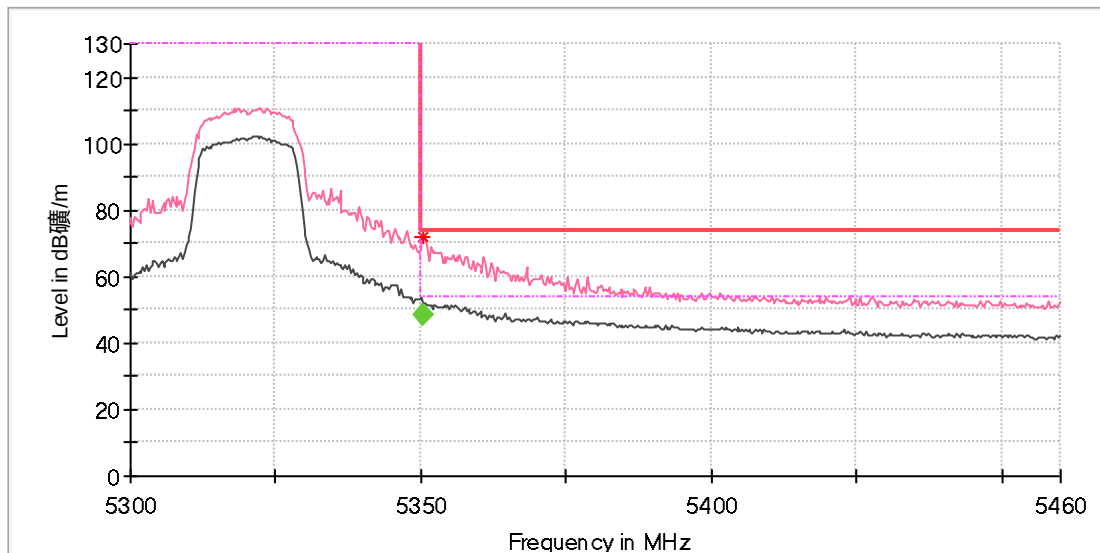

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5350.46667	71.79	---	74.00	2.21	100.0	V	118.0	13.3

Final_Result

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5350.28889	48.53	54.00	5.47	100.0	V	113.0	13.3

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n20_Ch52
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

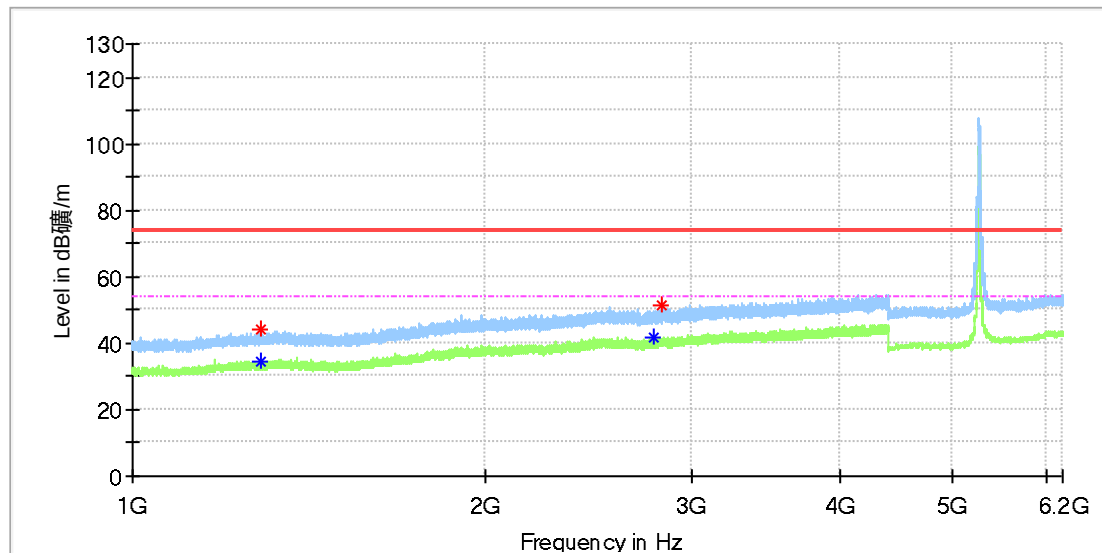

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1287.810000	---	34.23	54.00	19.77	100.0	H	125.0	1.9
1288.660000	44.12	---	74.00	29.88	100.0	H	245.0	1.9
2780.580000	---	41.97	54.00	12.03	100.0	H	234.0	7.9
2819.000000	51.31	---	74.00	22.69	100.0	H	255.0	8.0

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n20_Ch52
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

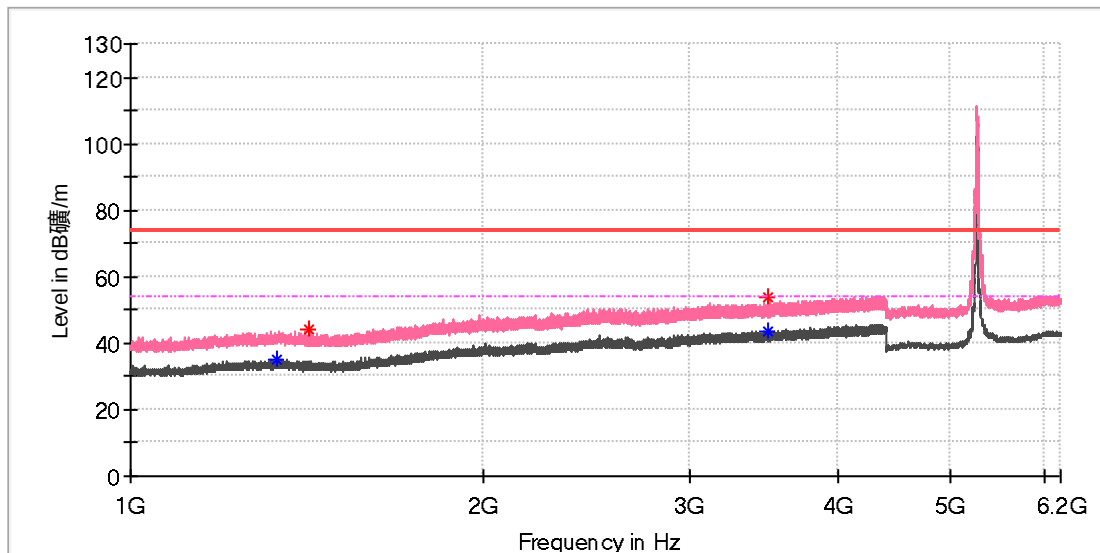

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1332.520000	---	35.12	54.00	18.88	100.0	V	5.0	2.1
1420.410000	44.32	---	74.00	29.68	100.0	V	0.0	1.6
3494.750000	---	43.71	54.00	10.29	100.0	V	307.0	9.0
3495.940000	54.02	---	74.00	19.98	100.0	V	319.0	9.0

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n20_Ch52
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

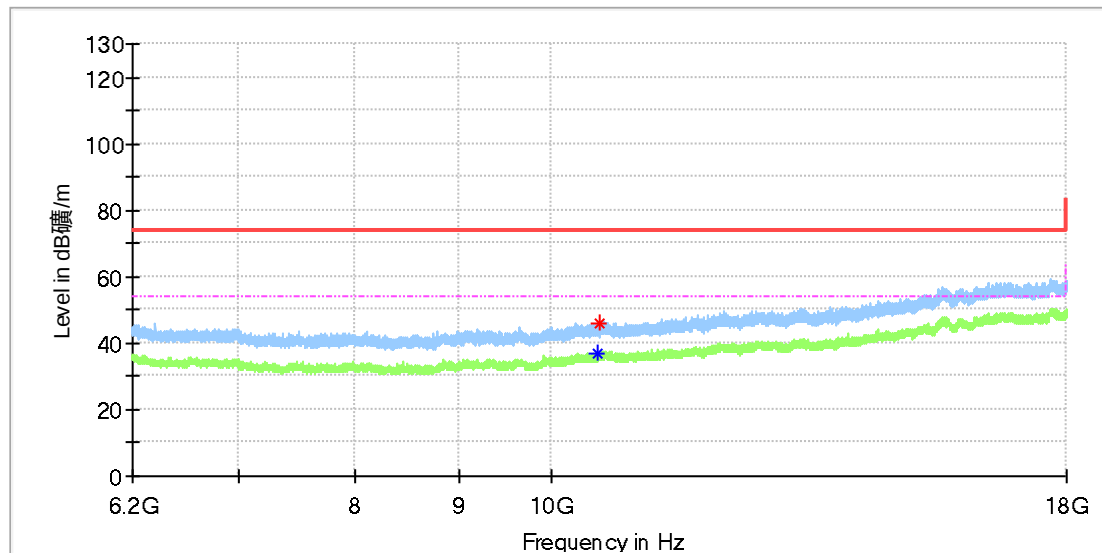

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
10538.958333	---	36.86	54.00	17.14	100.0	H	149.0	12.0
10553.708333	46.06	---	74.00	27.94	100.0	H	15.0	12.0

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n20_Ch52
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

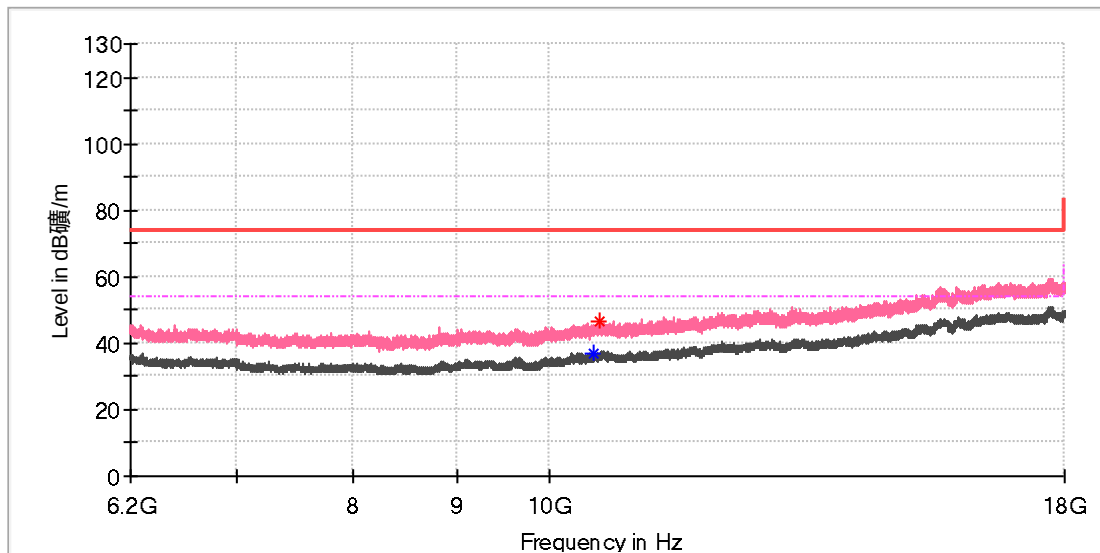

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
10513.883333	---	37.06	54.00	16.94	100.0	V	215.0	12.0
10595.008333	46.84	---	74.00	27.16	100.0	V	153.0	12.1

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n20_Ch64
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

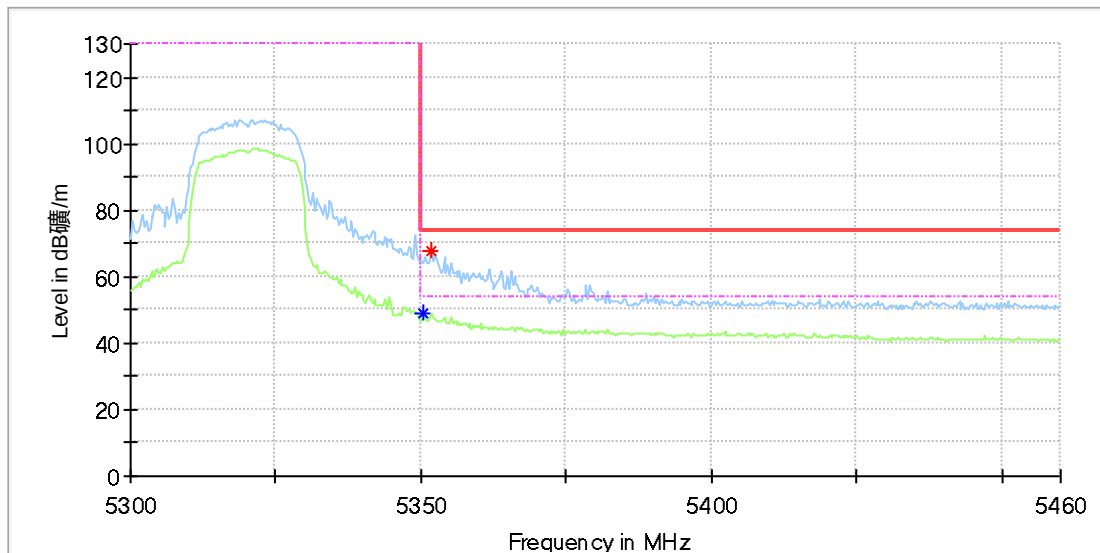

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5350.466667	---	49.01	54.00	4.99	100.0	H	224.0	13.3
5351.644445	67.53	---	74.00	6.47	100.0	H	51.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n20_Ch64
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

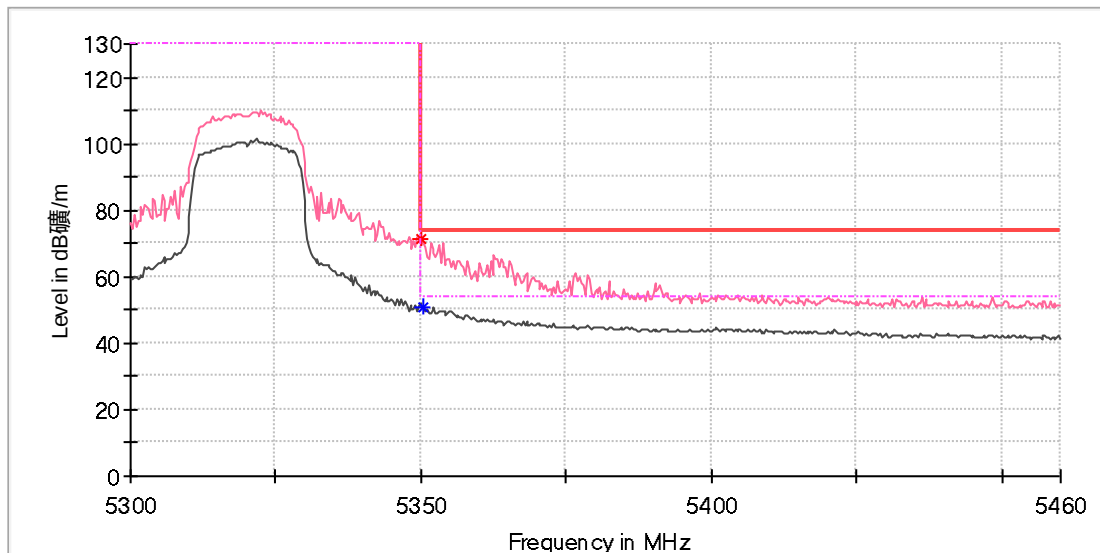

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5350.172222	71.60	---	74.00	2.40	100.0	V	117.0	13.3
5350.466667	---	50.92	54.00	3.08	100.0	V	87.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n40_Ch54
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

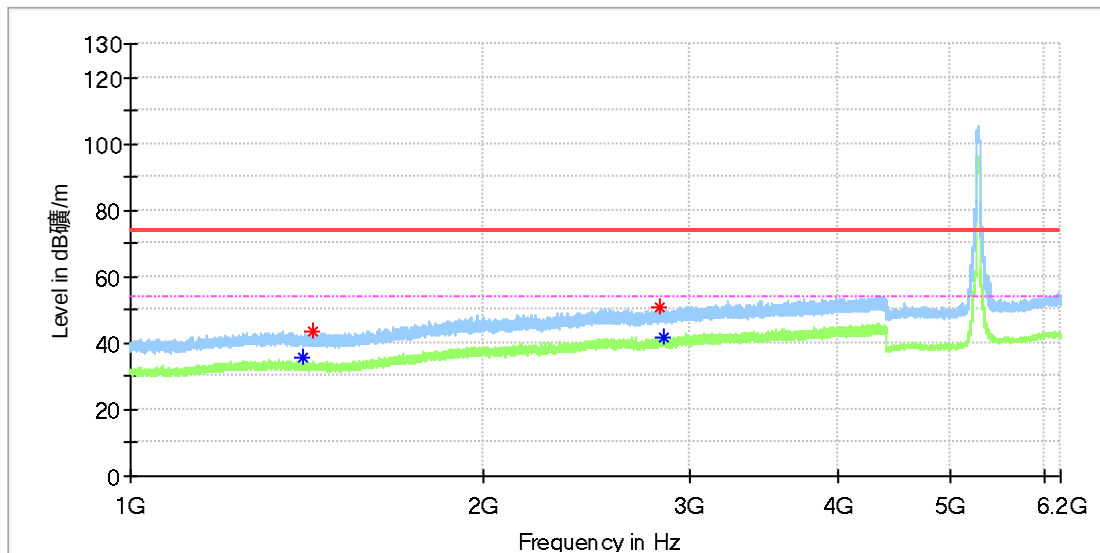

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1404.940000	---	35.58	54.00	18.42	100.0	H	29.0	1.7
1427.890000	43.37	---	74.00	30.63	100.0	H	291.0	1.6
2826.650000	51.07	---	74.00	22.93	100.0	H	358.0	8.1
2846.370000	---	41.45	54.00	12.55	100.0	H	151.0	8.1

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n40_Ch54
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

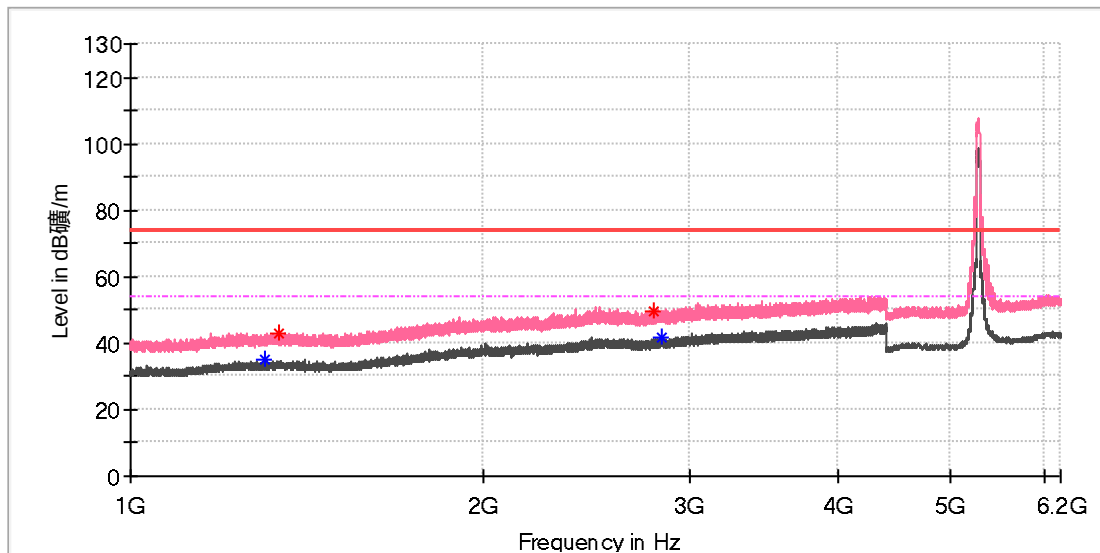

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1299.200000	---	34.97	54.00	19.03	100.0	V	156.0	1.9
1335.580000	43.08	---	74.00	30.92	100.0	V	323.0	2.1
2793.330000	49.72	---	74.00	24.28	100.0	V	359.0	8.0
2833.280000	---	41.71	54.00	12.29	100.0	V	0.0	8.1

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n40_Ch54
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

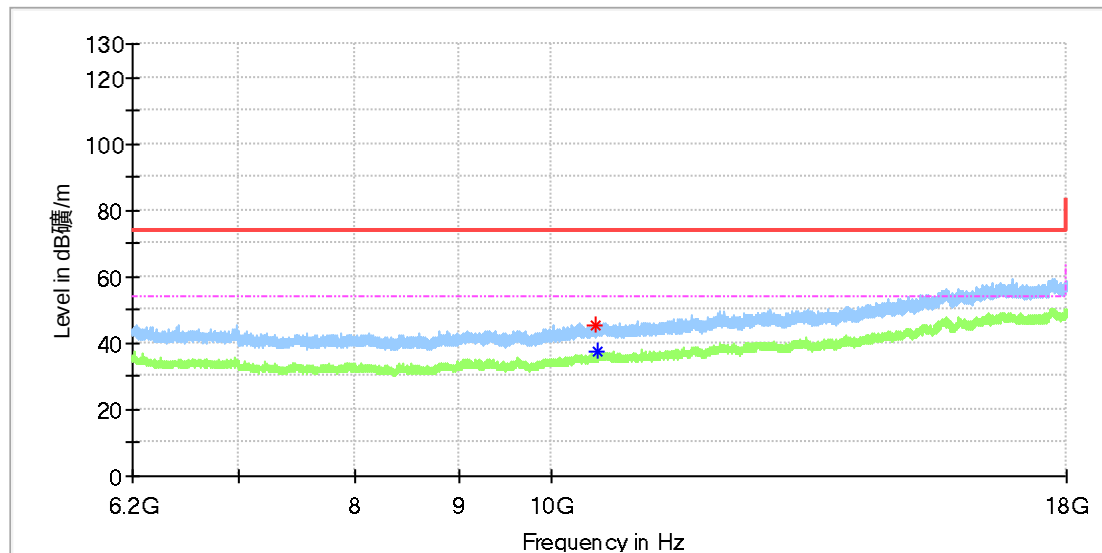

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
10520.275000	45.25	---	74.00	28.75	100.0	H	112.0	12.0
10536.008333	---	37.43	54.00	16.57	100.0	H	0.0	12.0

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n40_Ch54
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

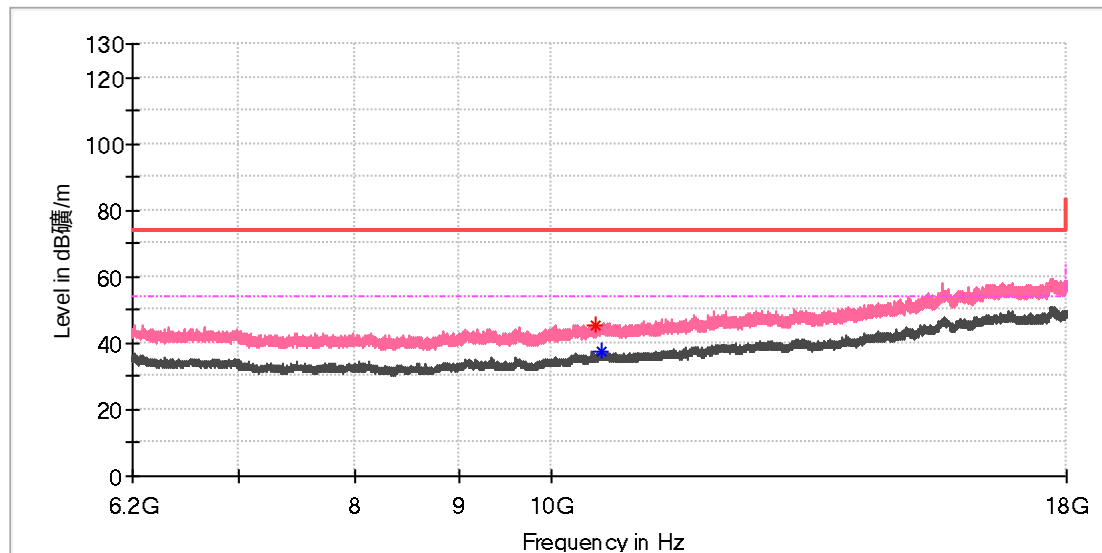

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
10526.175000	45.37	---	74.00	28.63	100.0	V	125.0	12.0
10587.633333	---	37.19	54.00	16.81	100.0	V	282.0	12.0

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n40_Ch62
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

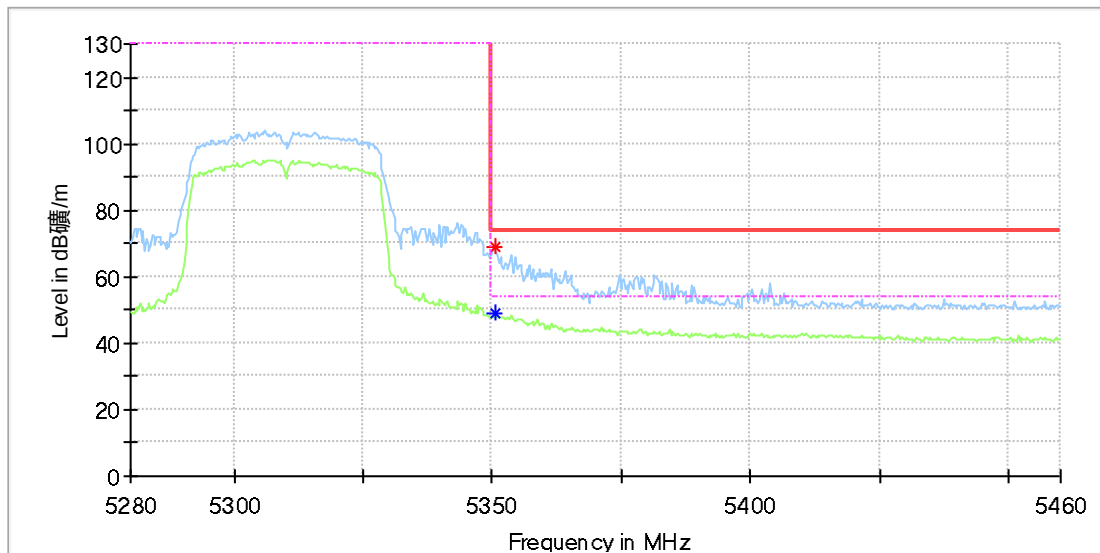

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5350.466667	---	48.86	54.00	5.14	100.0	H	33.0	13.3
5350.466667	68.83	---	74.00	5.17	100.0	H	33.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n40_Ch62
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

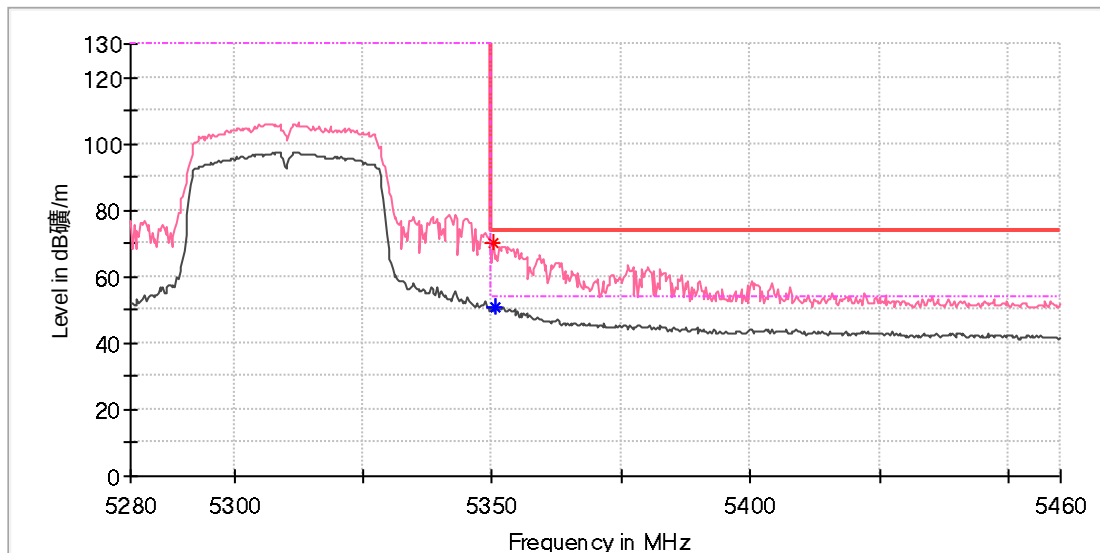

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5350.172222	69.96	---	74.00	4.04	100.0	V	124.0	13.3
5350.761111	---	50.91	54.00	3.09	100.0	V	161.0	13.3
5350.761111	---	50.91	54.00	3.09	100.0	V	161.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11ac80_Ch58
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

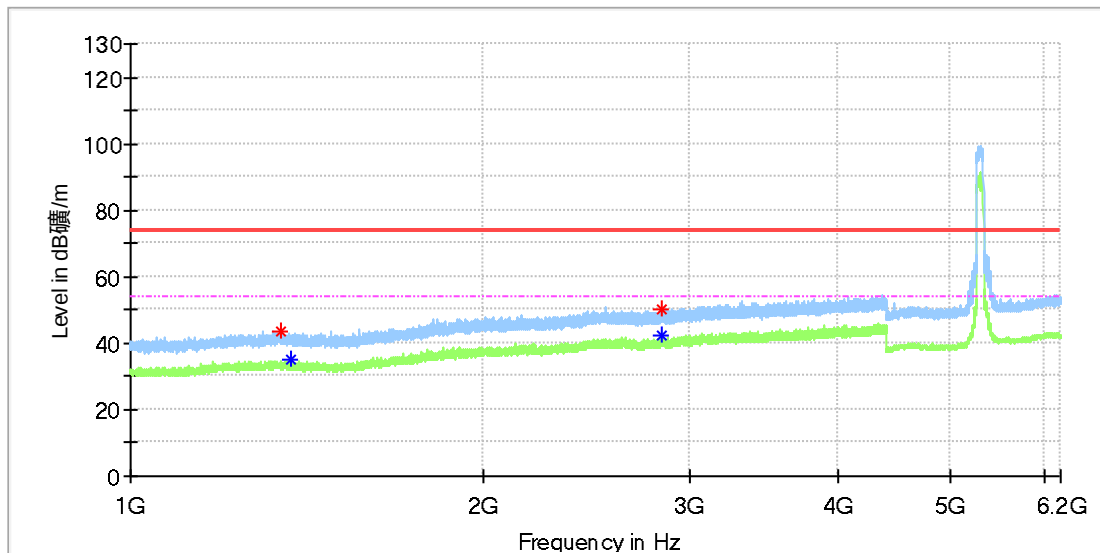

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1345.100000	43.48	---	74.00	30.52	100.0	H	326.0	2.1
1370.430000	---	34.85	54.00	19.15	100.0	H	0.0	1.9
2830.220000	---	42.07	54.00	11.93	100.0	H	94.0	8.1
2837.190000	50.09	---	74.00	23.91	100.0	H	247.0	8.1

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11ac80_Ch58
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

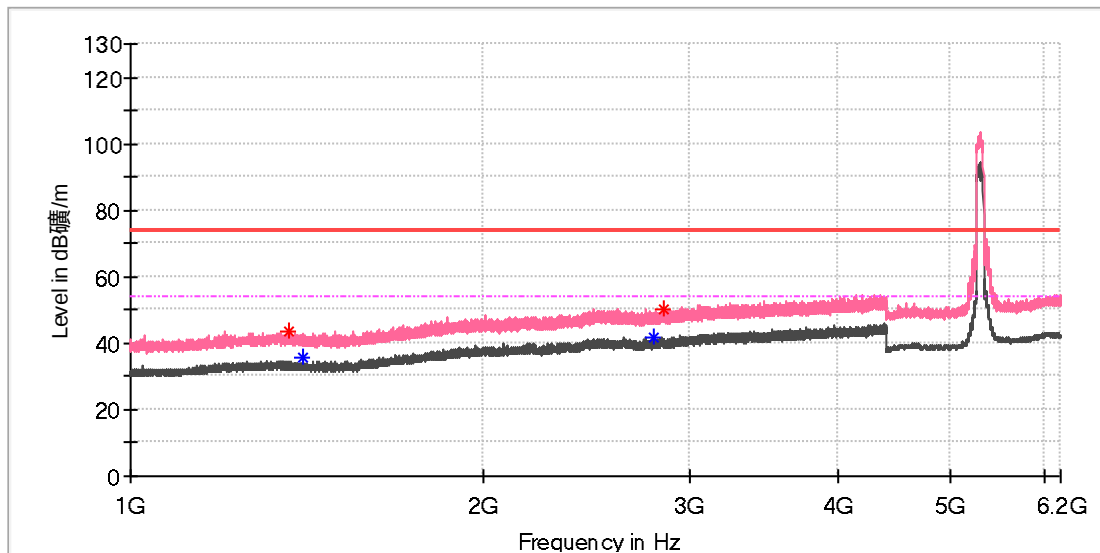

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1363.290000	43.56	---	74.00	30.44	100.0	V	352.0	2.0
1404.940000	---	35.53	54.00	18.47	100.0	V	322.0	1.7
2795.710000	---	41.59	54.00	12.41	100.0	V	169.0	8.0
2846.540000	50.22	---	74.00	23.78	100.0	V	333.0	8.1

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11ac80_Ch58
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

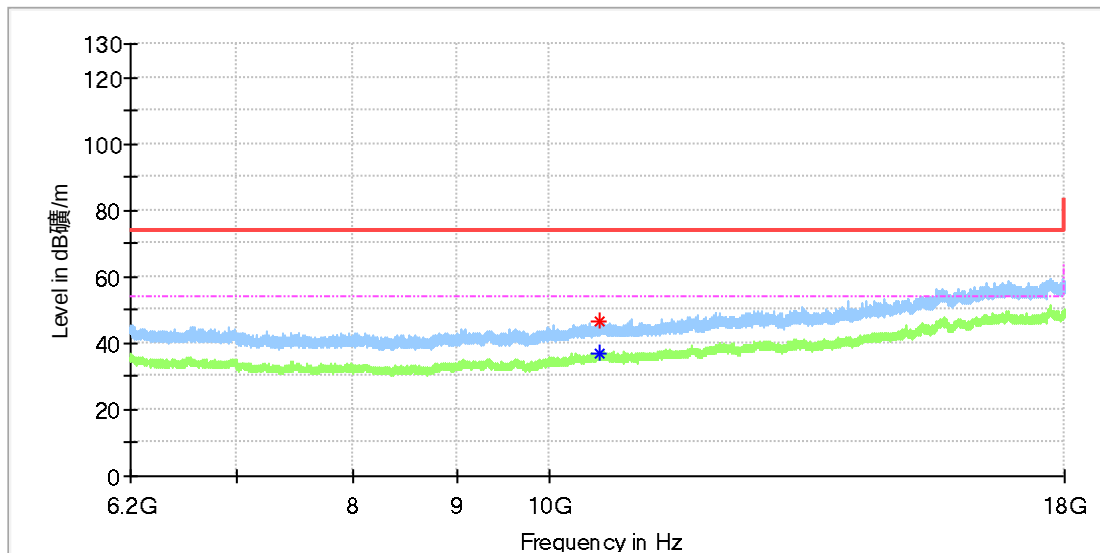

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
10590.583333	46.79	---	74.00	27.21	100.0	H	341.0	12.1
10590.583333	---	37.19	54.00	16.81	100.0	H	341.0	12.1

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11ac80_Ch58
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

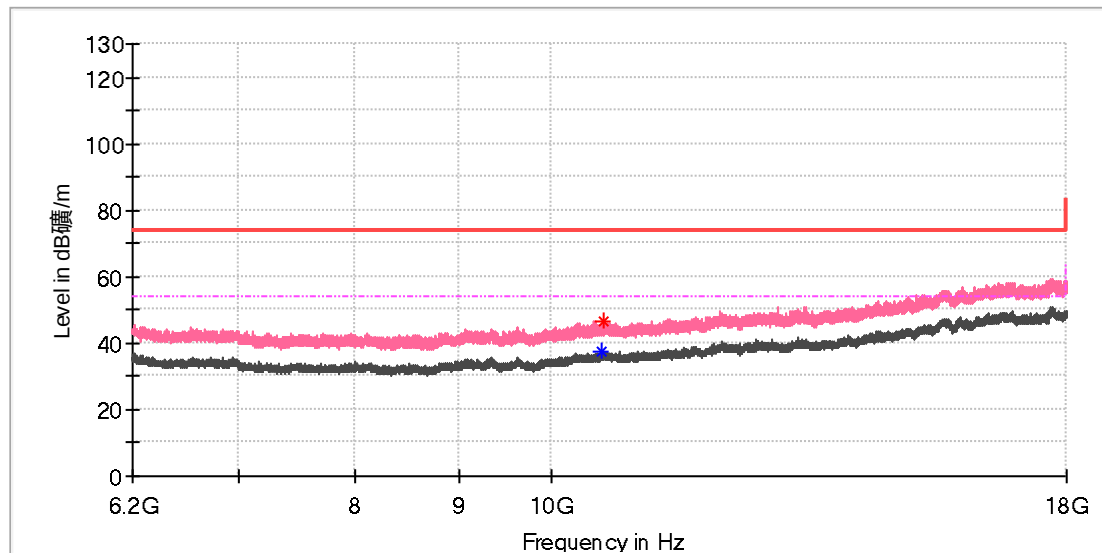

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
10585.175000	---	37.64	54.00	16.36	100.0	V	343.0	12.0
10606.808333	46.29	---	74.00	27.71	100.0	V	209.0	12.1

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11ac80_Ch58
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

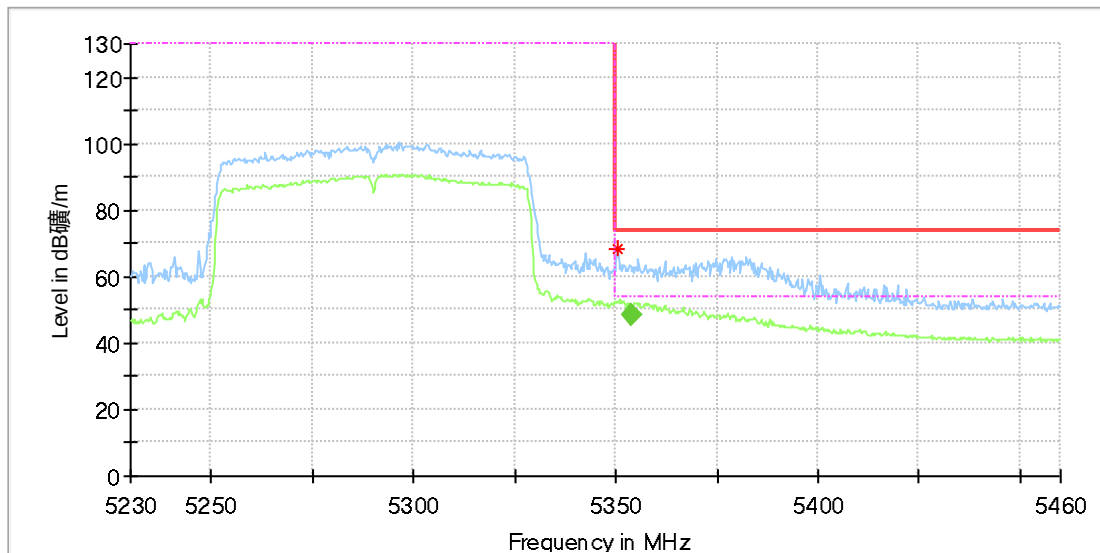

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5350.46667	68.21	---	74.00	5.79	100.0	H	54.0	13.3

Final_Result

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5354.011111	48.32	54.00	5.68	100.0	H	52.0	13.3

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11ac80_Ch58
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

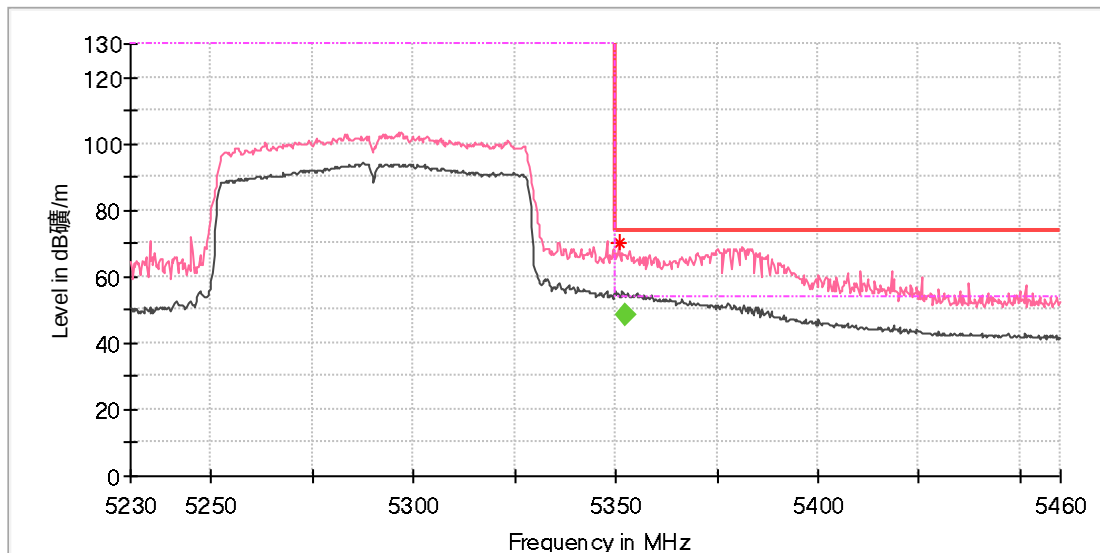

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5350.761111	70.05	---	74.00	3.95	100.0	V	107.0	13.3


Final_Result

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5352.344444	48.32	54.00	5.68	100.0	V	160.0	13.3

U-NII-2C Band

EUT Information

EUT Name:	Jarvisen Translator 2
Model:	JT-2-BLACK
Test Mode:	WIFI 5G_11a_Ch100
Order No/Sample No:	168405109/A003399272-002
Test Voltage:	Battery
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

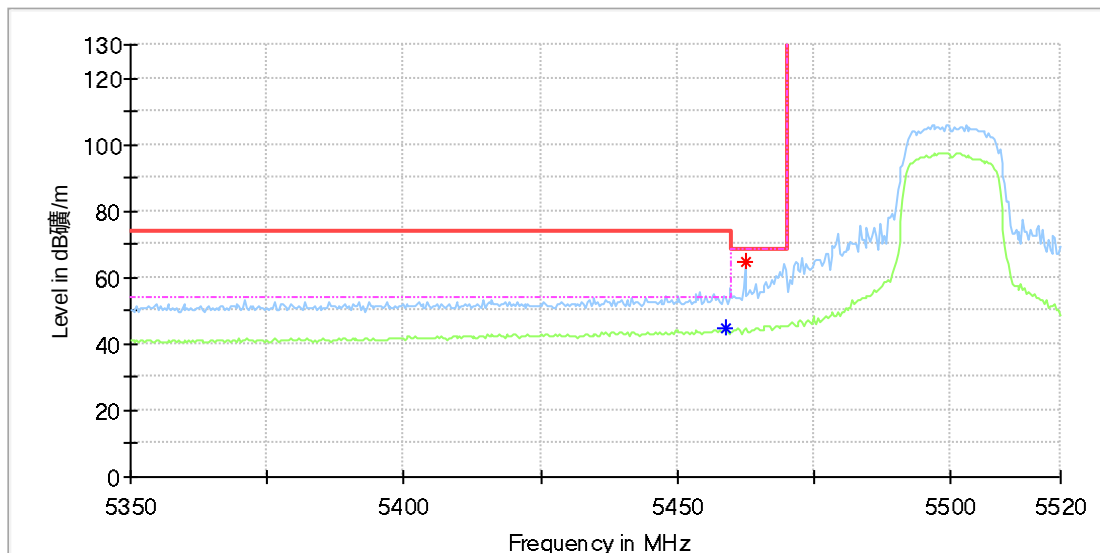

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5458.722222	---	44.71	54.00	9.29	100.0	H	270.0	13.6
5462.327778	64.78	---	68.20	3.42	100.0	H	123.0	13.6

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
 Model: JT-2-BLACK
 Test Mode: WIFI 5G_11a_Ch100
 Order No/Sample No: 168405109/A003399272-002
 Test Voltage: Battery
 Remark: Temp 22 Humi:52%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

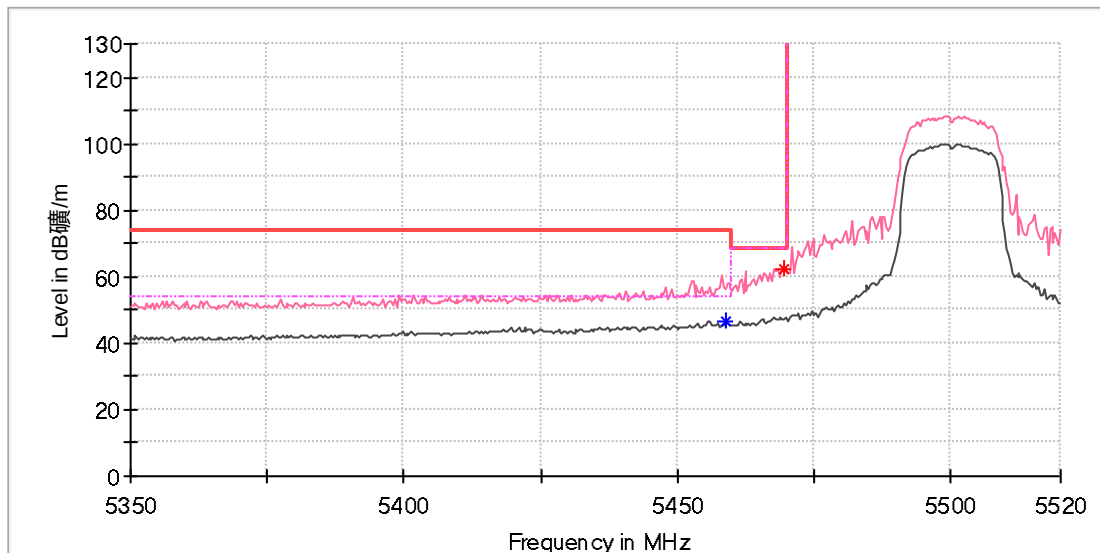

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5458.722222	---	46.72	54.00	7.28	100.0	V	230.0	13.6
5469.538889	62.51	---	68.20	5.69	100.0	V	202.0	13.6

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11a_Ch116
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

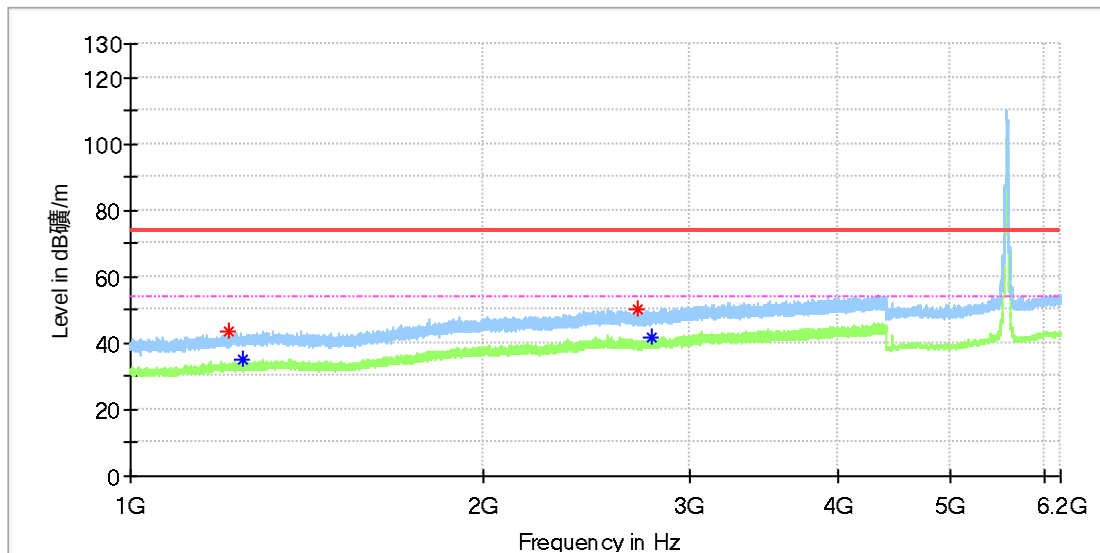

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1210.290000	43.72	---	74.00	30.28	100.0	H	300.0	1.3
1245.310000	---	34.90	54.00	19.10	100.0	H	300.0	1.8
2699.150000	50.36	---	74.00	23.64	100.0	H	142.0	7.5
2775.140000	---	41.43	54.00	12.57	100.0	H	255.0	7.9

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11a_Ch116
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

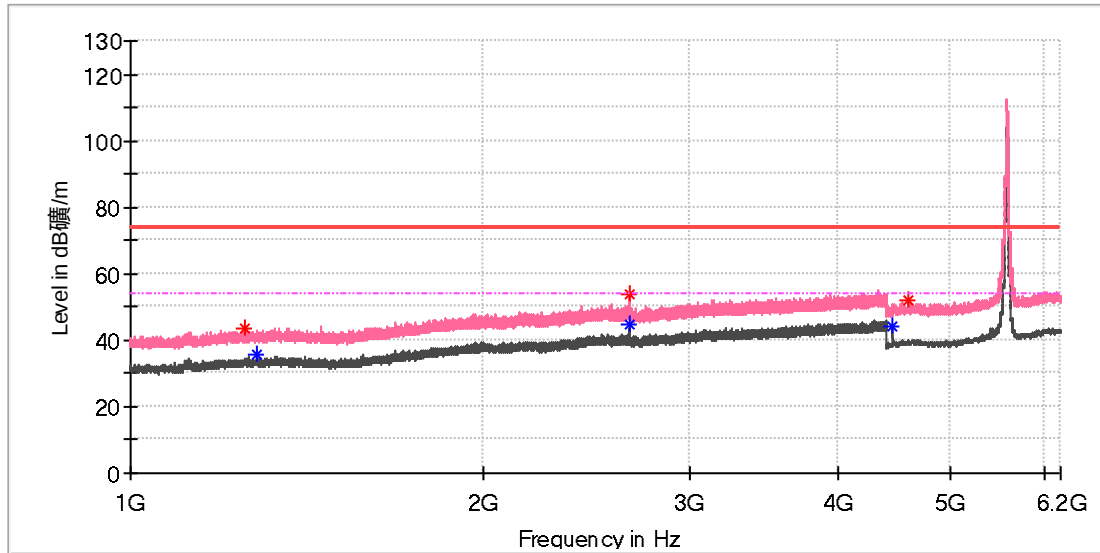

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1251.770000	43.35	---	74.00	30.65	100.0	V	72.0	1.9
1282.030000	---	35.44	54.00	18.56	100.0	V	22.0	1.9
2659.370000	---	44.52	54.00	9.48	100.0	V	223.0	7.6
2660.050000	53.85	---	74.00	20.15	100.0	V	0.0	7.6
4464.000000	---	44.01	54.00	10.00	100.0	V	260.0	11.3
4591.500000	52.02	---	74.00	21.98	100.0	V	294.0	12.0

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11a_Ch116
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

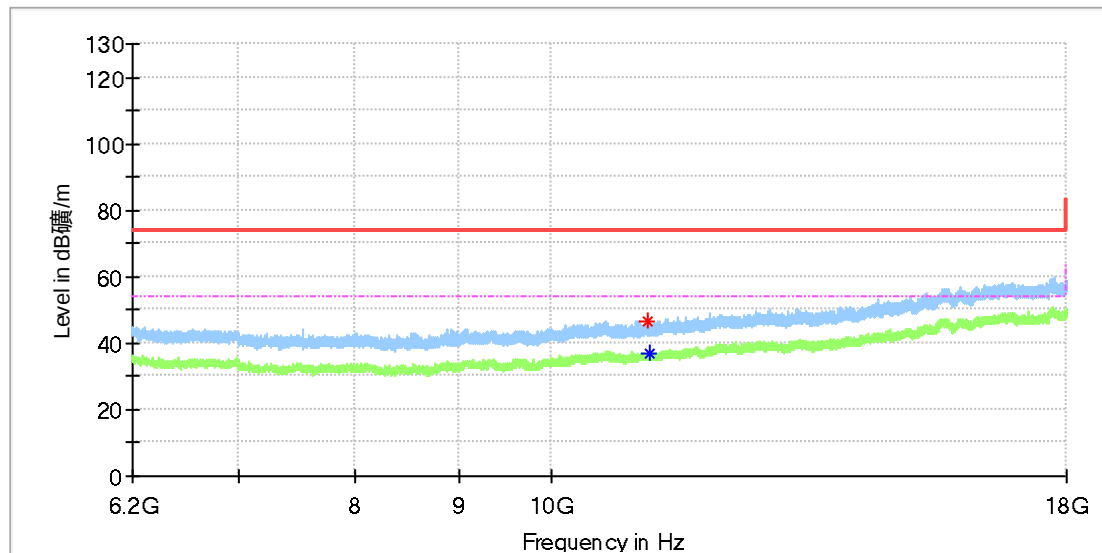

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11171.241667	46.29	---	74.00	27.71	100.0	H	291.0	12.5
11175.666667	---	37.13	54.00	16.87	100.0	H	291.0	12.5

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11a_Ch116
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

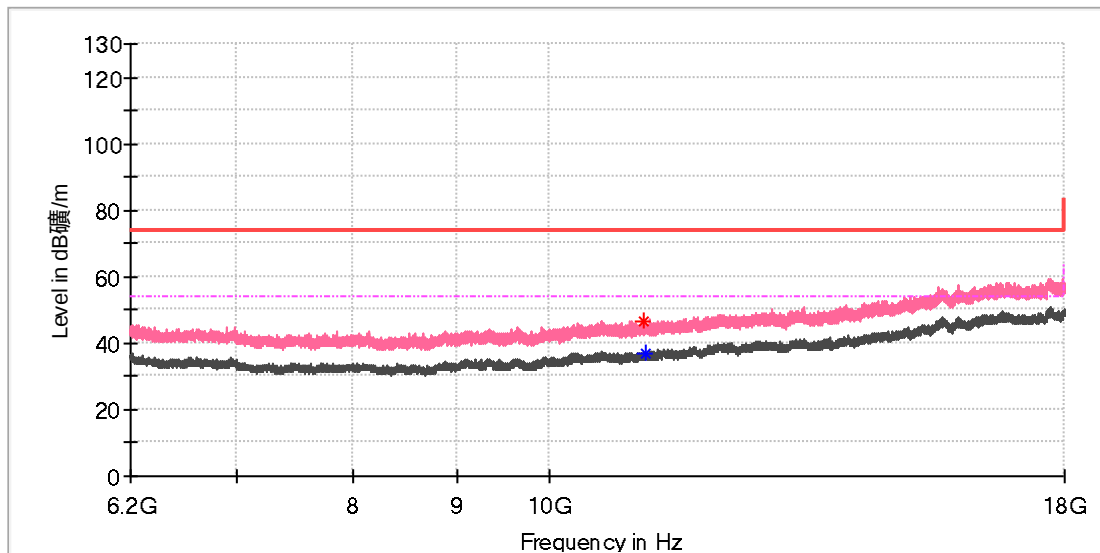

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11141.250000	46.82	---	74.00	27.18	100.0	V	31.0	12.5
11156.000000	---	37.17	54.00	16.83	100.0	V	166.0	12.5

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11a_Ch140
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

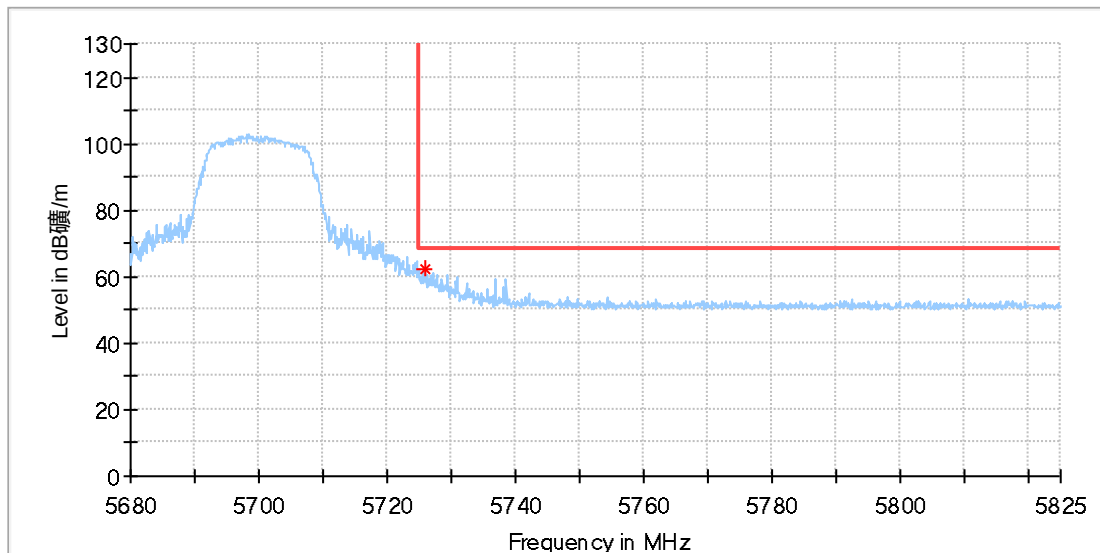

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5725.802778	62.49	68.20	5.71	100.0	H	135.0	13.9

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11a_Ch140
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

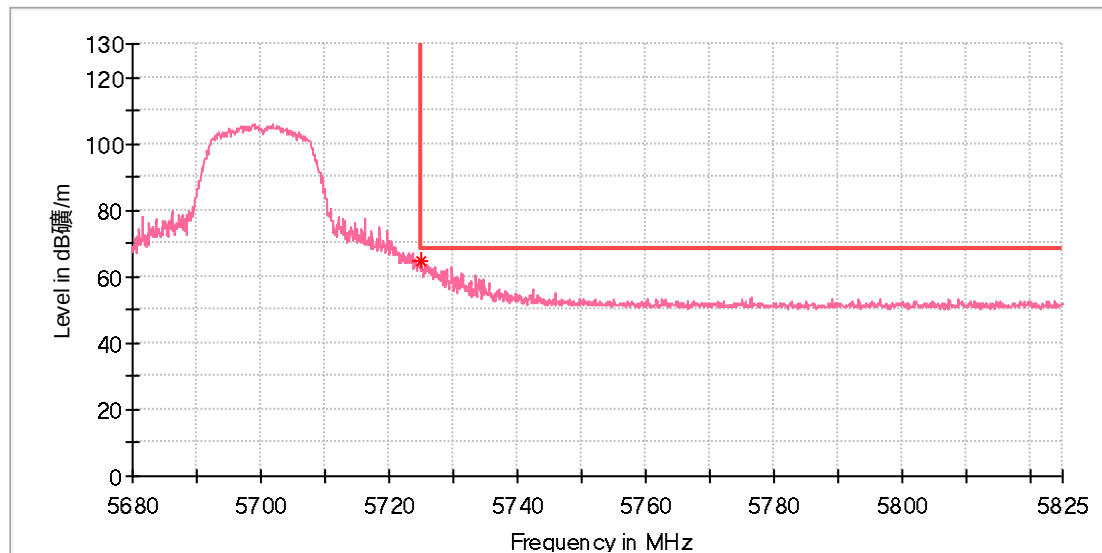

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5725.058333	64.85	68.20	3.35	100.0	V	182.0	13.9

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n20_Ch100
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

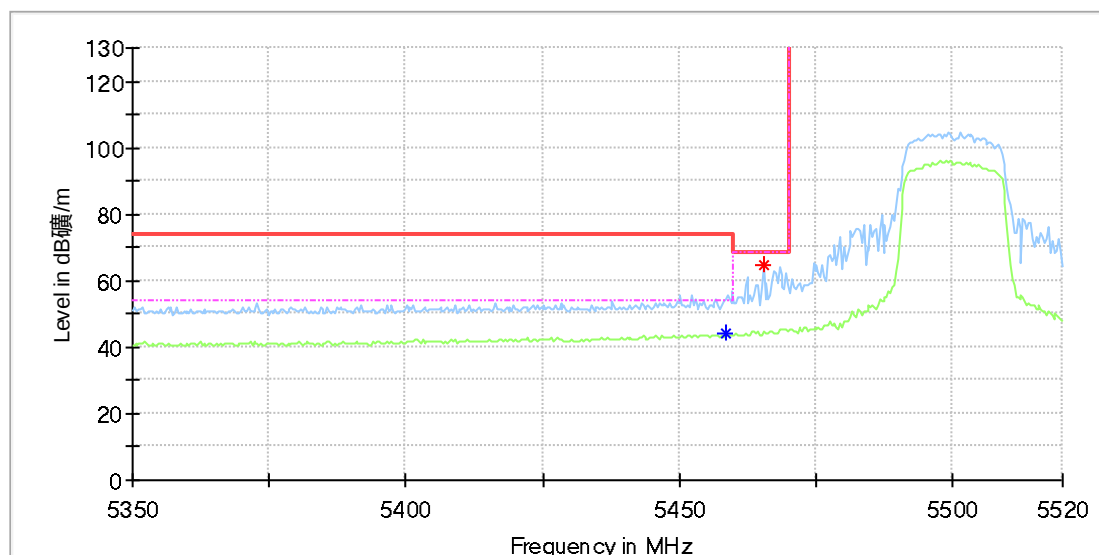

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5458.394445	---	43.96	54.00	10.04	100.0	H	131.0	13.6
5465.277778	64.61	---	68.20	3.59	100.0	H	143.0	13.6

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n20_Ch100
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

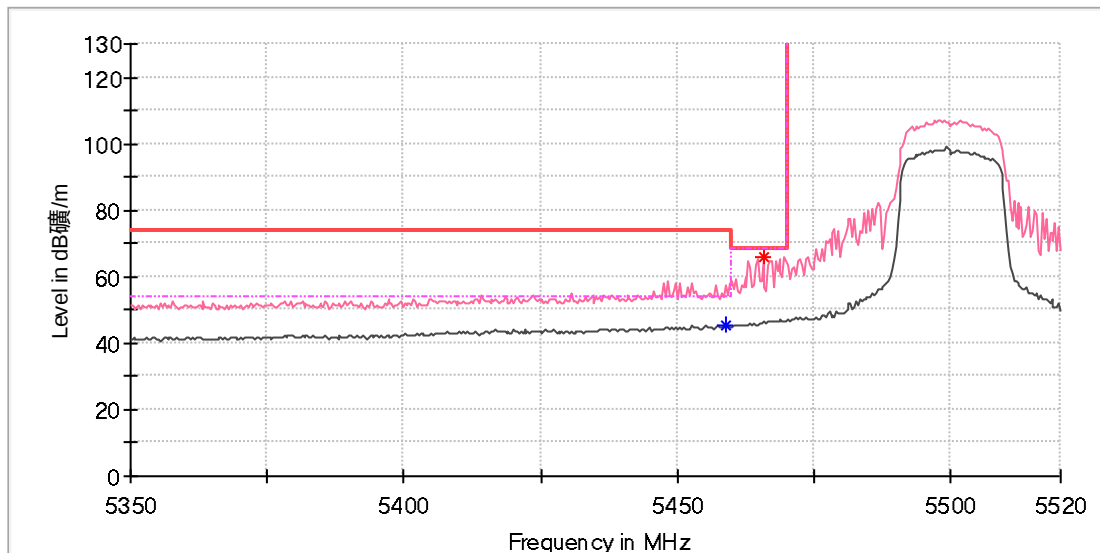

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5458.722222	---	45.38	54.00	8.62	100.0	V	172.0	13.6
5465.605556	65.72	---	68.20	2.48	100.0	V	221.0	13.6

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n20_Ch116
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

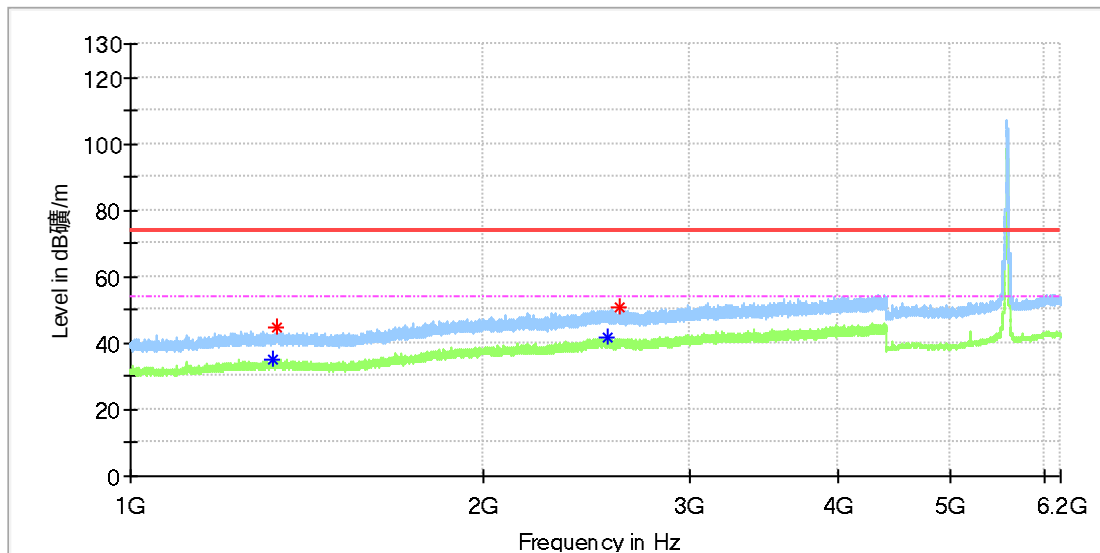

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1321.980000	---	34.88	54.00	19.12	100.0	H	308.0	2.0
1332.860000	44.60	---	74.00	29.40	100.0	H	177.0	2.1
2551.080000	---	41.54	54.00	12.46	100.0	H	115.0	7.6
2612.280000	50.77	---	74.00	23.23	100.0	H	127.0	7.4

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n20_Ch116
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

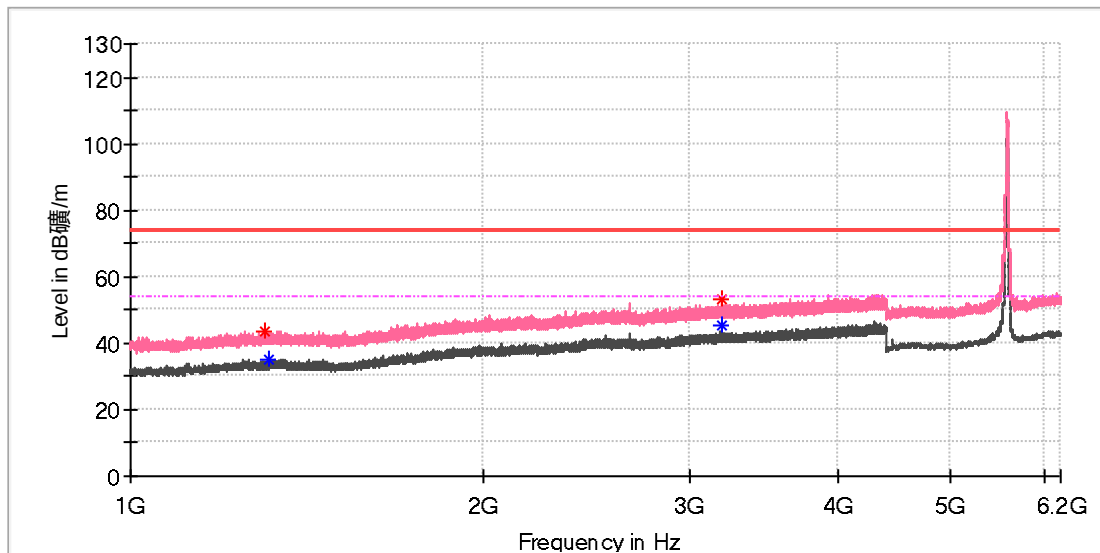

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1303.110000	43.76	---	74.00	30.24	100.0	V	352.0	1.9
1310.760000	---	34.81	54.00	19.19	100.0	V	312.0	2.0
3190.450000	53.36	---	74.00	20.64	100.0	V	26.0	8.6
3190.620000	---	45.41	54.00	8.59	100.0	V	26.0	8.6

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n20_Ch116
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

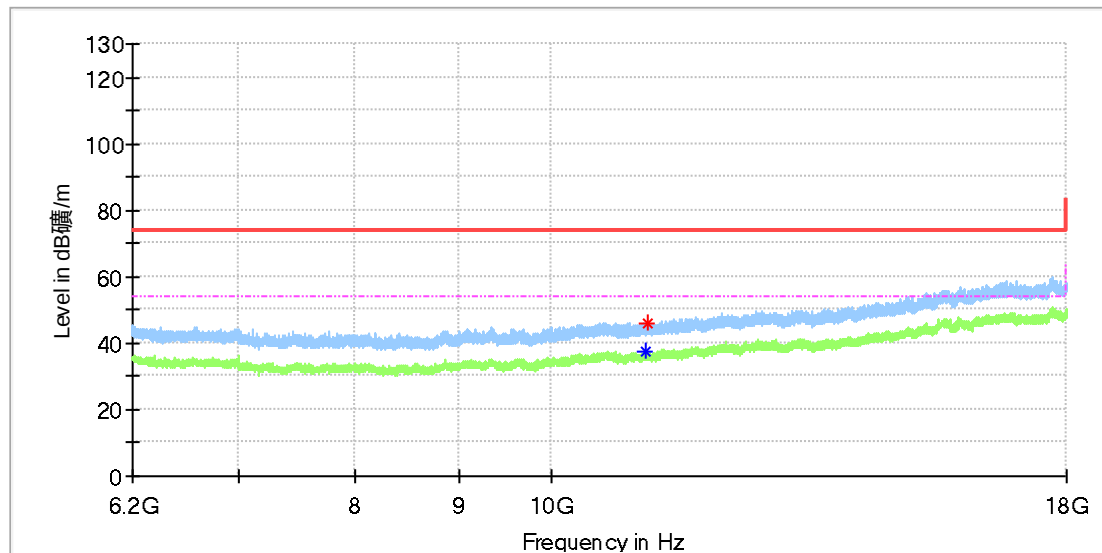

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11143.216667	---	37.74	54.00	16.26	100.0	H	0.0	12.5
11147.641667	45.73	---	74.00	28.27	100.0	H	0.0	12.5

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n20_Ch116
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

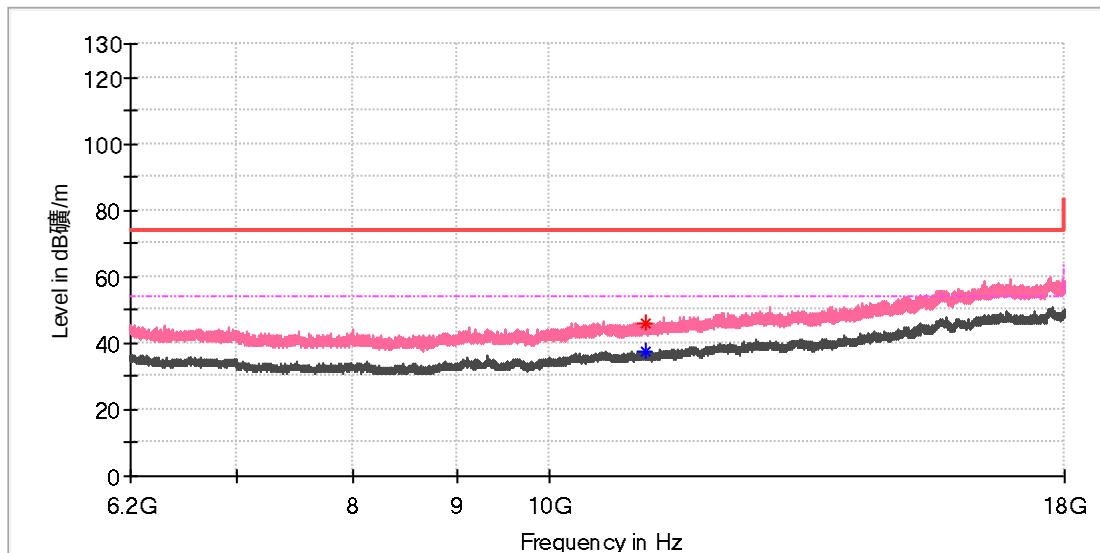

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11149.116667	---	37.35	54.00	16.65	100.0	V	258.0	12.5
11164.850000	45.87	---	74.00	28.13	100.0	V	258.0	12.5

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n20_Ch140
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

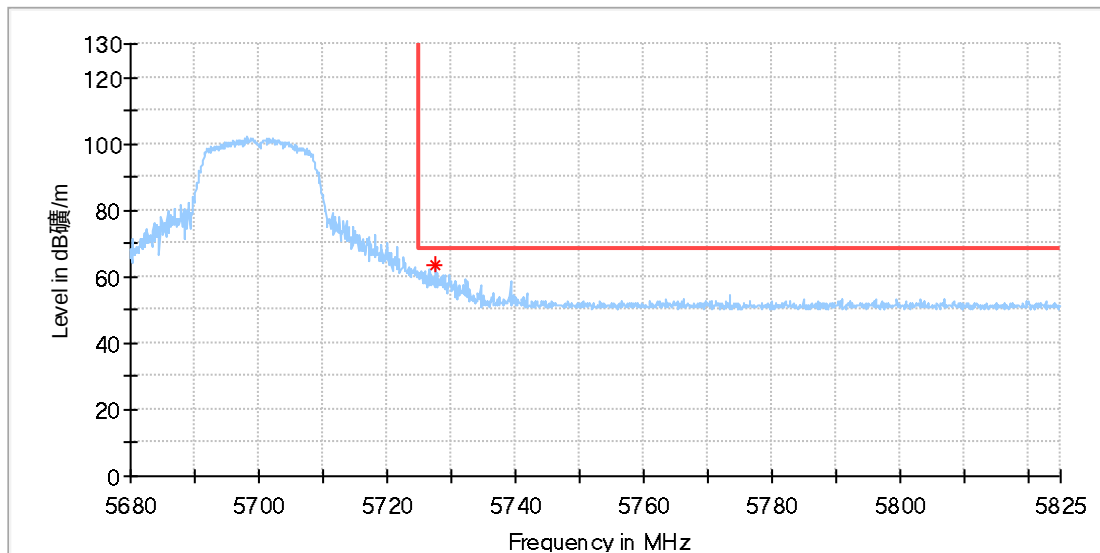

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5727.570833	63.50	68.20	4.70	100.0	H	134.0	13.9

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n20_Ch140
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

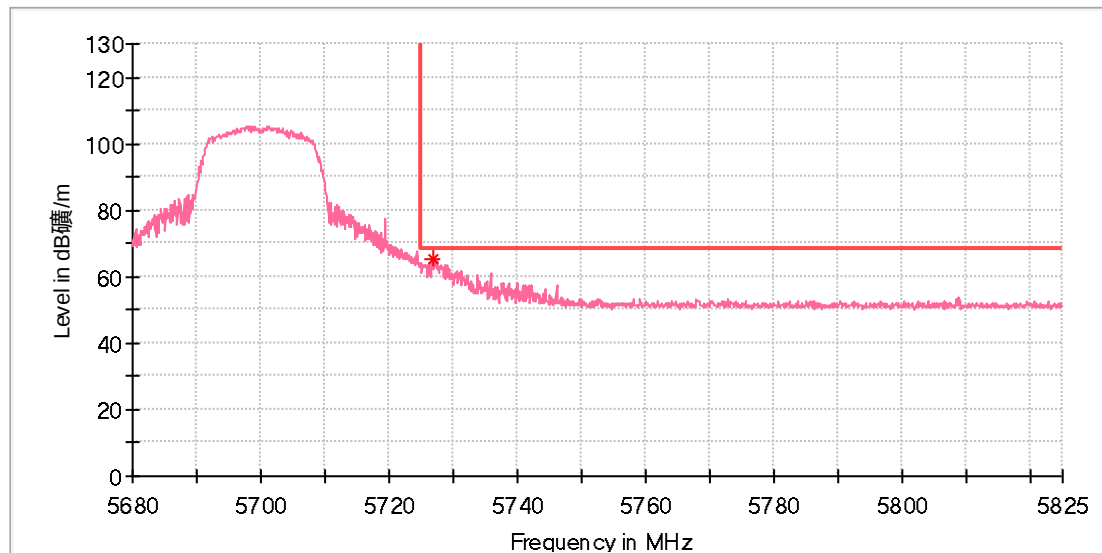

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5726.826389	65.03	68.20	3.17	100.0	V	223.0	13.9

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n40_Ch102
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

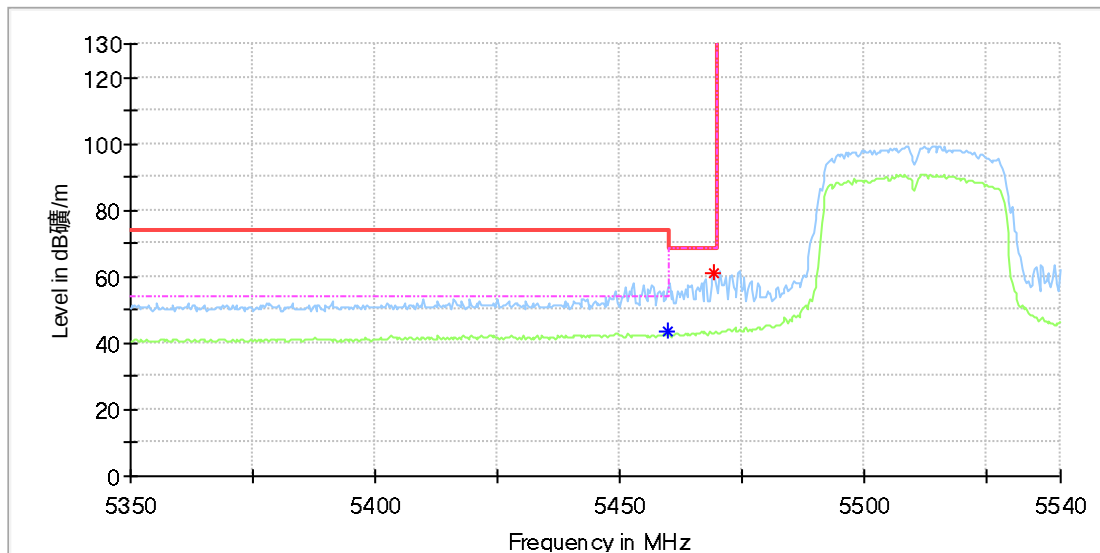

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5459.705556	---	43.38	54.00	10.62	100.0	H	129.0	13.6
5469.211111	61.36	---	68.20	6.84	100.0	H	124.0	13.6

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n40_Ch102
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

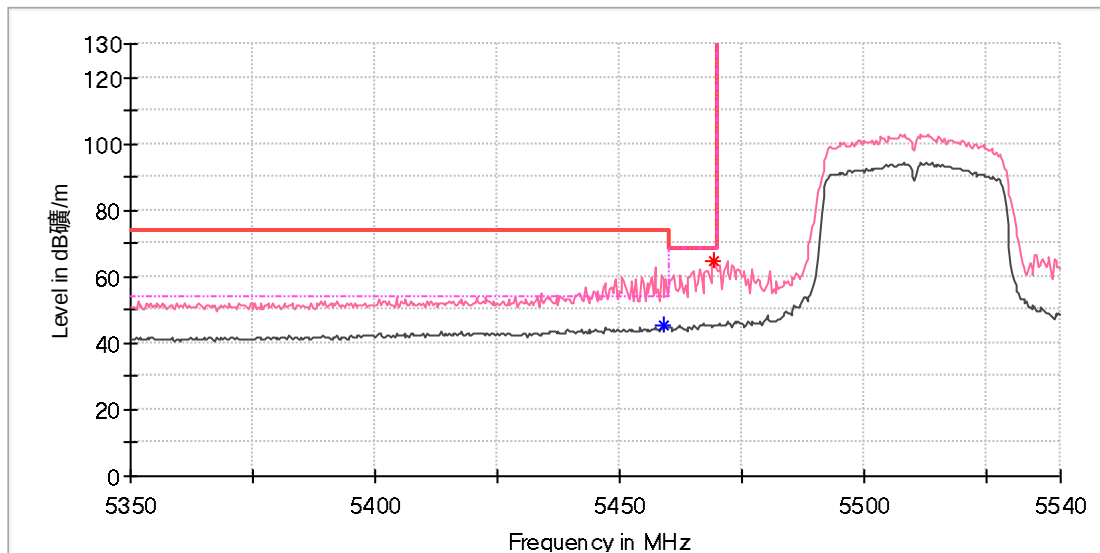

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5459.050000	---	45.14	54.00	8.86	100.0	V	29.0	13.6
5469.211111	64.73	---	68.20	3.47	100.0	V	195.0	13.6

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n40_Ch110
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

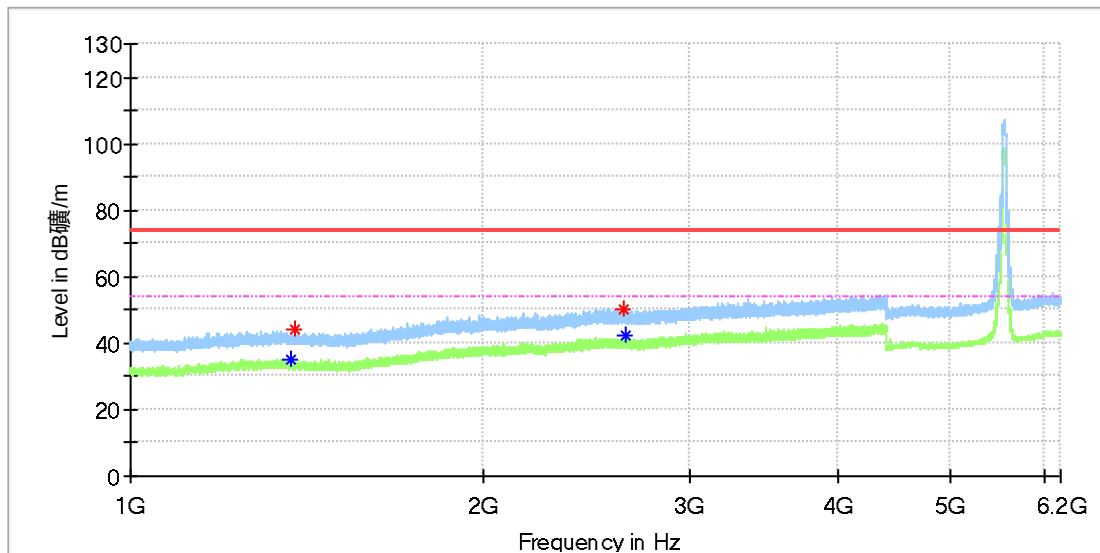

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1370.940000	---	35.17	54.00	18.83	100.0	H	131.0	1.9
1379.610000	43.94	---	74.00	30.06	100.0	H	173.0	1.9
2633.020000	49.95	---	74.00	24.05	100.0	H	142.0	7.5
2638.630000	---	42.04	54.00	11.96	100.0	H	64.0	7.6

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n40_Ch110
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

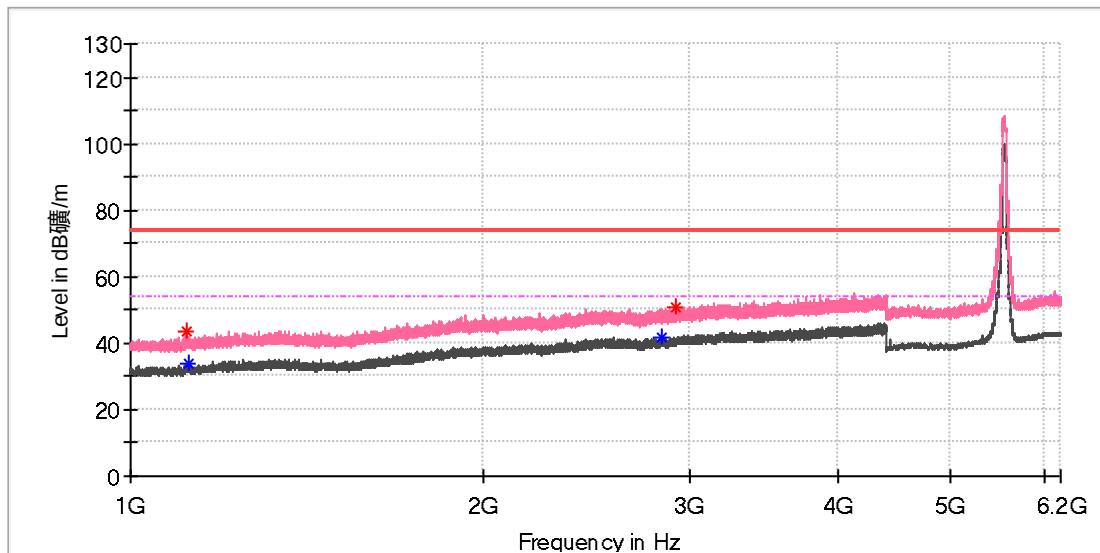

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1117.470000	43.27	---	74.00	30.73	100.0	V	16.0	0.1
1118.830000	---	34.12	54.00	19.88	100.0	V	213.0	0.2
2839.570000	---	41.90	54.00	12.10	100.0	V	265.0	8.1
2918.110000	50.89	---	74.00	23.11	100.0	V	50.0	8.3

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n40_Ch110
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

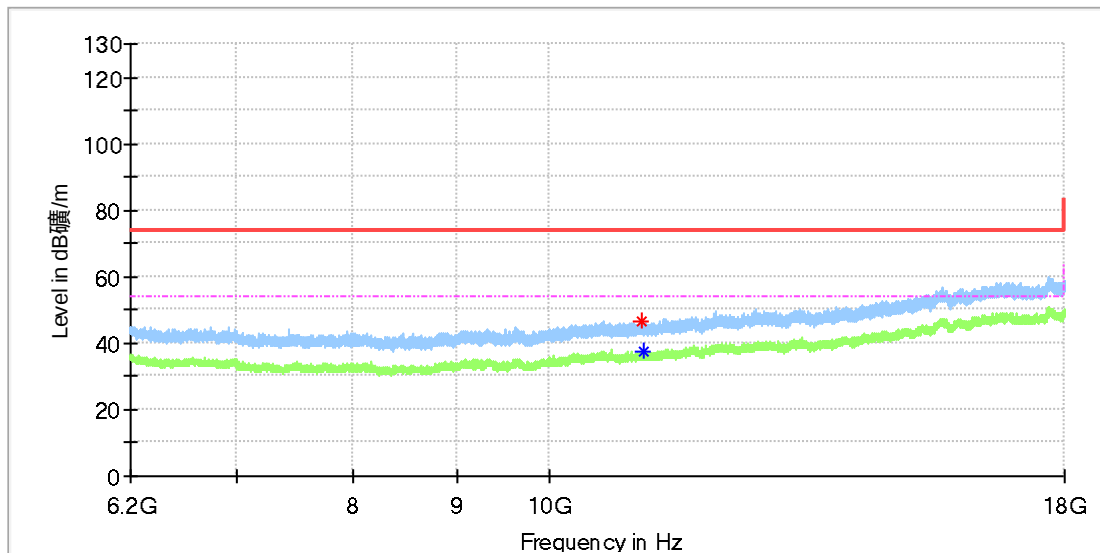

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11097.491667	46.60	---	74.00	27.40	100.0	H	228.0	12.4
11126.500000	---	37.48	54.00	16.52	100.0	H	90.0	12.5

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n40_Ch110
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

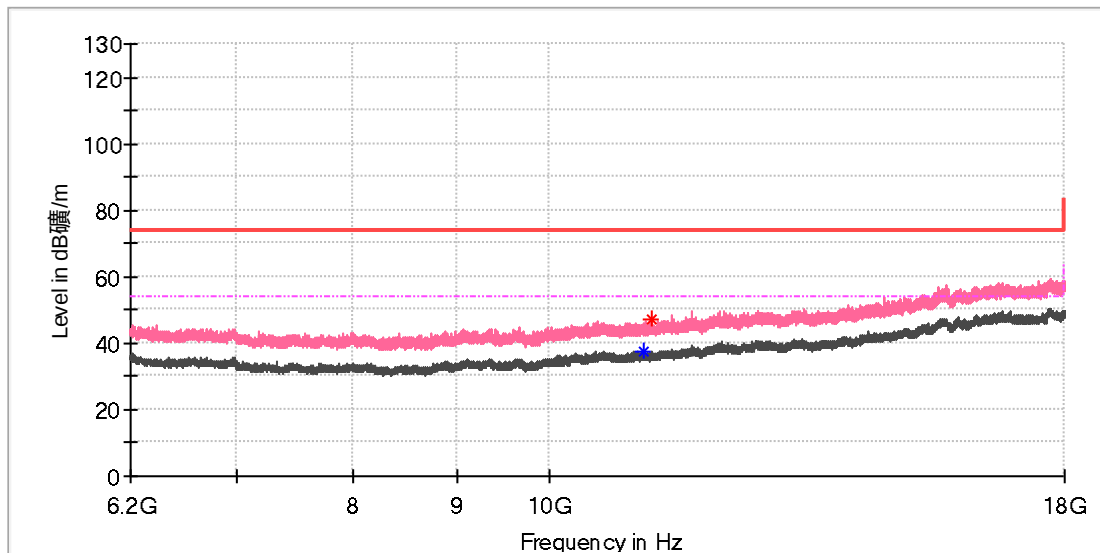

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11142.233333	---	37.46	54.00	16.54	100.0	V	100.0	12.5
11224.341667	47.42	---	74.00	26.59	100.0	V	139.0	12.6

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n40_Ch134
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

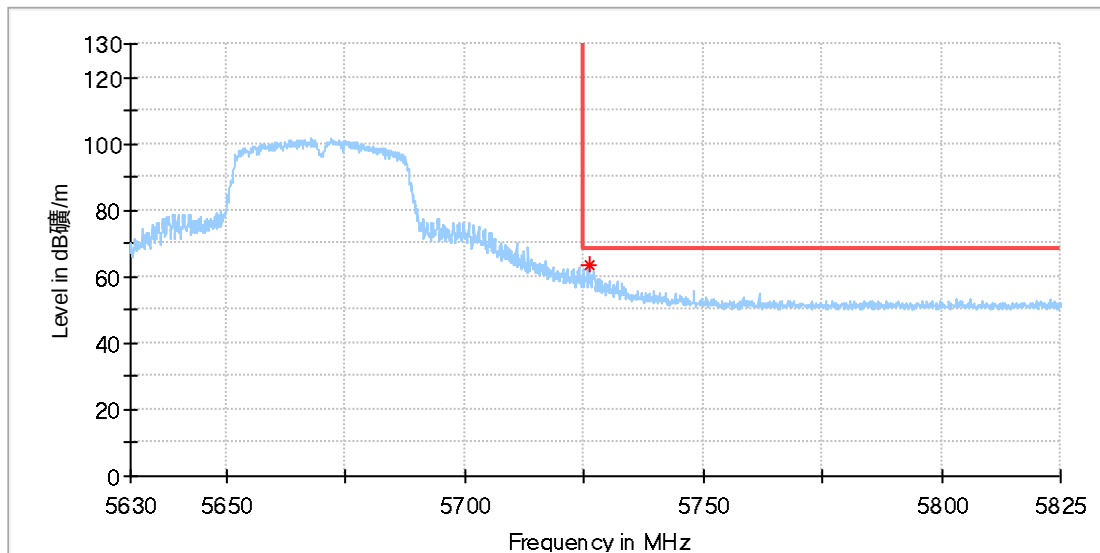

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5726.081945	63.62	68.20	4.58	100.0	H	132.0	13.9

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n40_Ch134
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

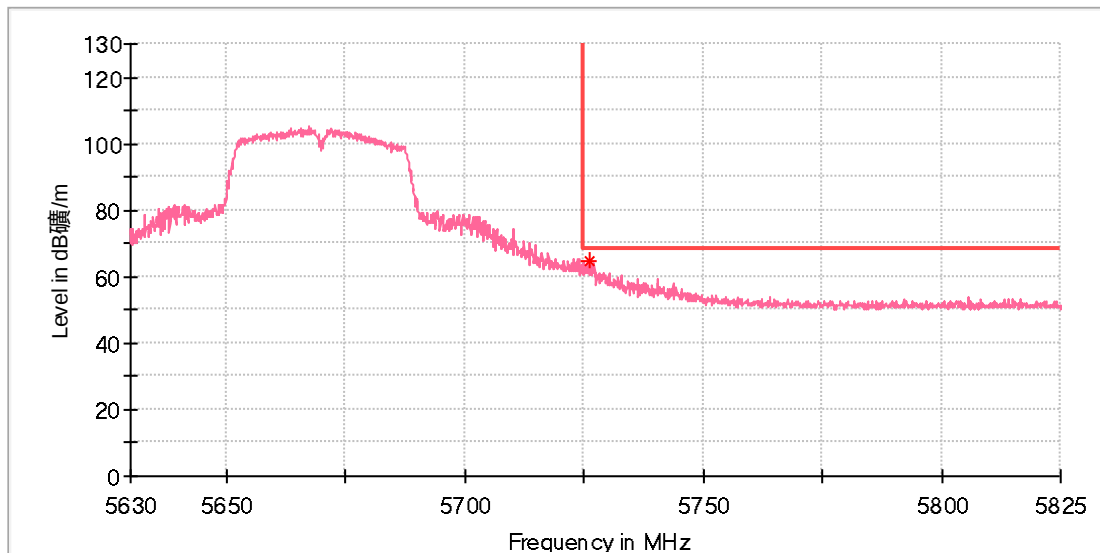

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5726.175000	64.47	68.20	3.73	100.0	V	220.0	13.9

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11ac80_Ch106
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

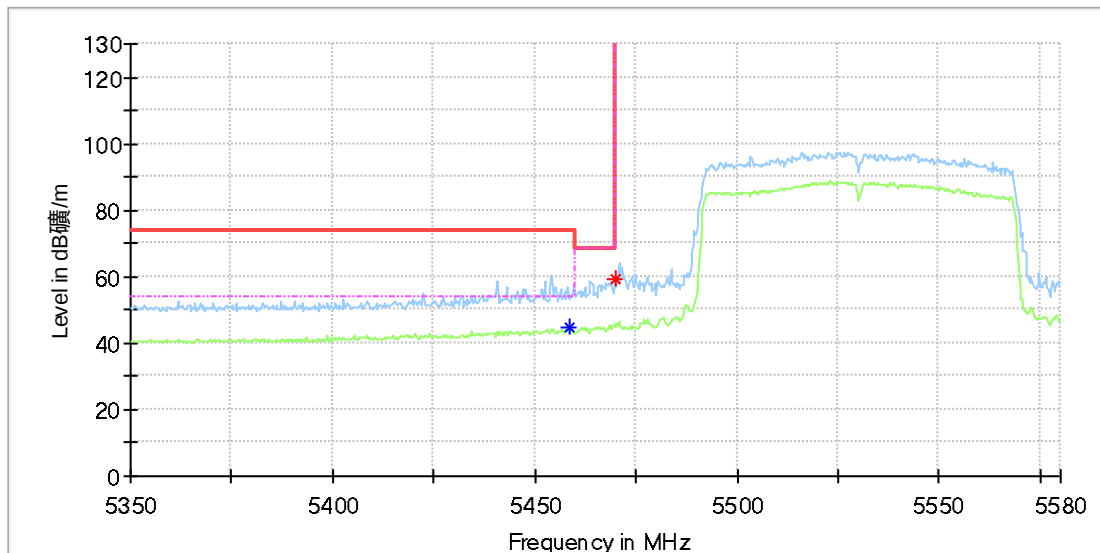

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5458.722222	---	44.99	54.00	9.01	100.0	H	139.0	13.6
5469.866667	59.29	---	68.20	8.91	100.0	H	139.0	13.6

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11ac80_Ch106
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

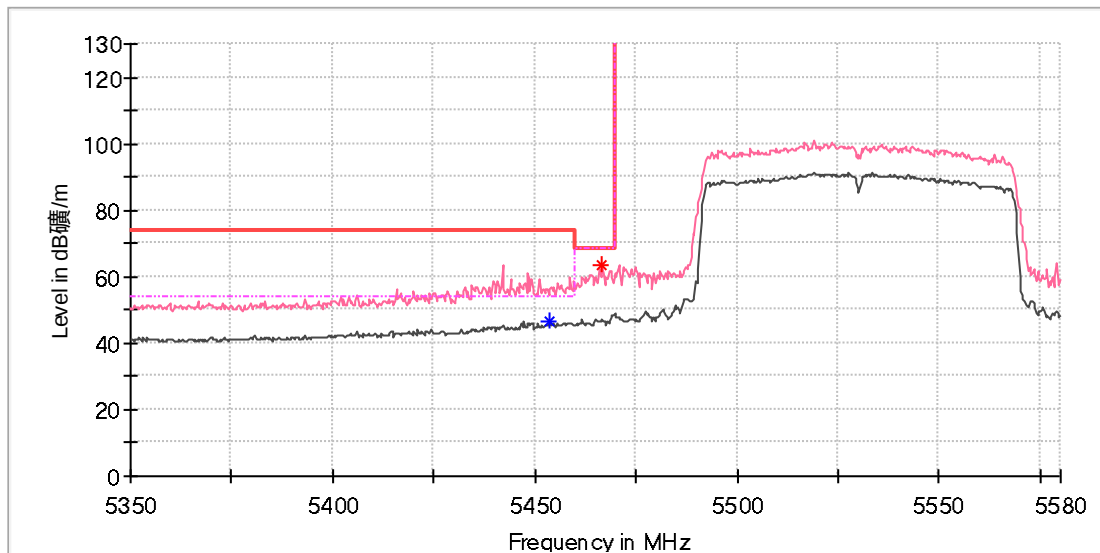

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5453.805556	---	46.34	54.00	7.66	100.0	V	217.0	13.5
5466.588889	63.47	---	68.20	4.73	100.0	V	217.0	13.6

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11ac80_Ch122
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

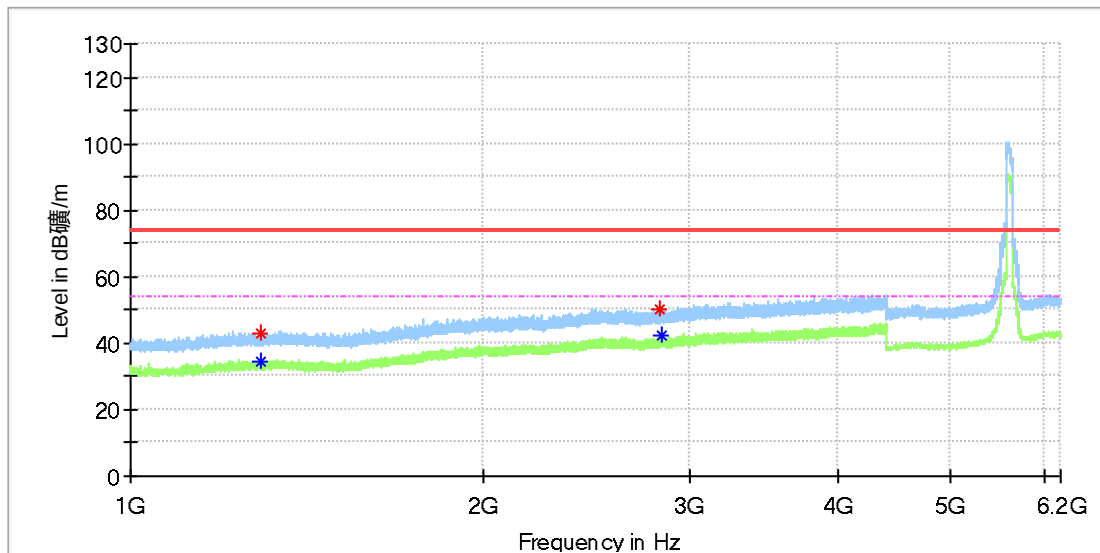

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1290.530000	42.98	---	74.00	31.02	100.0	H	280.0	1.9
1293.760000	---	34.56	54.00	19.44	100.0	H	118.0	1.9
2827.330000	50.09	---	74.00	23.91	100.0	H	3.0	8.1
2835.660000	---	42.22	54.00	11.78	100.0	H	89.0	8.1

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11ac80_Ch122
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

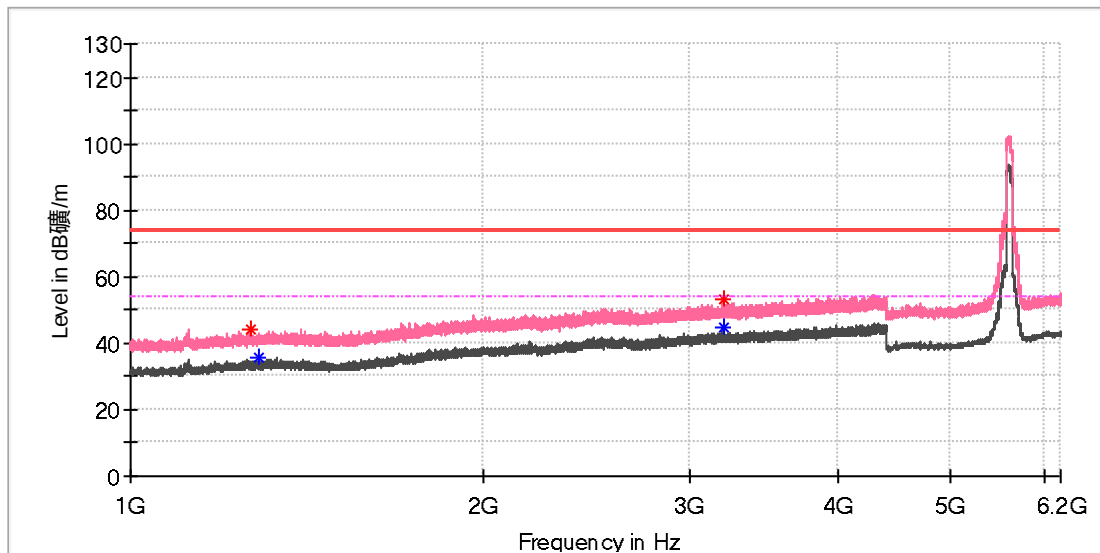

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1263.840000	43.92	---	74.00	30.08	100.0	V	148.0	1.9
1287.130000	---	35.63	54.00	18.37	100.0	V	344.0	1.9
3196.910000	53.19	---	74.00	20.81	100.0	V	188.0	8.6
3199.460000	---	44.91	54.00	9.09	100.0	V	188.0	8.6

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11ac80_Ch122
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

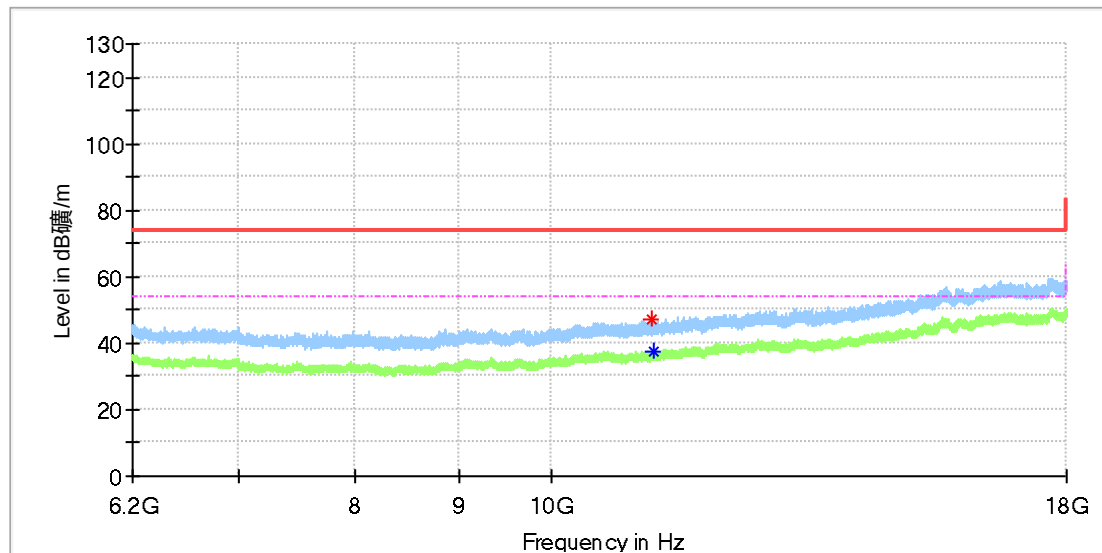

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11212.541667	46.86	---	74.00	27.14	100.0	H	71.0	12.6
11231.716667	---	37.33	54.00	16.67	100.0	H	58.0	12.6

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11ac80_Ch122
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

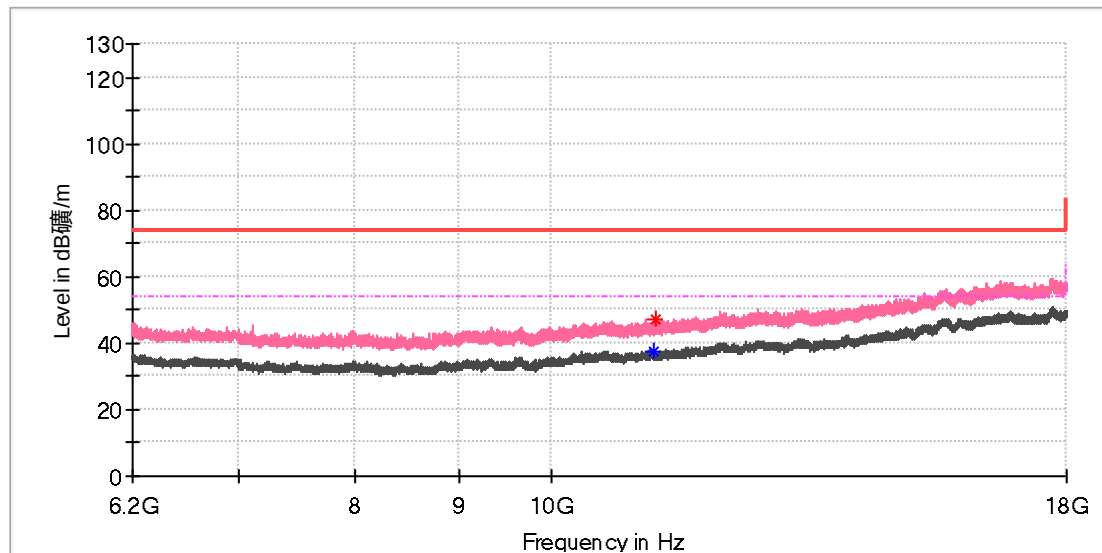

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11227.291667	---	37.52	54.00	16.48	100.0	V	8.0	12.6
11257.283333	46.86	---	74.00	27.14	100.0	V	91.0	12.6

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11ac80_Ch122
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

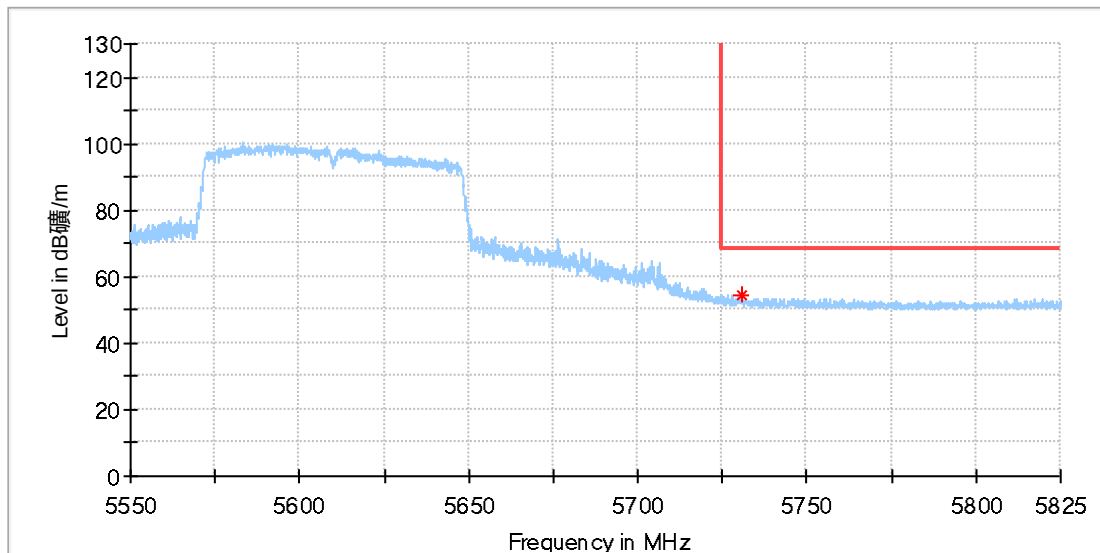

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5730.641667	54.46	68.20	13.74	100.0	H	132.0	13.9

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11ac80_Ch122
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

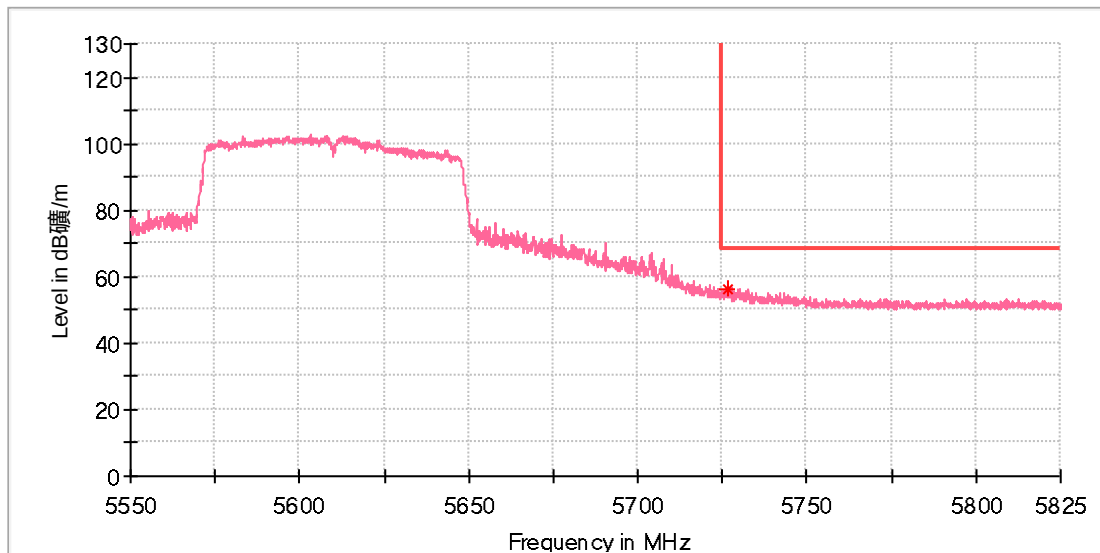

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5726.640278	56.39	68.20	11.81	100.0	V	225.0	13.9


Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

U-NII-3 Band

EUT Information

EUT Name:	Jarvisen Translator 2
Model:	JT-2-BLACK
Test Mode:	WIFI 5G_11a_Ch149
Order No/Sample No:	168405109/A003399272-002
Test Voltage:	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

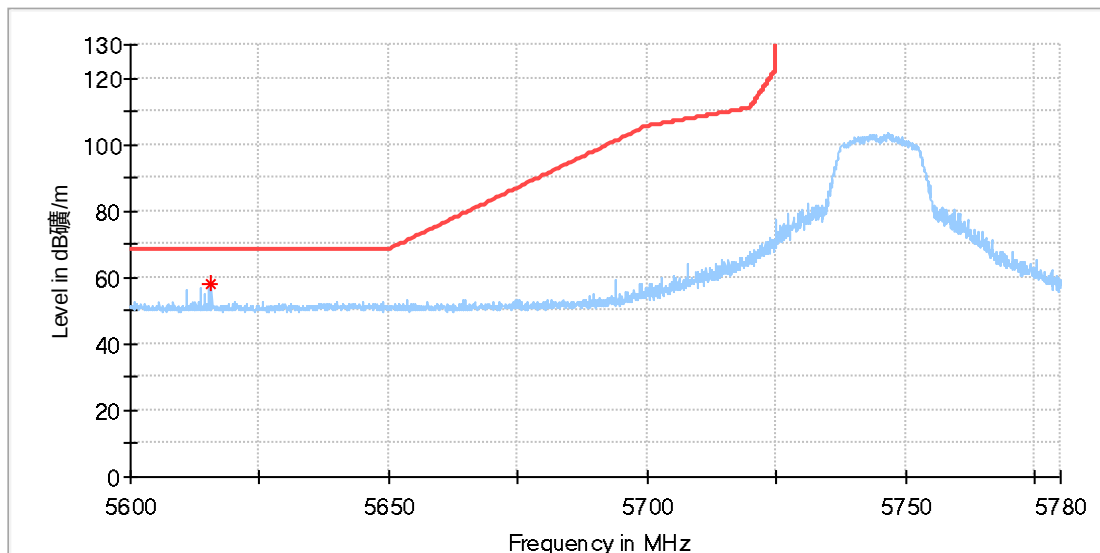

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5615.705556	58.07	68.20	10.13	100.0	H	209.0	13.8

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11a_Ch149
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

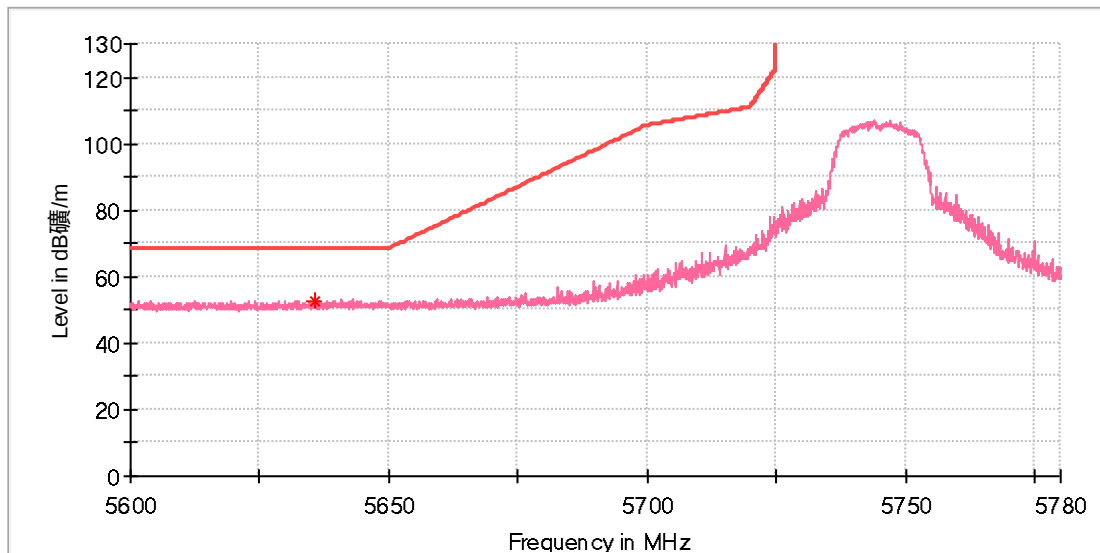

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5635.750000	52.83	68.20	15.37	100.0	V	272.0	13.8

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
 Model: JT-2-BLACK
 Test Mode: WIFI 5G_11a_Ch157
 Order No/Sample No: 168405109/A003399272-002
 Test Voltage: Battery
 Remark: Temp 23 Humi:53%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

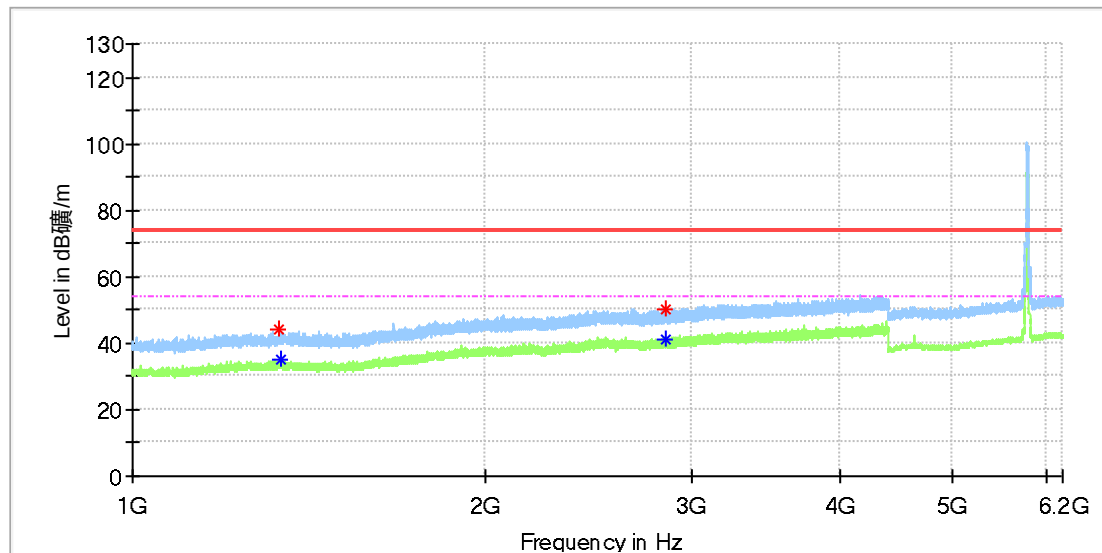

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1330.820000	44.22	---	74.00	29.78	100.0	H	0.0	2.1
1335.240000	---	35.11	54.00	18.89	100.0	H	149.0	2.1
2841.610000	---	41.39	54.00	12.61	100.0	H	297.0	8.1
2843.990000	50.14	---	74.00	23.86	100.0	H	130.0	8.1

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11a_Ch157
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

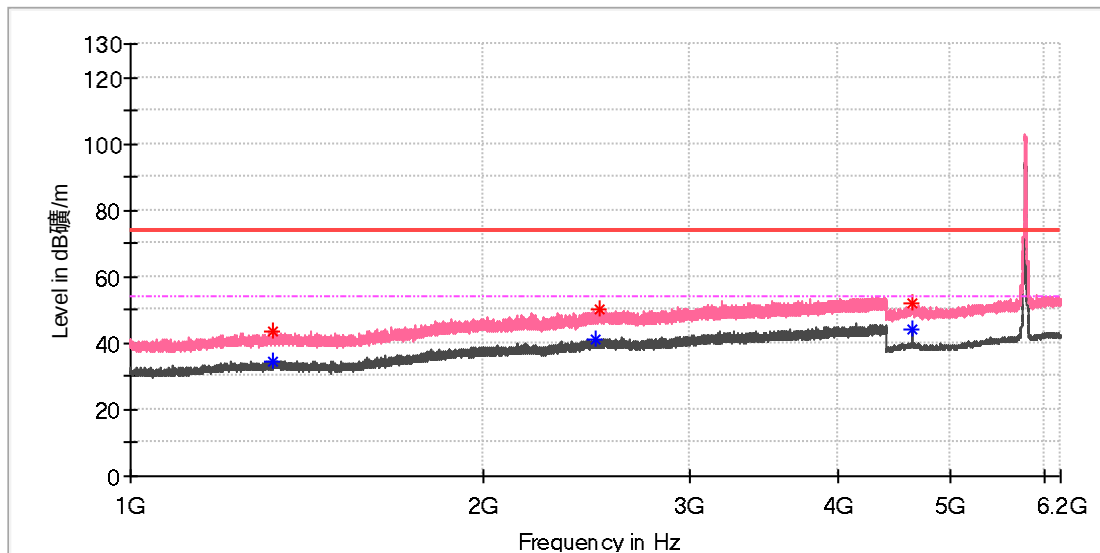

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1321.300000	43.43	---	74.00	30.57	100.0	V	156.0	2.0
1321.640000	---	34.42	54.00	19.58	100.0	V	206.0	2.0
2489.370000	---	41.27	54.00	12.73	100.0	V	147.0	7.4
2506.540000	50.10	---	74.00	23.90	100.0	V	326.0	7.4
4627.500000	---	43.92	54.00	10.08	100.0	V	91.0	12.0
4628.000000	52.19	---	74.00	21.81	100.0	V	103.0	12.0

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11a_Ch157
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

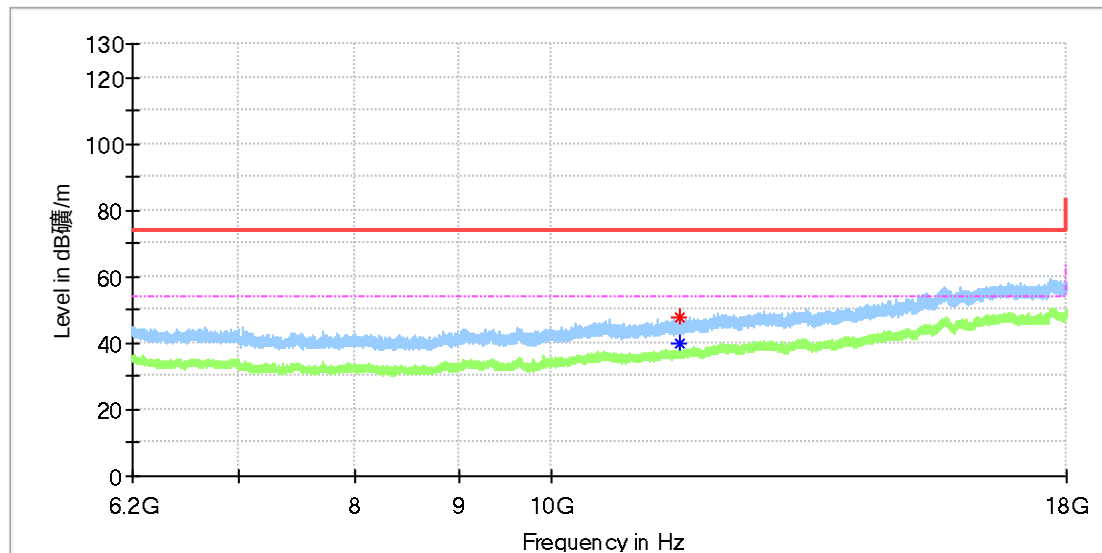

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11568.508333	---	40.04	54.00	13.96	100.0	H	208.0	13.4
11572.933333	48.00	---	74.00	26.00	100.0	H	208.0	13.4

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11a_Ch157
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

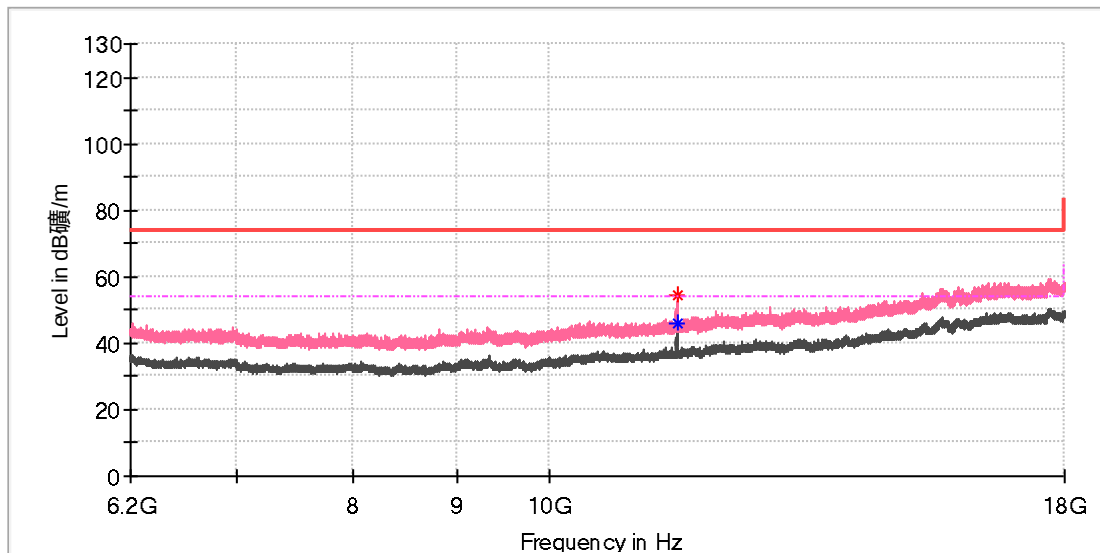

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11567.525000	54.60	---	74.00	19.40	100.0	V	129.0	13.4
11569.000000	---	46.06	54.00	7.94	100.0	V	116.0	13.4

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11a_Ch165
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

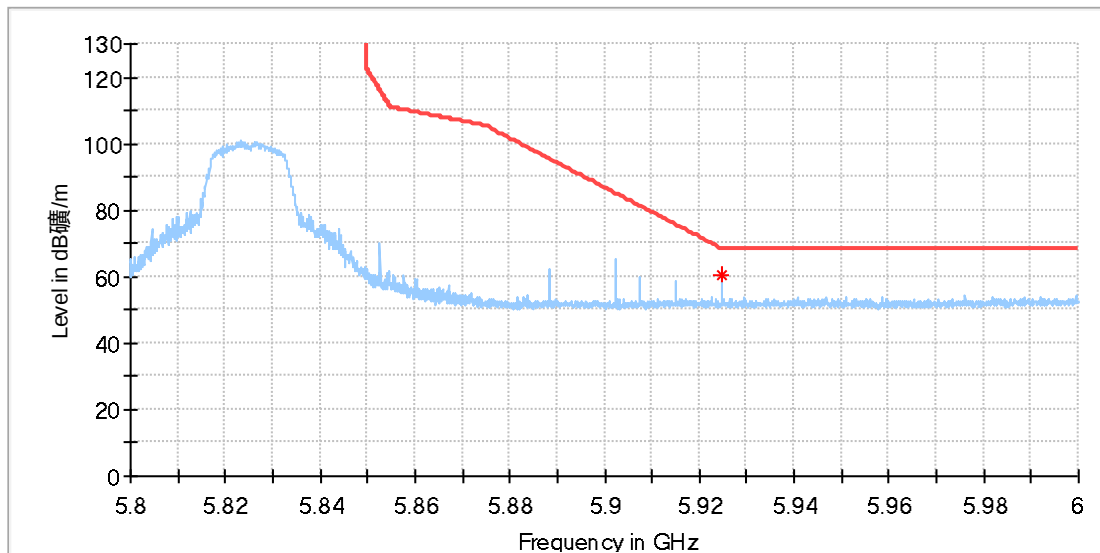

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5924.738889	60.66	68.39	7.74	100.0	H	132.0	14.6

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11a_Ch165
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

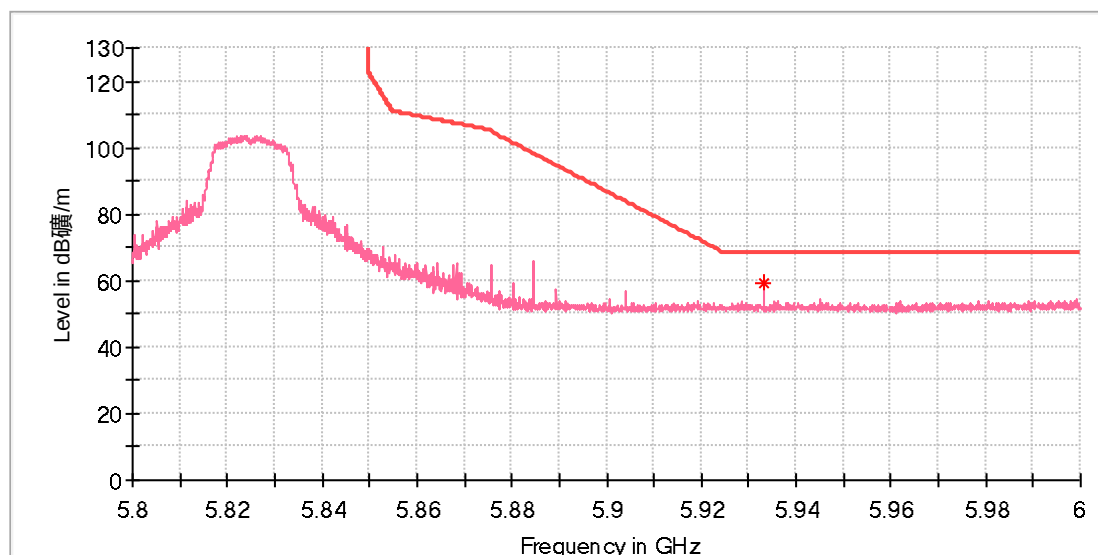

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5933.172222	59.50	68.20	8.70	100.0	V	240.0	14.7

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n20_Ch149
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

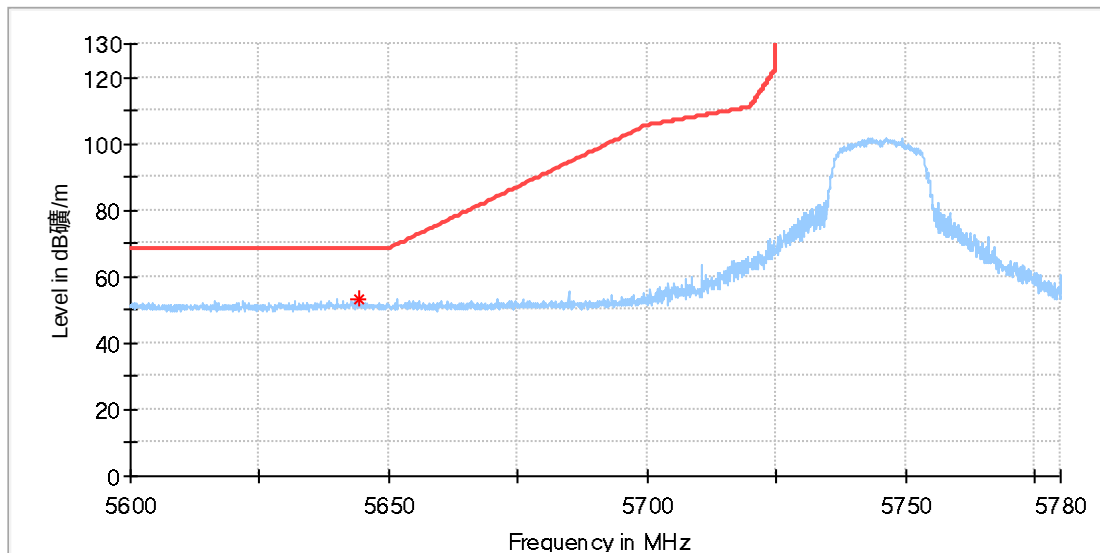

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5644.183333	53.02	68.20	15.18	100.0	H	195.0	13.8

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n20_Ch149
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

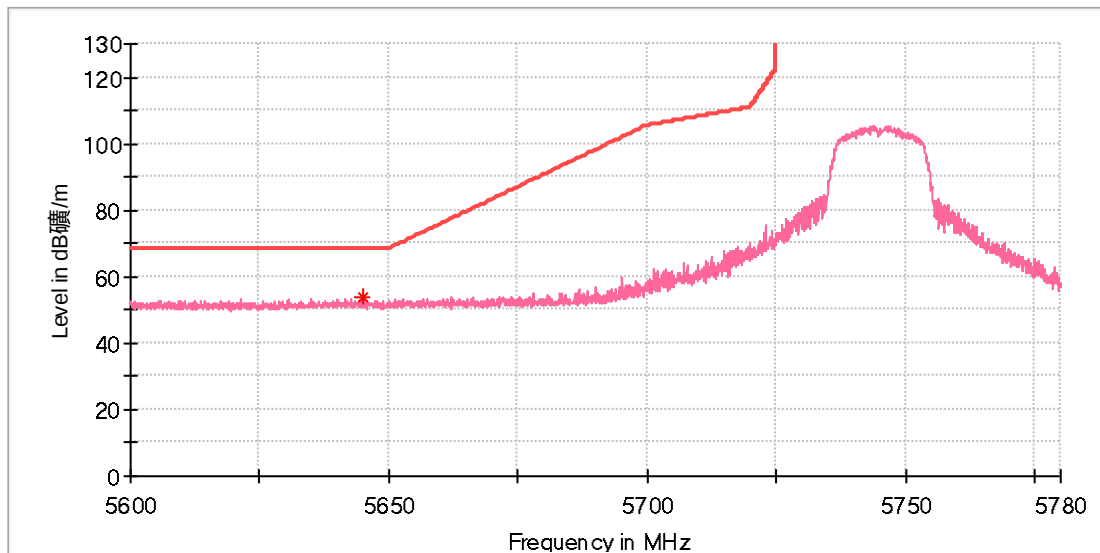

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5645.161111	54.11	68.20	14.09	100.0	V	121.0	13.8

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n20_Ch157
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

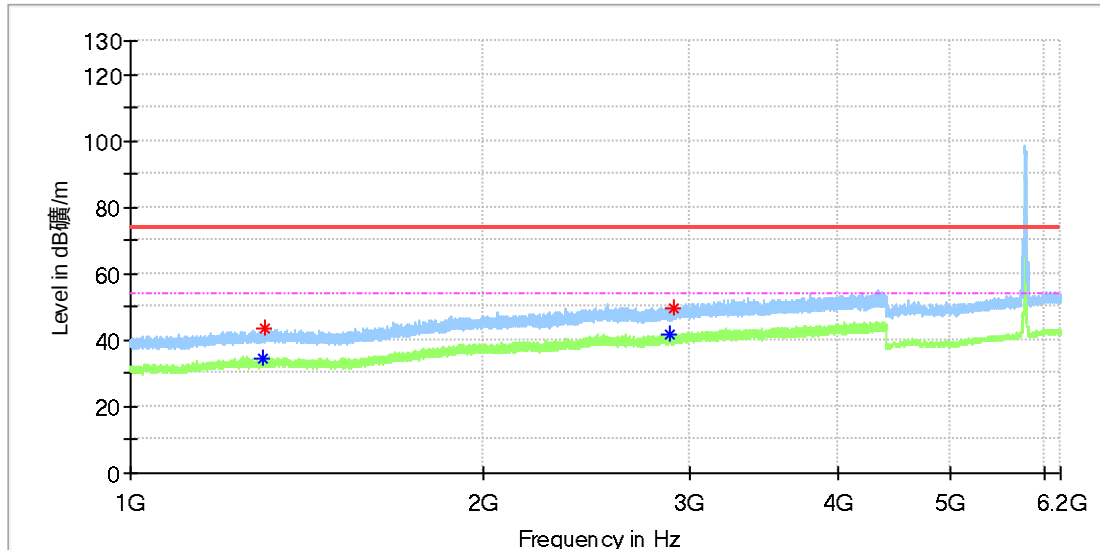

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1298.690000	---	34.65	54.00	19.35	100.0	H	300.0	1.9
1303.450000	43.30	---	74.00	30.70	100.0	H	350.0	1.9
2877.140000	---	41.85	54.00	12.15	100.0	H	218.0	8.2
2904.850000	49.60	---	74.00	24.40	100.0	H	105.0	8.3

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n20_Ch157
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

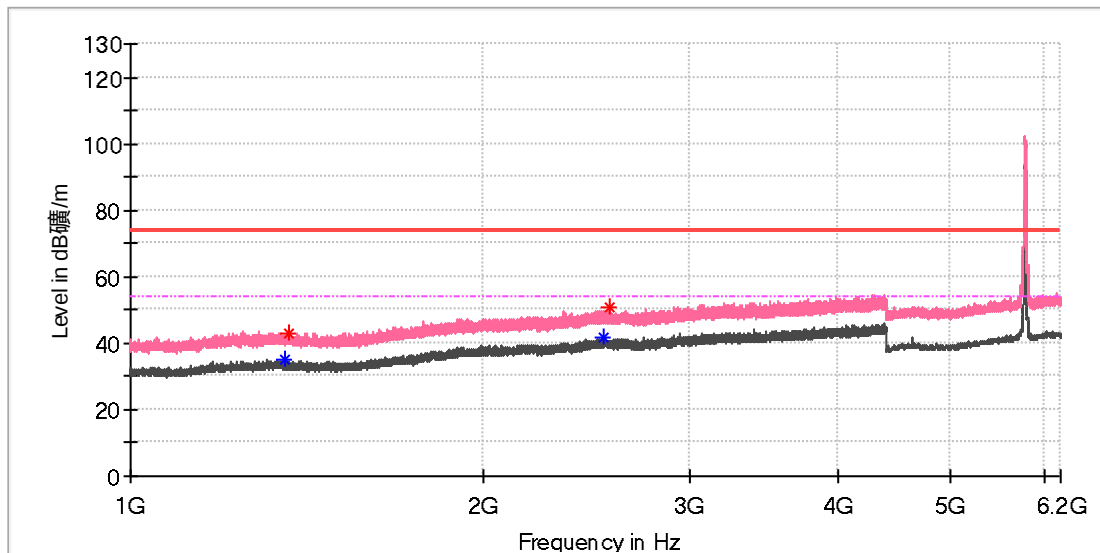

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1353.770000	---	35.26	54.00	18.74	100.0	V	281.0	2.1
1362.780000	43.15	---	74.00	30.85	100.0	V	291.0	2.0
2526.770000	---	41.54	54.00	12.46	100.0	V	0.0	7.5
2556.180000	50.93	---	74.00	23.07	100.0	V	161.0	7.6

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n20_Ch157
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

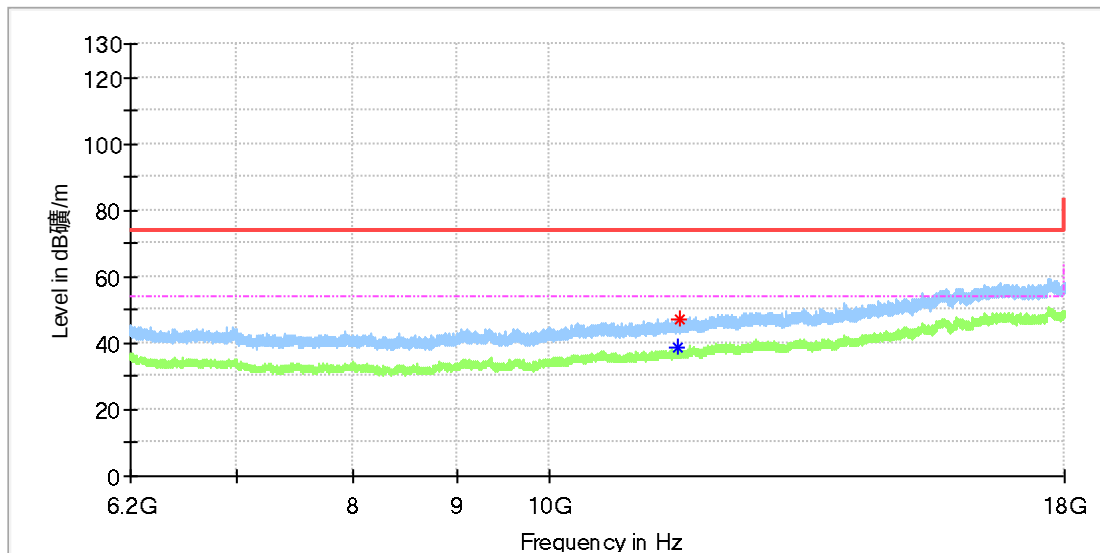

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11568.508333	---	38.92	54.00	15.08	100.0	H	146.0	13.4
11608.333333	47.40	---	74.00	26.60	100.0	H	219.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n20_Ch157
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

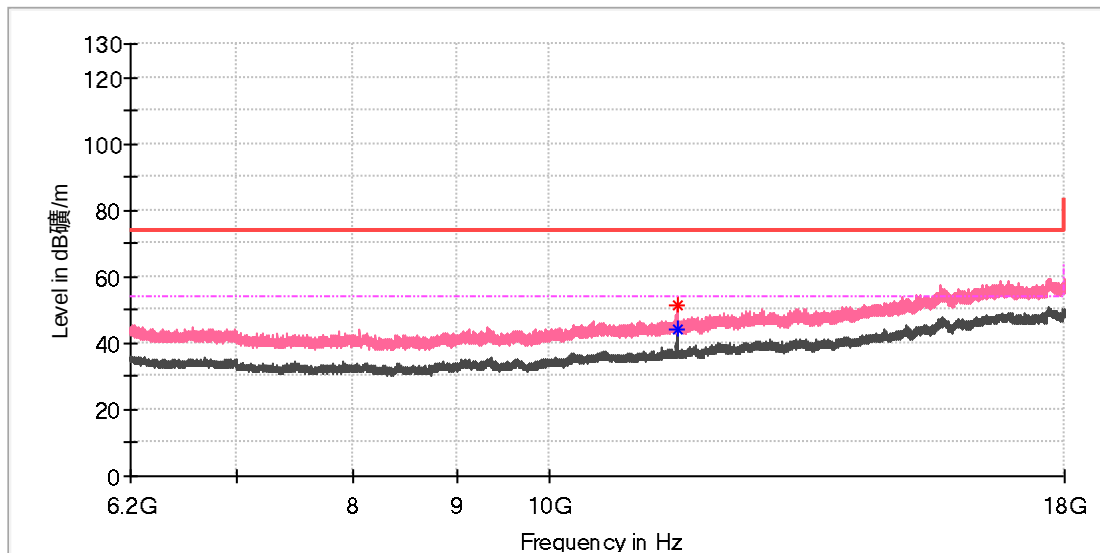

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11572.933333	51.33	---	74.00	22.67	100.0	V	140.0	13.4
11574.900000	---	44.17	54.00	9.83	100.0	V	140.0	13.4

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n20_Ch165
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

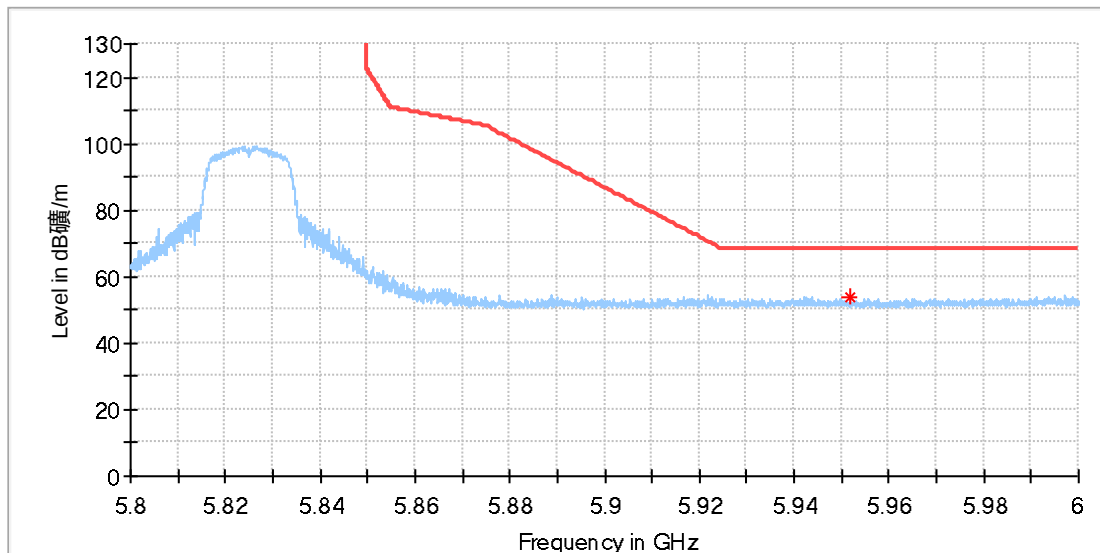

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5951.700000	53.71	68.20	14.49	100.0	H	245.0	14.8

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n20_Ch165
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

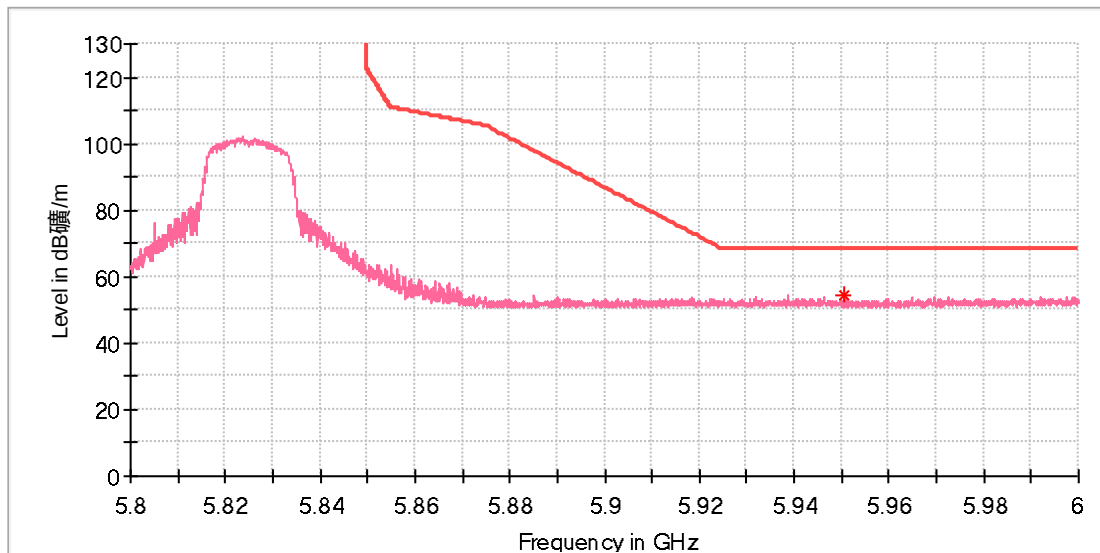

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5950.550000	54.62	68.20	13.58	100.0	V	23.0	14.8

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n40_Ch151
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

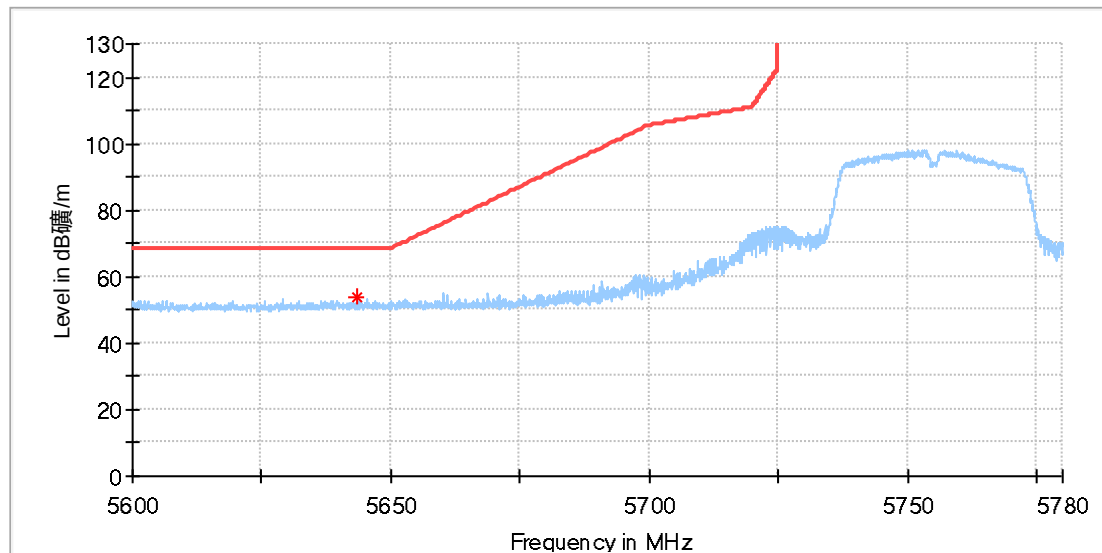

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5643.327778	53.56	68.20	14.64	100.0	H	54.0	13.8

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n40_Ch151
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

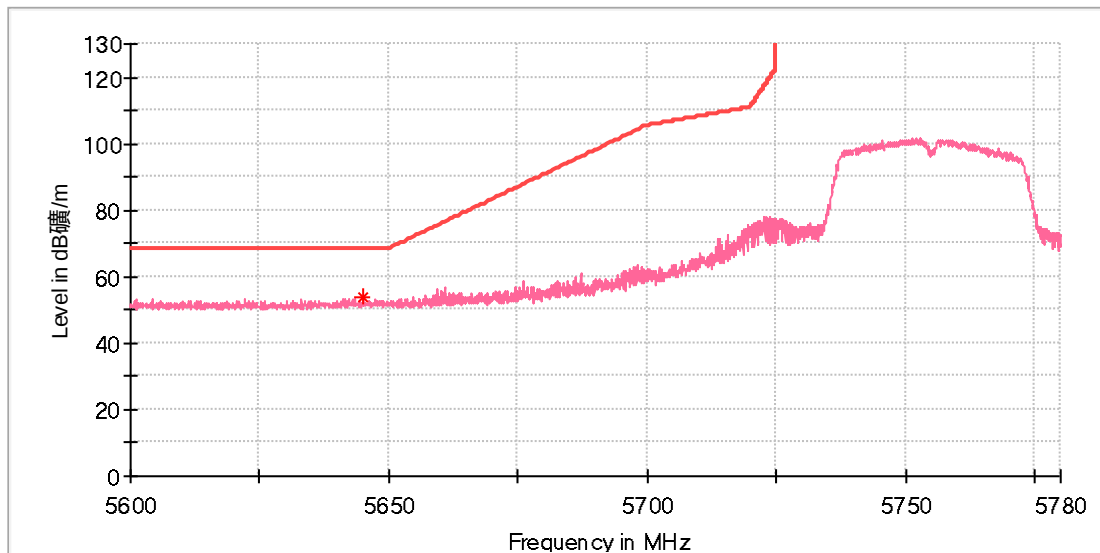

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5645.100000	53.58	68.20	14.62	100.0	V	133.0	13.8

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n40_Ch159
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

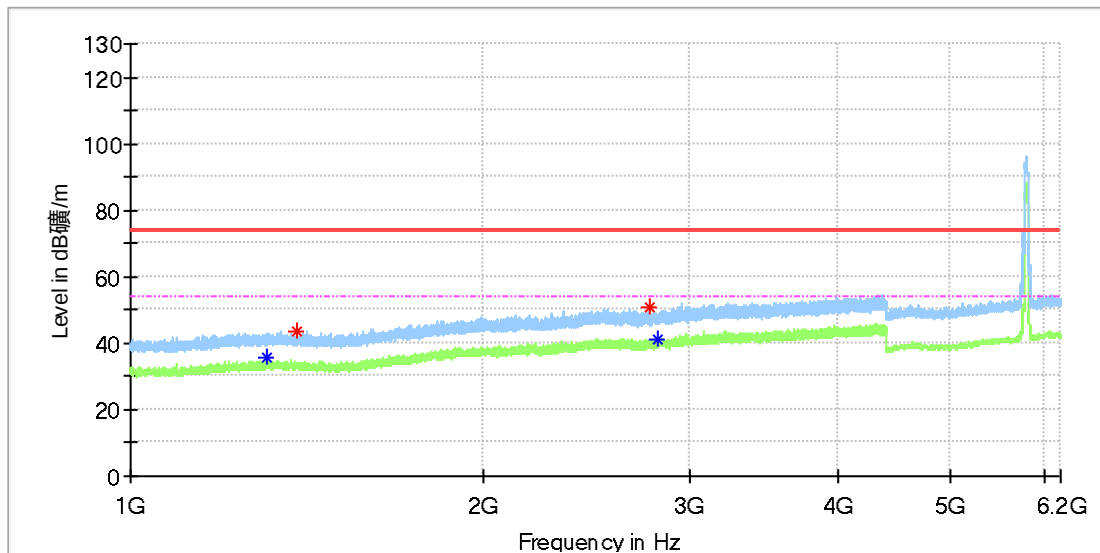

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1307.870000	---	35.60	54.00	18.40	100.0	H	303.0	2.0
1385.730000	43.66	---	74.00	30.34	100.0	H	172.0	1.8
2768.680000	50.54	---	74.00	23.46	100.0	H	359.0	7.9
2813.730000	---	41.05	54.00	12.95	100.0	H	282.0	8.0

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n40_Ch159
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

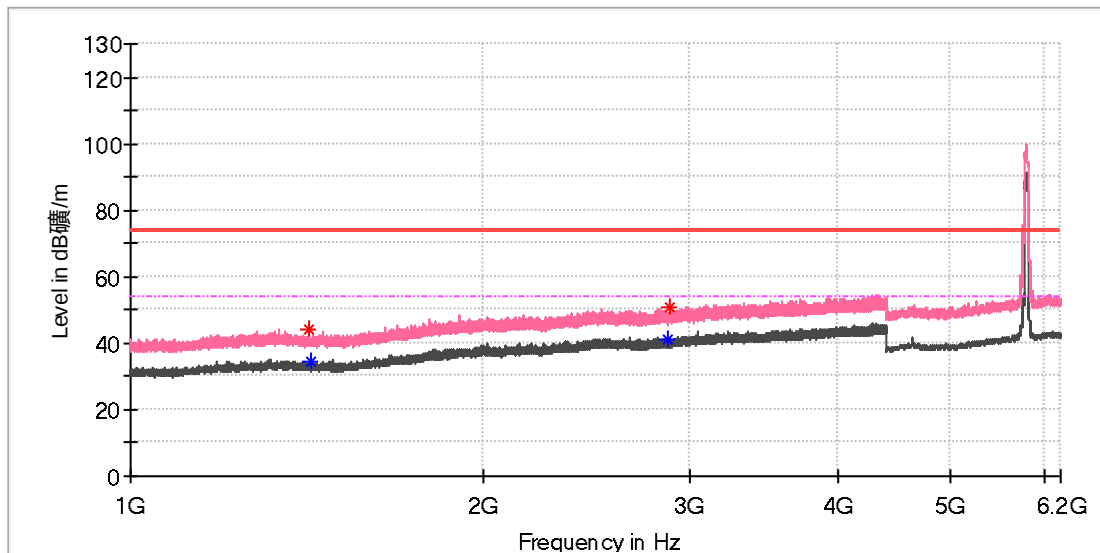

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1420.920000	44.17	---	74.00	29.83	100.0	V	340.0	1.6
1423.810000	---	34.59	54.00	19.41	100.0	V	51.0	1.6
2869.490000	---	41.34	54.00	12.66	100.0	V	270.0	8.2
2878.840000	50.50	---	74.00	23.50	100.0	V	291.0	8.2

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n40_Ch159
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

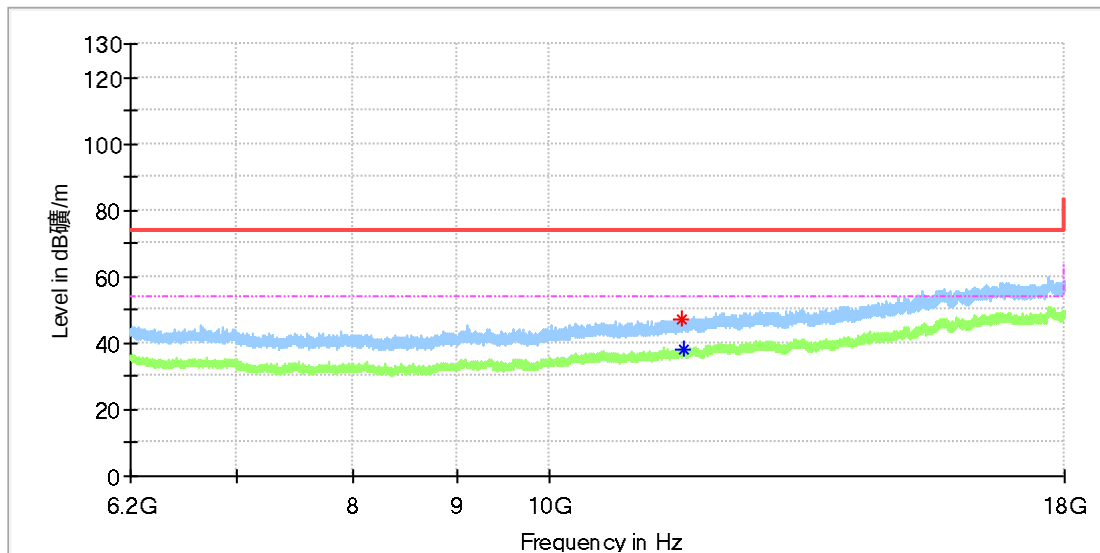

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11633.408333	47.40	---	74.00	26.60	100.0	H	298.0	13.3
11656.516667	---	38.30	54.00	15.70	100.0	H	6.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n40_Ch159
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

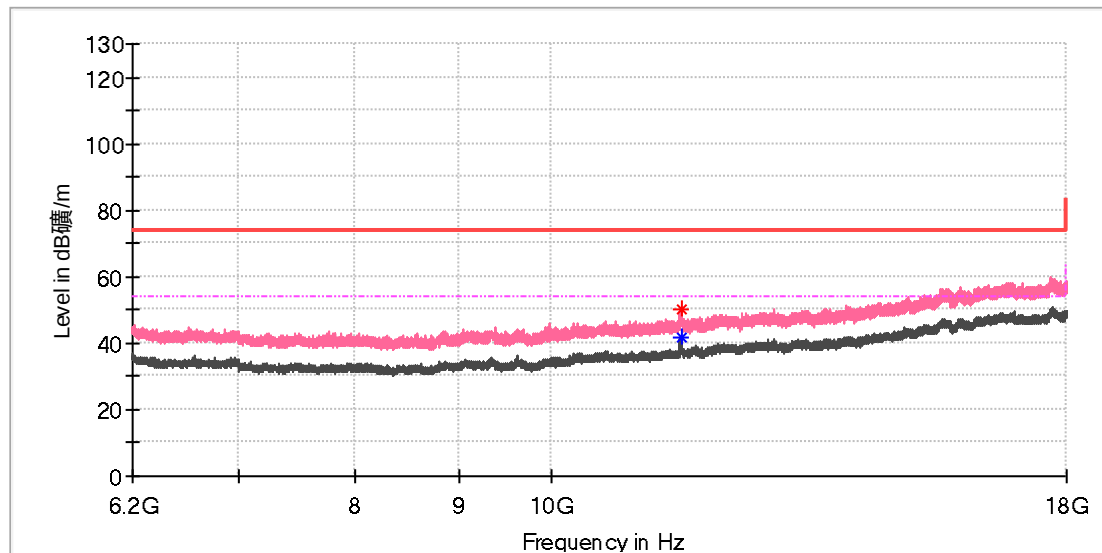

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11589.650000	50.44	---	74.00	23.56	100.0	V	138.0	13.3
11598.008333	---	41.68	54.00	12.32	100.0	V	138.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n40_Ch159
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

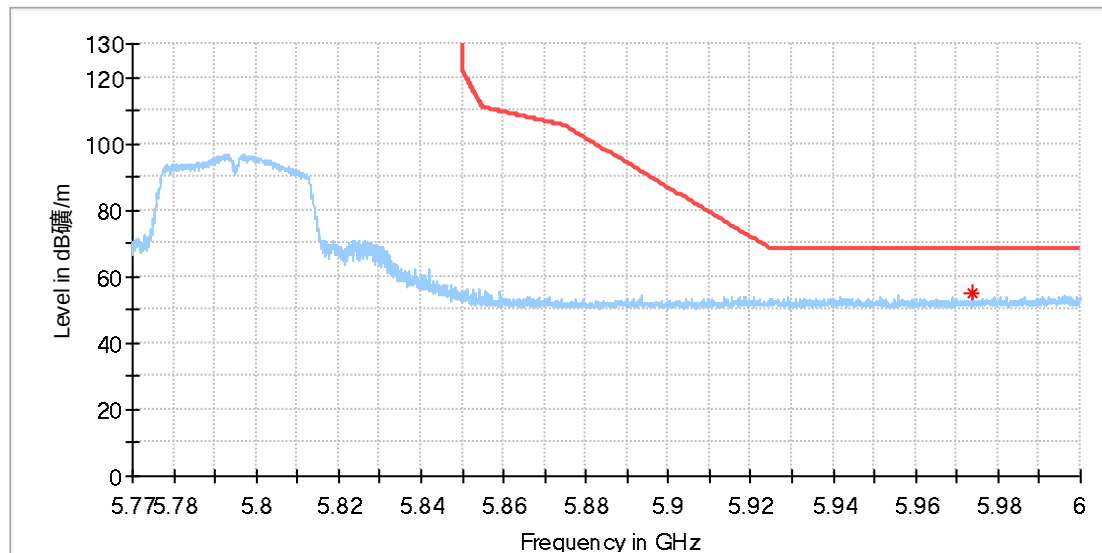

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5973.869445	55.04	68.20	13.16	100.0	H	116.0	14.9

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11n40_Ch159
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

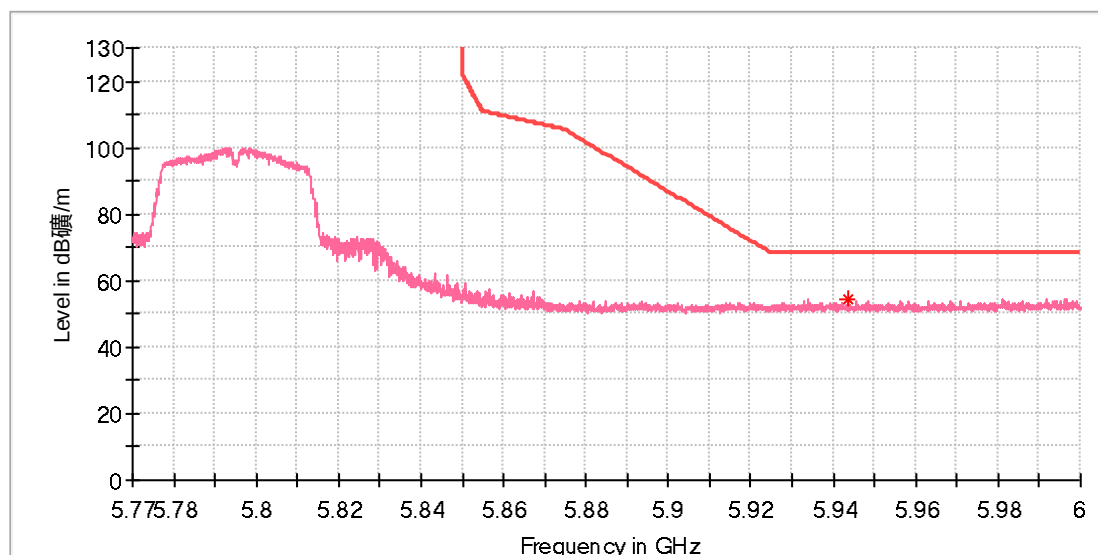

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5943.586111	54.49	68.20	13.71	100.0	V	235.0	14.7

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11ac80_Ch155
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

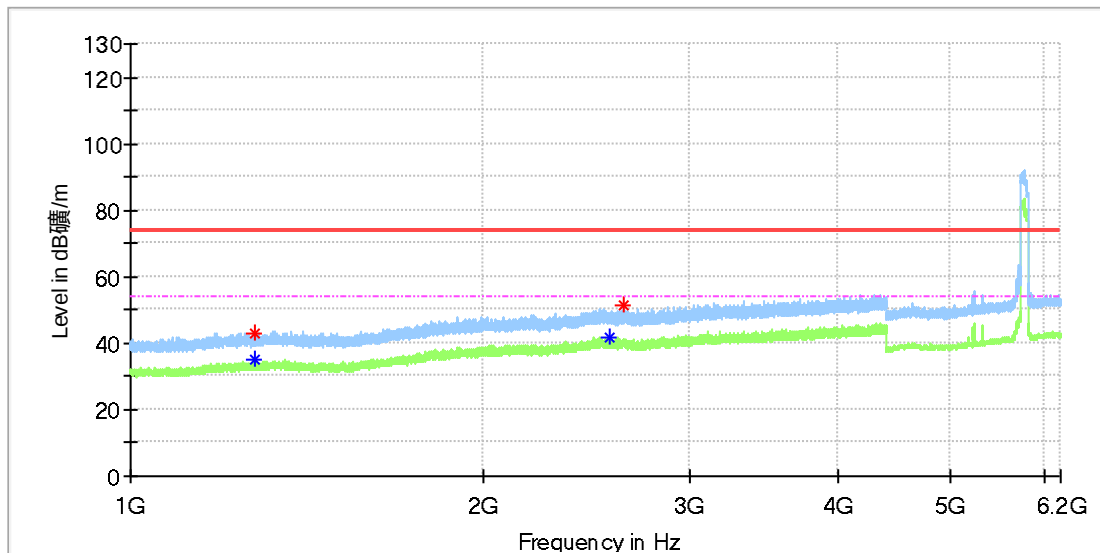

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1273.700000	---	35.24	54.00	18.76	100.0	H	214.0	1.9
1278.290000	43.17	---	74.00	30.83	100.0	H	172.0	1.9
2562.130000	---	41.88	54.00	12.12	100.0	H	297.0	7.6
2630.640000	51.61	---	74.00	22.39	100.0	H	18.0	7.5

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11ac80_Ch155
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

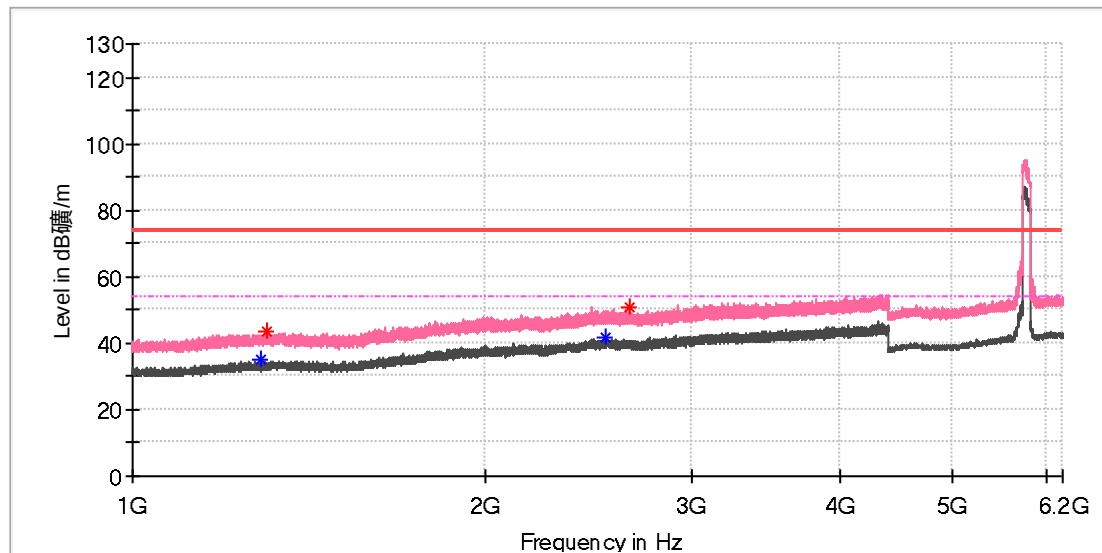

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1286.790000	---	34.89	54.00	19.11	100.0	V	29.0	1.9
1301.410000	43.71	---	74.00	30.29	100.0	V	82.0	1.9
2528.130000	---	41.55	54.00	12.45	100.0	V	233.0	7.5
2649.510000	50.59	---	74.00	23.41	100.0	V	2.0	7.6

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11ac80_Ch155
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

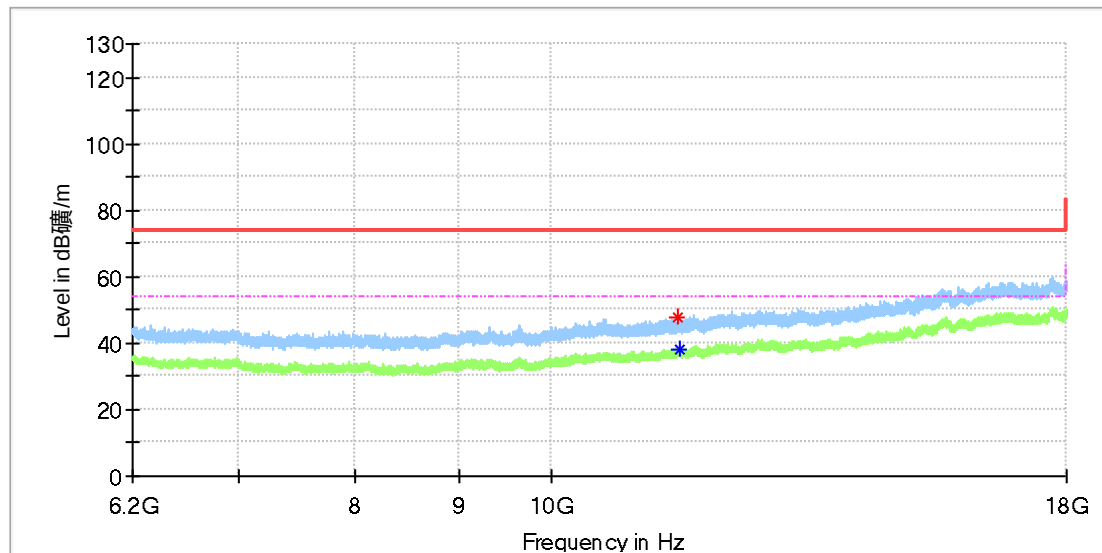

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11541.958333	47.53	---	74.00	26.47	100.0	H	138.0	13.5
11580.800000	---	38.31	54.00	15.69	100.0	H	125.0	13.4

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11ac80_Ch155
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

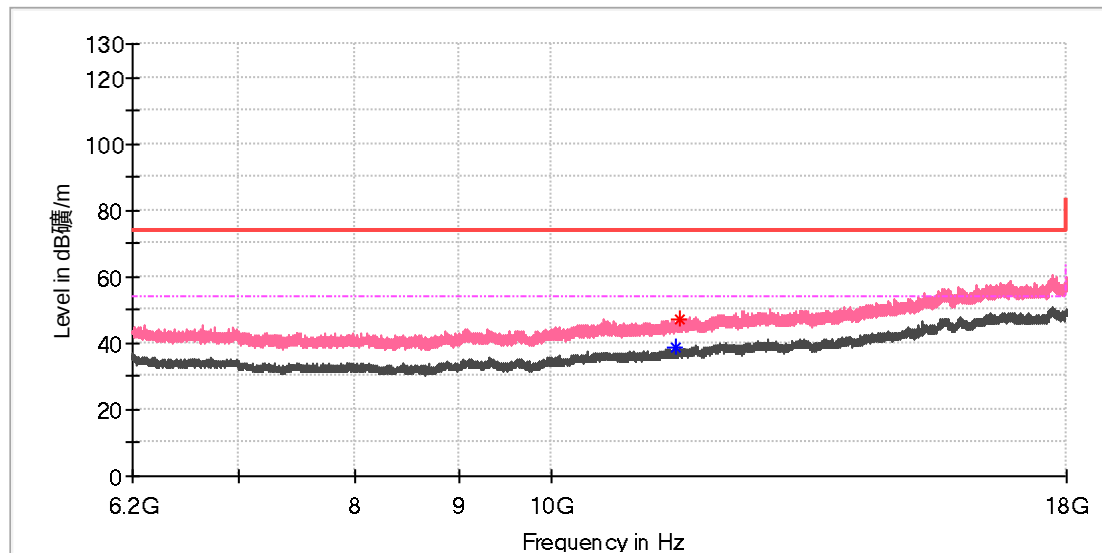

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11531.141667	---	38.41	54.00	15.59	100.0	V	356.0	13.6
11568.508333	47.37	---	74.00	26.63	100.0	V	33.0	13.4

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11ac80_Ch155
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

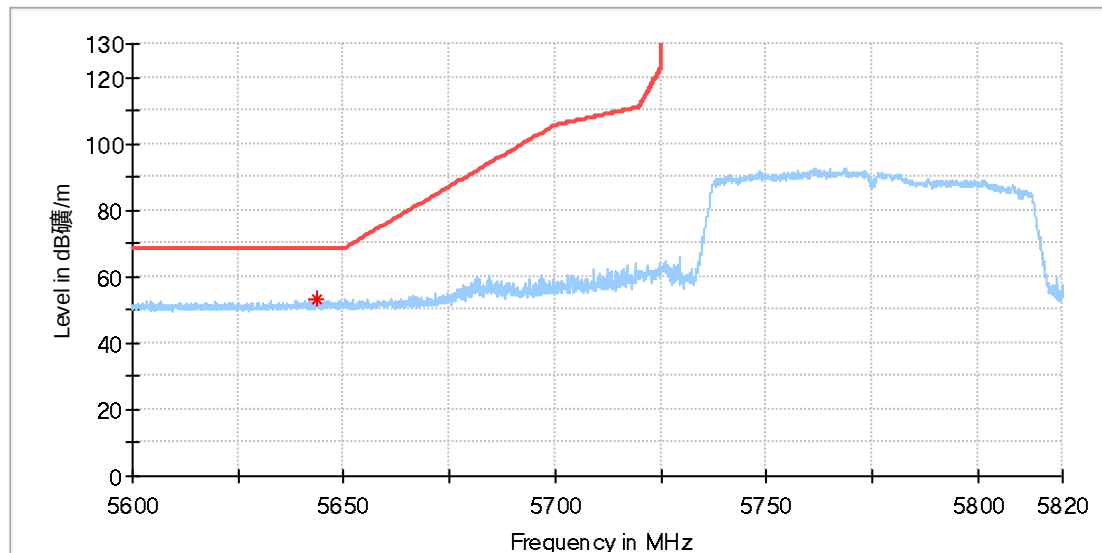

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5643.511111	52.96	68.20	15.24	100.0	H	49.0	13.8

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Jarvisen Translator 2
Model: JT-2-BLACK
Test Mode: WIFI 5G_11ac80_Ch155
Order No/Sample No: 168405109/A003399272-002
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

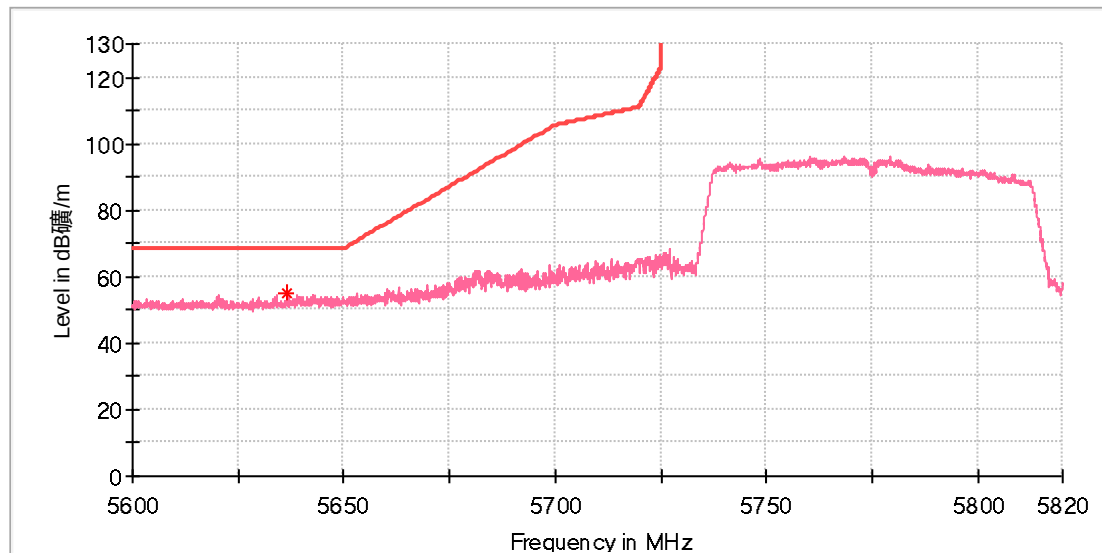

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5636.605556	54.82	68.20	13.38	100.0	V	114.0	13.8

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Appendix A.8: Test Results of Dynamic Frequency Selection (DFS)

DFS In-Service Monitoring (5290 MHz; 20.000 dBm; 80 MHz)

Test according to FCC title 47 part 15 §15.407(h), KDB 905462 D02 U-NII DFS Compliance Procedures New Rules v02

Measurement Summary

DUT Frequency (MHz)	Radar Type No.	Type of Measurement value	Overall Result
5290.000000	0	First of all Transmitt Test	---
5290.000000	0	Channel Move Time	PASS
5290.000000	0	Channel Closing Transmission Time	PASS
5290.000000	0	Non-occupancy period	PASS

(continuation of the "Measurement Summary" table from column 4 ...)

DUT Frequency (MHz)	Overall Comment
5290.000000	not performed / not finished
5290.000000	
5290.000000	
5290.000000	

Channel Move Time Detailed Results

DUT Frequency (MHz)	Radar Type No.	CMT Tx Time (s)	CMT Limit (s)	CMT Result
5290.000000	0	3.867	10.000	PASS

(continuation of the "Channel Move Time Detailed Results" table from column 5 ...)

DUT Frequency (MHz)	CMT Comment
5290.000000	Tx Time value is last trailing edge found within sweep. See Note 1.

Channel Closing Transmission Time Detailed Results

DUT Frequency (MHz)	Radar Type No.	CCTT Type of Value	CCTT No. of Pulses found	CCTT Tx Time (ms)
5290.000000	0	first 200 ms	16	0.864
5290.000000	0	remaining 10.0 second(s) period	34	0.664

(continuation of the "Channel Closing Transmission Time Detailed Results" table from column 5 ...)

DUT Frequency (MHz)	CCTT Tx Time Limit (ms)	CCTT Result	CCTT Comment
5290.000000	200.000	PASS	See Note 1.
5290.000000	60.000	PASS	See Note 1.

Non-occupancy period Detailed Results

DUT Frequency (MHz)	Radar Type No.	NOP No. of Pulses found	NOP No. of Pulses Limit	NOP Tx Time (s)	NOP Tx Time Limit (s)
5290.000000	0	0	0	0.000	0.000

(continuation of the "Non-occupancy period Detailed Results" table from column 6 ...)

DUT Frequency (MHz)	NOP Result	NOP Comment
5290.000000	PASS	not performed because of Channel Closing Transmission Time / Channel Move Time Test failed

Transmitting Test Detailed Results

DUT Frequency (MHz)	Tx-Test Result	Tx-Test Comment
5290.000000	---	not performed / not finished


Radar level verification

Description / Formula	Value	Unit
IF(({DFS Mode(0/1/2)}=0)or({DFS Mode(0/1/2)}=1) , IF((dBm2W({Nominal Power[dBm]}>0.2) , -64 , IF({Configured PSD[dBm]}<10) , -62 , -64))+ {Attenuation Vector Generator to DUT[dB]} , -50+ {Attenuation Vector Generator to COMP[dB]}))+ {Radar Signal Level Offset[dB]})	Given setting / formula to calculate Vector Generator level	--
Configured DUT EIRP:	100.00	mW
Configured DUT PSD:	-10.00	dBm/MHz
Requirement of the Detection threshold value for this given values acc. to FCC clause 5.2 / Table 3	-62	dBm
Vector Generator level setting	-3.29	dBm
Configured overall pathloss from Vector Generator RF out to DUT connector of 'DUT to OSP'-cable	35.43	dB
Given additional level added to the amplitude of the waveform to account for variations in measurement equipment acc. to FCC clause 5.2 / Table 3 / Note 2	1.00	dB
This results in the following radar signal level at the DUT	-38.72	dBm

Additional Information


Note	Description
Note 1:	Because of the radar pulse event at the beginning, the investigation of the trace begins with an offset of 28.7 ms conforming to the end of the Radar burst.
Note 2:	Channel move time (CMT) / channel closing transmission time (CCTT) measurement was made with hi resolution video sweep using OSP DAQ channel
Note 3:	Because of the substantially higher sampling rate of the video signal the results for CCTT and CMT are more accurate than in the graphics visible. Reached timing accuracy of the video trace: approx 4 µs
Note 4:	The Non-Occupancy Period trace starts at the end of the Channel move time trace (20.000 secs.) Labeling of the x-axis (time) is relative to its beginning (0 secs.)

Channel Move Time

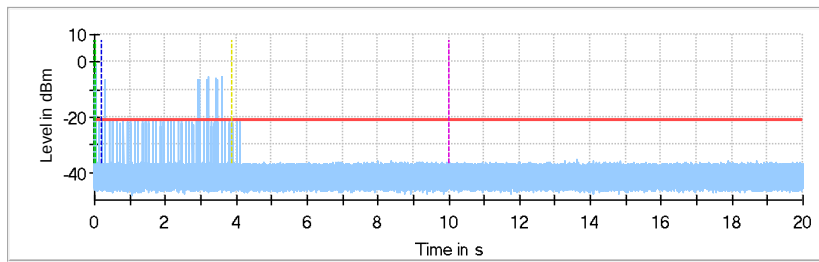


— Channel Move Time
— Threshold
- - - Start of Radar
- - - Trigger at end of Radar
- - - First 200ms of Channel Closing Tx Time
- - - 10sec Channel Move Time Limit
- - - Last measured edge of Channel Closing Tx Time

Channel Move Time first 200ms

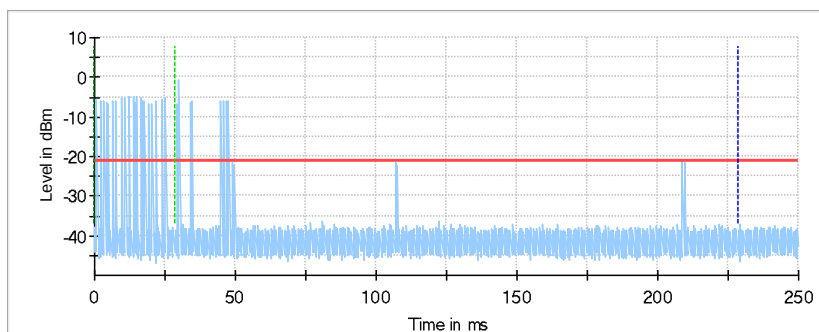

— Channel Move Time first 200ms
— Threshold
- - - Start of Radar
- - - Trigger at end of Radar
- - - First 200ms of Channel Closing Tx Time

Non-occupancy period

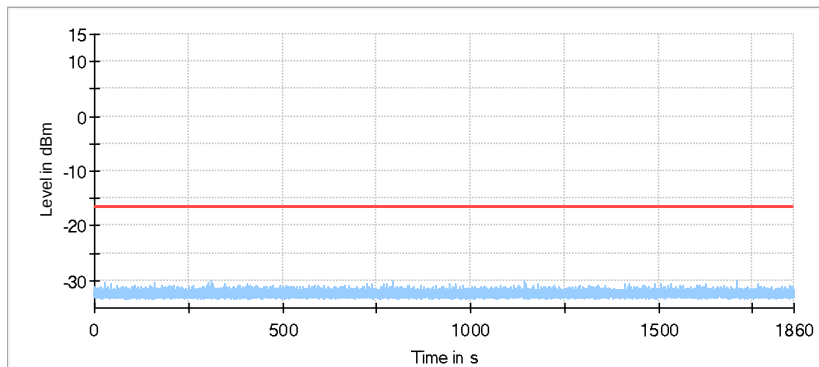

— Non-occupancy period
— Threshold

DFS In-Service Monitoring (5530 MHz; 20.000 dBm; 80 MHz)

Test according to FCC title 47 part 15 §15.407(h), KDB 905462 D02 U-NII DFS Compliance Procedures New Rules v02

Measurement Summary

DUT Frequency (MHz)	Radar Type No.	Type of Measurement value	Overall Result
5530.000000	0	First of all Transmitt Test	---
5530.000000	0	Channel Move Time	PASS
5530.000000	0	Channel Closing Transmission Time	PASS
5530.000000	0	Non-occupancy period	PASS

(continuation of the "Measurement Summary" table from column 4 ...)

DUT Frequency (MHz)	Overall Comment
5530.000000	not performed / not finished
5530.000000	
5530.000000	
5530.000000	

Channel Move Time Detailed Results

DUT Frequency (MHz)	Radar Type No.	CMT Tx Time (s)	CMT Limit (s)	CMT Result
5530.000000	0	4.061	10.000	PASS

(continuation of the "Channel Move Time Detailed Results" table from column 5 ...)

DUT Frequency (MHz)	CMT Comment
5530.000000	Tx Time value is last trailing edge found within sweep. See Note 1.

Channel Closing Transmission Time Detailed Results

DUT Frequency (MHz)	Radar Type No.	CCTT Type of Value	CCTT No. of Pulses found	CCTT Tx Time (ms)
5530.000000	0	first 200 ms	6	0.100
5530.000000	0	remaining 10.0 second(s) period	181	3.064

(continuation of the "Channel Closing Transmission Time Detailed Results" table from column 5 ...)

DUT Frequency (MHz)	CCTT Tx Time Limit (ms)	CCTT Result	CCTT Comment
5530.000000	200.000	PASS	See Note 1.
5530.000000	60.000	PASS	See Note 1.

Non-occupancy period Detailed Results

DUT Frequency (MHz)	Radar Type No.	NOP No. of Pulses found	NOP No. of Pulses Limit	NOP Tx Time (s)	NOP Tx Time Limit (s)
5530.000000	0	0	0	0.000	0.000

(continuation of the "Non-occupancy period Detailed Results" table from column 6 ...)

DUT Frequency (MHz)	NOP Result
5530.000000	PASS

Transmitting Test Detailed Results


DUT Frequency (MHz)	Tx-Test Result	Tx-Test Comment
5530.000000	---	not performed / not finished

Radar level verification


Description / Formula	Value	Unit
IF((DFS Mode(0/1/2))=0)or({DFS Mode(0/1/2)}=1) , IF((dBm2W({Nominal Power[dBm]})>0.2) , -64 , IF({Configured PSD[dBm]}<10) , -62 , -64))+{Attenuation Vector Generator to DUT[dB]} , -50+{Attenuation Vector Generator to COMP[dB]}+{Radar Signal Level Offset[dB]}	Given setting / formula to calculate Vector Generator level	--
Configured DUT EIRP:	100.00	mW
Configured DUT PSD:	-10.00	dBm/MHz
Requirement of the Detection threshold value for this given values acc. to FCC clause 5.2 / Table 3	-62	dBm
Vector Generator level setting	-1.56	dBm
Configured overall pathloss from Vector Generator RF out to DUT connector of 'DUT to OSP'-cable	36.55	dB
Given additional level added to the amplitude of the waveform to account for variations in measurement equipment acc. to FCC clause 5.2 / Table 3 / Note 2	1.00	dB
This results in the following radar signal level at the DUT	-38.11	dBm

Additional Information


Note	Description
Note 1:	Because of the radar pulse event at the beginning, the investigation of the trace begins with an offset of 28.7 ms conforming to the end of the Radar burst.
Note 2:	Channel move time (CMT) / channel closing transmission time (CCTT) measurement was made with hi resolution video sweep using OSP DAQ channel
Note 3:	Because of the substantially higher sampling rate of the video signal the results for CCTT and CMT are more accurate than in the graphics visible. Reached timing accuracy of the video trace: approx 4 µs
Note 4:	The Non-Occupancy Period trace starts at the end of the Channel move time trace (20.000 secs.) Labeling of the x-axis (time) is relative to its beginning (0 secs.)

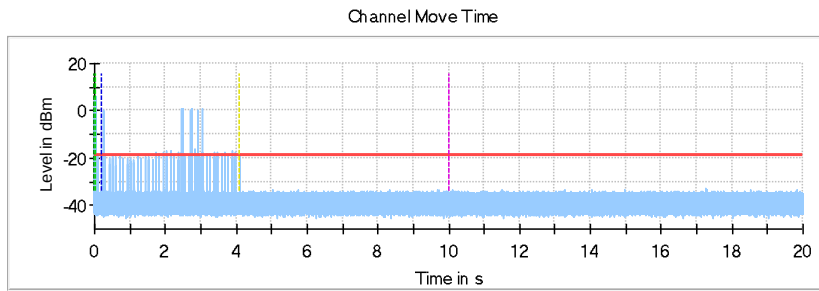

Channel Move Time
Threshold
Start of Radar
Triquer at end of Radar
First 200ms of Channel Closing Tx Time
10sec Channel Move Time Limit
Last measured edge of Channel Closing Tx Time

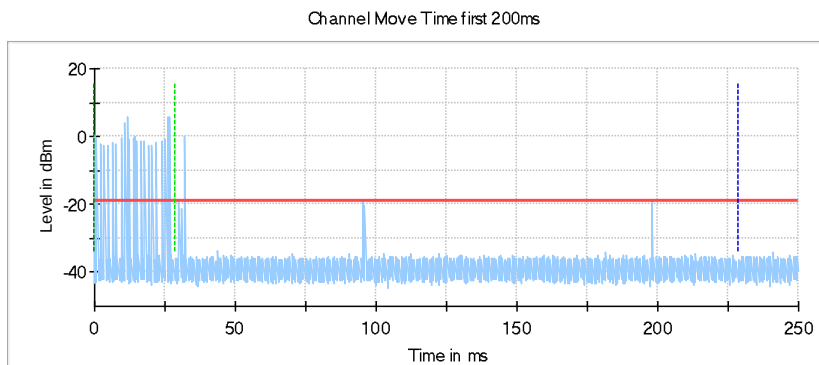

Channel Move Time first 200ms
Threshold
Start of Radar
Triquer at end of Radar
First 200ms of Channel Closing Tx Time

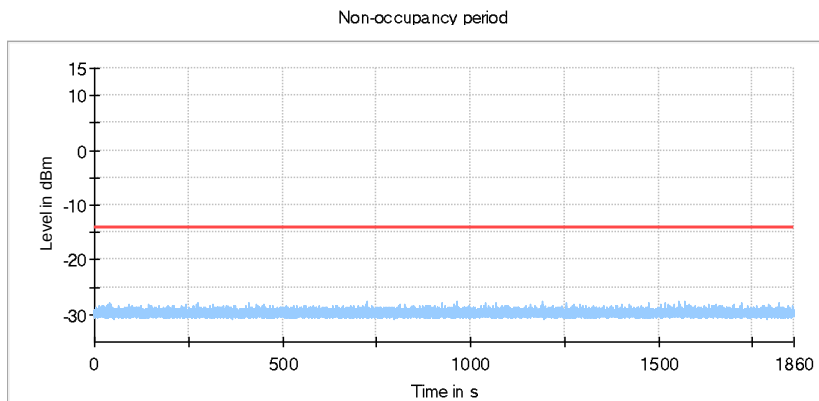

Non-occupancy period
Threshold

[illegible]

