

SPECIFICATION FOR APPROVAL

Customer	QiJi
Project Name	RD026
Customer NO.	
specification	FPC, Black
Supplier NO.	F01-6871-ROA
Specification NO.	
Write by	Hongliang. Zhou
REV.	Ver.
Date	202 / /
Note	

CUSTOMER APPROVED BY		
Approved by	Checked by	Prepared by
SUPPLIER APPROVED BY		
Approved by	Checked by	Prepared by

Record of version changes				
Date	Content of Change	Version	Change	Prepared

1. Index

Serial No.	Content	Page
—	Cover	1
—	Change Records	2
1	List of items	3
2	Test Equipment & Conditions	4
3	Mechanical instruction	5
4	S11	7
5	Gain & Efficiency& 3D Pattern	8
6	Packaging	9

2. Test Equipment & Conditions


2.1. Network Analyzers : KEYSIGHT P5002A

2.2. Communications Test Set: R&S CMW 500

2.3. 3D Chamber Test System: 64 Probe Test system




3. Mechanical instruction

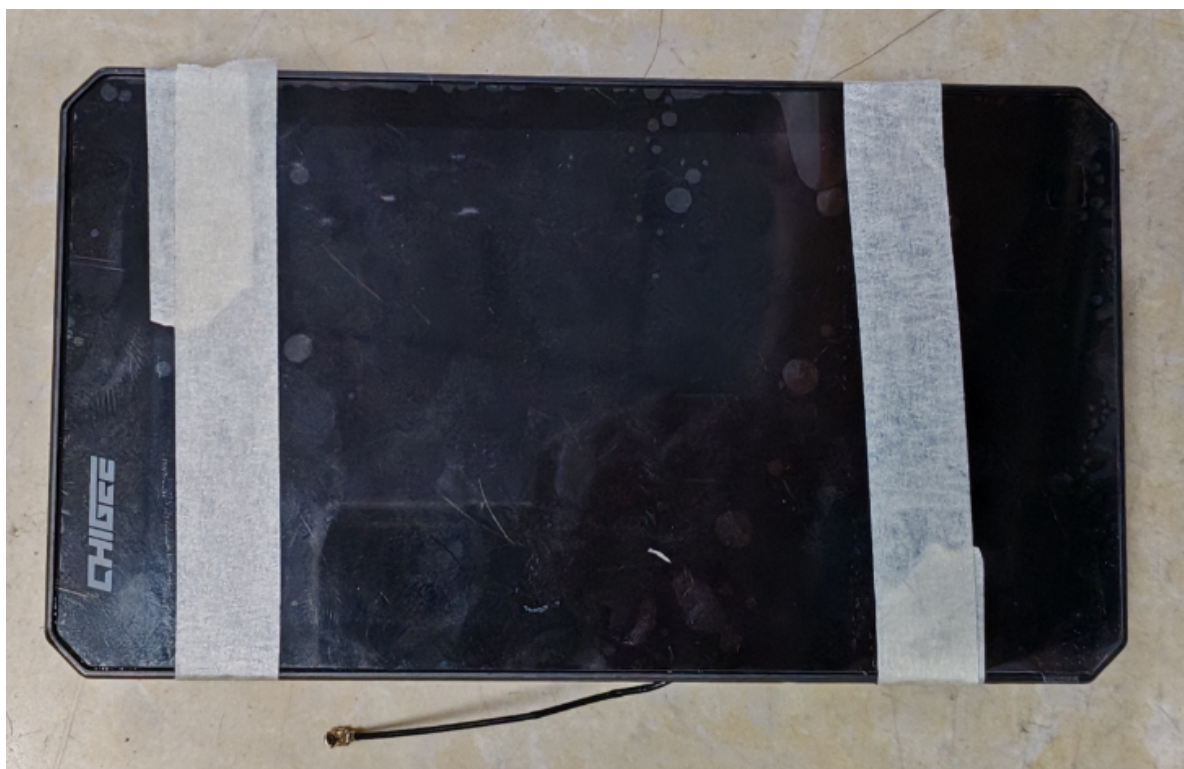



4. S11-4G

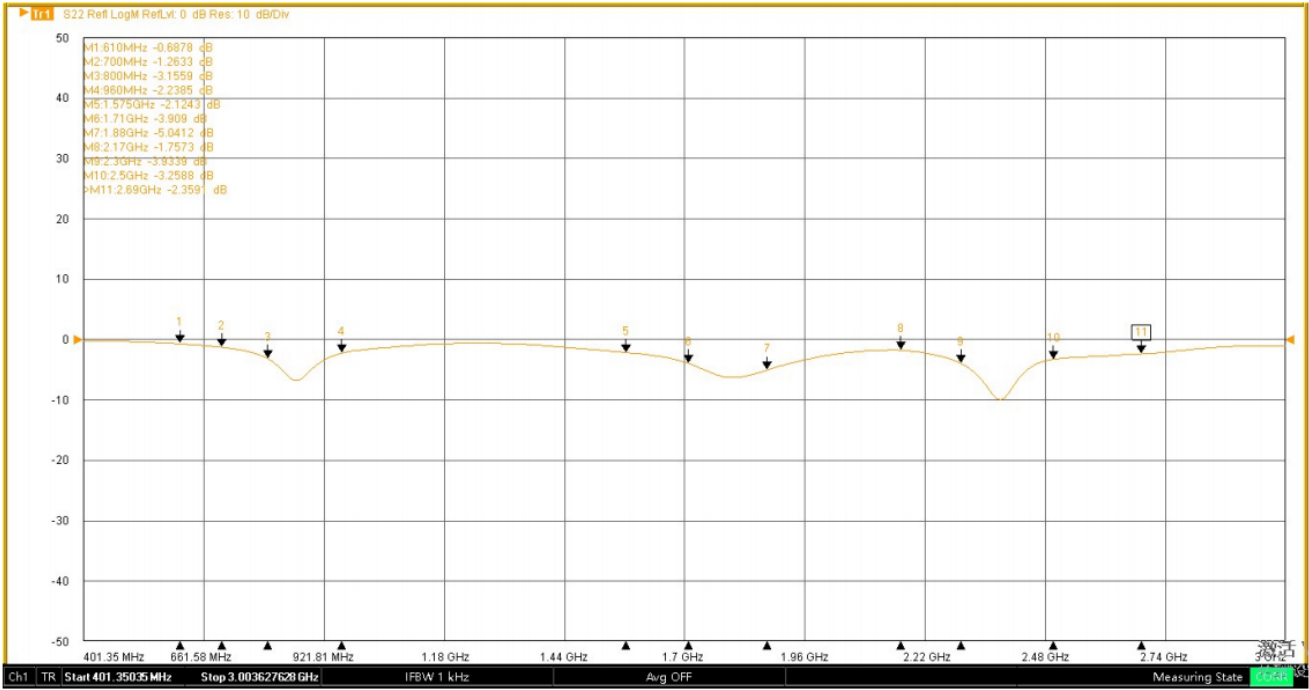

5. Gain & Efficiency& 3D Pattern

Frequency (MHz)	Gain (dBi)	Efficiency (%)	Frequency (MHz)	Gain (dBi)	Efficiency (%)
800.0	-3.92	15.83	2000.0	-3.86	19.56
810.0	-4.33	17.71	2020.0	-4.08	19.02
820.0	-3.70	20.14	2040.0	-4.26	17.98
830.0	-3.32	22.32	2060.0	-4.52	17.52
840.0	-2.06	24.40	2080.0	-4.21	17.65
850.0	-1.68	25.69	2100.0	-4.79	17.01
860.0	-2.68	24.41	2120.0	-5.02	16.51
870.0	-2.94	22.98	2140.0	-5.32	15.36
880.0	-2.68	21.46	2160.0	-4.71	16.10
890.0	-3.06	20.44	2180.0	-4.20	16.57
900.0	-3.79	18.75	2300.0	-1.03	24.08
910.0	-4.53	17.48	2320.0	-0.24	27.55
920.0	-5.38	16.30	2340.0	0.11	28.94
930.0	-6.12	14.64	2360.0	0.98	33.70
940.0	-6.56	13.03	2380.0	1.22	34.48
950.0	-6.78	11.86	2400.0	0.78	32.61
960.0	-7.47	10.97	2420.0	0.26	28.99
1700.0	-4.09	16.68	2440.0	-0.98	23.24
1720.0	-2.78	20.02	2460.0	-1.75	19.97
1740.0	-2.44	21.55	2480.0	-2.50	17.87
1760.0	-1.89	24.77	2500.0	-3.13	15.39
1780.0	-2.40	26.63	2520.0	-3.21	14.77
1800.0	-2.88	26.99	2540.0	-3.37	13.50
1820.0	-3.00	27.07	2560.0	-3.84	13.30
1840.0	-2.64	28.47	2580.0	-4.22	13.18
1860.0	-3.45	27.31	2600.0	-4.62	12.28
1880.0	-3.64	26.58	2620.0	-5.23	12.17
1900.0	-3.14	26.99	2640.0	-6.61	11.91
1920.0	-3.69	24.37	2660.0	-6.70	11.56
1940.0	-4.28	23.20	2680.0	-7.59	10.86
1960.0	-3.86	22.21	2700.0	-7.08	10.62
1980.0	-4.13	20.74			

5. Gain & Efficiency & 3D Pattern

