



Impedance Plot for SN 29/15 DIP 2G450-393
2450 Head

Calibrated impedance: $52.3\Omega + 3.4j\Omega$; Measurement impedance: $50.0\Omega + 5.0j\Omega$ (within 5Ω)

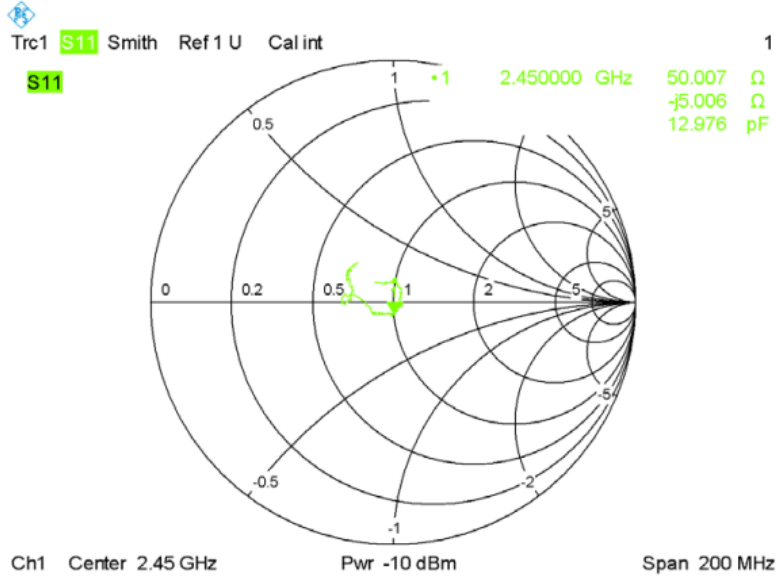

Date: 21.FEB.2024 19:04:50

Calibrated return loss: -27.80dB; Measurement return loss: -26.75dB (within 20%)

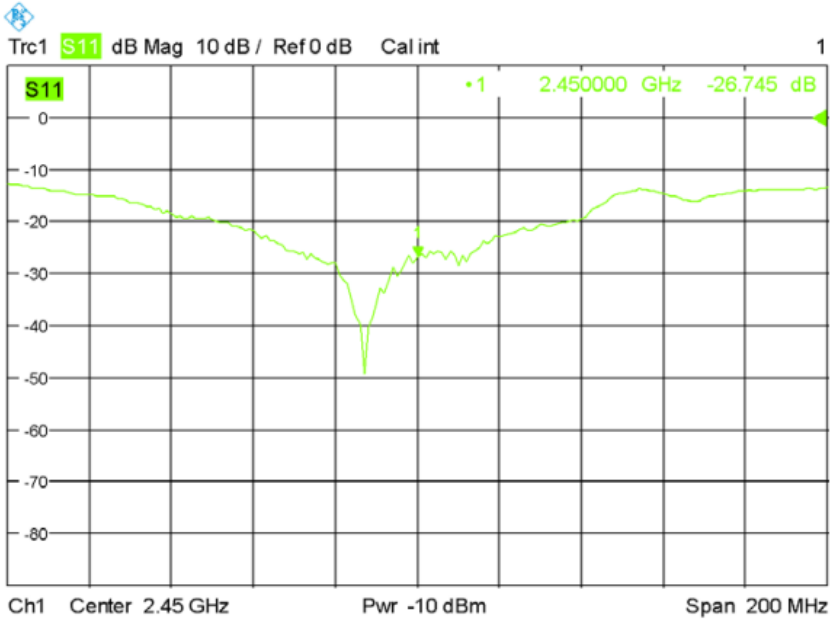

Date: 26.FEB.2024 19:28:46

Impedance Plot for SN17/22 DIP 5G000-671

5200 Head


Calibrated impedance: $54.06\Omega + 8.44j\Omega$; Measurement impedance: $55.03\Omega + 7.00j\Omega$ (within 5Ω)



Trc1 S11 Smith Ref 1 U

1

S11

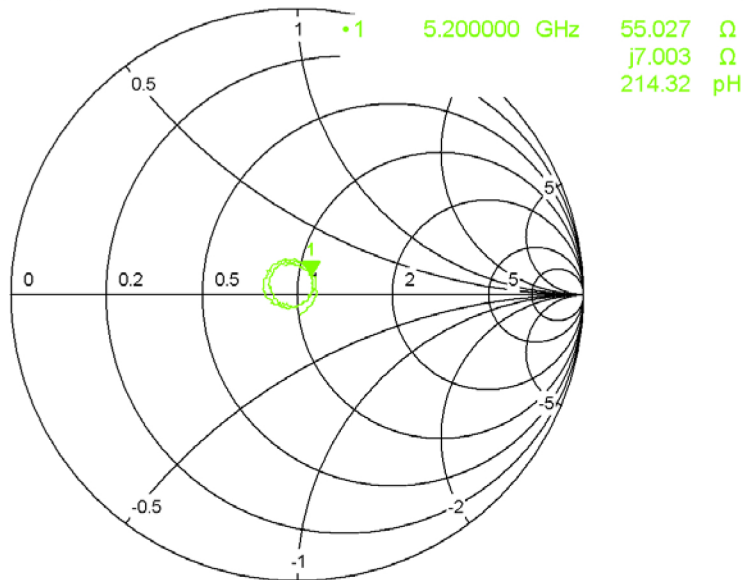

Ch1 Center 5.2 GHz

Pwr -10 dBm

Span 200 MHz


Date: 24.MAY.2024 11:06:34

Calibrated return loss: -20.52dB; Measurement return loss: -21.29dB (within 20%)



Trc1 S11 dB Mag 10 dB / Ref -20 dB

1

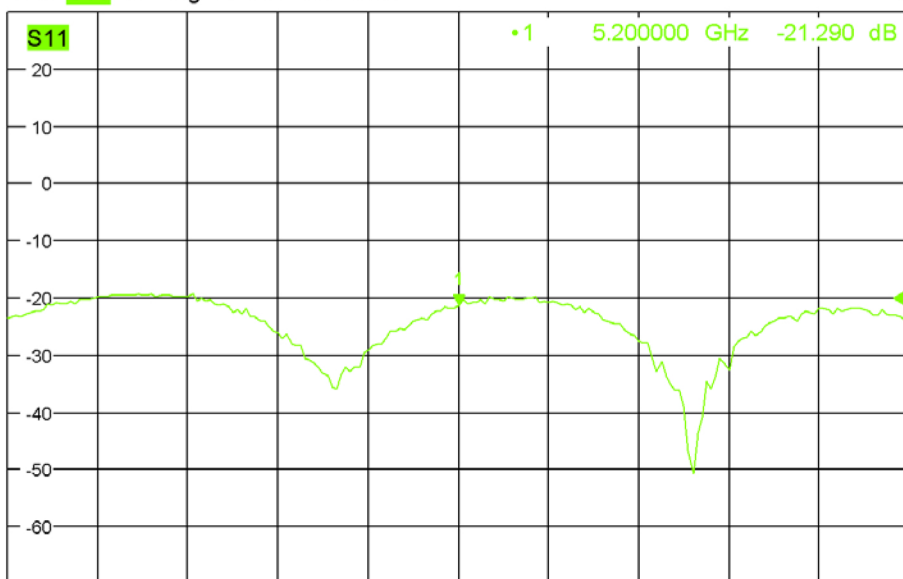

Ch1 Center 5.2 GHz

Pwr -10 dBm

Span 200 MHz

Date: 24.MAY.2024 11:08:53