

5800 Head


Calibrated impedance: $47.44\Omega - 4.21j\Omega$; Measurement impedance: $48.59\Omega - 6.81j\Omega$ (within 5Ω)



Trc1 S11 Smith Ref 1 U

1

S11

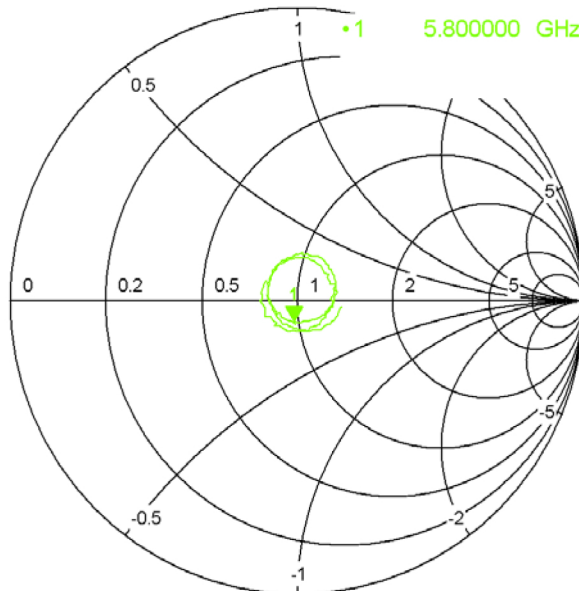

48.591 Ω
 $-j6.805 \Omega$
4.032 pF

Ch1 Center 5.8 GHz

Pwr -10 dBm

Span 200 MHz

Date: 24.MAY.2024 11:15:47


Calibrated return loss: -26.14dB; Measurement return loss: -22.57dB (within 20%)



Trc1 S11 dB Mag 10 dB / Ref -20 dB

1

S11

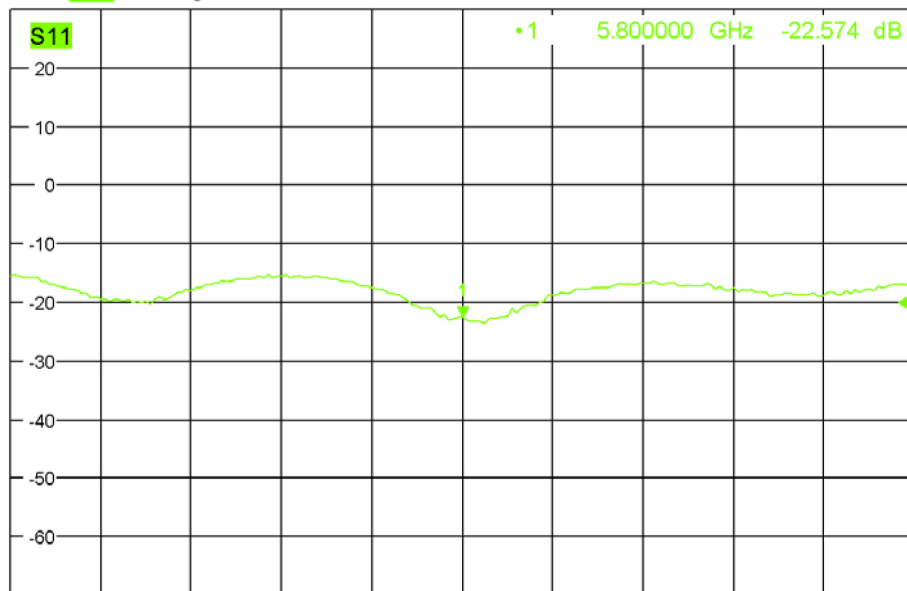

Ch1 Center 5.8 GHz

Pwr -10 dBm

Span 200 MHz

Date: 24.MAY.2024 11:14:59