

AC003+美标铭牌(亚银贴纸)

Model:AC003PT17

AC Electric Vehicle Charging Station

Rated Power : 7kW
AC Input : 208V/240VAC L1+L2+PE 50/60HZ 32A
AC Output : 208V/240VAC 32A MAX
SN: AC003PT17A01PC*****
Operating Temperature: -30~55°C
Degree of Protection: Type 3R
Manufacturer: Powercore Technology Co., Ltd.
Contains IC: 21098-ESPWROOMUE
Contains IC: 10224A-201903EG25G
IC: 30675-AC003P
Contains FCC ID: 2AC7Z-ESPWROOM32UE
Contains FCC ID: XMR201903EG25G
FCC ID: 2A98K-AC003P
This device complies with part 15 of the FCC Rules.
Operation is subject to the following two conditions:
(1) This device may not cause harmful interference.
and(2) this device must accept any interference receivedincluding interference that may cause undesired operation.



Intertek
5022798
Conforms to UL Std.2594
Certified to CSA Std.C22.2#280

For use with Electric Vehicles.

Ventilation Not Required.

To avoid a risk of fire or electric shock, do not use this device with an extension cord.

The suitability of the use of flexible cord in accordance with CE code part, rule 4-012, is to be determined by the local inspection authority having jurisdiction.

WARNING


To reduce the risk of electric shock, connect only to properly grounded outlets.

Do not use this product if there is any damage to the unit.

Risk of electric shock. Do not remove cover or attempt to open the enclosure. No user serviceable parts inside. Refer servicing to qualified service personnel.

This device is intended only for charging vehicles not requiring ventilation during charging.

Label Location

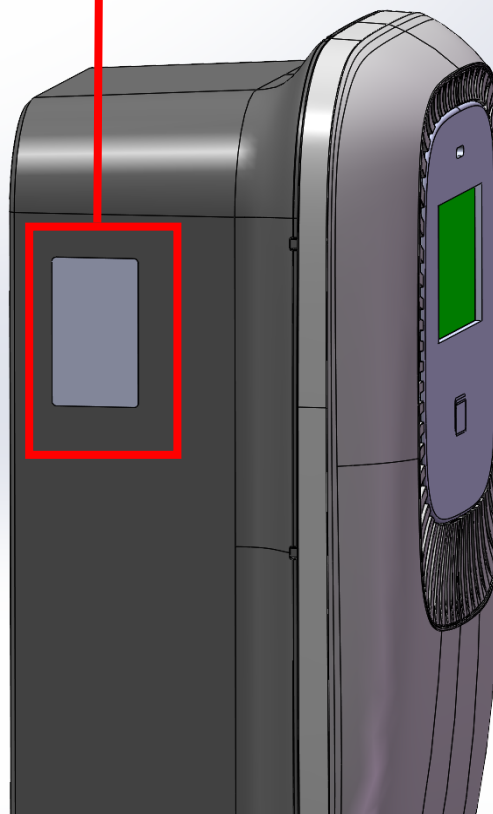

Model:AC003PT19

AC Electric Vehicle Charging Station

Rated Power : 9kW
AC Input : 208V/240VAC L1+L2+PE 50/60HZ 40A
AC Output : 208V/240VAC 40A MAX
SN: AC003PT19A01PC*****
Operating Temperature: -30~55°C
Degree of Protection: Type 3R
Manufacturer: Powercore Technology Co., Ltd.
Contains IC: 21098-ESPWROOMUE
Contains IC: 10224A-201903EG25G
IC: 30675-AC003P
Contains FCC ID: 2AC7Z-ESPWROOM32UE
Contains FCC ID: XMR201903EG25G
FCC ID: 2A98K-AC003P
This device complies with part 15 of the FCC Rules.
Operation is subject to the following two conditions:
(1) This device may not cause harmful interference.
and(2) this device must accept any interference receivedincluding interference that may cause undesired operation.



Intertek
5022798
Conforms to UL Std.2594
Certified to CSA Std.C22.2#280

For use with Electric Vehicles.

Ventilation Not Required.

To avoid a risk of fire or electric shock, do not use this device with an extension cord.

The suitability of the use of flexible cord in accordance with CE code part, rule 4-012, is to be determined by the local inspection authority having jurisdiction.

WARNING

To reduce the risk of electric shock, connect only to properly grounded outlets.

Do not use this product if there is any damage to the unit.

Risk of electric shock. Do not remove cover or attempt to open the enclosure. No user serviceable parts inside. Refer servicing to qualified service personnel.

This device is intended only for charging vehicles not requiring ventilation during charging.

Model:AC003PT111

AC Electric Vehicle Charging Station

Rated Power : 11kW
AC Input : 208V/240VAC L1+L2+PE 50/60HZ 48A
AC Output : 208V/240VAC 48A MAX
SN: AC003PT111A01PC*****
Operating Temperature: -30~55°C
Degree of Protection: Type 3R
Manufacturer: Powercore Technology Co., Ltd.
Contains IC: 21098-ESPWROOMUE
Contains IC: 10224A-201903EG25G
IC: 30675-AC003P
Contains FCC ID: 2AC7Z-ESPWROOM32UE
Contains FCC ID: XMR201903EG25G
FCC ID: 2A98K-AC003P
This device complies with part 15 of the FCC Rules.
Operation is subject to the following two conditions:
(1) This device may not cause harmful interference.
and(2) this device must accept any interference receivedincluding interference that may cause undesired operation.



Intertek
5022798
Conforms to UL Std.2594
Certified to CSA Std.C22.2#280

For use with Electric Vehicles.

Ventilation Not Required.

To avoid a risk of fire or electric shock, do not use this device with an extension cord.

The suitability of the use of flexible cord in accordance with CE code part, rule 4-012, is to be determined by the local inspection authority having jurisdiction.

WARNING

To reduce the risk of electric shock, connect only to properly grounded outlets.

Do not use this product if there is any damage to the unit.

Risk of electric shock. Do not remove cover or attempt to open the enclosure. No user serviceable parts inside. Refer servicing to qualified service personnel.

This device is intended only for charging vehicles not requiring ventilation during charging.