

SN:YYWW0000xxxx

Model:AC006NA7

Charging Station for Vehicles Electrics AC

Rated power: 7kW
AC Input : 240VAC L1+L2+PE 50/60Hz 32A
AC Output : 240VAC 32A MAX
Charging Outlets: NACS
SN:
Operating Temperature: -25 ~ 50°C
Degree of Protection: Type 3R
Manufacturer:Powercore Technology Co., Ltd.
Contains FCC ID: 2AC7Z-ESPWROOM32UE
FCC ID: 2A98K-AC006
Contains IC: 21098-ESPWROOMUE
IC: 30675-AC006



Intertek
5022798

Conforms to UL Std.2594
Certified to CSA Std.C22.2#280

Model:AC006NA7NE

Charging Station for Vehicles Electrics AC

Rated power: 7kW
AC Input : 240VAC L1+L2+PE 50/60Hz 32A
AC Output : 240VAC 32A MAX
Charging Outlets: NACS
SN:
Operating Temperature: -25 ~ 50°C
Degree of Protection: Type 3R
Manufacturer:Powercore Technology Co., Ltd.
Contains FCC ID: 2AC7Z-ESPWROOM32UE
FCC ID: 2A98K-AC006
Contains IC: 21098-ESPWROOMUE
IC: 30675-AC006



Intertek
5022798

Conforms to UL Std.2594
Certified to CSA Std.C22.2#280

Model:AC006T19NE

Charging Station for Vehicles Electrics AC

Rated power: 9kW
AC Input : 240VAC L1+L2+PE 50/60Hz 40A
AC Output : 240VAC 40A MAX
Charging Outlets: Single Outlet(Type1)
SN:
Operating Temperature: -25 ~ 50°C
Degree of Protection: Type 3R
Manufacturer:Powercore Technology Co., Ltd.
Contains FCC ID: 2AC7Z-ESPWROOM32UE
FCC ID: 2A98K-AC006
Contains IC: 21098-ESPWROOMUE
IC: 30675-AC006



Intertek
5022798

Conforms to UL Std.2594
Certified to CSA Std.C22.2#280

Model:AC006T111

Charging Station for Vehicles Electrics AC

Rated power: 11kW
AC Input : 240VAC L1+L2+PE 50/60Hz 48A
AC Output : 240VAC 48A MAX
Charging Outlets: Single Outlet(Type1)
SN:
Operating Temperature: -25 ~ 50°C
Degree of Protection: Type 3R
Manufacturer:Powercore Technology Co., Ltd.
Contains FCC ID: 2AC7Z-ESPWROOM32UE
FCC ID: 2A98K-AC006
Contains IC: 21098-ESPWROOMUE
IC: 30675-AC006



Intertek
5022798

Conforms to UL Std.2594
Certified to CSA Std.C22.2#280

Model:AC006NA9

Charging Station for Vehicles Electrics AC

Rated power: 9kW
AC Input : 240VAC L1+L2+PE 50/60Hz 40A
AC Output : 240VAC 40A MAX
Charging Outlets: NACS
SN:
Operating Temperature: -25 ~ 50°C
Degree of Protection: Type 3R
Manufacturer:Powercore Technology Co., Ltd.
Contains FCC ID: 2AC7Z-ESPWROOM32UE
FCC ID: 2A98K-AC006
Contains IC: 21098-ESPWROOMUE
IC: 30675-AC006



Intertek
5022798

Conforms to UL Std.2594
Certified to CSA Std.C22.2#280

Model:AC006T19

Charging Station for Vehicles Electrics AC

Rated power: 9kW
AC Input : 240VAC L1+L2+PE 50/60Hz 40A
AC Output : 240VAC 40A MAX
Charging Outlets: Single Outlet(Type1)
SN:
Operating Temperature: -25 ~ 50°C
Degree of Protection: Type 3R
Manufacturer:Powercore Technology Co., Ltd.
Contains FCC ID: 2AC7Z-ESPWROOM32UE
FCC ID: 2A98K-AC006
Contains IC: 21098-ESPWROOMUE
IC: 30675-AC006



Intertek
5022798

Conforms to UL Std.2594
Certified to CSA Std.C22.2#280

Model:AC006T17NE

Charging Station for Vehicles Electrics AC

Rated power: 7kW
AC Input : 240VAC L1+L2+PE 50/60Hz 32A
AC Output : 240VAC 32A MAX
Charging Outlets: Single Outlet(Type1)
SN:
Operating Temperature: -25 ~ 50°C
Degree of Protection: Type 3R
Manufacturer:Powercore Technology Co., Ltd.
Contains FCC ID: 2AC7Z-ESPWROOM32UE
FCC ID: 2A98K-AC006
Contains IC: 21098-ESPWROOMUE
IC: 30675-AC006



Intertek
5022798

Conforms to UL Std.2594
Certified to CSA Std.C22.2#280

Model:AC006T17

Charging Station for Vehicles Electrics AC

Rated power: 7kW
AC Input : 240VAC L1+L2+PE 50/60Hz 32A
AC Output : 240VAC 32A MAX
Charging Outlets: Single Outlet(Type1)
SN:
Operating Temperature: -25 ~ 50°C
Degree of Protection: Type 3R
Manufacturer:Powercore Technology Co., Ltd.
Contains FCC ID: 2AC7Z-ESPWROOM32UE
FCC ID: 2A98K-AC006
Contains IC: 21098-ESPWROOMUE
IC: 30675-AC006



Intertek
5022798

Conforms to UL Std.2594
Certified to CSA Std.C22.2#280

Model:AC006NA11

Charging Station for Vehicles Electrics AC

Rated power: 11kW
AC Input : 240VAC L1+L2+PE 50/60Hz 48A
AC Output : 240VAC 48A MAX
Charging Outlets: NACS
SN:
Operating Temperature: -25 ~ 50°C
Degree of Protection: Type 3R
Manufacturer:Powercore Technology Co., Ltd.
Contains FCC ID: 2AC7Z-ESPWROOM32UE
FCC ID: 2A98K-AC006
Contains IC: 21098-ESPWROOMUE
IC: 30675-AC006



Intertek
5022798

Conforms to UL Std.2594
Certified to CSA Std.C22.2#280

Model:AC006NA9NE


Charging Station for Vehicles Electrics AC

Rated power: 9kW
AC Input : 240VAC L1+L2+PE 50/60Hz 40A
AC Output : 240VAC 40A MAX
Charging Outlets: NACS
SN:
Operating Temperature: -25 ~ 50°C
Degree of Protection: Type 3R
Manufacturer:Powercore Technology Co., Ltd.
Contains FCC ID: 2AC7Z-ESPWROOM32UE
FCC ID: 2A98K-AC006
Contains IC: 21098-ESPWROOMUE
IC: 30675-AC006



Intertek
5022798

Conforms to UL Std.2594
Certified to CSA Std.C22.2#280

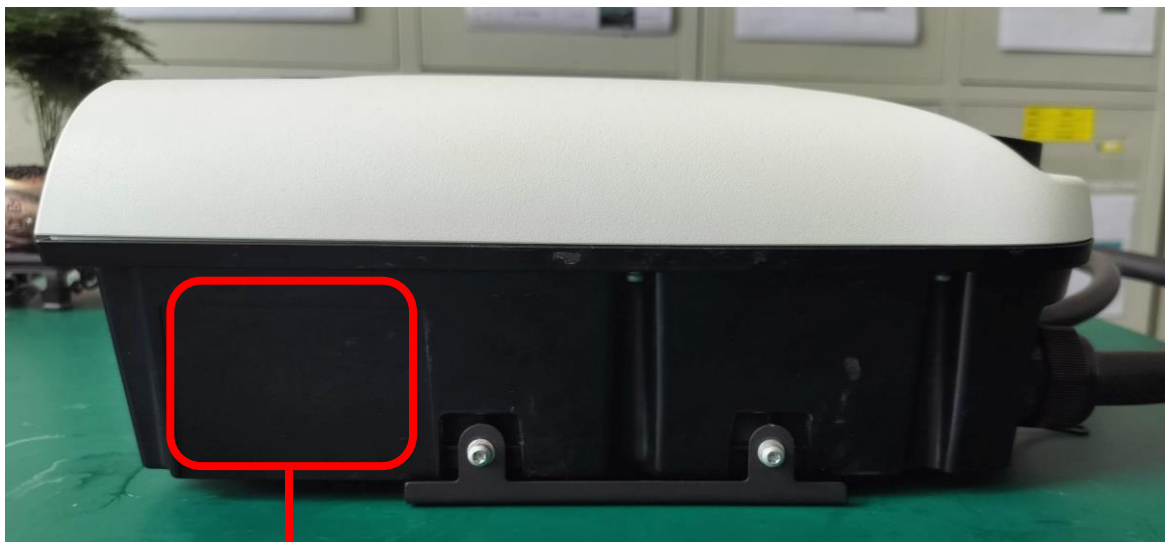

Label Location