



Solutions

TEST REPORT

Test Report No.: UL-RPT-RP-14140770-2916-FCC

Applicant * : Maquet GmbH

Model No. * : 1009.25B0

FCC ID * : Contains FCC ID: 2A98NNINAW106

Technology * : WLAN 2.4 GHz (802.11 b, g, n)

Test Standard(s) : **FCC Parts 15.209(a) & 15.247**

For details of applied tests refer to test result summary

1. This test report shall not be reproduced in full or partial, without the written approval of UL International Germany GmbH.
2. The results in this report apply only to the sample tested.
3. The test results in this report are traceable to the national or international standards.
4. **Test Report Version 1.3 supersede Version 1.2 with immediate effect**
Test Report No. UL-RPT-RP-14140770-2916-FCC Version 1.3, Issue Date 06 JUNE 2024 replaces
Test Report No. UL-RPT-RP-14140770-2916-FCC Version 1.2, Issue Date 03 JUNE 2024, which is no longer valid.
5. Result of the tested sample: **PASS**
6. All information marked with a (*) were provided by customer / applicant or authorized representative

Prepared by: Muhammad Faiq, Khan
Title: Project Engineer
Date: 06 June 2024

Approved by: Rachid, Acharkaoui
Title: Operations Manager
Date: 06 June 2024



Deutsche
Akkreditierungsstelle
D-PL-19381-02-00

This laboratory is accredited by DAkkS.
The tests reported herein have been performed in
accordance with its' terms of accreditation.

UL INTERNATIONAL GERMANY GMBH

Hedelfinger Str. 61
70327 Stuttgart, Germany
STU.CTECHLab@ul.com

This page has been left intentionally blank.

Table of Contents

1. Customer Information *	4
1.1. Applicant Information	4
1.2. Manufacturer Information	4
2. Summary of Testing.....	5
2.1. General Information	5
Applied FCC Rule Part(s)	5
Location	5
Date Information	5
2.2. Summary of Test Results	6
2.3. Methods and Procedures	6
2.4. Deviations from the Test Specification	6
3. Equipment Under Test (EUT)	7
3.1. Identification of Equipment Under Test (EUT) *	7
3.2. Description of EUT *	7
3.3. Modifications Incorporated in the EUT	7
3.4. Additional Information Related to Testing *	8
3.5. Support Equipment	8
A. Support Equipment (In-house)	8
B. Support Equipment (Manufacturer supplied)	8
4. Operation and Monitoring of the EUT during Testing	9
4.1. Operating Modes	9
4.2. Configuration and Peripherals	9
5. Measurements, Examinations and Derived Results	10
5.1. General Comments	10
5.2. Test Results	11
5.2.1. Transmitter Radiated Emissions	11
Transmitter Radiated Emissions (continued)	14
Transmitter Radiated Emissions (continued)	16
5.2.2. Transmitter Band Edge Radiated Emissions	20
6. Measurement Uncertainty	28
7. Used equipment	29
8. Report Revision History	30

1. Customer Information *

1.1. Applicant Information

Company Name:	Maquet GmbH
Company Address:	Kehler Str. 31, 76437 Rastatt, GERMANY
Company Phone No.:	+49 7222 932 574
Company E-Mail:	cb-nrtl-reports.deras@getinge.com
Contact Person:	Knut von Kopp Ostrowski
Contact E-Mail Address:	knut.vonkoppstrowski@getinge.com
Contact Phone No.:	+49 7222 9321 281

1.2. Manufacturer Information

Company Name:	Maquet GmbH
Company Address:	Kehler Str. 31, 76437 Rastatt, GERMANY
Company Phone No.:	+49 7222 932 574
Company E-Mail:	cb-nrtl-reports.deras@getinge.com
Contact Person:	Knut von Kopp Ostrowski
Contact E-Mail Address:	knut.vonkoppstrowski@getinge.com
Contact Phone No.:	+49 7222 9321 281

2. Summary of Testing

2.1. General Information

Applied FCC Rule Part(s)

Specification Reference:	47CFR15.247
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Intentional Radiators) - Section 15.247
Specification Reference:	47CFR15.209
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Intentional Radiators) – Section 15.209

Location

Location of Testing:	UL International Germany GmbH Hedelfinger Strasse. 61, 70327 Stuttgart, GERMANY
Registration Number:	399704

Date Information

Order Date:	15 December 2021
EUT Arrived:	18 September 2023
Test Dates:	25 September 2023 to 10 October 2023
EUT Returned:	-/-

2.2. Summary of Test Results

DIGITAL TRANSMISSION SYSTEMS (DTS): 2400-2483.5 MHz					
FCC Part 15 Clause	Compliance Test Description	Test Result			
		C	N.C.	N.P.	N.A.
15.207	Transmitter AC Power Line Conducted Emissions ⁽¹⁾	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
15.247(a)(2)	Transmitter Minimum 6 dB Bandwidth ⁽²⁾	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
15.35(c)	Transmitter Duty Cycle ⁽²⁾	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
15.247(b)(3)	Transmitter Maximum Peak Output Power ⁽²⁾	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
15.247(e)	Transmitter Power Spectral Density ⁽²⁾	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
15.247(d) & 15.209(a)	Transmitter Conducted Emissions ⁽³⁾	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
15.247(d) & 15.209(a)	Transmitter Radiated Emissions	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
15.247(d) & 15.209(a)	Transmitter Band Edge Radiated Emissions	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
C: COMPLIED N.C.: NOT COMPLIED N.P.: NOT PERFORMED N.A.: NOT APPLICABLE					
Decision rule: Where not otherwise specified or communicated in writing, statements of conformity (e.g. Pass/Fail) are established according to the following decision rule: considering the ILAC G8:2019 chapter 4.2.1 (simple acceptance rule). This leads to a maximum 50% of false accept or false reject when the measured value equals the tolerance limit. See ILAC-G8:09/2019 for further details.					

Note(s):

1. The EUT is a battery powered device therefore, no AC conducted emissions were performed.
2. According to applicant's declaration a Pre-certified Radio module was integrated (Model: NINA-W156, FCC ID: 2A98NNINAW106). Therefore, only partial testing has been performed.
3. The Spurious emission measurements were performed Radiated and therefore conducted emissions were not required.

2.3. Methods and Procedures

Reference:	ANSI C63.10-2013
Title:	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
Reference:	FCC KDB 558074 D01 DTS Meas Guidance v05r02 April 2, 2019
Title:	Guidance for compliance measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating Under Section 15.247 of the FCC rules
Title:	FCC KDB 996369 D04 Module Integration Guide v02 October 13, 2020
Reference:	Modular Transmitter Integration Guide Guidance for Host Product Manufacturers

2.4. Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

3. Equipment Under Test (EUT)

3.1. Identification of Equipment Under Test (EUT) *

Brand Name:	Universal Remote Control (URC) 1009.25B0
Model Name or Number:	Universal Remote Control (URC) 1009.25B0
Test Sample Serial Number:	00001 (Radiated Test Sample)
Hardware Version Number:	0980 0464 01
Firmware Version Number:	URC_EMVTEST_0_99_17
FCC ID:	2A98NNINAW106

3.2. Description of EUT *

The equipment under test was an Operating table Remote Control supporting WLAN 2.4 GHz operations in 2400 2483.5 MHz ISM band.

3.3. Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing.

3.4. Additional Information Related to Testing *

Category of Equipment:	WLAN 2.4 GHz (IEEE 802.11b, g, n)				
Type of Radio Device:	Transceiver				
FCC Equipment Classification:	Digital Transmission System (DTS)				
Power Supply Requirement(s):	Internal Battery powered: 3.6V DC				
Supported Transmit Operating Mode(s):	802.11b/g HT20 802.11n HT20 / HT40				
Tested Data Rate(s):	802.11b	1 Mbps (Note 1) (Note 2)			
	802.11g	6 Mbps (Note 1)			
	802.11n HT20	MCS0 (Note 1)			
Nominal Channel Bandwidth:	20 MHz 40 MHz				
Highest internally generated clock and/ or oscillator frequency:	220 MHz				
Transmit Frequency Range:	2412 MHz to 2462 MHz				
Transmit Channels Tested:	Channel ID	RF Channel	Frequency(MHz)		
Nominal Channel Bandwidth: 20 MHz	Bottom	1 (Note 1)	2412		
	Middle	6	2437		
	Top	11	2462		
(Note 1) According to applicant's declaration a Pre-certified Radio module was integrated (Model: NINA-W156, FCC ID: 2A98NNINAW106 Therefore, only partial testing has been performed only on the worst-case modulation, data rate and channel.					
(Note 2) In accordance with FCC KDB 996369 D04 Section 3.4 (b) Host Product testing has been performed on unwanted (spurious) radiated emissions on the worst-case modulation and channel per frequency.					

3.5. Support Equipment

The following support equipment was used to exercise the EUT during testing:

A. Support Equipment (In-house)

Item	Description	Brand Name	Model Name or Number	Serial Number
1	Test Laptop with Test software: Putty	HP	ProBook 650	5CG6143YW

B. Support Equipment (Manufacturer supplied)

Item	Description	Brand Name	Model Name or Number	Serial Number
1	-/-	-/-	-/-	-/-

4. Operation and Monitoring of the EUT during Testing

4.1. Operating Modes

The EUT was tested in the following operating mode(s):

Transmitter / Modulated Carrier Continuous Transmissions Mode WLAN 2.4 GHz, Worst Case:

- 802.11b | 20 MHz | 1 Mbps | PWR MAX ^(Note 1) ^(Note 2)
- 802.11g | 20 MHz | 6 Mbps | PWR MAX ^(Note 2)
- 802.11n | 20 MHz | MCS0 | PWR MAX ^(Note 2)

(Note ¹) According to applicant's declaration a Pre-certified Radio module was integrated (Model: NINA-W156, FCC ID: 2A98NNINAW106). Therefore, only partial testing has been performed only on the worst-case modulation, data rate and channel.

(Note ²) Used for band edge measurements.

4.2. Configuration and Peripherals

The EUT was tested in the following configuration(s):

EUT Power Supply:

- The EUT was powered with Internal Battery (3.6V).

Test Mode Activation:

- The applicant or manufacturer supplied test setup instruction 'Setup Instructions Radio Test Remote.pdf' was used to configure the EUT into respective test modes.
- The EUT can be connected with the Test laptop via USB. The terminal software 'Putty' was used to give commands and configure the EUT in respective modes. The test laptop was then removed during the measurement.

Radiated Measurements:

- The radiated sample with integrated antenna was used for the radiated spurious emissions measurement.
- The EUT with its integrated antenna was evaluated for its worst-case position and it was found that EUT in Standing position is the worst-case. Therefore, all the tests were performed in this position.
- Radiated measurements below 30 MHz were performed with the EUT positioned on the turn table and rotating 360 degrees while the loop antenna height was set at 100 cm.
- Radiated measurements above 30 MHz were performed with the EUT positioned on the turn table and rotating 360 degrees while the antenna height varies from 1 to 4 m over the measurement frequency range.
- R&S® EMC32 V11.30.00 Software was used for the Radiated spurious emission measurements.

Duty Cycle Correction Details:

- As the EUT continuous transmission of the EUT ($D \geq 98\%$) can be achieved and EUT was transmitting continuously with 100% duty cycle (duty cycle variations are less than $\pm 2\%$). Therefore, Duty Cycle Correction Factors was not added to all average measurements.

5. Measurements, Examinations and Derived Results

5.1. General Comments

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to Section 6 *Measurement Uncertainty* for details.

In accordance with DAkkS requirements all the measurement equipment is on a calibration schedule. All equipment was within the calibration period on the date of testing.

5.2. Test Results

5.2.1. Transmitter Radiated Emissions

Test Summary:

Test Engineer:	Muhammad Faiq Khan	Test Date:	29 September 2023
Test Sample Serial Number:	00001 (Radiated Test Sample)		
Test Site Identification	SR 1/2		

FCC Reference:	Parts 15.247(d) & 15.209(a)
Test Method Used:	FCC KDB 558074 Sections 8.5 & 8.6 referencing ANSI C63.10 Sections 11.11 and 11.12 ANSI C63.10:2013 Sections 6.3 and 6.4
Frequency Range	9 kHz to 30 MHz

Environmental Conditions:

Temperature (°C):	24.1
Relative Humidity (%):	46.3

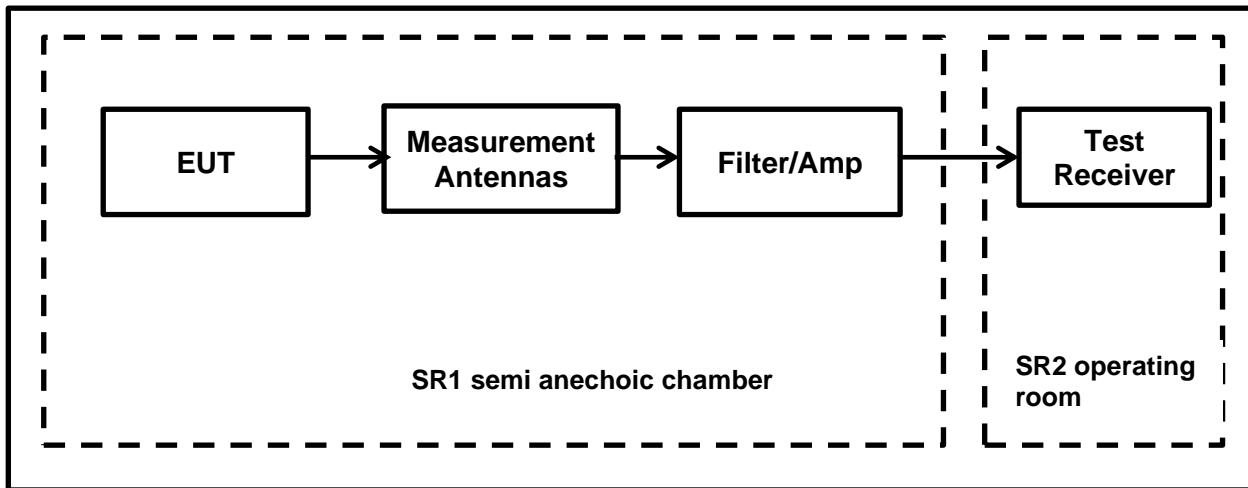
Notes:

1. In accordance with FCC KDB 414788 D01 Radiated Test Site & ANSI C63.10 clause 5.2 an alternative test site that can demonstrate equivalence to an open area test site may be used. Therefore, the measurement was performed in a Semi Anechoic Chamber. (The OATS / SAC comparison data is available upon request).
2. The limits are specified at a test distances of 30 and 300 metres. However, as specified in FCC Section 15.31 (f)(2) & ANSI C63.10 clause 6.4.3, measurements may be performed at a closer distance and the measured level extrapolated to the specified measurement distance using the method described in clauses 6.4.4, specifically sub-clause 6.4.4.1 which specifies that the measured level shall be extrapolated to the specified distance by conservatively presuming that the field strength decays at 40 dB/decade.
Therefore, measurements were performed at a measurement distance of 3 m.
3. The measured values at 3 m were extrapolated to the required measurement distances of 300 m and 30 m and compared the specified limits at those distances as follows:
 - 9 kHz- 490 kHz: measured value extrapolated from 3 m to 300 m by subtracting 80 dB at 40 dB /decade.
 - 490 kHz-30 MHz: measured value extrapolated from 3 m to 30 m by subtracting 40 dB at 40 dB /decade.
4. Measurements below 30 MHz were performed in a semi-anechoic chamber SR1/2 (Asset Number 1603665) at a distance of 3 m. The EUT was placed at a height of 80cm from reference ground plane in the centre of the chamber turntable. The measurement loop antenna height was 100 cm.
5. In accordance with FCC KDB 996369 D04 Section 3.4 (b) the Host Product testing has been performed on unwanted (spurious) radiated emissions on the worst-case modulation and channel per frequency range as shown in original filing.
6. The radiated emissions measurements were performed with the EUT set to the following worst-case mode.
 - WLAN 2.4 GHz | b-Mode | 20 MHz| 1 Mbps | Bottom channel | PWR MAX |
7. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
8. All other emissions shown on the pre-scan plot were investigated and found to be below the measurement system noise floor.

Transmitter Radiated Emissions (continued)**Notes:**

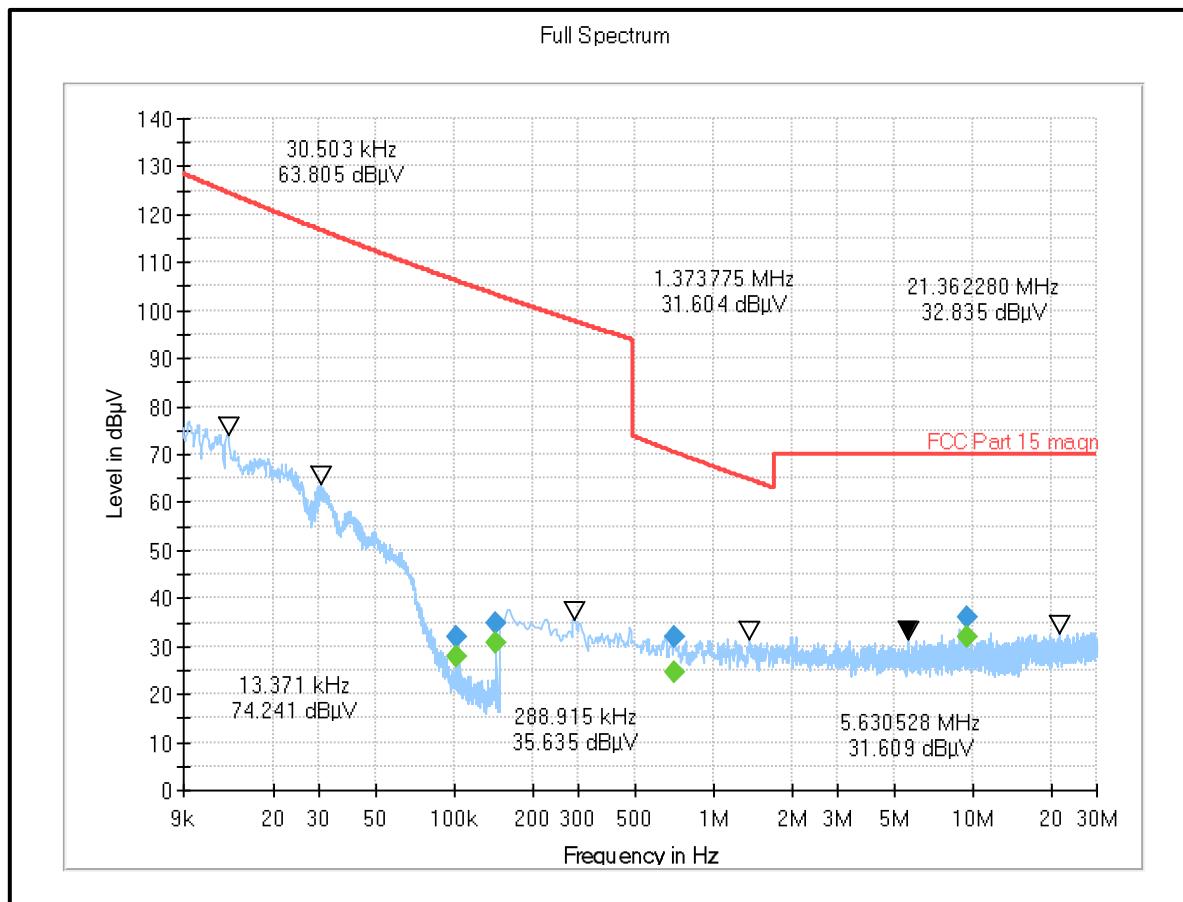
9. Pre-scans were performed, and markers placed on the highest measured levels. The test receiver was set to:

- Frequency range: 9 kHz-150 kHz: RBW: 300 Hz / VBW: 1 kHz
- Frequency range: 150 kHz – 30 MHz: RBW: 10 kHz /VBW: 30 kHz
- Detector: Peak detector
- Trace Mode: Max Hold

Test Setup:

Transmitter Radiated Emissions (continued)**Results: 802.11b / 20 MHz / 1 Mbps / PWR MAX / Bottom Channel**

Frequency (MHz)	Loop Antenna Orientation	MaxPeak Level at 3 m(dB μ V/m) Note 2	MaxPeak Emission Level extrapolated (dBmV/m) Note 3	Limit (dB μ V/m)	Margin (dB)	Result
0.101919	90° to the EUT	32.02	-47.98	26.15	74.13	Complied
0.144854	0° to the EUT	34.96	-45.05	23.25	68.29	Complied
0.702353	90° to the EUT	32.03	-7.97	30.50	38.47	Complied
9.467995	90° to the EUT	36.13	-3.87	30.00	33.87	Complied

Plot: 9 kHz – 30 MHz: 802.11b / 20 MHz / 1 Mbps / PWR MAX / Bottom Channel**Result: Pass**

Transmitter Radiated Emissions (continued)**Test Summary:**

Test Engineer:	Muhammad Faiq Khan	Test Date:	29 September 2023
Test Sample Serial Number:	00001 (Radiated Test Sample)		
Test Site Identification	SR 1/2		

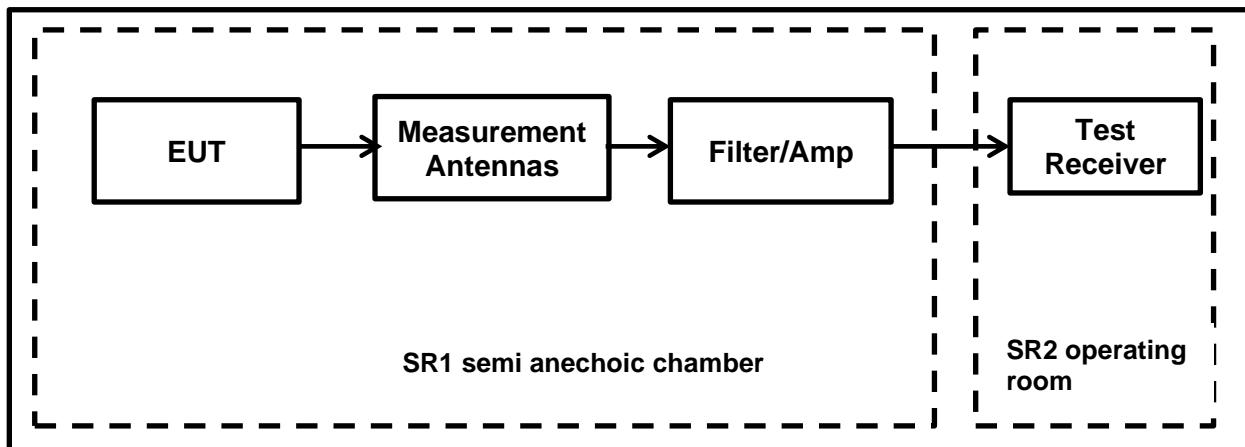
FCC Reference:	Parts 15.247(d) & 15.209(a)
Test Method Used:	FCC KDB 558074 Sections 8.5 & 8.6 referencing ANSI C63.10 Sections 11.11 and 11.12 ANSI C63.10:2013 Sections 6.3 and 6.5
Frequency Range:	30 MHz to 1000 MHz

Environmental Conditions:

Temperature (°C):	24.1
Relative Humidity (%):	46.3

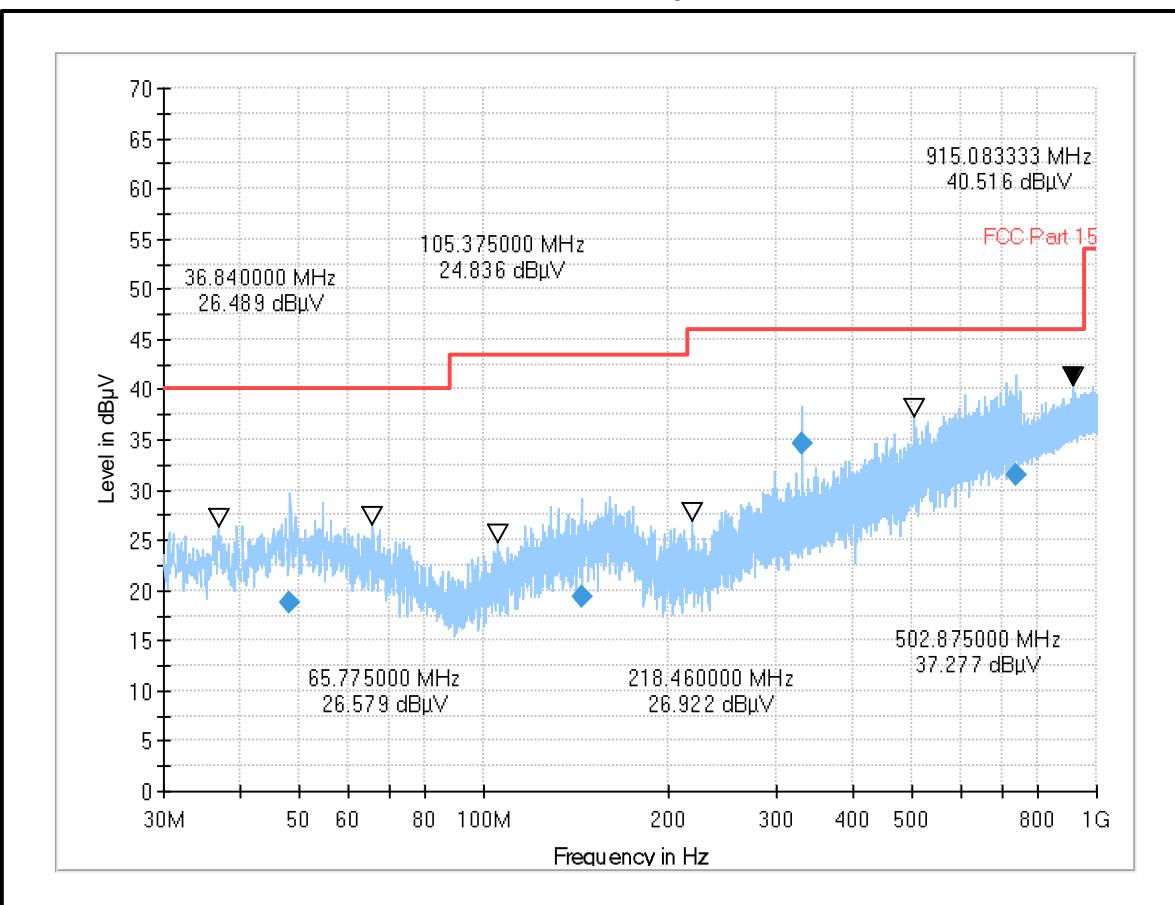
Note(s):

1. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
2. In accordance with FCC KDB 996369 D04 Section 3.4 (b) the Host Product testing has been performed on unwanted (spurious) radiated emissions on the worst-case modulation and channel per frequency range as shown in original filing.
3. The radiated emissions measurements were performed with EUT set to following worst-case mode.
 - WLAN 2.4 GHz | b-Mode | 20 MHz| 1 Mbps | Bottom channel | PWR MAX
4. Pre-scans were performed, and markers placed on the highest measured levels. The test receiver resolution bandwidth was set to 100 kHz and video bandwidth 300 kHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold.
5. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
6. All other emissions shown on the pre-scan plot were investigated and found to be below the measurement system noise floor.

Test Setup:

Transmitter Radiated Emissions (continued)**Results: 802.11b / 20 MHz / 1 Mbps / PWR MAX / Bottom Channel**

Frequency (MHz)	Antenna Polarization	MaxPeak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
48.225000	Horizontal	18.74	40.00	21.26	Complied
144.120000	Horizontal	19.42	43.50	24.08	Complied
329.933333	Horizontal	34.55	46.00	11.45	Complied
736.541667	Horizontal	31.56	46.00	14.44	Complied

Plot: 30 MHz – 1GHz: 802.11b / 20 MHz / 1 Mbps / PWR MAX / Bottom Channel**Result: Pass**

Transmitter Radiated Emissions (continued)**Test Summary:**

Test Engineer:	Muhammad Faiq Khan	Test Date:	25 September 2023
Test Sample Serial Number:	00001 (Radiated Test Sample)		
Test Site Identification	SR 1/2		

FCC Reference:	Parts 15.247(d) & 15.209(a)
Test Method Used:	FCC KDB 558074 Sections 8.5 & 8.6 referencing ANSI C63.10 Sections 11.11 and 11.12 ANSI C63.10:2013 Sections 6.3 and 6.6
Frequency Range:	1 GHz to 26.5 GHz

Environmental Conditions:

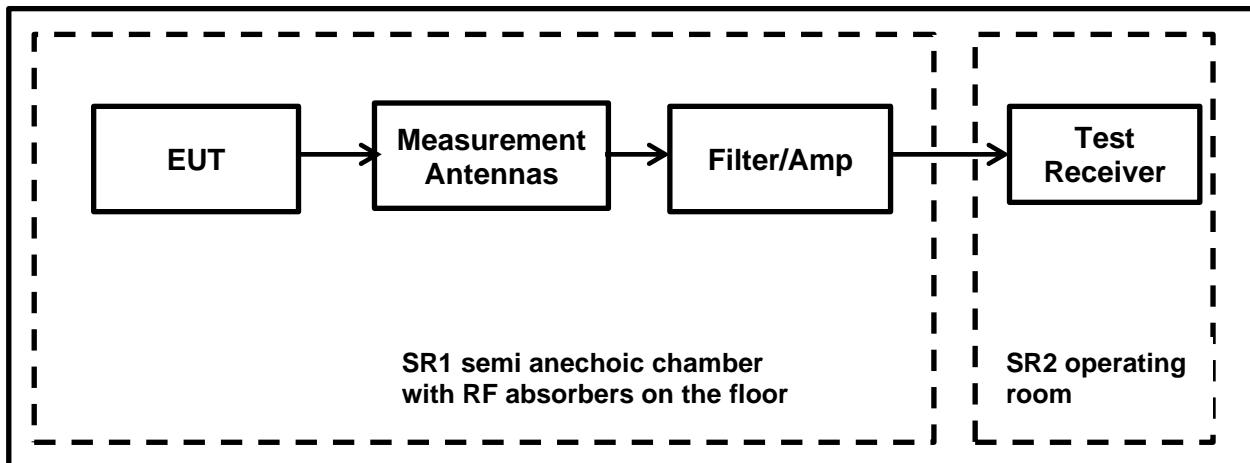
Temperature (°C):	22.1
Relative Humidity (%):	44.3

Notes:

1. Pre-scans above 1 GHz were performed in a semi-anechoic chamber SR1/ 2 (Asset Number 1603665) with RF absorbers on the floor at a distance of 3 m. The EUT was placed at a height of 1.5m from ground reference plane in the centre of the chamber turntable.
2. Final measurements above 1 GHz were performed in a semi-anechoic chamber SR1/ 2 (Asset Number 1603665) with absorber on the floor at a distance of 3 m. Maximum emission levels were determined by height searching the measurement antenna over the range 1 m to 4 m.
3. In accordance with FCC KDB 996369 D04 Section 3.4 (b) the Host Product testing has been performed on unwanted (spurious) radiated emissions on the worst-case modulation and channel per frequency range as shown in original filing.
4. The radiated emissions measurements were performed on Middle channel with the EUT set to the following worst-case mode.
 - WLAN 2.4 GHz | b-Mode | 20 MHz| 1 Mbps | Bottom channel | PWR MAX |
5. Pre-scans were performed, and a marker placed on the highest measured level of the appropriate plot. The test receiver resolution bandwidth was set to 1 MHz and video bandwidth 3 MHz the sweep time was set to auto.
6. The emissions shown at frequencies approximately 2.4 GHz to 2.4835 GHz on the 1 GHz to 18 GHz plots are the EUT fundamental for the tested channel.
7. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
8. All other emissions shown on the pre-scan plots were investigated and found to be below system noise floor.
9. In accordance with ANSI C63.10 Section 6.6.4.3 (Note 1), if the peak measured value complies with the average limit, it is unnecessary to perform an average measurement.
10. In accordance with ANSI C63.10-2013 Section 5.3.3 measurements above 18 GHz were performed at closer distance (1 m); because at specified measurement distance (3m) for compliance the instrumentation noise floor was typically close to the radiated emission limit.

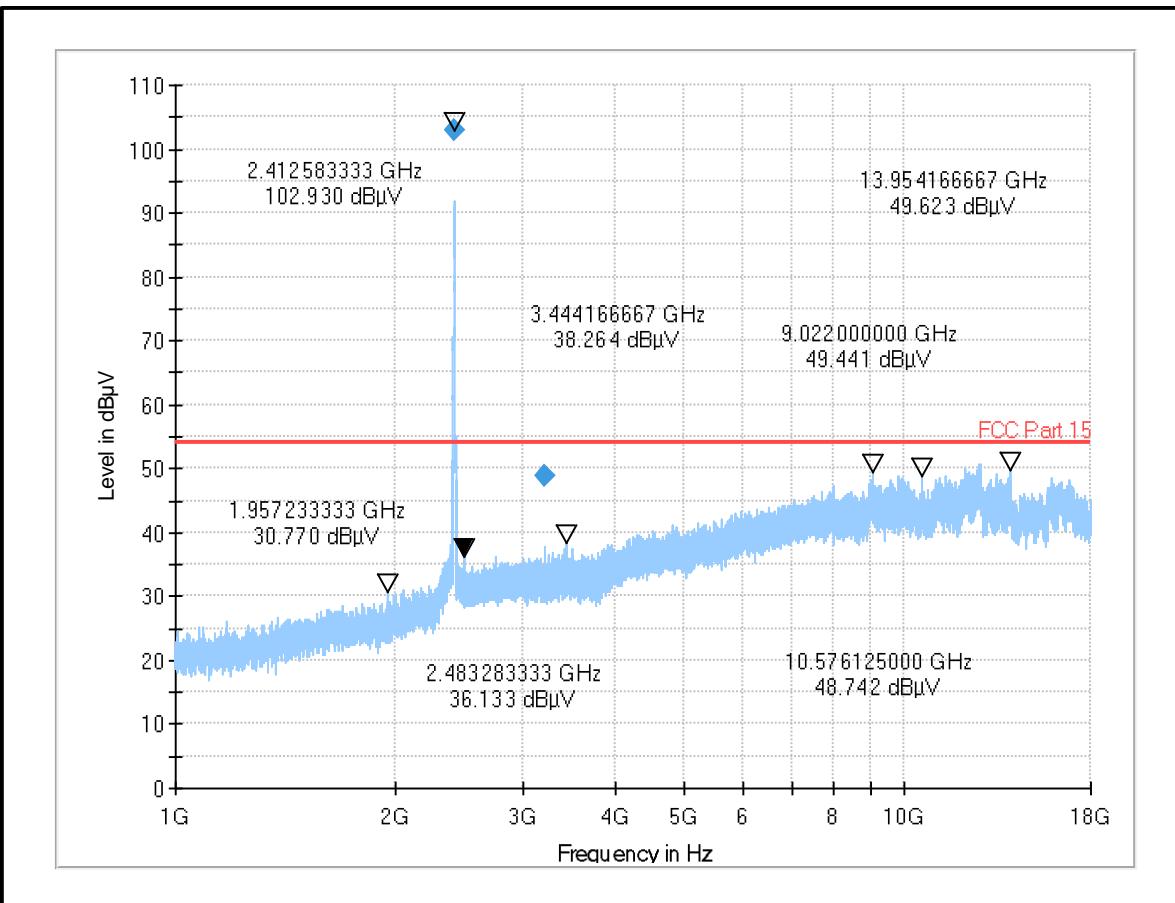
Transmitter Radiated Emissions (continued)**Notes:**

11. For frequency range between 18 GHz and 26.5 GHz, no critical emissions were found. All emissions shown on the pre-scans were investigated and found to be below the noise floor of the measurement system

Test Setup:

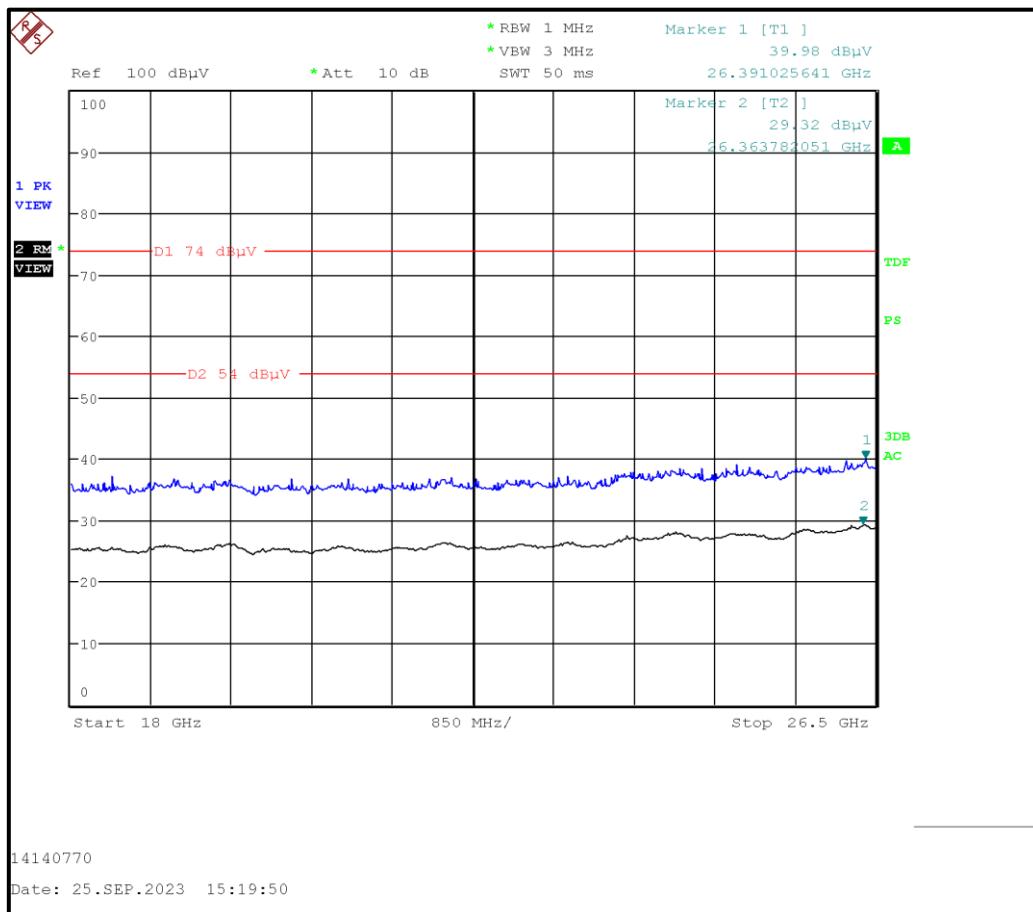
Transmitter Radiated Emissions (continued)**Results: 802.11b / 20 MHz / 1 Mbps / PWR MAX / Bottom Channel**

Frequency (MHz)	Antenna Polarization	Peak Level (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
3215.833333	Vertical	48.85	54.00	5.15	Complied

Plot: 1 GHz – 18GHz: 802.11b / 20 MHz / 1 Mbps / PWR MAX / Bottom Channel**Result: Pass**

Transmitter Radiated Emissions (continued)**Results: 802.11b / 20 MHz / 1 Mbps / PWR MAX / Bottom Channel**

Frequency (MHz)	Antenna Polarization	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
All emissions were below the level of the measurement system noise floor.					

Plot: 18 GHz – 26.5 GHz: 802.11b / 20 MHz / 1 Mbps / PWR MAX / Bottom Channel**Result: Pass**

5.2.2. Transmitter Band Edge Radiated Emissions

Test Summary:

Test Engineer:	Muhammad Faiq Khan	Test Date:	06 & 10 October 2023
Test Sample Serial Number:	00001 (Radiated Test Sample)		
Test Site Identification	SR 1/2		

FCC Reference:	Parts 15.247(d) & 15.209(a)
Test Method Used:	DTS emissions in non-restricted frequency bands: FCC KDB 558074 Section 8.5 referencing ANSI C63.10:2013 Sections 11.11
	DTS emissions in restricted frequency bands: FCC KDB 558074 Section 8.6 referencing ANSI C63.10:2013 Sections 11.12
	ANSI C63.10:2013 Sections 6.10.4, 6.10.5

Environmental Conditions:

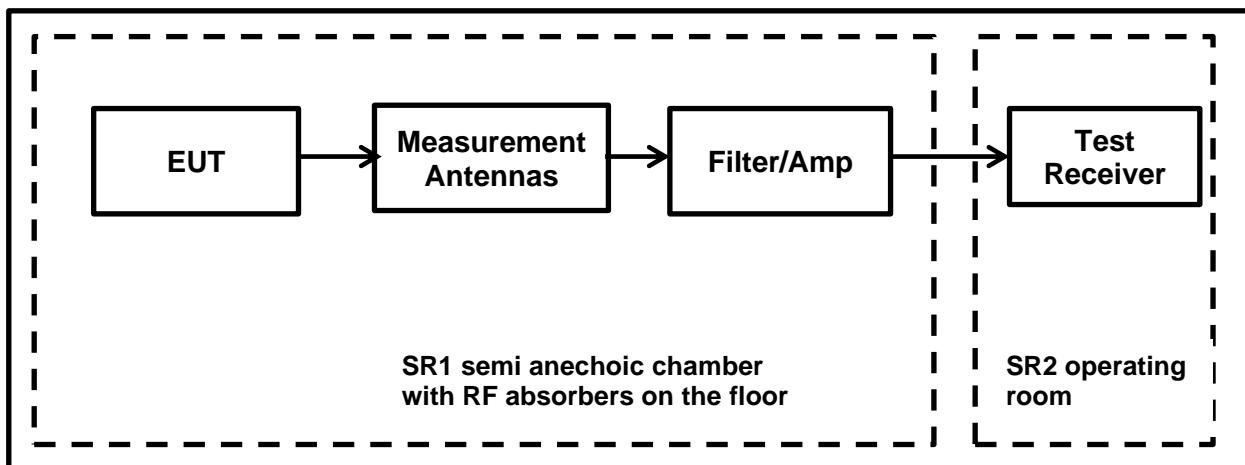
Temperature (°C):	22 to 24
Relative Humidity (%):	44 to 51

Notes:

1. The measurements were in a semi-anechoic chamber SR1/2 (Asset Number 1603665) with RF absorbers on the floor at a distance of 3 m. The EUT was placed at a height of 1.5m from reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 m to 4 m.
2. As the lower band edge falls within a non-restricted band, measurements were performed in accordance with FCC KDB 558074 Section 8.5 referencing ANSI C63.10 Section 11.11. As the maximum peak conducted output power was previously measured, in accordance with ANSI C63.10 Section 11.11.1(a) lower band edge measurement was performed with a peak detector and the -20 dBc limit applied.
3. As the lower band edge falls within a non-restricted band, only peak measurements are required. The test receiver resolution bandwidth was set to 100 kHz and video bandwidth 300 kHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold. The test receiver was left to sweep for a sufficient length of time in order to maximise the carrier level and out-of-band emissions. A marker and corresponding reference level line were placed on the peak of the carrier. Marker frequencies and levels were recorded.
4. The restricted band peak measurements were performed in accordance with ANSI C63.10 Section 11.12.2.4.
5. As the upper band edge falls within a restricted band both peak and average measurements were recorded by placing a marker at the edge of the band. For peak measurements the test receiver resolution bandwidth was set to 1 MHz and the video bandwidth 3 MHz A peak detector was used, sweep time was set to auto and trace mode was Max Hold. For average measurements the test receiver resolution bandwidth was set to 1 MHz and the video bandwidth 3 MHz and RMS detector in linear power averaging mode was used. The test receiver was left to sweep for 300 sweeps in order to maximise the carrier level and out-of-band emissions. A marker was placed on the band edge spot frequencies and a second marker placed on the highest emission level in the adjacent restricted band of operation (where a higher-level emission was present). Marker frequencies and levels were recorded.
6. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.

Transmitter Band Edge Radiated Emissions (continued)**Notes:**

7. There is a restricted band 10 MHz below the lower band edge. The test receiver was set up as follows: the RBW set to 1 MHz, the VBW set to 3 MHz, with the sweep time set to auto couple. The test receiver was left to sweep for 300 sweeps in order to maximise the emissions. Peak and average measurements were performed with their respective detectors. Markers were placed on the highest point on each trace.
8. The Final radiated emissions measurements were performed on Bottom, Middle and Top channels with the EUT set to the following worst-case mode.
 - WLAN 2.4 GHz | b-Mode | 20 MHz| 1 Mbps | PWR MAX
 - WLAN 2.4 GHz | g-Mode | 20 MHz| 6 Mbps | PWR MAX
 - WLAN 2.4 GHz | n-Mode | 20 MHz| MCS0 | PWR MAX
9. As the EUT continuous transmission of the EUT ($D \geq 98\%$) can be achieved and EUT was transmitting continuously with 100% duty cycle (duty cycle variations are less than $\pm 2\%$). Therefore, Duty Cycle Correction Factors was not added to all average measurements.

Test Setup:

Transmitter Band Edge Radiated Emissions (continued)**Results: 802.11b / 20 MHz / 1 Mbps / PWR MAX****Results: Lower Band Edge / Peak**

Frequency (MHz)	Peak Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Result
2399.95	47.69	77.60	29.91	Complied
2400.00	47.55	77.60	30.05	Complied

Results: 2310 to 2390 MHz Restricted Band / Peak

Frequency (MHz)	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
2385.24	50.42	74.00	23.58	Complied

Results: 2310 to 2390 MHz Restricted Band / Average

Frequency (MHz)	Average Level (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
2387.32	39.17	54.00	14.83	Complied

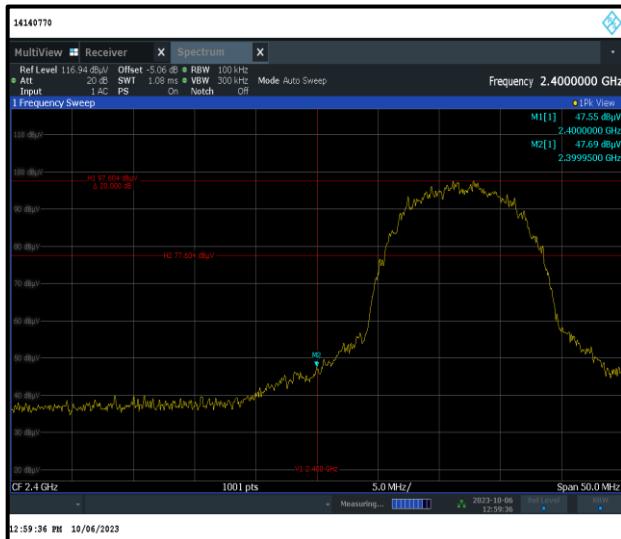
Results: Upper Band Edge / Peak

Frequency (MHz)	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
2483.50	44.02	74.00	29.98	Complied
2492.29	46.51	74.00	27.49	Complied

Results: Upper Band Edge / Average

Frequency (MHz)	Average Level (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
2483.50	34.54	54.00	19.46	Complied
2488.05	35.32	54.00	19.68	Complied

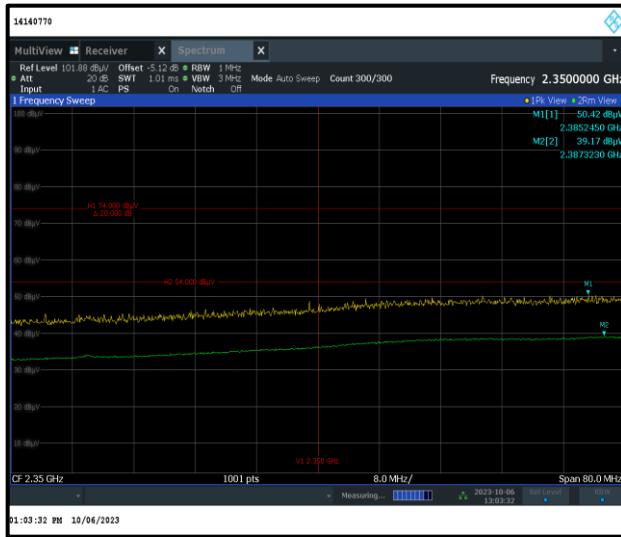
Result: Pass

Transmitter Band Edge Radiated Emissions (continued)**Results: 802.11b / 20 MHz / 1 Mbps / PWR MAX**

Lower Band Edge Peak Measurement



Upper Band Edge Measurement



2310 MHz to 2390 MHz Restricted Band Plot

Transmitter Band Edge Radiated Emissions (continued)**Results: 802.11g / 20 MHz / 6 Mbps / PWR MAX****Results: Lower Band Edge / Peak**

Frequency (MHz)	Peak Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Result
2399.45	66.00	78.19	12.19	Complied
2400.00	61.36	78.19	16.83	Complied

Results: 2310 to 2390 MHz Restricted Band / Peak

Frequency (MHz)	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
2389.96	69.47	74.00	4.53	Complied

Results: 2310 to 2390 MHz Restricted Band / Average

Frequency (MHz)	Average Level (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
2389.96	51.04	54.00	3.96	Complied

Results: Upper Band Edge / Peak

Frequency (MHz)	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
2483.50	66.34	74.00	7.66	Complied
2483.58	65.52	74.00	8.48	Complied

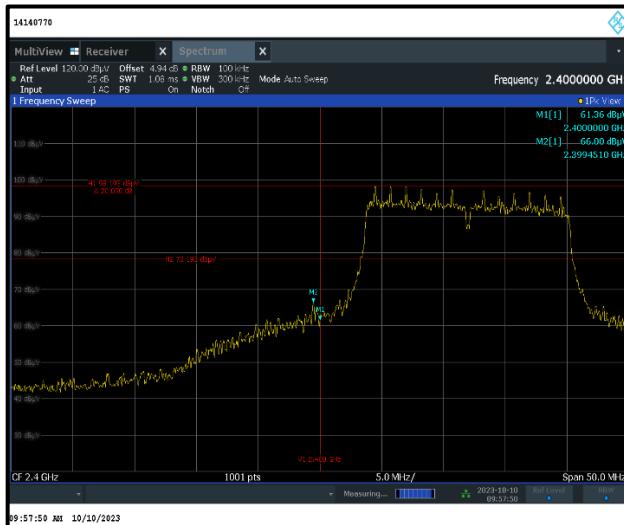
Results: Upper Band Edge / Average

Frequency (MHz)	Average Level (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
2483.50	52.34	54.00	1.66	Complied
2483.58	52.02	54.00	1.98	Complied

Result: Pass

Transmitter Band Edge Radiated Emissions (continued)

Results: 802.11g / 20 MHz / 6 Mbps / PWR MAX



Lower Band Edge Peak Measurement



Upper Band Edge Measurement



2310 MHz to 2390 MHz Restricted Band Plot

Transmitter Band Edge Radiated Emissions (continued)**Results: 802.11n / 20 MHz / MCS0 / PWR MAX****Results: Lower Band Edge / Peak**

Frequency (MHz)	Peak Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Result
2397.95	63.32	77.99	14.67	Complied
2400.00	60.83	77.99	17.16	Complied

Results: 2310 to 2390 MHz Restricted Band / Peak

Frequency (MHz)	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
2389.64	70.12	74.00	3.88	Complied

Results: 2310 to 2390 MHz Restricted Band / Average

Frequency (MHz)	Average Level (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
2389.96	50.79	54.00	3.21	Complied

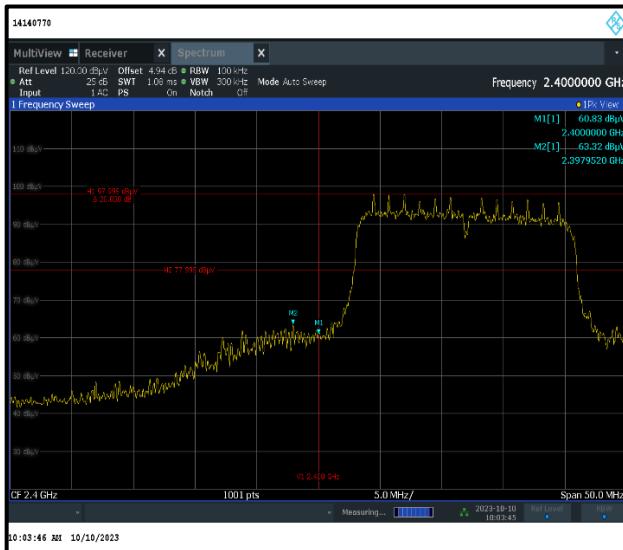
Results: Upper Band Edge / Peak

Frequency (MHz)	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
2483.50	69.92	74.00	4.08	Complied
2483.58	69.63	74.00	4.37	Complied

Results: Upper Band Edge / Average

Frequency (MHz)	Average Level (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
2483.50	52.94	54.00	1.06	Complied
2483.58	52.50	54.00	1.50	Complied

Result: Pass

Transmitter Band Edge Radiated Emissions (continued)**Results: 802.11n / 20 MHz / MCS0 / PWR MAX**

Lower Band Edge Peak Measurement



Upper Band Edge Measurement



2310 MHz to 2390 MHz Restricted Band Plot

6. Measurement Uncertainty

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

Measurement Type	Confidence Level (%)	Calculated Uncertainty
Radiated Spurious Emissions	95%	±3.10 dB
Band Edge Radiated Emissions	95%	±3.10 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

7. Used equipment

Test site: SR 1/2

ID	Manufacturer	Type	Model	Serial	Calibration Date	Cal. Cycle (months)
1	Rohde & Schwarz	Antenna, Loop	HFH2-Z2	831247/012	18/07/2023	36
377	BONN Elektronik	Amplifier, Low Noise Pre	BLMA 0118-1A	025294B	18/07/2023	12
423	Bonn Elektronik	Amplifier, Low Noise Pre	BLMA 1840-1A	55929	18/07/2023	12
460	Deisel	Turntable	DT 4250 S	n/a	n/a	n/a
465	Schwarzbeck	Antenna, Trilog Broadband	VULB 9168	9168-240	02/09/2020	42
496	Rohde & Schwarz	Antenna, log. - periodical	HL050	100297	22/08/2022	24
588	Maturo	Controller	NCD	029/7180311	n/a	n/a
591	Rohde & Schwarz	Receiver	ESU 40	100244/040	13/07/2023	12
669	Rohde & Schwarz	EMI Test Receiver	ESW 44	103087	13/07/2023	18
607	Schwarzbeck	Antenna broadband horn antenna	BBHA 9170	9170-561	15/10/2019	48
608	Rohde & Schwarz	Switch Matrix	OSP 120	101227	lab verification	n/a
628	Maturo	Antenna mast	CAM 4.0-P	224/19590716	n/a	n/a
629	Maturo	Kippeinrichtung	KE 2.5-R-M	MAT002	n/a	n/a
-/-	Testo	Thermo-Hygrometer	608-H1	01	lab verification	n/a
328	SPS	AC/DC power distribution system	PAS 5000	A2464 00/2 0200	lab verification	n/a
1603665	Siemens Matsushita Components	semi-anechoic chamber SR1/ 2	-/-	B83117-A1421-T161	n/a	n/a
681	Maturo	Antenna mast, tilting	BAM4.5-P	402/0718.1	n/a	n/a

8. Report Revision History

Version Number	Revision Details		
	Page No(s)	Clause	Details
1.0	30	-	Initial Version
1.1	Page No(s)	Clause	Details
	1	Front	FCC ID and standard updated
	4	1	Table info updated
	5	2.1	Standard updated
	6	2.2	Notes updated
	8	3.4	Additional info table and notes updated
	9	4.1	Notes updated
	11,12,14 &16	5.2.1	Notes updated
	20	5.2.2	Notes updated
1.2	Page No(s)	Clause	Details
	9	4.1	Notes updated
	11	5.2.1	Notes updated
	13	5.2.1	Result table updated
	16	5.2.1	Notes updated
Test Report Version 1.3 supersedes Version 1.2 with immediate effect			
Test Report No. UL-RPT-RP-14140770-2916-FCC Version 1.3, Issue Date 06 JUNE 2024 replaces			
Test Report No. UL-RPT-RP-14140770-2916-FCC Version 1.2, Issue Date 03 JUNE 2024, which is no longer valid.			
1.3	Page No(s)	Clause	Details
	13	5.2.1	Result table updated

--- END OF REPORT ---