



MYLOUserGUide

RevA|MYLOUserGuide

Copyright©2022CoralSmartPool,allrightsreserved.



Contact information

For help with this device, please contact Coral Smart Pool at:



Website

www.coralsmartpool.com



e-mail

info@coraldd.com



Facebook

www.facebook.com/CoralSmartPool

MENU

INTRODUCTION

INITIAL INSTALLATION

ROUTINE OPERATION

MAINTENANCE

TROUBLESHOOTING

SPECIFICATIONS





Preface

SafetyInstructions

- **MYLOdoesnotreplaceadult supervision.**
- Theconnectiontothepoolunitshouldbeconsistentwithalllocalandnationalwiringrules(electricalcode).
- Onlyusethepoolunitpowersupplycablesuppliedwiththesystem.

	Warning:
	A Ground Fault Current Interrupter (GFCI-USA) or a Residual CurrentDevice(RCD-EUROPE)mustbeinstalledtoprotectyour electric outlet and prevent any possible electric shock.

- MYLOoffersafieldviewof110°foradirectline-of-sightencompassingtheentirepool.
- MYLOoperationisoptimalinpoolsuppto10yardslong.
- Keepthepoolwaterasclearaspossible(consultwithapoolserviceprofessional).
- Verifythattheimagesretrievedfromthecamerasareclearandthatdetailsonthefarendofthepoolcanbeviewedclearly.
- MYLOisanotherlayerofsafetyanddoesnotreplaceotherpoolsafetydevicesormeasuresrequiredbylocalcity/state/countrylaws.
- MYLOusescomputervisiontechnologytodetectdrowning.Dependingonvariousfactors,somedrowningeventsmightnotbedetected.

MENU

INTRODUCTION

INITIALINSTALLATION

ROUTINEOPERATION

MAINTENANCE

TROUBLESHOOTING

SPECIFICATIONS





- MYLOusesWi-Fitotransferalerts,warnings,andnotifications,andimagesfromthepoolunittoyourpaireddevicesusingsecuredserversinthecloud.
- CommunicationtothepaireddevicesdependsonthequalityofthehomeWi-Finetwork,andcould,onoccasion,bedegradedorlowerdependingon signal quality.
- ThedrowningdetectionfunctionisnotdependentonWi-Ficommunication.Thealarmsandindicatorsinthepoolunitandhomeunitdonotdependon the Wi-Fi network quality.
- Thehomeunitmustbepluggedintoapoweroutletinsidethehouse,ascloseaspossibletothepoolunit.Makesurethehomeunitcanbeclearlyseenand heardinsidethehomeatalltimes(e.g.whenthereisbackgroundnoise,music,peopletalking,orworkingelectricalappliances).
- Thepowercableprovideslowvoltage(24V)tothepoolunit,andcanbesafelyusednexttothepool.
- **AdultsupervisionisrequiredATALLTimes.**

MENU





Disclaimers

- Using MYLO is subject to the acceptance of the “Terms of Use” and “Privacy Policy”.
- Setting up and installing MYLO indicates your acceptance of the “Terms of Use” and “Privacy Policy”.
- If you DO NOT accept the “Terms of Use” and “Privacy Policy” please contact us to arrange a refund and return shipment.
- Activating MYLO requires pairing it with the MYLO app (using the app is mandatory only for activating the system).



Note:

The shape and position of the pool may effect system performance. Verify that the pool shape is suitable and that the pool unit is installed in the proper place, see [Mounting the Docking Station](#).

MENU

INTRODUCTION

INITIAL INSTALLATION

ROUTINE OPERATION

MAINTENANCE

TROUBLESHOOTING

SPECIFICATIONS





introduction

This chapter provides an overview of the system and includes:

- [System Layout](#)
- [Pool Unit](#)
- [Home Unit](#)
- [Mobile Application](#)

MENU

INTRODUCTION

INITIAL INSTALLATION

ROUTINE OPERATION

MAINTENANCE

TROUBLESHOOTING

SPECIFICATIONS






SystemLayout

MYLO is programmed to detect people, their position and motion, both in and around the pool. MYLO analyzes images captured by cameras above and underwater. When MYLO detects an near drowning event, an alarm is generated. MYLO learns from image analysis and attempts to automatically ignore alerts generated from false alarms.

MYLO includes the following:

- [Pool Unit](#) (1): mounted on a corner of the pool, it includes video cameras, and generates alerts according to the scenario identified in the pool (see [Detection Scenarios](#)). The pool unit transmits alerts to the home unit (2) and to the mobile device (3) as needed.
- [Home Unit](#) (2): connected to a power outlet in the house, it communicates with the pool unit over RF (direct) communication, and provides audio and visual indication of the alerts received from the pool unit.
- [Mobile Application](#) (3): the MYLO mobile application, installed on a mobile device (3), provides alerts, system status notifications and remote monitoring.

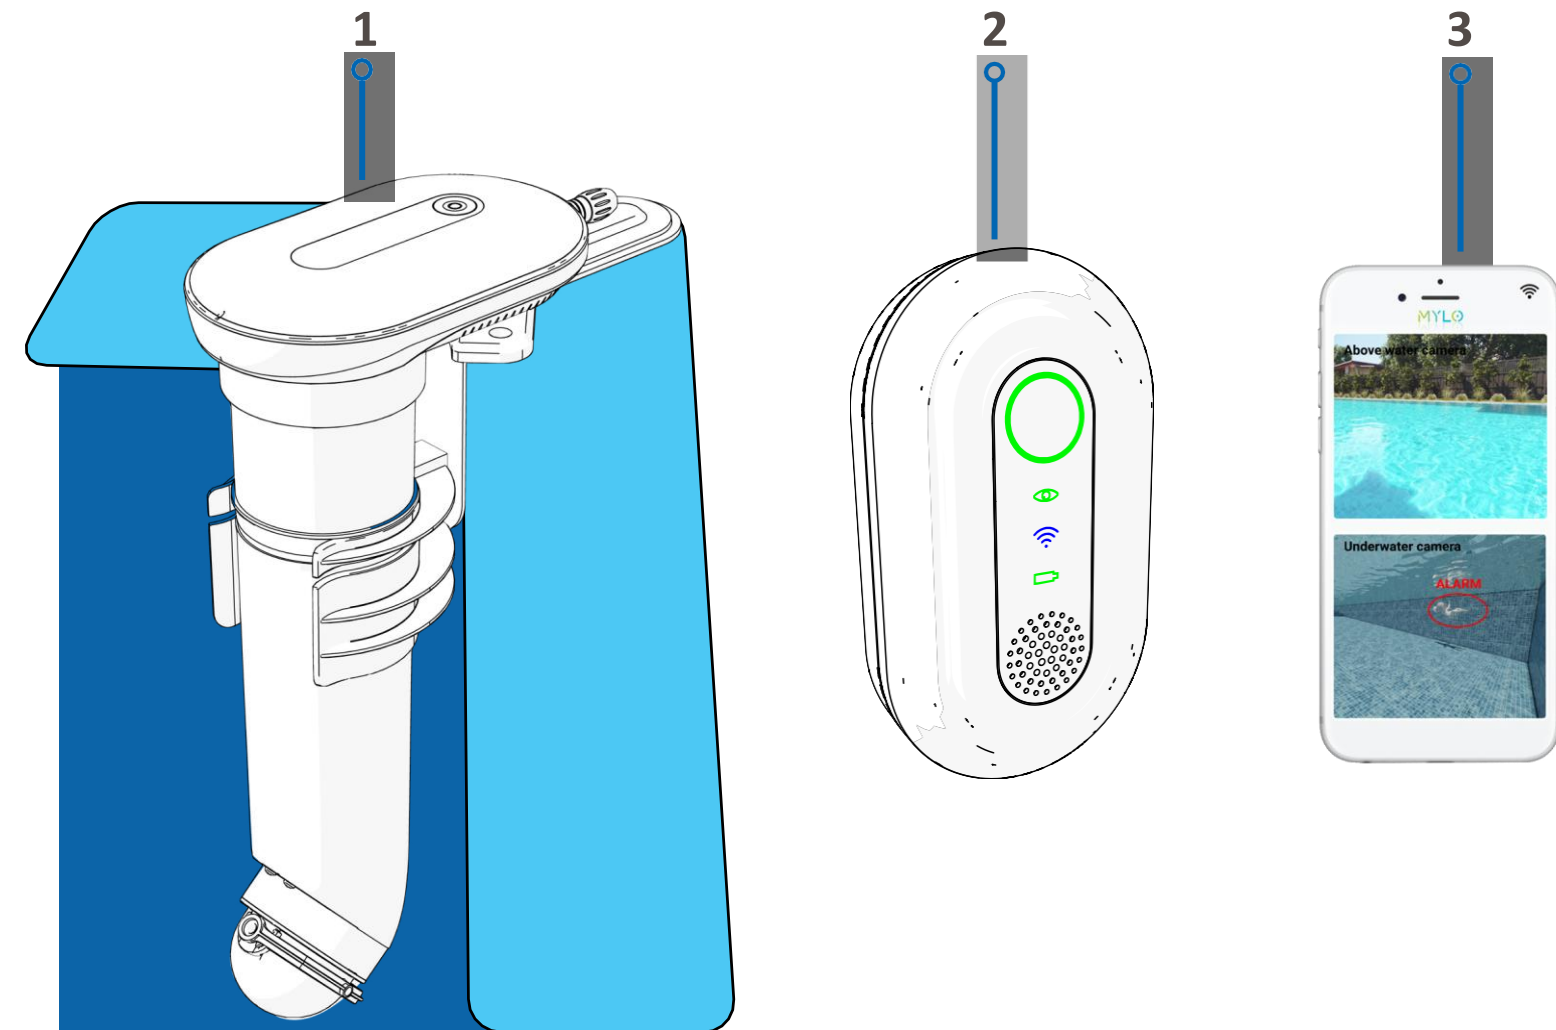

MENU






PoolUnit

Overview

The poolunit includes the following:

- Indicators and Button(1)
- Above-water Camera(2)
- Activity Sensor(3)
- Underwater Camera(4)
- Siren(5)
- Docking Station(6)

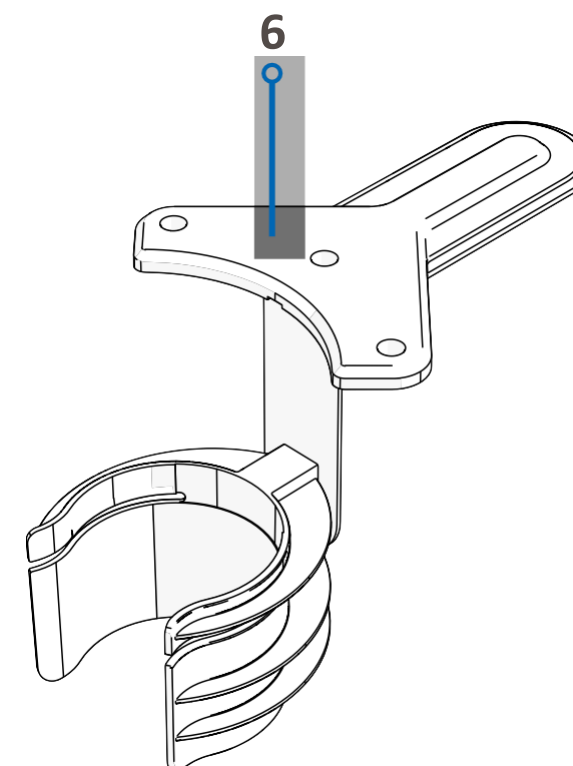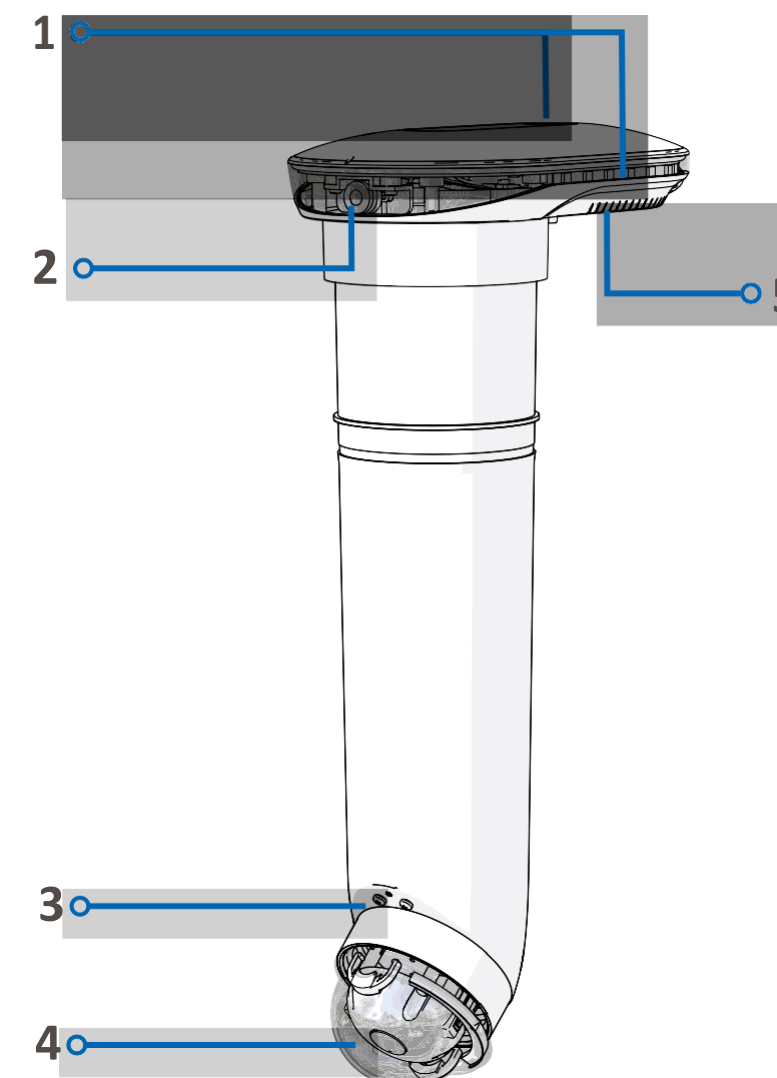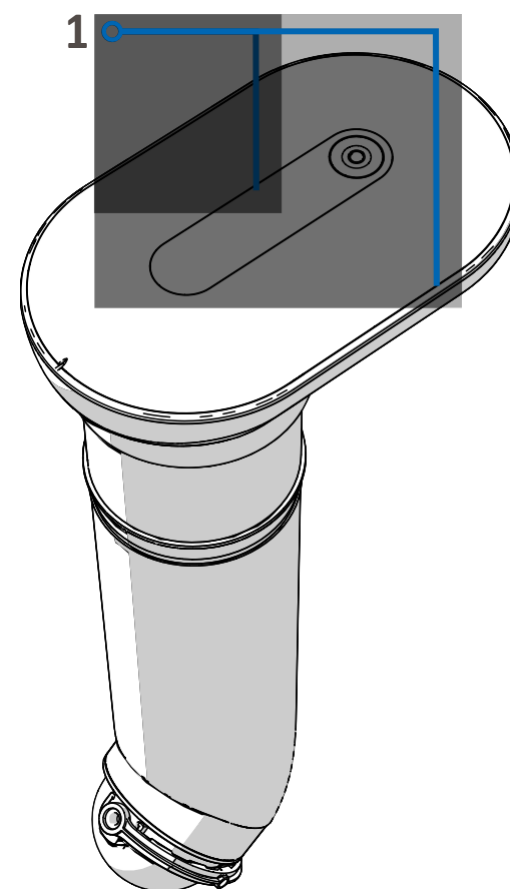

MENU

INTRODUCTION

INITIAL INSTALLATION

ROUTINE OPERATION

MAINTENANCE

TROUBLESHOOTING

SPECIFICATIONS




IndicatorsandButtons

Thesideindicators(1)providevisualindicationsofthedifferentscenariosin the pool. See [Detection Scenarios](#) for more information.

Theupperindicators(2)areusuallyoffandwillturnredonlywhensignsof drowning are detected. In this case, the alarm (4) will sound.

Thedismissalarmbutton(3)hasthefollowingoperations:

- **dismissAlarm**:shortpressupto5secondstosilencethealarm(incase of a false alarm).
- **reset**:pressandholdfor5secondstoresetthesystem.
- **Power Off**: press and hold for 10 seconds to turn off the system. (Useonly before uninstalling the system).

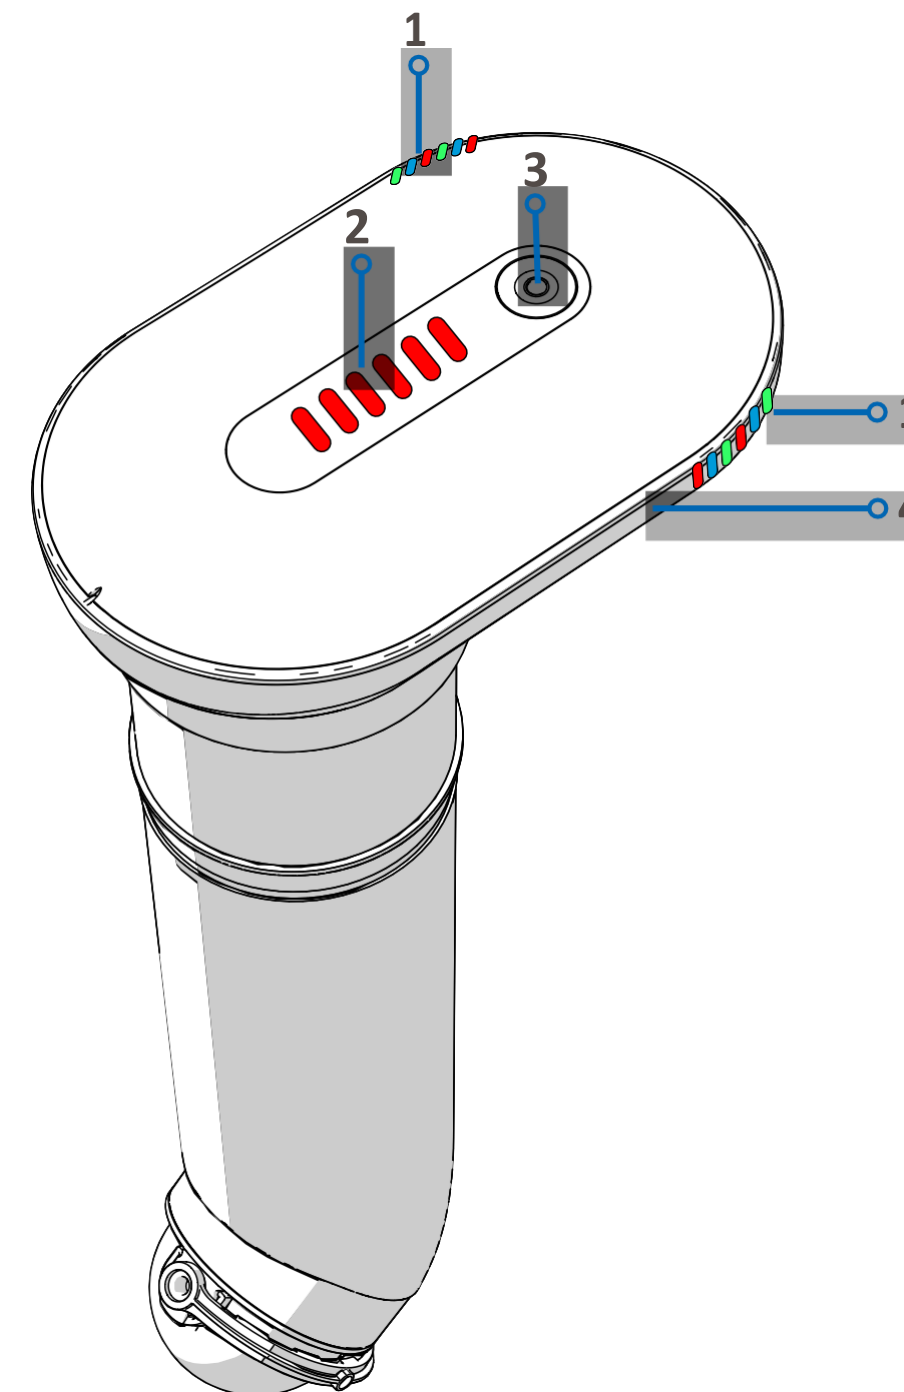

	Note:
	ONLYForWinterstorage: PowerOFF :longpress(morethan10seconds) PowerON :presstoactivate.

MENU

[INTRODUCTION](#)
[INITIALINSTALLATION](#)
[ROUTINEOPERATION](#)
[MAINTENANCE](#)
[TROUBLESHOOTING](#)
[SPECIFICATIONS](#)



PowerSupply


Thepoolunitincludes:

- DCin(1)–powersupplycordinlet
- PowersupplyCord(2)



Warning:

The system does not work without a connected power supply.
Keep the system connected at all times.

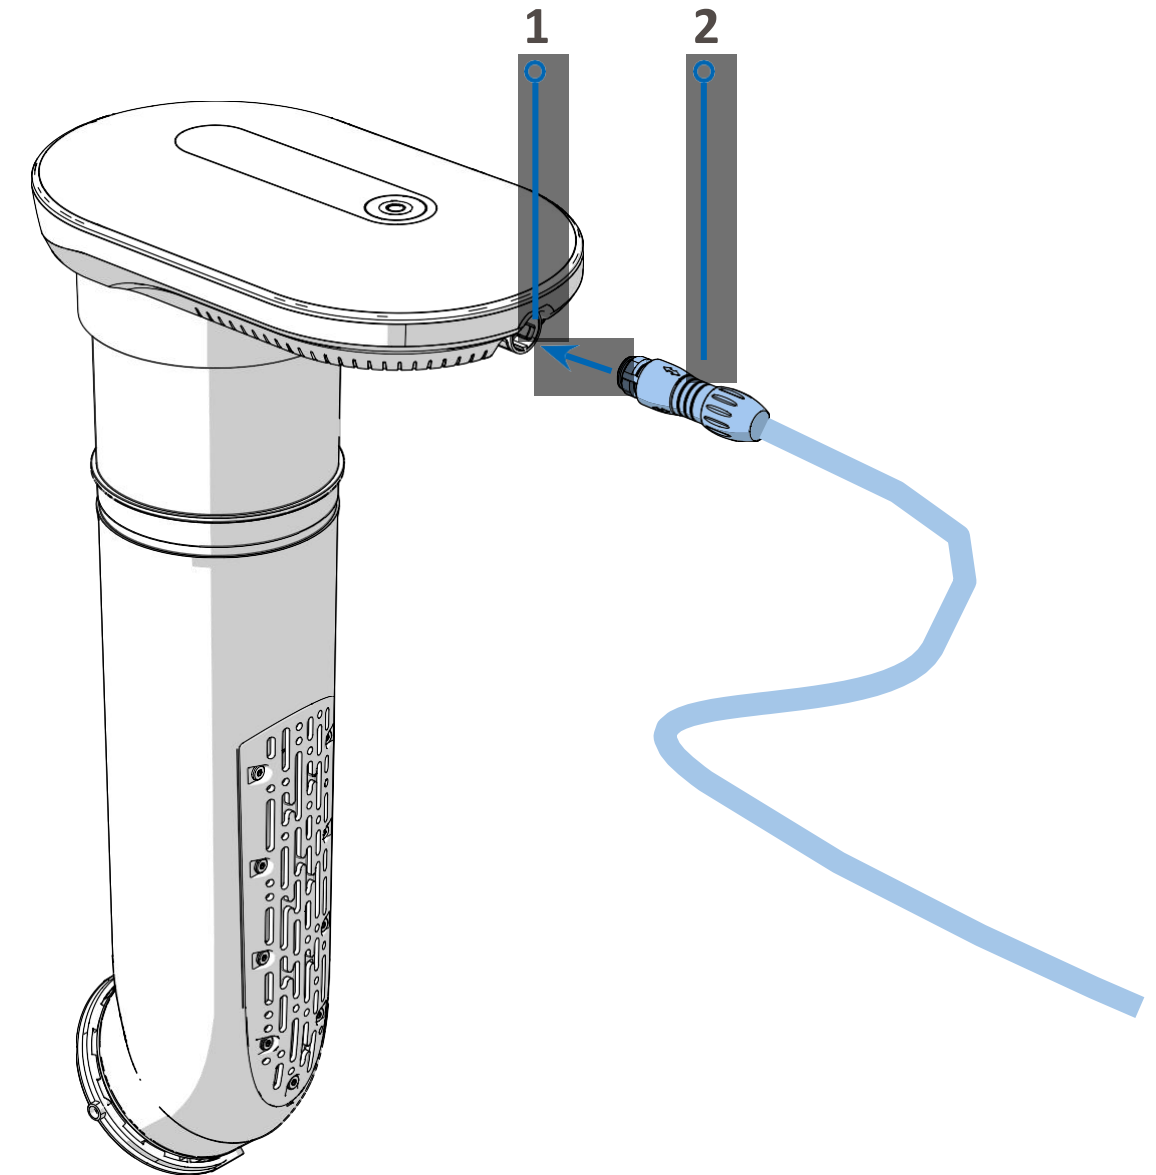

MENU

INTRODUCTION

INITIALINSTALLATION

ROUTINEOPERATION

MAINTENANCE

TROUBLESHOOTING



SPECIFICATIONS



DockingStation

The docking station is mounted on a corner of the pool, (see [Selecting the Mounting Position](#)) and serves as a base for the pool unit. After first installation of the docking station (see [Mounting the Docking Station](#)), the pool unit can be installed or removed quickly. The docking station includes the following:

- **dockingstationBase(1)**-attached to the surface with two screws.
- **BasePlateCover(3)**-covers the screws.
- **screws(2)**-two screws to secure the docking station to the selected corner of the pool.

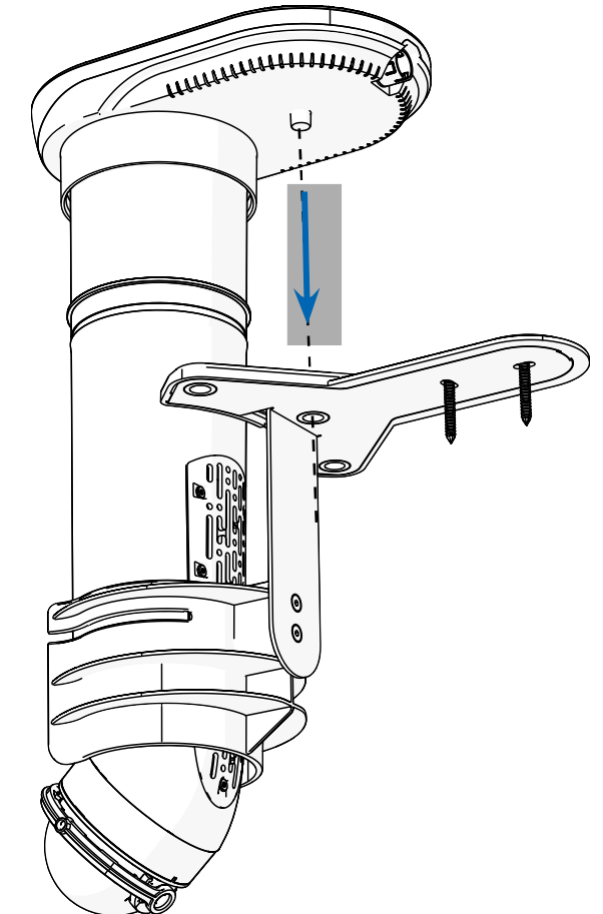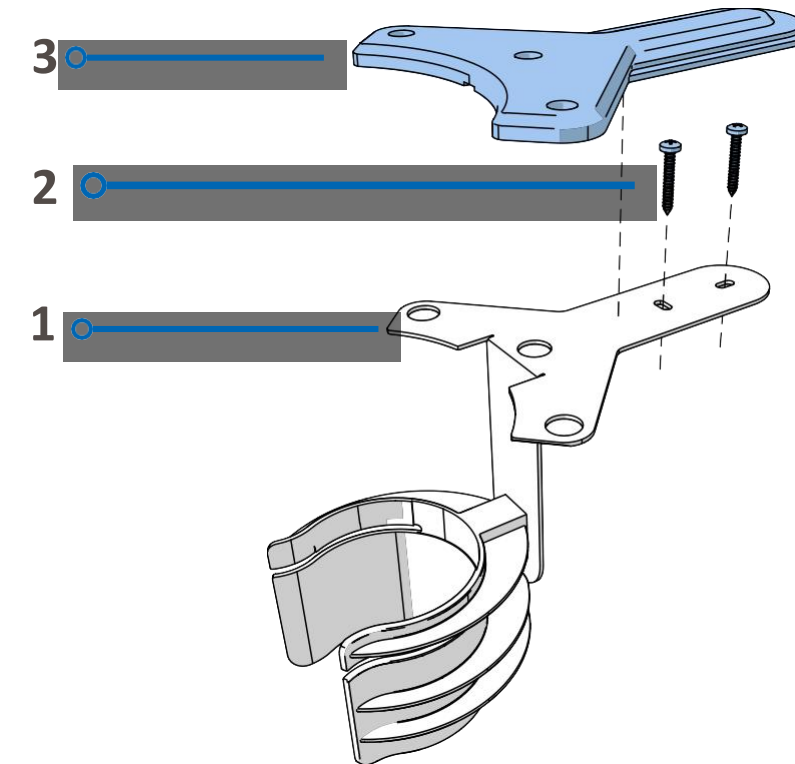


MENU



HomeUnit

The home unit is plugged into a power outlet inside the user's home and includes the following:

- **Plug(1)**—connects to a power outlet inside the house.
- **Pool Activity indicator(2)**—provides visual indication of the different scenarios in the pool, see [Detection Scenarios](#).
- **Led indicators(3)**—provide indication of the system operation—connectivity, power, and visibility, see [Home Unit Indicators](#).
- **Buzzer(4)**—provides auditory indication of different scenarios in the pool, see [Detection Scenarios](#).

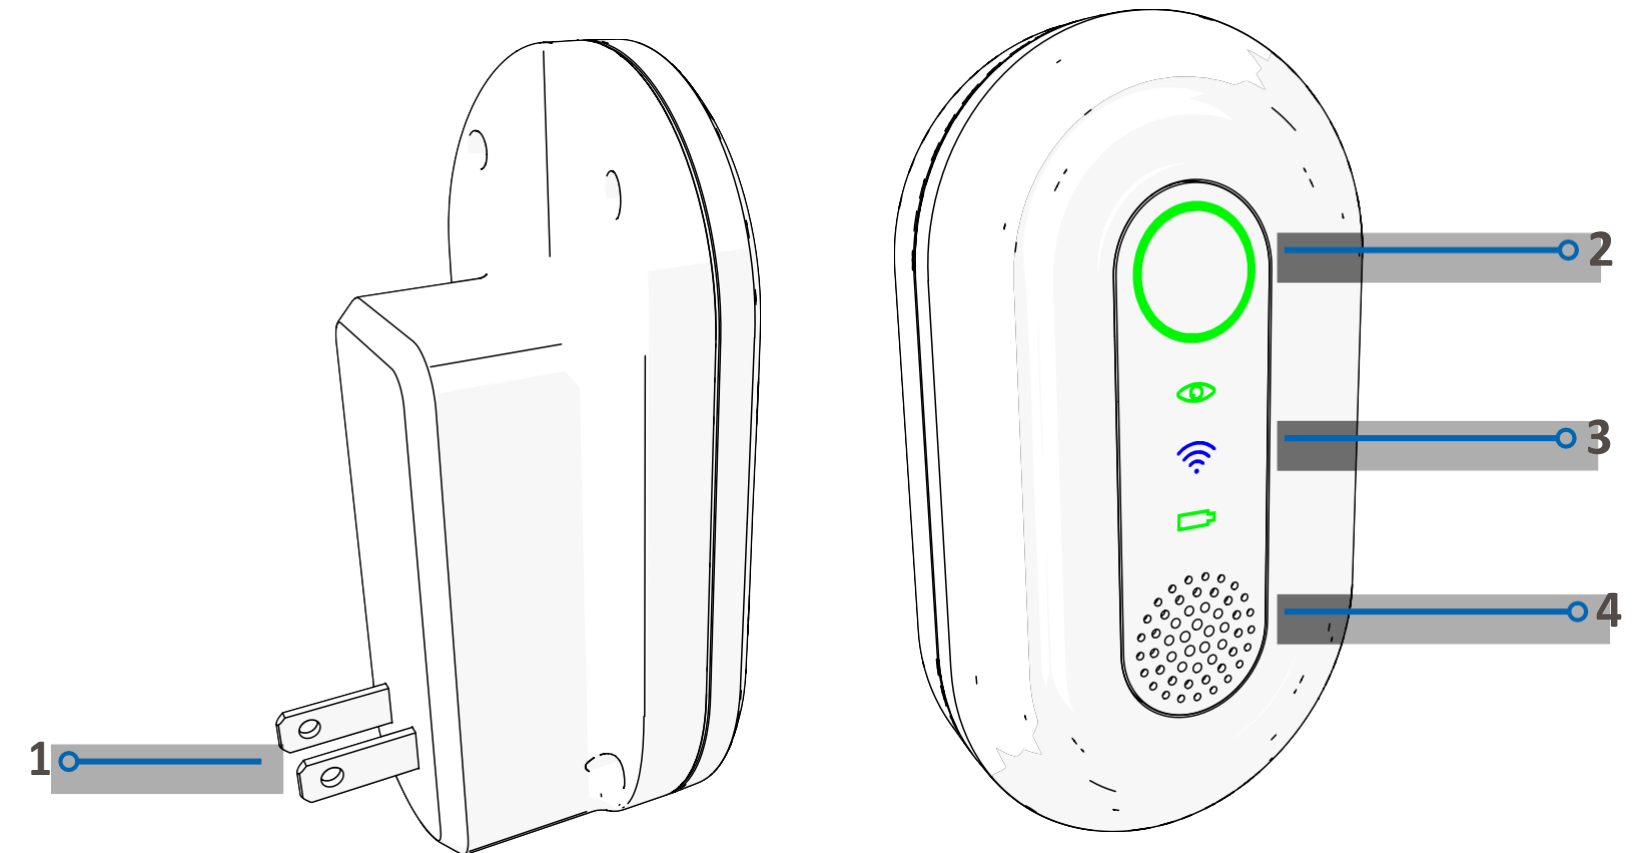

MENU



HomeUnitIndicators

Water Visibility indicator(1)

Thewatervisibilityindicator(1)providesthefollowingindicationsofwater clarity:

- **steadygreen**—clearwater
- **steadyyellow**—thereissomevisibilitydegradation
- **steadyred**—thereissignificantvisibilitydegradation


Communicationindicator(2)

Thecommunicationindicator(2)providesthefollowingindicationsofconnectivity:

- **steadyblue**—thepoolunitisconnectedtotheInternet
- **Blinkingblue**—noInternetconnectioninthepoolunit

PoolUnitPowerindicator(3)

Thepoolunitindicator(3)shouldalwaysappearsteadygreenindicating power is supplied to the pool unit.

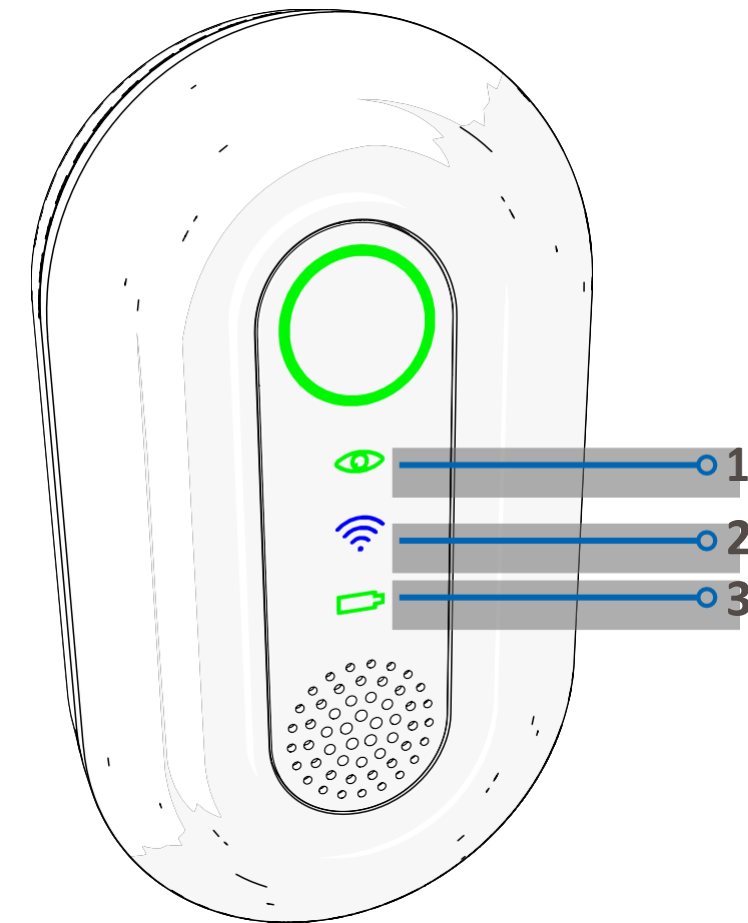

MENU



MobileApplication

The**MYLO**by**CoralsmartPool**mobileapplicationisavailableonthe GooglePlayStoreandontheAppleAppStore.

ThemobileapplicationreceivesalertsfromtheMYLO deviceandproduces notifications on the mobile device.

Themobileapplicationallowstheusertoretrieveimagesofthepool, dismiss alerts, and receive notifications of visibility and connectivity.

MENU





initialinstallation

Thischapterprovidesinstallationinstructionsandincludes:

- [OpeningtheBox](#)
- [SelectingtheMountingPosition](#)
- [SelectingtheMountingOrientation](#)
- [MountingtheDockingStation](#)
- [InsertingtheUnitintotheDockingStation](#)
- [ConnectingtheUnittoPower](#)
- [ConnectingtheHomeUnit](#)
- [DownloadingtheMYLOApplication](#)

MENU

INTRODUCTION

INITIALINSTALLATION

ROUTINEOPERATION

MAINTENANCE

TROUBLESHOOTING



SPECIFICATIONS





OpeningtheBox

TheMYLOpackageincludesthefollowing:

	description	QTY
	PoolUnit	1
	HomeUnit	1
	DockingStationandPlasticCover	1
	PowerCord The adapter shall be installed near the equipment and shall be easily accessible.	1
	Accessories Pack	1
	QuickStartGuide	1

MENU





SelectingtheMountingPosition

Selectthemountingpositionaccordingtothefollowingguidelines:

- Poolsizeanddimensionscomplywithsystemrequirements(see[Coralwebsite](#)).
- Camera line of sight covers the entire pool area (the camera has a field of view of 110°).
- Distance between the home unit and the pool unit should not exceed 50yards.
- Thedockingstationmountingscrewsshouldbeanchored.Formore information,see[MountingtheDockingStation](#).
- The pool water level should reach at least the minimum mark on theunderwatertubeonceitisinsertedintothe pool.




MENU

SelectingtheMountingOrientation


The docking station must be mounted, depending on pool size, in the best location for drowning detection. The selected location must have a field of view of 110° , and a pool edge ready for drilling and fastening two mounting holes. Select one of the following mounting orientations:

- For a pool that has a round or straight edge (1).
- When mounting the unit on the corner of the pool, use the straight mounting (2). If the surface of the pool's edge is not conducive for drilling of the two holes, use the rotated mounting option (3).


ROUND OR STRAIGHT WALL

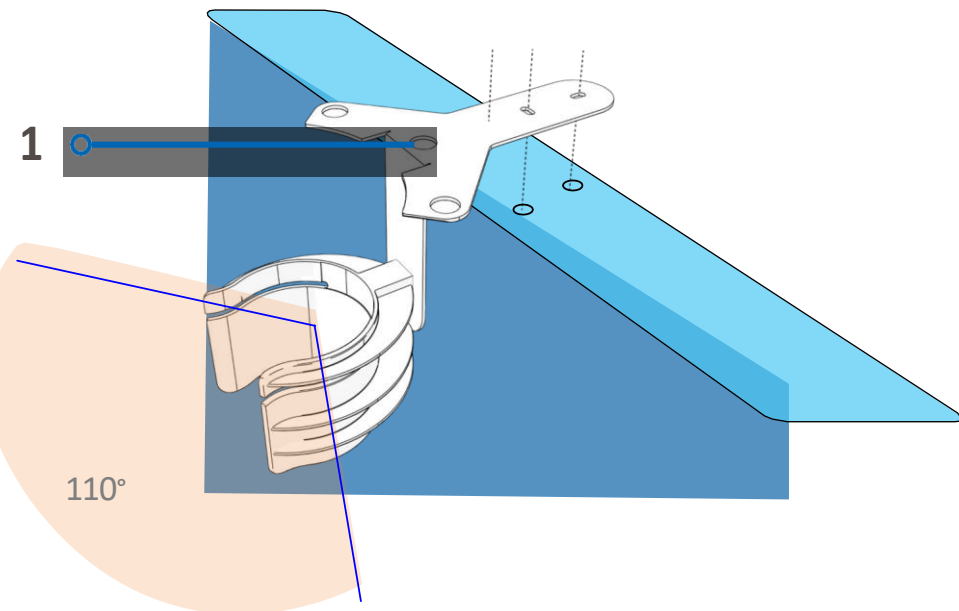

CORNER MOUNTING (STRAIGHT)

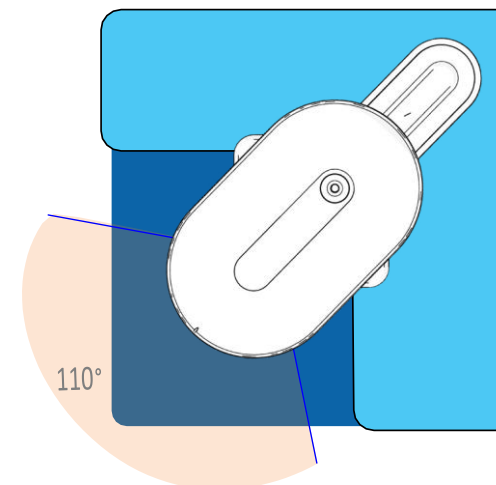

CORNER MOUNTING (ROTATED)

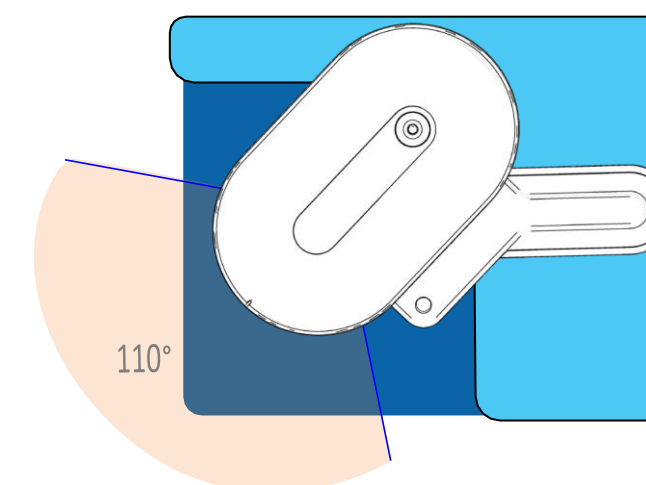



MENU

MountingtheDockingStation

Aftertheoptimallocationforthepoolunithasbeenchosen,performthefollowingto install the docking station:


- A. Placethedockingstationontheselectedwallofthepoolthathasa110°fieldofview.
- B. Verifythatthemetalverticalpart(3)touchestheinnerwallofthe pool.
- C. Markthelocationofthescrews(1).
- D. Drilltwo8mm(5/16")holes(2).

	Note:
	Imageshereareforillustrationonlyanddepicttheinstallationof the docking station in the corner of the pool. Mount the unit according previous pages (see Selecting the Mounting Position).

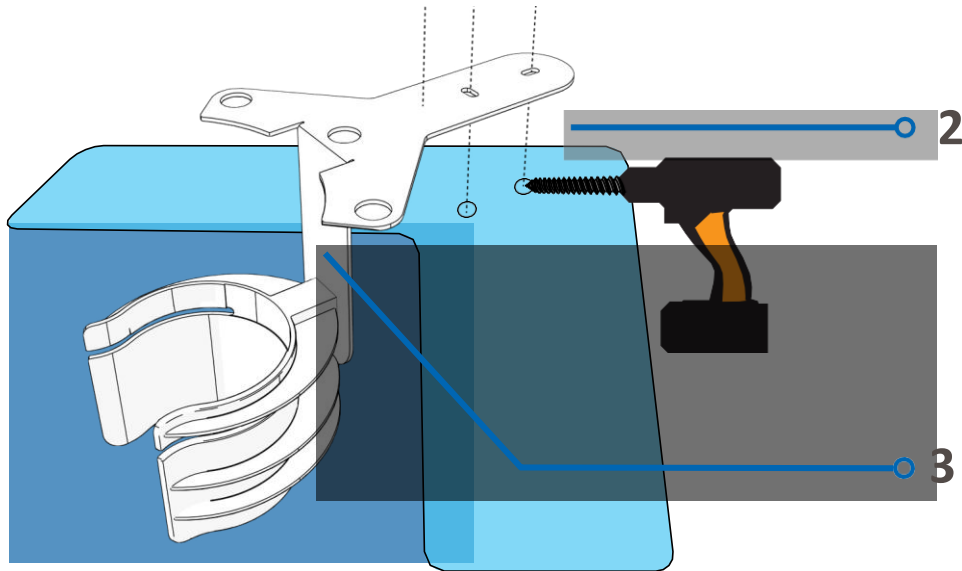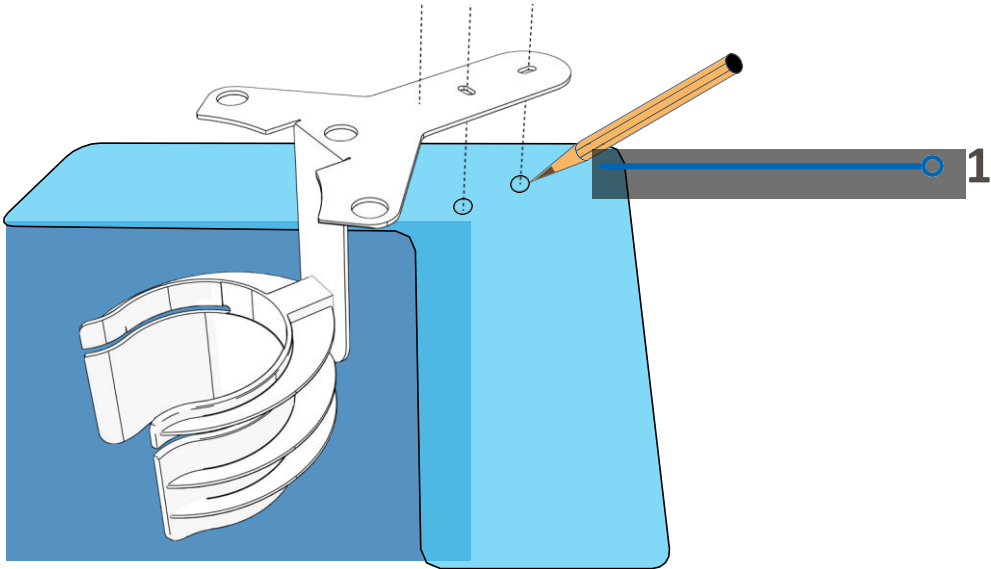

MENU

- A. Placetwoscrewanchors(4)intheholes(5).
- B. Attachthedockingstation(3)usingtwoscrews(2).
- C. Attachthebaseplatecover(1).


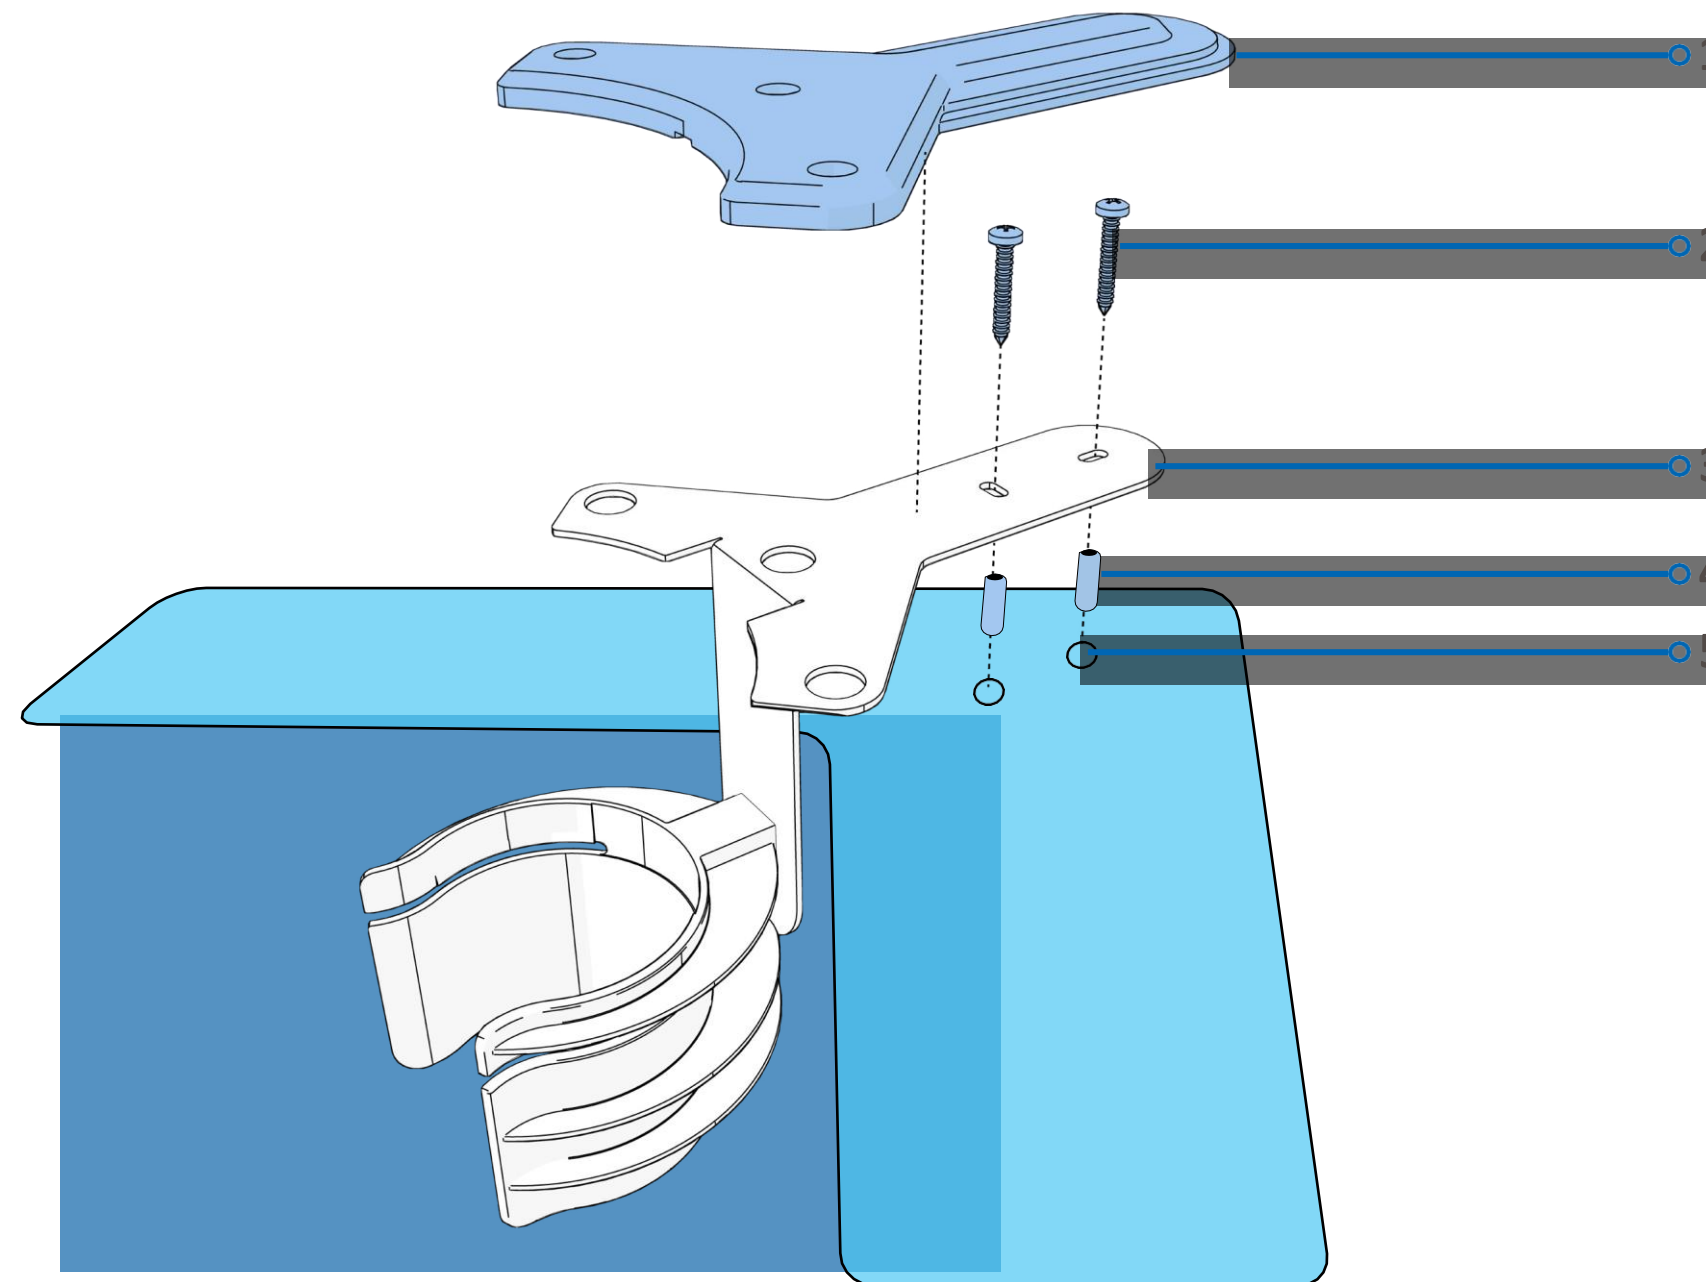


MENU

[INTRODUCTION](#)[INITIALINSTALLATION](#)[ROUTINEOPERATION](#)[MAINTENANCE](#)[TROUBLESHOOTING](#)[SPECIFICATIONS](#)

InsertingtheUnitintotheDockingStation



- A. Takethepoolunitoutofthepackage.
- B. Insertthelowerpartoftheunit(2)intothedockingstationgrip(4).
- C. Gentlylowerthepoolunituntilthegrip(5)catchesandholdsthegripmarks(1).
- D. Insertthepoolunitpin(3)accordingtostraightorrotateddockingposition.Forstraightmountings,thepinisinsertedintothecentralhole(6). Forrotatedmountings,thepinisinsertedintooneofthetwoexternalholes(7),see[MountingtheDockingStation](#).

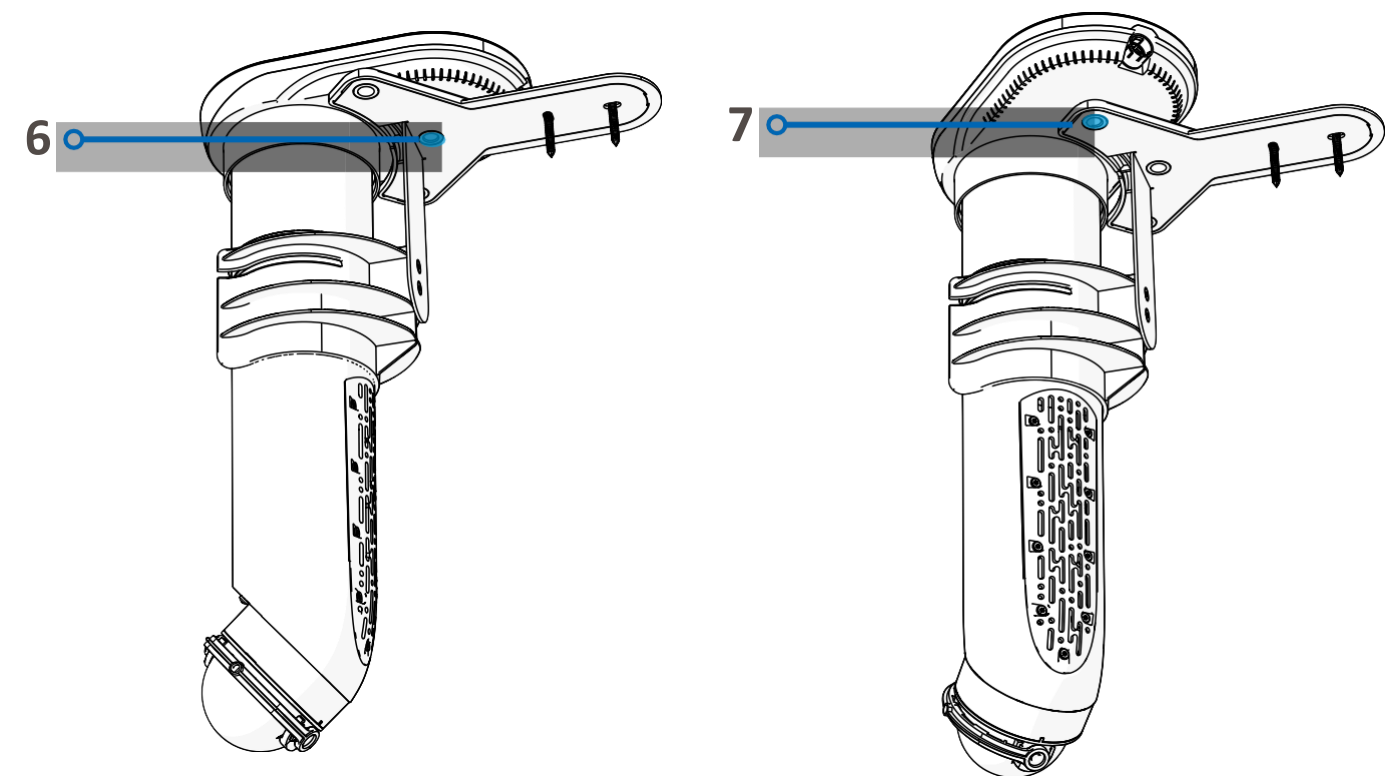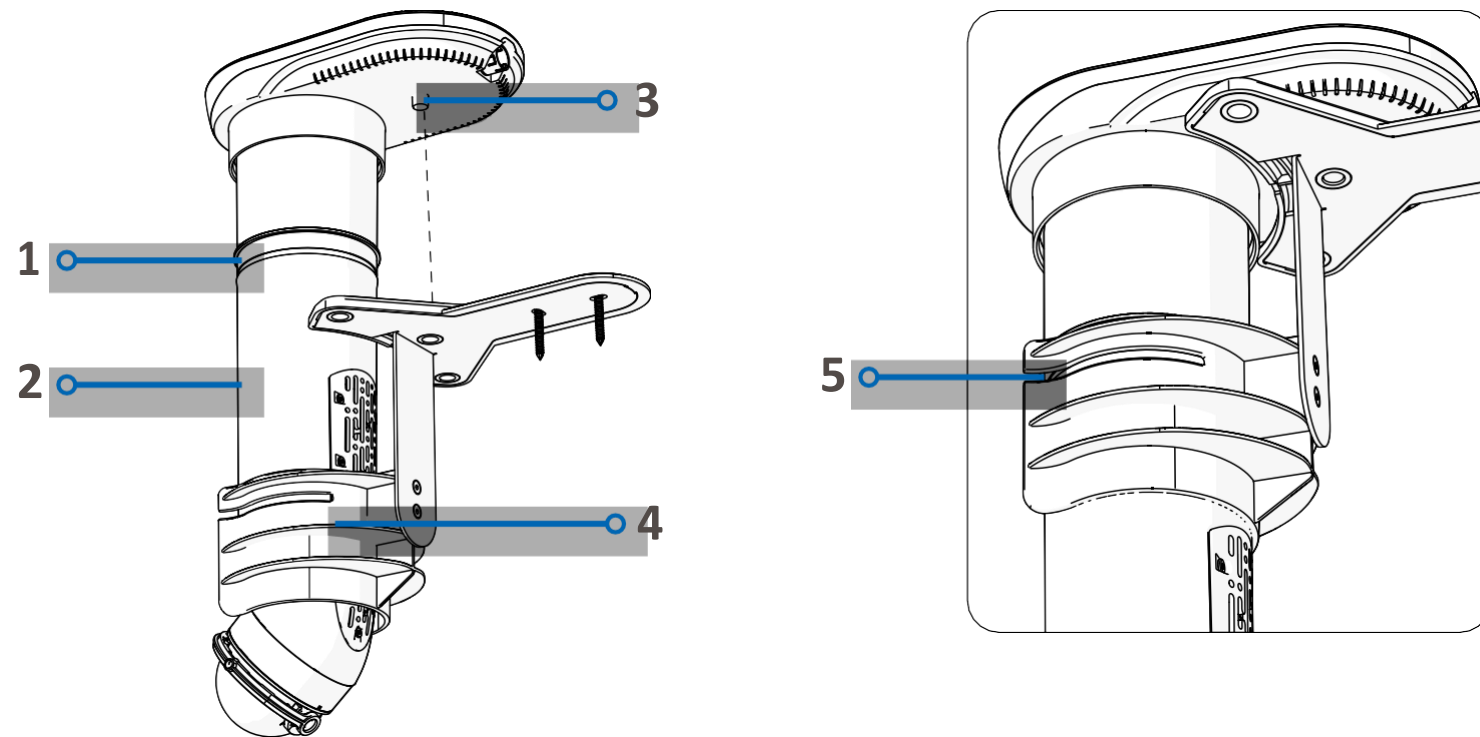

MENU

ConnectingtheUnittoPower

- A. Insertthepowercordintothe poolunitconnection(1)andplugthe other end into a water protected power outlet.
- B. Theside indicationLEDswillstartblinkingwhite(2).Afterabout 30seconds,theLEDswillchangetogreen(3),indicatingthatthe system is active.

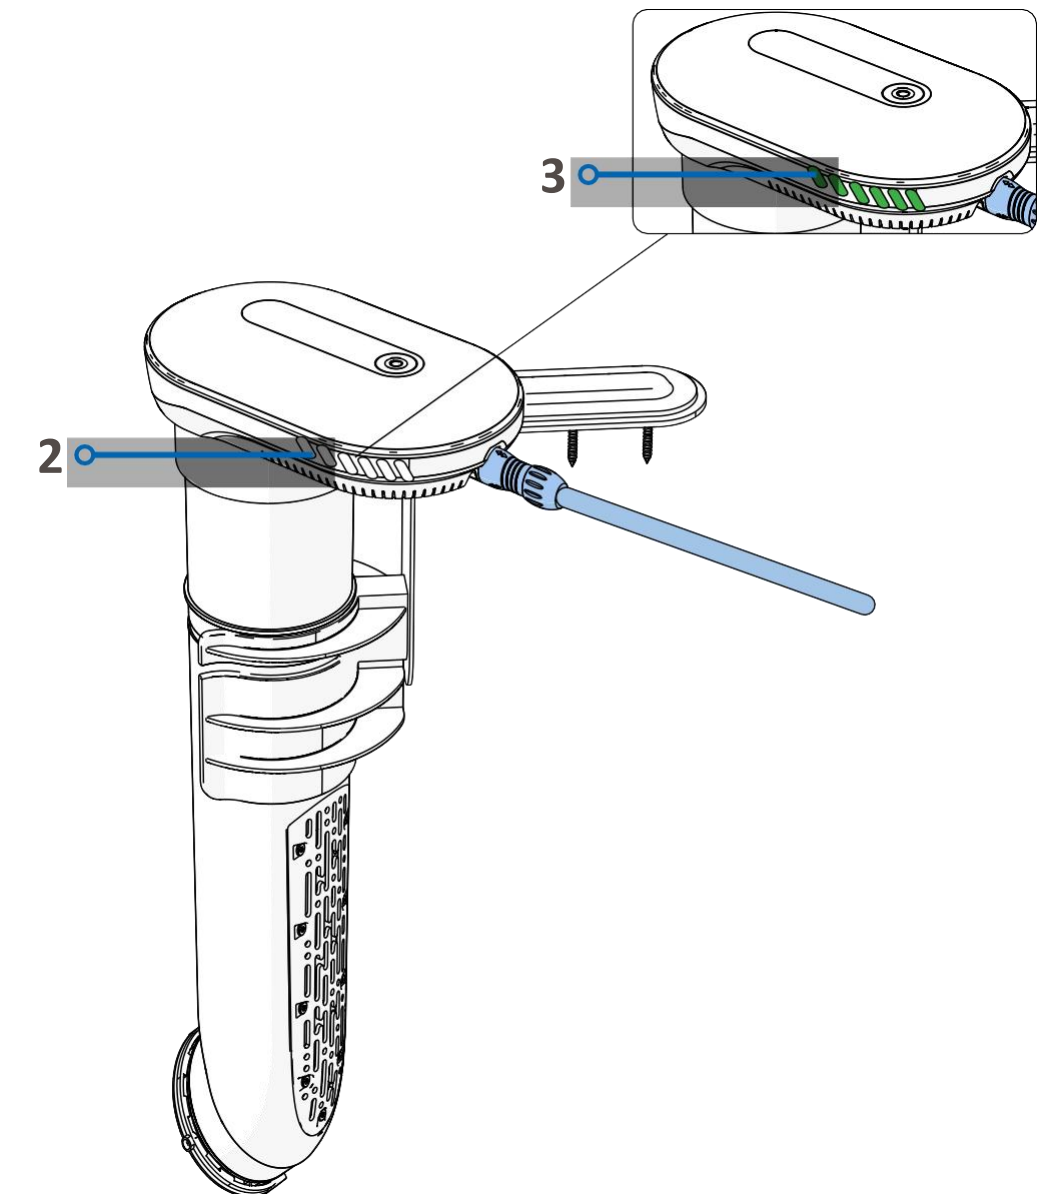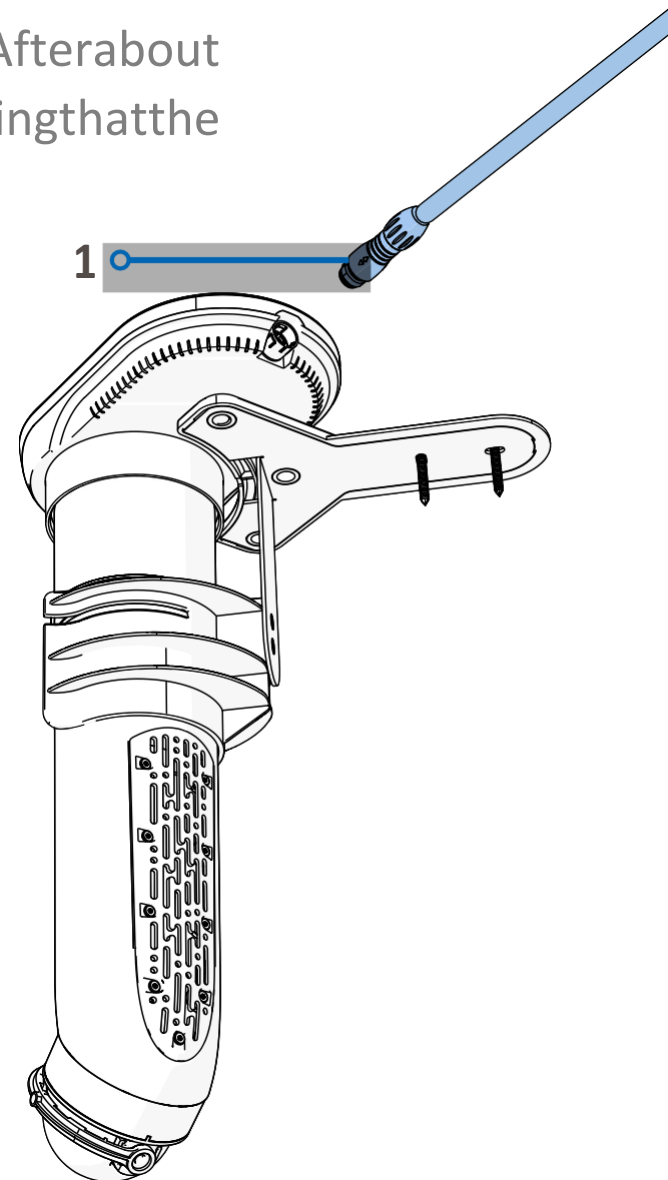

MENU




WaterLevel

The water level in the pool must reach the water level mark (1) on the tube.



Note:

The water level is important to ensure the optimal performance of the system's processor and underwater camera. If the minimal water level is not met, add water to the pool. If for any reason this is not possible, contact Coral Smart Pool.

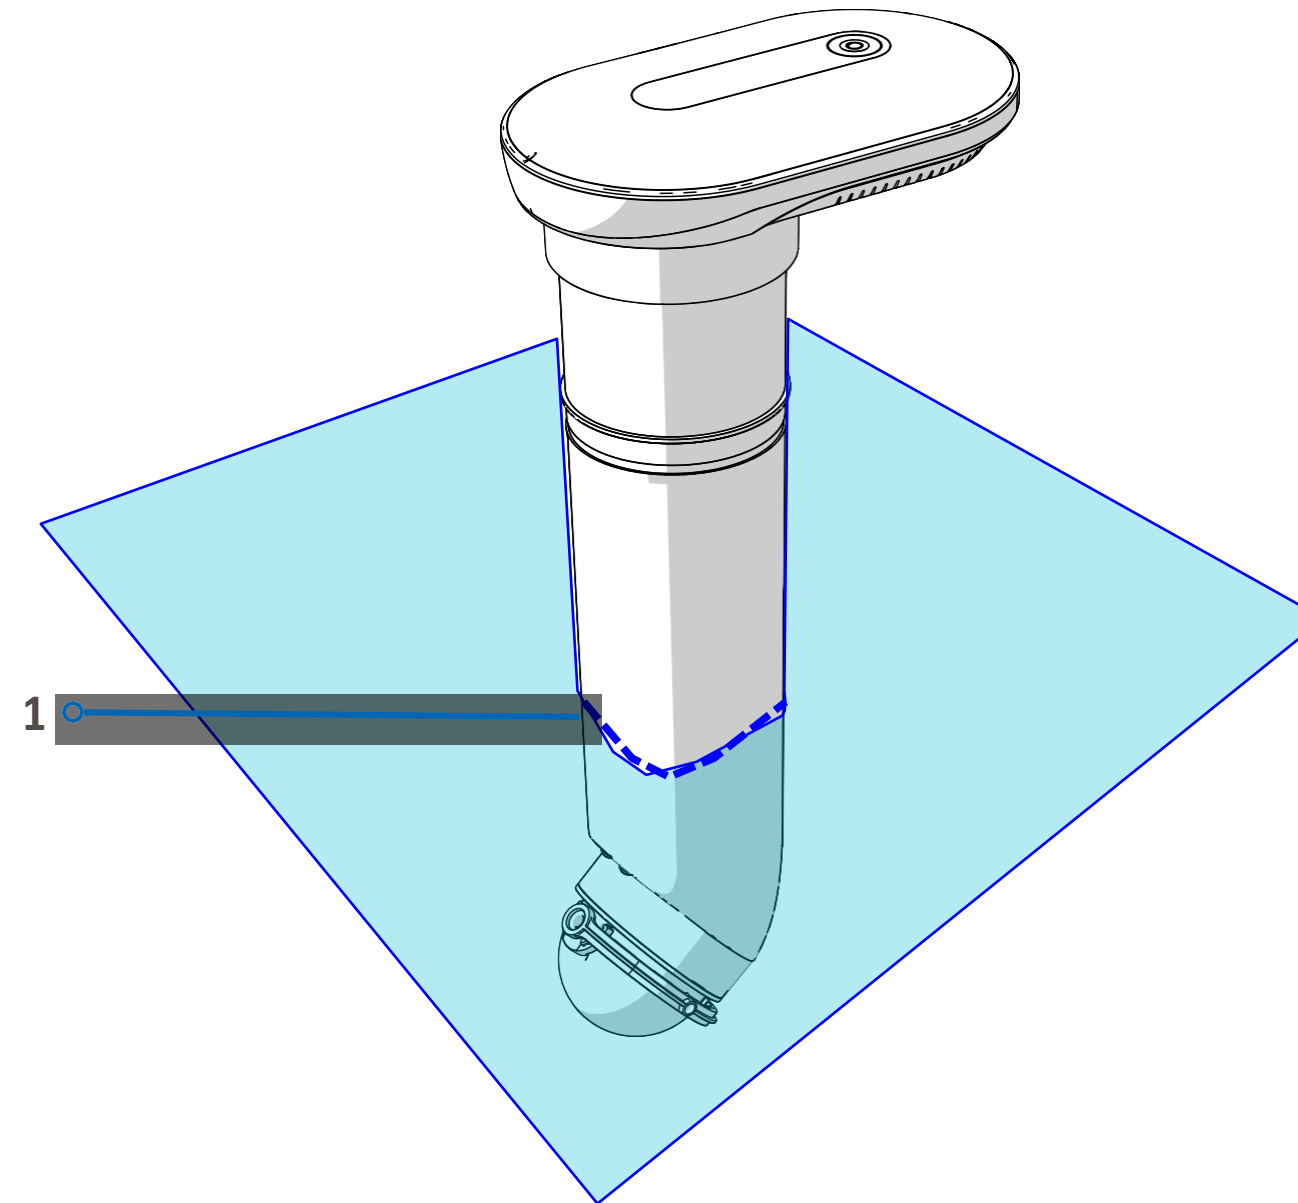

MENU

INTRODUCTION

INITIAL INSTALLATION

ROUTINE OPERATION

MAINTENANCE

TROUBLESHOOTING

SPECIFICATIONS





ConnectingtheHomeUnit


Toinstallthehomeunit,plugitintoapoweroutletinsidethehouse,as closeaspossibletothepoolunit.Thedistancebetweenthe twounits shouldnotexceed50yards.

Oncethehomeunitispluggedinandthepoolunitisoperational,the following indications occur:

- A. SystemStart-Up –all LEDsblink inall colorsand thebuzzer (2)emitsashortbeep.
- B. Oncethepoolunitandhomeunitaresynchronized,thepool activity indicator (1) will blink green slowly.

DownloadingtheMYLOApplication

DownloadandInstallthe**MYLObyCoralsmartPool**mobileapplication fromtheGooglePlayStoreorAppleAppStore.Followtheinstallationand pairing instructions on the application. For more information, see [Mobile ApplicationOperation](#).

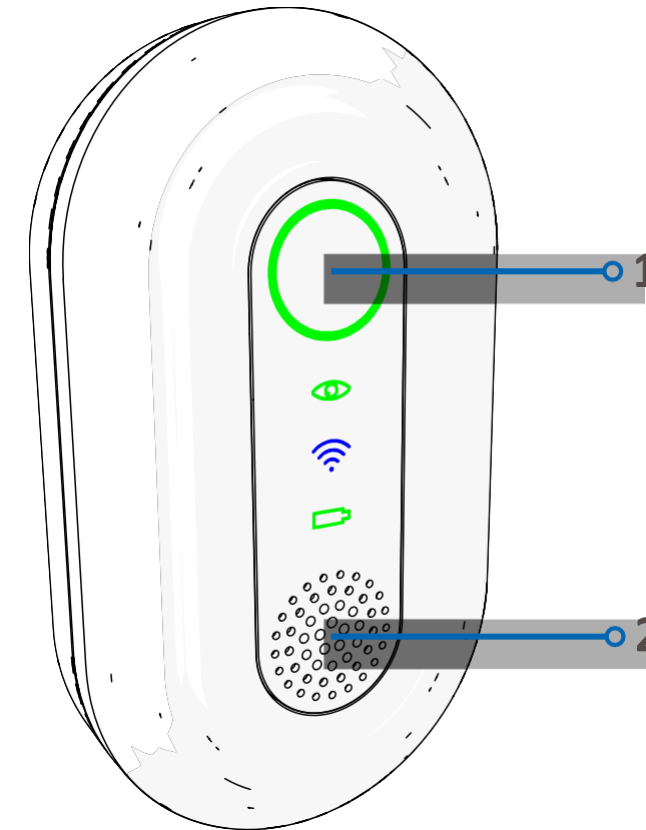

MENU



routineOperation

Overview

This section reviews the tasks associated with operating MYLO, and includes:

- [DetectionScenarios](#)
- [MobileApplicationOperation](#)

	Notes:
	▪ Alerts on the mobile device depend on the strength of the network communication. When the Wi-Fi signal is unsteady or weak, you may not receive timely alerts and/or notifications. ▪ Never rely solely on alerts on the mobile device.

MENU







DetectionScenarios

MYLO displays the following indicators to report the identified pool activity:

- Pool activity indicator on the pool unit (6) and on the home unit (1).
- Buzzers on the pool unit (5) and on the home unit (3).
- Additional red light - only activated in drowning events (2).
- Mobile app (4).

When MYLO is operational it can identify each of the following scenarios:

- [Pool Area is Unoccupied](#)
- [Entrance To The Pool Area / Entrance To Pool](#)
- [Normal Pool Use](#)
- [Drowning Suspicion](#)
- [Drowning Alert](#)
- [Drowning Critical Alert](#)

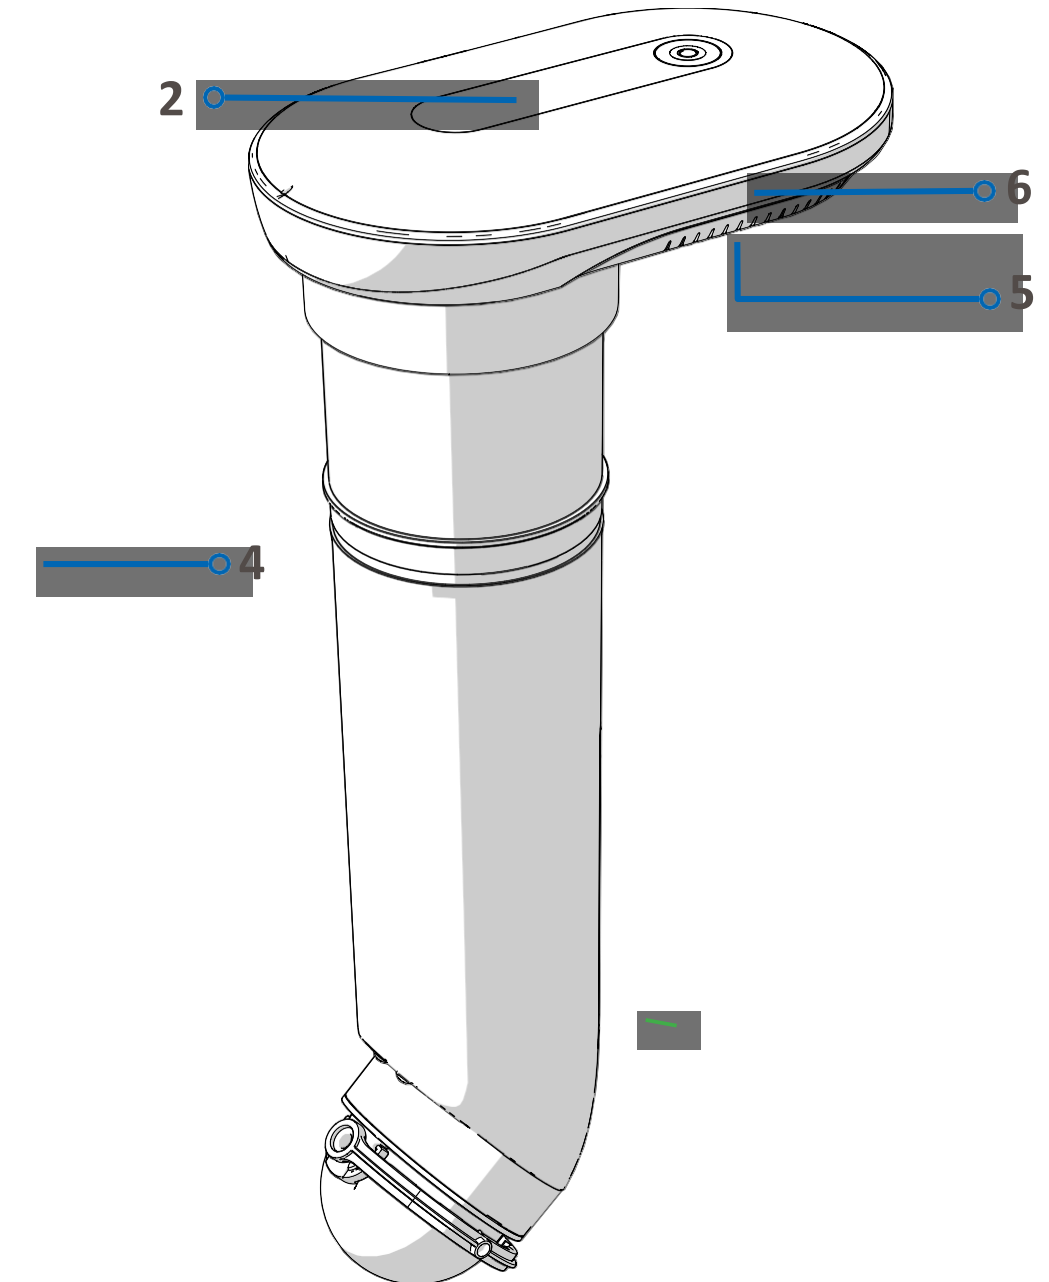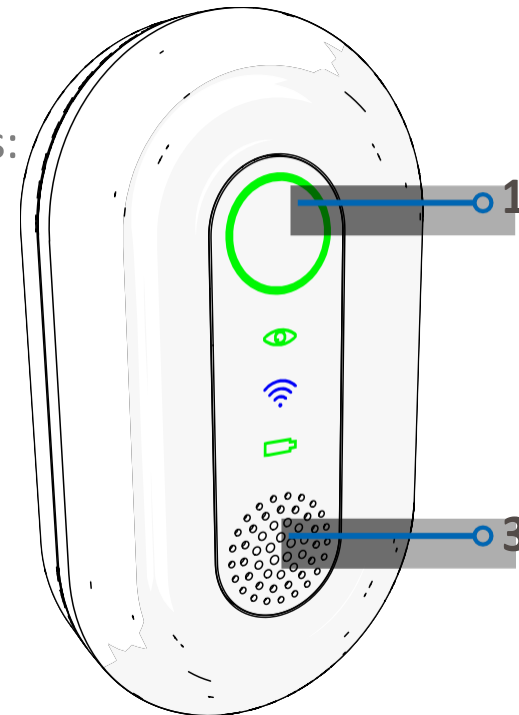

MENU



PoolAreaisUnoccupied

- **scenariodescription**—MYLOisoperationalanddetectstheabsenceofpeopleinthepoolorinthepoolarea.
- **indications**—poolactivityindicatorblinksgreenslowlyandthebuzzerissilent.

EntranceToThePoolArea/EntranceToPool

- **scenariodescription**—MYLOdetectsentrancetothepoolarea,orentranceintothepool.
- **indications**—poolactivityindicatorblinksgreenquickly,buzzersemitasinglebeep,andanotificationwithanimageofthepoolissenttothemobile device.Thepoolactivityindicatorcontinuestoblinkquicklyforthedurationthatitdetectssomeonein,oraroundthepool.

NormalPoolUse

- **scenariodescription**—MYLOdetectspresenceofatleastonepersoninthepooloritssurroundingarea.Nodetectionofdrowningsigns.
- **indications**—poolactivityindicatorblinksgreenquickly.

	Note:
	Abeepsoundwillbeemittedonentrancetopoolareaorpool, only ifithasnotbeenoccupiedforatleast5minutesprior.

MENU





DrowningSuspicion

- **scenariodescription**—MYLOdetectsapersonatriskofdrowningfor about 10 seconds . If signs of drowning disappear, status changes to [Normal Pool Use](#).
- **indications**—poolactivityindicatorandtheextraredlightblinkquickly,buzzerssoundanalar m,anotificationandanimageofthepool is sent to the mobile app.
- **AlertdismissOptions**—theDismissbuttononthe poolunit,see [IndicatorsandButtons](#)andviathemobileapp,see [TeachingtheSyste m](#).

DrowningAlert

- **scenariodescription**—MYLOdetectsapersonatriskofdrowningfor additional10seconds.Ifsignsofdrowningdisappear,statuschangesto [Normal Pool Use](#).
- **indications**—poolactivityindicatorandtheextraredlightblinkred quickly,buzzersoundsaloudersiren,anotificationandanimageofthe pool is sent to the mobile app.
- **AlertdismissOptions**—theDismissbuttononthe poolunitandviate the mobile app.

DrowningCriticalAlert

- **scenariodescription**—MYLOdetectsapersonatriskofdrowningfor an additional 10 seconds.
- **indications**—poolactivityindicatorandtheextraredlightblink quickly,buzzersoundstheloudestsiren,anotificationandanimageof the pool is sent to the mobile app.
- **AlertdismissOptions**—theDismissbuttononthe poolunitandviate the mobile app.

MENU



MobileApplicationOperation

This section provides an overview of the MYLO mobile application, and includes:

- [Downloading and Installing the App](#)
- [Terms of Use Screen](#)
- [Screen Overview](#)
- [Notifications and Alerts](#)
- [Teaching the System](#)

Downloading and Installing the App

- Using a mobile device, search for the **MYLO by CoralsmartPool** app in the Google Play store or the Apple App Store.
- Press **install**.
- Allow the app to send notifications. Otherwise, alerts will not be received on the mobile device.
- Allow the app to access the camera in order to scan the QR-code.
- Follow the installation instructions. You will be asked to enter your Google or Apple ID, to scan your system's unique ID QR-code (found in the Quick Start Guide), and configure the home Wi-Fi. You will be asked to confirm the Terms of Use and Privacy Policy (see next page).

MENU

[INTRODUCTION](#)[INITIAL INSTALLATION](#)[ROUTINE OPERATION](#)[MAINTENANCE](#)[TROUBLESHOOTING](#)[SPECIFICATIONS](#)




TermsofUseScreen

- A. Aspartoftheinstallationprocess,youwillneedtoacceptthe Terms of Use.
- B. ConfirmreadingoftheTermsofUsebyselectingeachtoggle button on the screen (1).
- C. Tap **AGREE** (2).

	Note:
	It is not mandatory to select to allow "using images/videos to improve detection".

	Note:
	MYLO will not begin working until all terms and disclaimers are acknowledged within the mobile app.

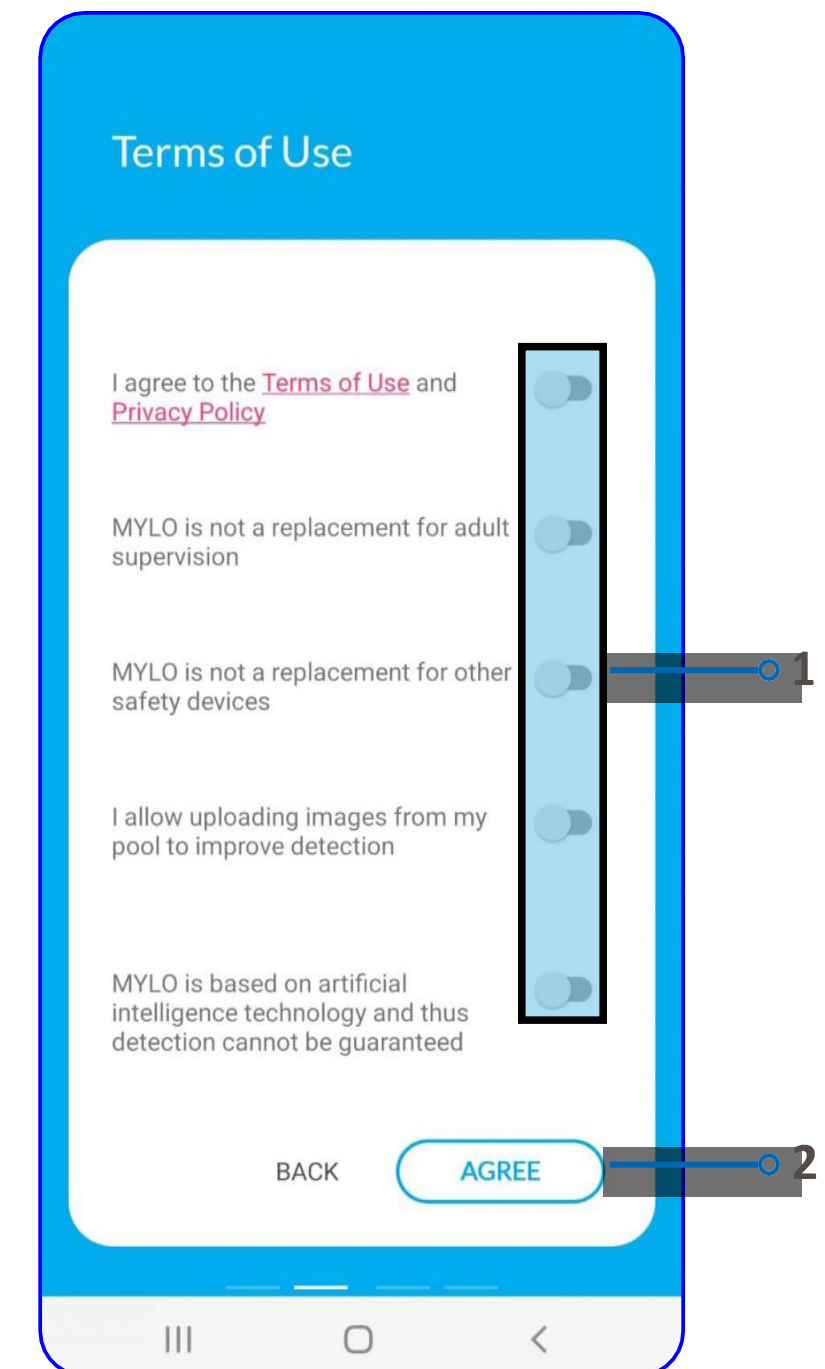

MENU

INTRODUCTION

INITIALINSTALLATION

ROUTINEOPERATION

MAINTENANCE

TROUBLESHOOTING

SPECIFICATIONS




ScreenOverview

The mainscreenoftheappincludesthefollowing:

- **MenuButton(1)**
- **Visibility(2)**—displaysthestatusofthepoolwaterclarity
- **refreshButton(3)**—refreshestheapptodisplaythemostcurrent underwater and above water images

Pressthe **MENU** (1)buttontodisplaythemenuandchooseoneofthe followingoptions:

- Pair with another device or system (in case you have a large pool andpurchased more than one system).
- ChangeWi-Fi settings
- Reviewprivacypolicyandtermsofuse
- AbouttheApp(4)-LinkstoinformationabouttheMYLOsystem

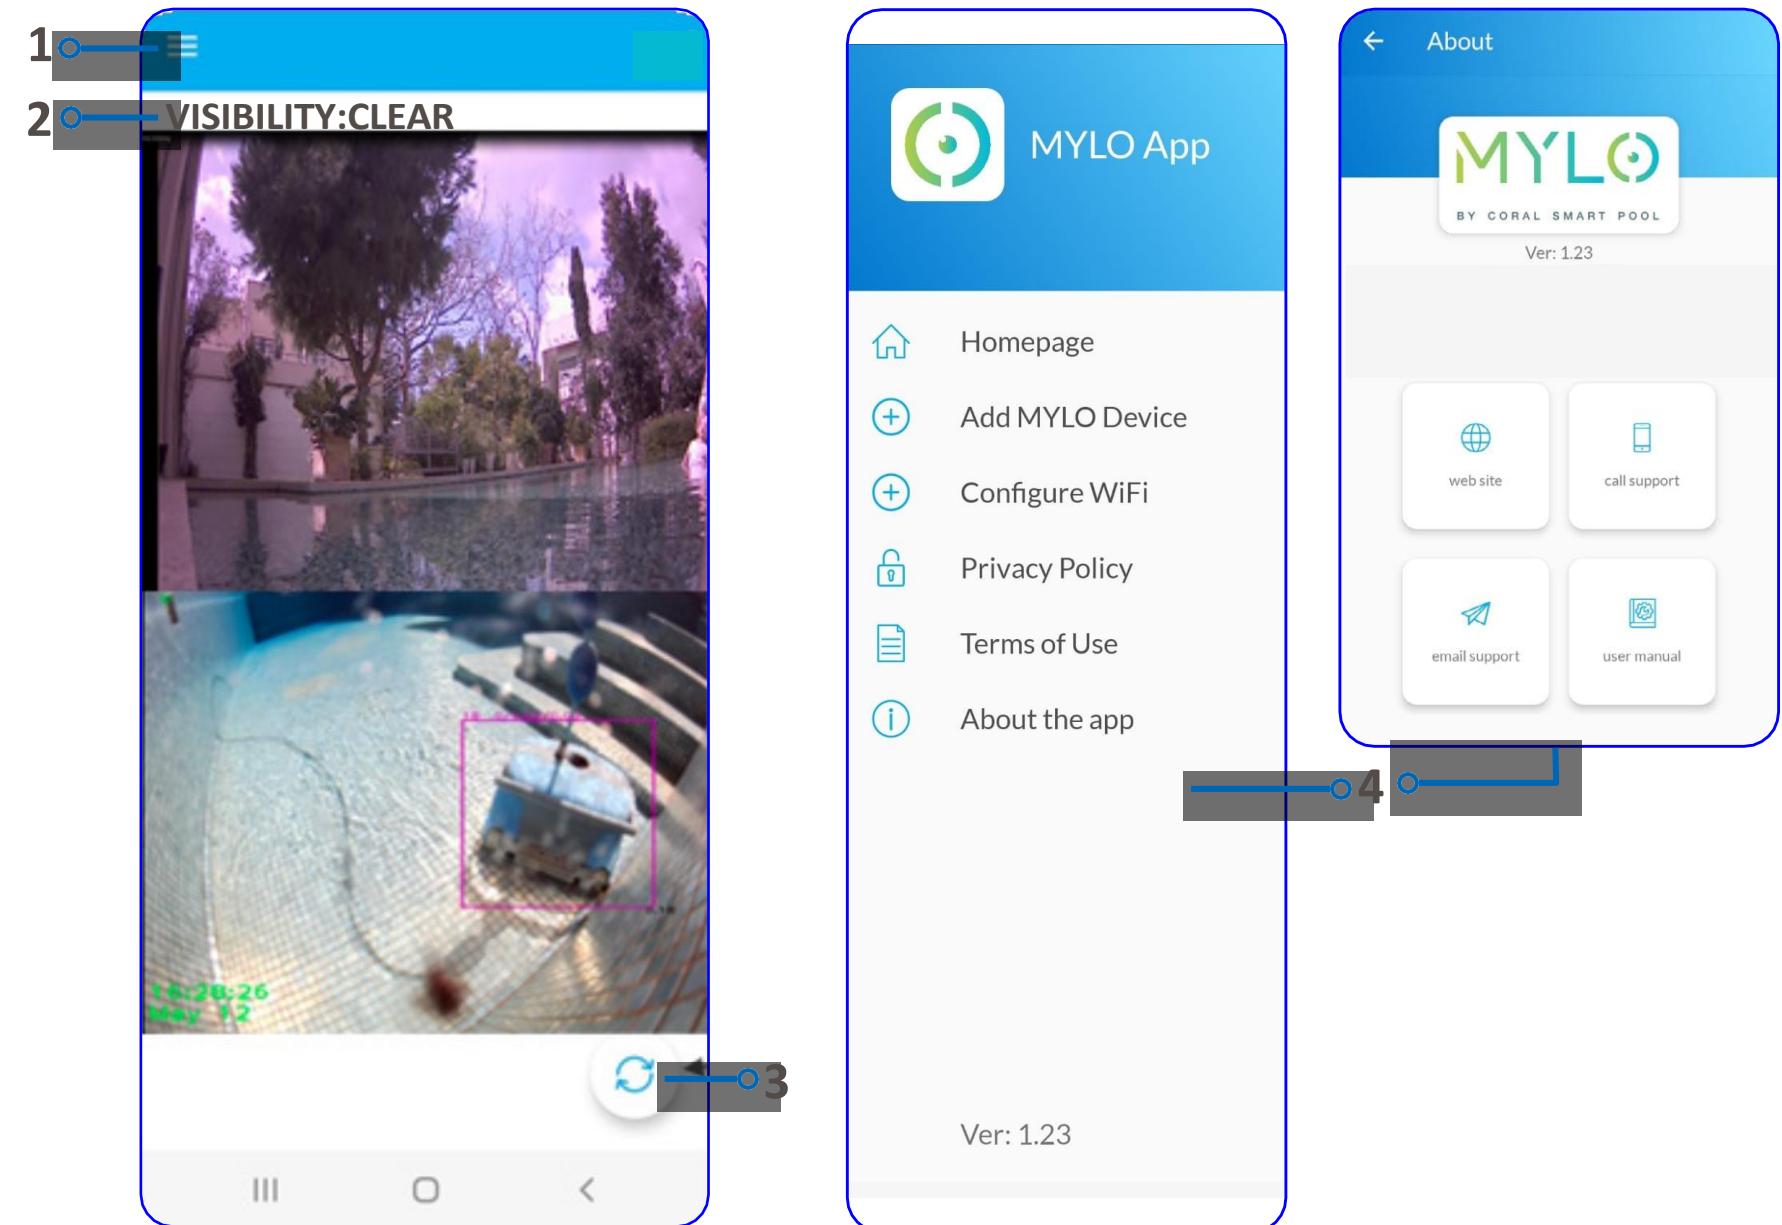


MENU



Notifications and Alerts

When the pool unit detects a person's presence or a drowning scenario (see [Detection Scenarios](#)), the mobile device receives an alert. Pressing the alert will open the app's screen, and images corresponding to the alarm will appear.

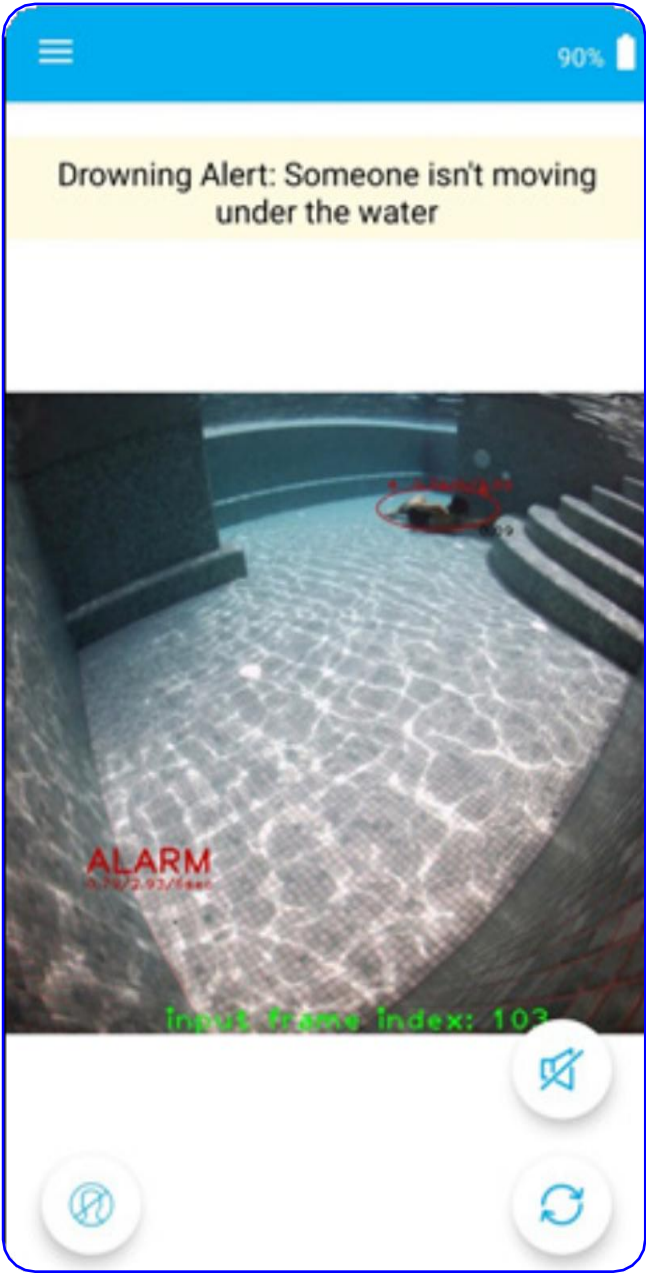

MENU




TeachingtheSystem

MYLO is programmed to detect drowning situations and to ignore the detection of objects and non-drowning situations. Each pool has unique elements and MYLO can learn and adjust to the specific elements of the pool it is installed in. During the first few weeks of system operation, MYLO might be confused by such elements and generate more false alarms. These false alarms are quickly reduced and nearly disappear thanks to the ability of the system to learn what triggers false alarms.

HowitWorks

When receiving an alert, the object that generated the alarm is marked on the image with an ellipse. Refertofollowingbuttons:


- **Mute(3)**—tap to silence the alarm without teaching the system to ignore similar objects in the future. Use this option when there is a person in the marked ellipse (1) but there is absolutely no drowning risk (e.g., someone is diving and appears to be drowning but it is certain that they are not at risk).
- **Mute and Teach (2)** — tap to silence the alarm and teach the system to further ignore similar scenarios in the future. Use this option ONLY if you are sure there is no person or body part in the marked ellipse (1).

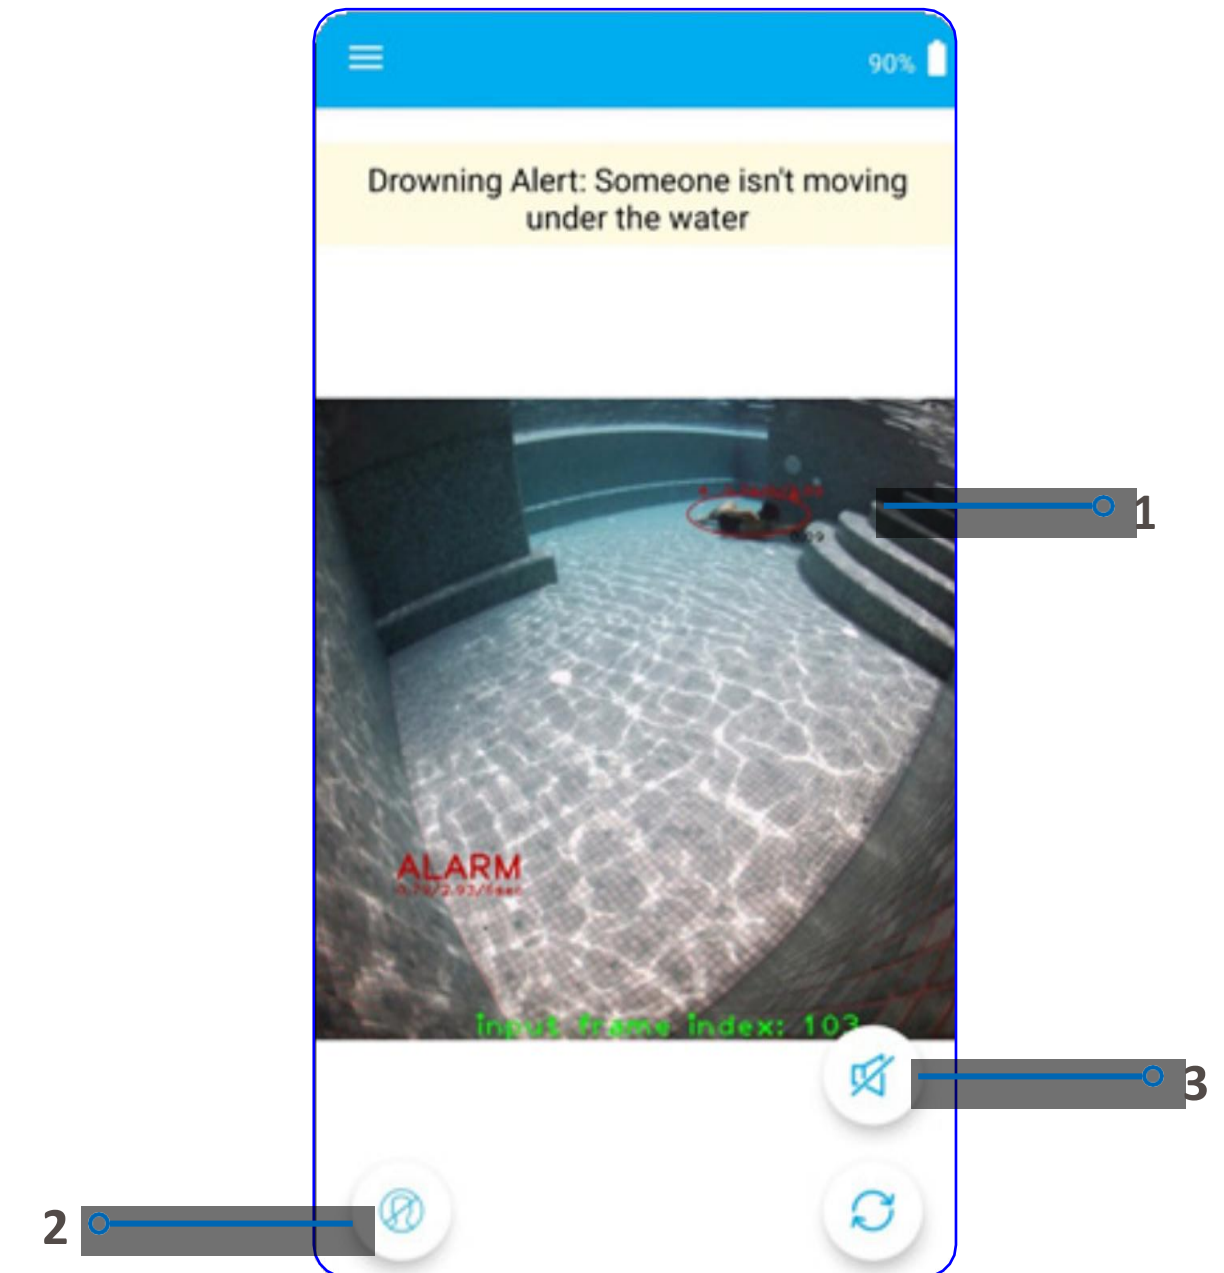

MENU

If you choose to tap on the **Mute and Teach** button, a confirmation message will appear on the screen with the following buttons to select:

- **I'M NOT SURE, ABORT** (1) – tap if you are unsure whether it is a false alarm, and you do not want the system to learn to ignore similar images in the future.
- **I'M SURE, DISMISS** (2) – tap if you are sure it is a false alarm. This action teaches MYLO to ignore any alarms generated from similar images in the future. If this option is selected, you will be requested to solve a simple math exercise (3).

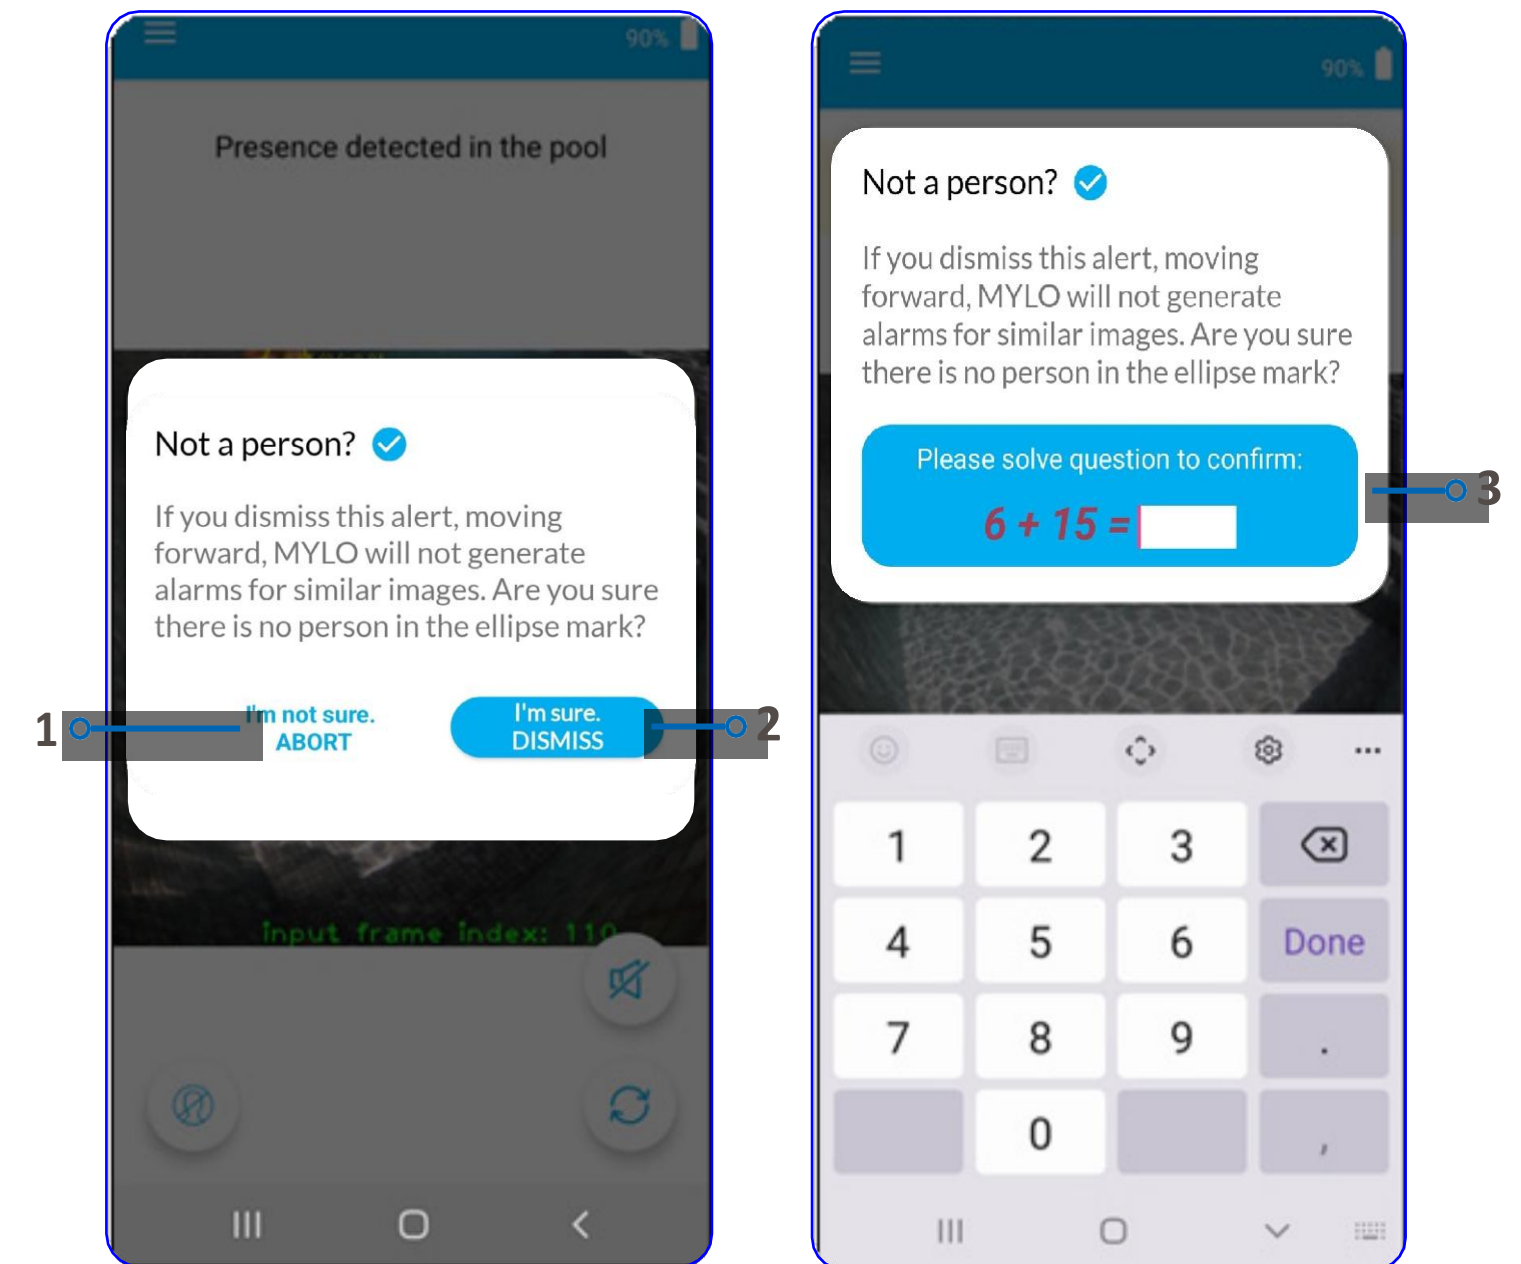

	Warning:
	Do not dismiss or mute an alarm before verifying that there is no danger of drowning.

MENU

[INTRODUCTION](#)
[INITIAL INSTALLATION](#)
[ROUTINE OPERATION](#)
[MAINTENANCE](#)
[TROUBLESHOOTING](#)
[SPECIFICATIONS](#)



Maintenance

PoolWaterClarity

Makesurethewaterinthepoolisasclearaspossible.Tochecktheclarityof the water, check the underwater image in the mobile app, or go into the poolwithgogglestospotobjectsattheotherendofthepool.

	Caution:
	Keep the water in the pool as clear as possible according to best practice instructions. Verify that the camera video footage is clear and that details on the far end of the pool can be viewed clearly.

MENU





Storing the System

To store the pool unit:

- A. Press the button on the pool unit for 10 seconds, until all indicators turn off and the system is shut down.
- B. Disconnect the power cord.
- C. Lift the pool unit off of the docking station.
- D. Verify that the pool unit is dry and clean.
- E. Cover the end of the underwater tube with a protective cover.
- F. Place the pool unit in the original package.

MENU





Troubleshooting

IndicationandResolution

indication	description	resolution
Watervisibilityindicatoronthe home unit is steady yellow.	There is some degradation in visibility that can be caused by a water clarity issue or from something partly obscuring the camera view.	Checkwaterclarity,see PoolWaterClarity .
Watervisibilityindicatoronthe home unit is steady red.	There is a significant visibility problem caused by water clarity issue or by something obscuring the camera view.	Checkwaterclarity,see PoolWaterClarity .
Communicationindicatoronthe home unit blinks blue.	Nocommunicationbetweenthepoolunitandthemobileapplication.	1. CheckWi-Ficonfigurationinthemobileapp. 2. ResetyourWi-Firouter.
AllLEDindicatorsblinkred simultaneously.	Thereisnocommunicationbetweenthepoolunitandhomeunit.	1. Placethehomeunitclosertothe poolunit. 2. Checkifthe poolunitis poweredonandwellconnected. 3. Disconnect and reconnect the power supply. If the issue persists, contact customer support.
AllhomeunitLEDsareblinking red.	Operationalfault,such asananalytical fault,orsystem start-upfailure.	Pressthepoolunitbuttonfor5secondstoresetthesystem.Iftheissuepersists,contactcustomersupport.

MENU

INTRODUCTION

INITIALINSTALLATION

ROUTINEOPERATION

MAINTENANCE

TROUBLESHOOTING

SPECIFICATIONS





specifications

RegulatoryCompliance

Parameter	POOLUnit	HomeUnit
Dimensions	430x220x130 [mm]	115x65x50[mm]
Weight	2[Kg](4.4lbs)	0.2[Kg](0.4lbs)
SupplyVoltage	24Vexternalpowersupply	100-240VAC
Connectivity	Wi-Fi	
	RFPointto Point	RFPointto Point
LEDIndicators,see IndicatorsandButtons	PoolActivityIndicator	PoolActivityIndicator
		CommunicationIndicator
	DrowningRiskIndicators	PowerIndicator
		WaterVisibility Indicator
Alerts	Siren	Siren
Controls	Dismissalarm/reset/shutdown	
IPlevel	TubeIP67.UpperpartIP65	
OperatingTemperature	10~40deg	10~40deg

MENU





CE

We declare that this device is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU. This product can be used across EU member states.

Wi-Fi& BLE:

Operation Frequency: 2400MHz~2500MHz& 5150MHz~5850MHz

Maximum Power: 3.24Db

SRD:

Operation Frequency: 860-870, 902-928

Maximum Power:

SMD 868 - < -9.9 dB, 1.7 dBi

SMD 915- < -6.6 dB, 2.4 dBi



MENU

INTRODUCTION

INITIALINSTALLATION

ROUTINEOPERATION

MAINTENANCE

TROUBLESHOOTING

SPECIFICATIONS





CompliancewithFCCrules

MYLOcomplieswithFCCrulesPart15.

The FCC Wants You to Know

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: 1) this device may not cause harmful interference, and 2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- a) Reorient or relocate the receiving antenna.
- b) Increase the separation between the equipment and receiver.
- c) Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- d) Consult the dealer or an experienced radio/TV technician.

CANICES-3 (B) / NMB-3 (B)

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de classe B est conforme à la norme canadienne ICES-003.

MENU

[INTRODUCTION](#)[INITIALINSTALLATION](#)[ROUTINEOPERATION](#)[MAINTENANCE](#)[TROUBLESHOOTING](#)[SPECIFICATIONS](#)



Coral smart Pool has not approved any changes or modifications to this device by the user. Any changes or modifications could void the user's authority to operate the equipment.

1. Mobile Device RF Exposure Statement :

a. Mobile Device definition: Mobile: (§2.1091) (b) — A mobile device is defined as a transmitting device designed to be used in other than fixed locations and to generally be used in such a way that a separation distance of at least 20 centimeters is normally maintained between the transmitter's radiating structure(s) and the body of the user or nearby persons. Per §2.1091d(d)(4) In some cases (for example, modular or desktop transmitters), the potential conditions of use of a device may not allow easy classification of that device as either Mobile or Portable. In these cases, applicants are responsible for determining minimum distances for compliance for the intended use and installation of the device based on evaluation of either specific absorption rate (SAR), field strength, or power density, whichever is most appropriate.

b. Statement in UM:

RF Exposure -

For FCC and IC: This device is only authorized for use in a mobile application. At least 20 cm of separation distance between the device and the user's body must be maintained at all times.

For IC: La distance entre l'utilisateur et de produits ne devrait pas être inférieure à 20cm

MENU

[INTRODUCTION](#)[INITIALINSTALLATION](#)[ROUTINEOPERATION](#)[MAINTENANCE](#)[TROUBLESHOOTING](#)[SPECIFICATIONS](#)

**Warning:**

Modificationsnotexpresslyapprovedbythemanufacturercouldvoidtheuser'sauthoritytooperatetheequipmentunderFCCRules.

**WireLessNOTiCe:**

This device complies with FCC/ISED radiation exposure limits set forth for an uncontrolled environment and meets the FCC radio frequency (RF) Exposure GuidelinesandRSS-102oftheISEDradiofrequency(RF)Exposurerules.This transmittermustnotbeco-locatedoroperatinginconjunctionwithanyother antennaortransmitter.

IC STATEMENT

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Scienceand Economic Development Canada's licence-exempt RSS(s). Operation is subjectto the following two conditions:

(1) This device may not cause interference.

(2) This device must accept any interference, including interference that may causeundesired operation of the device

Cet appareil contient des émetteurs / récepteurs exemptés de licence conformes aux RSS (RSS)d'Innovation, Sciences et Développement économique Canada. Le fonctionnement est soumis auxdeux conditions suivantes:

(1) Cet appareil ne doit pas causer d'interférences.

(2) Cet appareil doit accepter toutes les interférences, y compris celles susceptibles deprouvoquer un fonctionnement indésirable de l'appareil.

MENU

INTRODUCTION

INITIALINSTALLATION

ROUTINEOPERATION

MAINTENANCE

TROUBLESHOOTING

SPECIFICATIONS





Labeling

- i. FCCID:2A98P-MYLO1000
- ii. IC ID: 30189-MYLO1000
- iii. Contains IC ID: 1000M-8265NG
- iv. ContainsFCCID: PD98265NG

POOLUNiTLABeL

Coral MYLO – Pool Unit
24VDC --- 1.25A
Made In Israel
by Coral Smart Pool Ltd.
HaMelacha St 3,
Binyamina-Giv'at Ada, 3057324

Serial Number: _____
Production Date: _____


FCC ID: 2A98P-MYLO1000
Contains FCC ID: PD98265NG
Contains IC ID: 1000M-8265NG
IC: 30189-MYLO1000; HVIN: rev.2
CAN ICES-003 (B)/NMB-003(B)

60X25mm

HOMEUNiTLABeL

TBD

MENU





RevisionHistory

reVisiON	desCriPTiONOFreVisiONs	CHANGedBY	dATe/siGN
	Initialrelease		September2022

MENU





THANKYOU!

