

# TEST REPORT

## FCC ID:2A9CD-X55

**Product** : Wireless Headset  
**Model Name** : X55, J1, TWS, X57  
**Brand** : /  
**Report No.** : NCT240502811XE1-1

Prepared for

**Shenzhen Senyang Zhiyuan Technology Co.,Ltd**  
**505, Floor 5, West Block, Building 405, Sanda Industrial Zone, Futian District,**  
**Shenzhen, 518000 China**

Prepared by

**Shenzhen NCT Testing Technology Co., Ltd.**  
**A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District,**  
**Shenzhen, People's Republic of China**

**TEL: 400-8868-419**

**FAX: 86-755-27790922**

## 1 TEST RESULT CERTIFICATION

Applicant's name : Shenzhen Senyang Zhiyuan Technology Co.,Ltd

Address : 505, Floor 5, West Block, Building 405, Sanda Industrial Zone, Futian District, Shenzhen, 518000 China

Manufacture's name : Shenzhen Senyang Zhiyuan Technology Co.,Ltd

Address : 505, Floor 5, West Block, Building 405, Sanda Industrial Zone, Futian District, Shenzhen, 518000 China

Product name : Wireless Headset

Model name : X55, J1, TWS, X57

Standards : FCC CFR47 Part 15 Section 15.247  
KDB558074 D01 15.247 Meas Guidance v05r02

Test procedure : ANSI C63.10:2020

Test Date : Nov. 29, 2024-Dec. 11, 2024

Date of Issue : Dec. 11, 2024

Test Result : Pass


This device described above has been tested by NCT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NCT, this document may be altered or revised by NCT, personal only, and shall be noted in the revision of the document.

Test Engineer:

  
Keven Wu / E

Technical Manager:

  
Henry Wang / Manager



## Contents

### Page

|                                                        |           |
|--------------------------------------------------------|-----------|
| <b>1 TEST RESULT CERTIFICATION .....</b>               | <b>2</b>  |
| <b>2 TEST SUMMARY .....</b>                            | <b>5</b>  |
| <b>3 TEST FACILITY .....</b>                           | <b>6</b>  |
| <b>4 GENERAL INFORMATION .....</b>                     | <b>7</b>  |
| 4.1 GENERAL DESCRIPTION OF E.U.T. ....                 | 7         |
| 4.2 CHANNEL LIST .....                                 | 8         |
| 4.3 TEST SETUP CONFIGURATION .....                     | 9         |
| 4.4 TEST MODE .....                                    | 9         |
| <b>5 EQUIPMENT DURING TEST .....</b>                   | <b>10</b> |
| 5.1 EQUIPMENTS LIST .....                              | 10        |
| 5.2 MEASUREMENT UNCERTAINTY .....                      | 12        |
| 5.3 DESCRIPTION OF SUPPORT UNITS .....                 | 12        |
| <b>6 CONDUCTED EMISSION .....</b>                      | <b>13</b> |
| 6.1 E.U.T. OPERATION .....                             | 13        |
| 6.2 EUT SETUP .....                                    | 13        |
| 6.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) ..... | 14        |
| 6.4 MEASUREMENT PROCEDURE: .....                       | 14        |
| 6.5 CONDUCTED EMISSION LIMIT .....                     | 14        |
| 6.6 MEASUREMENT DESCRIPTION .....                      | 14        |
| 6.7 CONDUCTED EMISSION TEST RESULT .....               | 14        |
| <b>7 RADIATED SPURIOUS EMISSIONS .....</b>             | <b>15</b> |
| 7.1 EUT OPERATION .....                                | 15        |
| 7.2 TEST SETUP .....                                   | 16        |
| 7.3 SPECTRUM ANALYZER SETUP .....                      | 17        |
| 7.4 TEST PROCEDURE .....                               | 18        |
| 7.5 SUMMARY OF TEST RESULTS .....                      | 19        |
| <b>8 MAXIMUM PEAK OUTPUT POWER TEST .....</b>          | <b>34</b> |
| 8.1 TEST STANDARD AND LIMIT .....                      | 34        |
| 8.2 TEST SETUP .....                                   | 34        |



|                                                                     |           |
|---------------------------------------------------------------------|-----------|
| 8.3 TEST PROCEDURE .....                                            | 34        |
| 8.4 TEST DATA .....                                                 | 34        |
| <b>9 20DB OCCUPY BANDWIDTH TEST .....</b>                           | <b>35</b> |
| 9.1 TEST STANDARD .....                                             | 35        |
| 9.2 TEST SETUP .....                                                | 35        |
| 9.3 TEST PROCEDURE .....                                            | 35        |
| 9.4 TEST DATA .....                                                 | 35        |
| <b>10 CARRIER FREQUENCY SEPARATION TEST .....</b>                   | <b>36</b> |
| 10.1 TEST STANDARD AND LIMIT .....                                  | 36        |
| 10.2 TEST SETUP .....                                               | 36        |
| 10.3 TEST PROCEDURE .....                                           | 36        |
| 10.4 TEST DATA .....                                                | 36        |
| <b>11 NUMBER OF HOPPING CHANNEL TEST .....</b>                      | <b>37</b> |
| 11.1 TEST STANDARD AND LIMIT .....                                  | 37        |
| 11.2 TEST SETUP .....                                               | 37        |
| 11.3 TEST PROCEDURE .....                                           | 37        |
| 11.4 TEST DATA .....                                                | 37        |
| <b>12 DWELL TIME TEST .....</b>                                     | <b>38</b> |
| 12.1 TEST STANDARD AND LIMIT .....                                  | 38        |
| 12.2 TEST SETUP .....                                               | 38        |
| 12.3 TEST PROCEDURE .....                                           | 38        |
| 12.4 TEST DATA .....                                                | 38        |
| <b>13 100KHZ BANDWIDTH OF FREQUENCY BAND EDGE REQUIREMENT .....</b> | <b>39</b> |
| 13.1 TEST STANDARD AND LIMIT .....                                  | 39        |
| 13.2 TEST SETUP .....                                               | 39        |
| 13.3 TEST PROCEDURE .....                                           | 39        |
| 13.4 TEST DATA .....                                                | 39        |
| <b>14 ANTENNA REQUIREMENT .....</b>                                 | <b>40</b> |
| 14.1 TEST STANDARD AND REQUIREMENT .....                            | 40        |
| 14.2 ANTENNA CONNECTED CONSTRUCTION .....                           | 41        |
| <b>15 TEST SETUP &amp; EUT PHOTOGRAPH .....</b>                     | <b>42</b> |

## 2 Test Summary

| Test Items                               | Test Requirement                 | Result |
|------------------------------------------|----------------------------------|--------|
| Radiated Spurious Emissions              | 15.205(a)<br>15.209<br>15.247(d) | PASS   |
| Band edge                                | 15.247(d)<br>15.205(a)           | PASS   |
| Conduct Emission                         | 15.207                           | N/A    |
| 20dB Bandwidth<br>99% Occupied Bandwidth | 15.247(a)(1)                     | PASS   |
| Maximum Peak Output Power                | 15.247(b)(1)                     | PASS   |
| Frequency Separation                     | 15.247(a)(1)                     | PASS   |
| Number of Hopping Frequency              | 15.247(a)(1)(iii)                | PASS   |
| Dwell time                               | 15.247(a)(1)(iii)                | PASS   |
| Antenna Requirement                      | 15.203                           | PASS   |

Note: The RF chips of the left and right earphones are the same, with differences in circuit layout. The RF output power of the left and right earphones is not significantly different, while the RF output power of the right earphone is slightly larger than that of the left earphone. So chose the right earphone for all the tests, while the left earphone was tested for radiation emissions and radiation spurious tests.

Remark:

1. "N/A" denotes test is not applicable in this Test Report.
2. The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

## 3 TEST FACILITY

### Site Description

EMC Lab. : Accredited by CNAS, 2022-09-27

The certificate is valid until 2028.01.07

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2017)

The Certificate Registration Number is L8251

Designation Number: CN1347

Test Firm Registration Number: 894804

Accredited by A2LA, June 14, 2023

The Certificate Registration Number is 6837.01

Accredited by Industry Canada, November 09, 2018

The Conformity Assessment Body Identifier is CN0150

Company Number: 30806

Name of Firm : Shenzhen NCT Testing Technology Co., Ltd.

Site Location : A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District, Shenzhen, People's Republic of China



## 4 General Information

### 4.1 General Description of E.U.T.

|                                                                                                                                                                                                                |   |                                                                                                                                                                                                                    |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Name                                                                                                                                                                                                   | : | Wireless Headset                                                                                                                                                                                                   |
| Model Name                                                                                                                                                                                                     | : | X55                                                                                                                                                                                                                |
| Sample(s) Status                                                                                                                                                                                               | : | Engineer sample                                                                                                                                                                                                    |
| series model                                                                                                                                                                                                   | : | J1, TWS, X57                                                                                                                                                                                                       |
| Difference                                                                                                                                                                                                     | : | X55 is tested model, other models are derivative models .The models are identical in circuit, only different on the model names and appearance color . So the test data of X55 can represent the remaining models. |
| Operating frequency                                                                                                                                                                                            | : | 2402-2480MHz                                                                                                                                                                                                       |
| Numbers of Channel                                                                                                                                                                                             | : | 79 channels                                                                                                                                                                                                        |
| Antenna Type                                                                                                                                                                                                   | : | Chip Antenna                                                                                                                                                                                                       |
| Antenna Gain                                                                                                                                                                                                   | : | 2.7dBi                                                                                                                                                                                                             |
| Type of Modulation                                                                                                                                                                                             | : | GFSK, $\pi/4$ -DQPSK, 8DPSK                                                                                                                                                                                        |
| Power supply                                                                                                                                                                                                   | : | Input: DC 5V or DC 3.7V powered by battery                                                                                                                                                                         |
| Hardware Version                                                                                                                                                                                               | : | V1.0                                                                                                                                                                                                               |
| Software Version                                                                                                                                                                                               | : | V1.0                                                                                                                                                                                                               |
| Remark: the Antenna gain is provided by customer from Antenna spec. and the laboratory will not be responsible for the accumulated calculation results which covers the information provided by the applicant. |   |                                                                                                                                                                                                                    |

## 4.2 Channel List

The EUT has been tested under its typical operating condition. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

The EUT has been associated with peripherals pursuant to ANSI C63.10-2020 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonics of the highest fundamental frequency or to 40 GHz, whichever is lower).

The EUT has been tested under TX operating condition.

This EUT is a FHSS system, were conducted to determine the final configuration from all possible combinations. We use software control the EUT, Let EUT hopping on and transmit with highest power, all the modes GFSK,  $\pi/4$ -DQPSK, 8DPSK have been tested. 79 Channels are provided by EUT. The 3 channels of lower, medium and higher were chosen for test.

Channel List:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| 0       | 2402            | 1       | 2403            | 2       | 2404            | 3       | 2405            |
| 4       | 2406            | 5       | 2407            | 6       | 2408            | 7       | 2409            |
| 8       | 2410            | 9       | 2411            | 10      | 2412            | 11      | 2413            |
| 12      | 2414            | 13      | 2415            | 14      | 2416            | 15      | 2417            |
| 16      | 2418            | 17      | 2419            | 18      | 2420            | 19      | 2421            |
| 20      | 2422            | 21      | 2423            | 22      | 2424            | 23      | 2425            |
| 24      | 2426            | 25      | 2427            | 26      | 2428            | 27      | 2429            |
| 28      | 2430            | 29      | 2431            | 30      | 2432            | 31      | 2433            |
| 32      | 2434            | 33      | 2435            | 34      | 2436            | 35      | 2437            |
| 36      | 2438            | 37      | 2439            | 38      | 2440            | 39      | 2441            |
| 40      | 2442            | 41      | 2443            | 42      | 2444            | 43      | 2445            |
| 44      | 2446            | 45      | 2447            | 46      | 2448            | 47      | 2449            |
| 48      | 2450            | 49      | 2451            | 50      | 2452            | 51      | 2453            |
| 52      | 2454            | 53      | 2455            | 54      | 2456            | 55      | 2457            |
| 56      | 2458            | 57      | 2459            | 58      | 2460            | 59      | 2461            |
| 60      | 2462            | 61      | 2463            | 62      | 2464            | 63      | 2465            |
| 64      | 2466            | 65      | 2467            | 66      | 2468            | 67      | 2469            |
| 68      | 2470            | 69      | 2471            | 70      | 2472            | 71      | 2473            |
| 72      | 2474            | 73      | 2475            | 74      | 2476            | 75      | 2477            |
| 76      | 2478            | 77      | 2479            | 78      | 2480            | -       | -               |



| Channel | Frequency(MHz) |
|---------|----------------|
| 0       | 2402           |
| 39      | 2441           |
| 78      | 2480           |

### 4.3 Test Setup Configuration

Radiated Emission(30MHz-1GHz)

EUT

Radiated Emission(above 1GHz)

EUT

Conducted Spurious

EUT

Analyzer

### 4.4 Test Mode

|                                                                                                                                                                                                                                       |                                                 |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|
| Transmitting mode                                                                                                                                                                                                                     | Keep the EUT in continuously transmitting mode. |
| Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data. |                                                 |

|                   |             |
|-------------------|-------------|
| Test Software     | FCC RF-Test |
| Power level setup | < 0 dBm     |

## 5 Equipment During Test

### 5.1 Equipment List

#### Conducted emission Test Equipment

| Name              | Model No.    | Serial No. | Manufacturer    | Date of Cal. | Due Date  |
|-------------------|--------------|------------|-----------------|--------------|-----------|
| 944 Shielded Room | 944 Room     | /          | EMToni          | 2022/5/31    | 2025/5/30 |
| EMI Test Receiver | ESPI         | 101604     | Rohde & Schwarz | 2024/6/17    | 2025/6/16 |
| LISN              | ENV 216      | 102796     | Rohde & Schwarz | 2024/6/17    | 2025/6/16 |
| LISN              | VN1-13S      | 004023     | CRANAGE         | 2024/6/17    | 2025/6/16 |
| Cable             | RG223-1500MM | NA         | RG              | 2024/6/17    | 2025/6/16 |

#### Radiated emission & Radio Frequency Test Equipment

| Name                                                | Model No.    | Serial No. | Manufacturer    | Date of Cal. | Due Date  |
|-----------------------------------------------------|--------------|------------|-----------------|--------------|-----------|
| 966 Shielded Room                                   | 966 Room     | /          | EMToni          | 2022/5/31    | 2025/5/30 |
| EMI Test Receiver                                   | ESCI         | 101178     | Rohde & Schwarz | 2024/6/17    | 2025/6/16 |
| Amplifier<br>(30MHz-1GHz)                           | BBV 9743 B   | 00374      | SCHNWARZBECK    | 2024/6/17    | 2025/6/16 |
| Bilog Antenna<br>(30MHz-1GHz)                       | VULB9162     | 00473      | SCHNWARZBECK    | 2023/3/19    | 2025/3/18 |
| Horn antenna<br>(1GHz-18GHz)                        | BBHA 9120 D  | 02622      | SCHNWARZBECK    | 2023/3/19    | 2025/3/18 |
| Preamplifier<br>(1GHz-18GHz)                        | BBV 9718D    | 0024       | SCHNWARZBECK    | 2024/6/17    | 2025/6/16 |
| Spectrum Analyzer<br>(10Hz-40GHz)                   | FSV 40       | 100952     | Rohde & Schwarz | 2024/6/17    | 2025/6/16 |
| Preamplifier<br>(18GHz-40GHz)                       | BBV 9721     | 0056       | SCHNWARZBECK    | 2024/6/17    | 2025/6/16 |
| Double Ridge Guide<br>Horn Antenna<br>(18GHz-40GHz) | SAS-574      | 588        | A.H.System      | 2023/3/19    | 2025/3/18 |
| Loop Antenna<br>(9KHz-30MHz)                        | FMZB 1513-60 | 00115      | SCHNWARZBECK    | 2024/6/17    | 2025/6/16 |
| Amplifier<br>(9KHz-30MHz)                           | BBV 9745     | 00109      | CHNWARZBECK     | 2024/6/17    | 2025/6/16 |

|                             |               |            |         |           |           |
|-----------------------------|---------------|------------|---------|-----------|-----------|
| MXG Signal Analyzer         | N9020A        | MY50510202 | Agilent | 2024/6/17 | 2025/6/16 |
| MXG Vector Signal Generator | N5182A        | MY50140020 | Agilent | 2024/6/17 | 2025/6/16 |
| MXG Analog Signal Generator | N5181A        | MY47420919 | Agilent | 2024/6/17 | 2025/6/16 |
| Power Sensor                | TR1029-2      | 512364     | Techoy  | 2024/6/17 | 2025/6/16 |
| RF Swith                    | TR1029-1      | 512364     | Techoy  | 2024/6/17 | 2025/6/16 |
| Cable                       | DA800-4000MM  | NA         | DA      | 2024/6/17 | 2025/6/16 |
| Cable                       | DA800-11000MM | NA         | DA      | 2024/6/17 | 2025/6/16 |

Other

| Item | Name                         | Manufacturer | Model  | Software version   |
|------|------------------------------|--------------|--------|--------------------|
| 1    | EMC Conduction Test System   | FALA         | EZ-EMC | Ver.EMC-CON 3A1.1+ |
| 2    | EMC radiation test system    | FALA         | EZ-EMC | Ver.FA-03A2 RE+    |
| 3    | RF test system               | TACHOY       | RFTest | V1.0.0             |
| 4    | RF communication test system | TACHOY       | RFTest | V1.0.0             |



## 5.2 Measurement Uncertainty

| Parameter                          | Uncertainty              |
|------------------------------------|--------------------------|
| RF output power, conducted         | ±1.0dB                   |
| Power Spectral Density, conducted  | ±2.2dB                   |
| Radio Frequency                    | ± 1 x 10 <sup>-6</sup>   |
| Bandwidth                          | ± 1.5 x 10 <sup>-6</sup> |
| Time                               | ±2%                      |
| Duty Cycle                         | ±2%                      |
| Temperature                        | ±1°C                     |
| Humidity                           | ±5%                      |
| DC and low frequency voltages      | ±3%                      |
| Conducted Emissions (150kHz~30MHz) | ±3.64dB                  |
| Radiated Emission(9KHz~30MHz)      | ±4.51dB                  |
| Radiated Emission(30MHz~1GHz)      | ±5.03dB                  |
| Radiated Emission(1GHz~25GHz)      | ±4.74dB                  |

## 5.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment | Mfr/Brand | Model/Type No. | Series No. | Note |
|------|-----------|-----------|----------------|------------|------|
|      |           |           |                |            |      |
|      |           |           |                |            |      |

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

## 6 Conducted Emission

Test Requirement: : FCC CFR 47 Part 15 Section 15.207, RSS-Gen §8.8  
Test Method: : ANSI C63.10:2020  
Test Result: : PASS  
Frequency Range: : 150kHz to 30MHz  
Class/Severity: : Class B  
Detector: : Peak for pre-scan (9kHz Resolution Bandwidth)


### 6.1 E.U.T. Operation

Operating Environment :


Temperature: : 23.2°C  
Humidity: : 51 % RH  
Atmospheric Pressure: : 101.12 kPa  
Test Voltage : AC 120V/60Hz

### 6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10: 2013

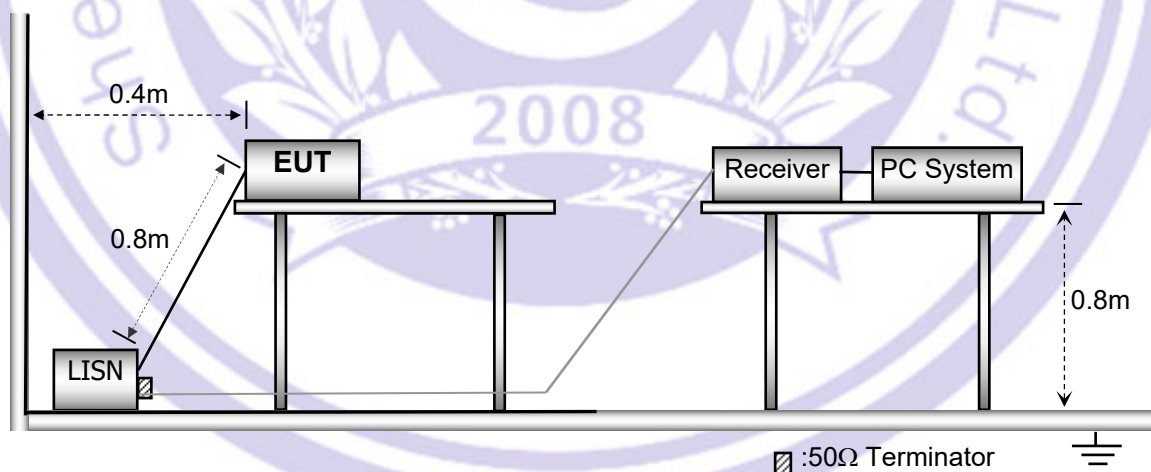

### 6.3 Test SET-UP (Block Diagram of Configuration)

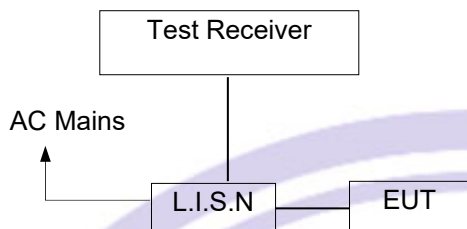

### 6.4 Measurement Procedure:

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

### 6.5 Conducted Emission Limit

#### Conducted Emission

| Frequency(MHz) | Quasi-peak | Average |
|----------------|------------|---------|
| 0.15-0.5       | 66-56      | 56-46   |
| 0.5-5.0        | 56         | 46      |
| 5.0-30.0       | 60         | 50      |

#### Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 6.6 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

### 6.7 Conducted Emission Test Result

N/A

The Product is powered by the DC only, the test item is not applicable.



## 7 Radiated Spurious Emissions

Test Requirement : FCC CFR47 Part 15 Section 15.209 & 15.247, RSS-Gen §6.13  
Test Method : ANSI C63.10:2020  
Test Result : PASS  
Measurement Distance : 3m  
Limit : See the follow table

| Frequency (MHz) | Field Strength        |              | Field Strength Limit at 3m Measurement Dist |                                       |
|-----------------|-----------------------|--------------|---------------------------------------------|---------------------------------------|
|                 | uV/m                  | Distance (m) | uV/m                                        | dBuV/m                                |
| 0.009 ~ 0.490   | $2400/F(\text{kHz})$  | 300          | $10000 * 2400/F(\text{kHz})$                | $20\log^{(2400/F(\text{kHz}))} + 80$  |
| 0.490 ~ 1.705   | $24000/F(\text{kHz})$ | 30           | $100 * 24000/F(\text{kHz})$                 | $20\log^{(24000/F(\text{kHz}))} + 40$ |
| 1.705 ~ 30      | 30                    | 30           | $100 * 30$                                  | $20\log^{(30)} + 40$                  |
| 30 ~ 88         | 100                   | 3            | 100                                         | $20\log^{(100)}$                      |
| 88 ~ 216        | 150                   | 3            | 150                                         | $20\log^{(150)}$                      |
| 216 ~ 960       | 200                   | 3            | 200                                         | $20\log^{(200)}$                      |
| Above 960       | 500                   | 3            | 500                                         | $20\log^{(500)}$                      |

### 7.1 EUT Operation


Operating Environment :

Temperature : 24.5 °C  
Humidity : 55.5% RH  
Atmospheric Pressure : 101.3kPa  
Test Voltage : AC 120V60Hz


## 7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz.

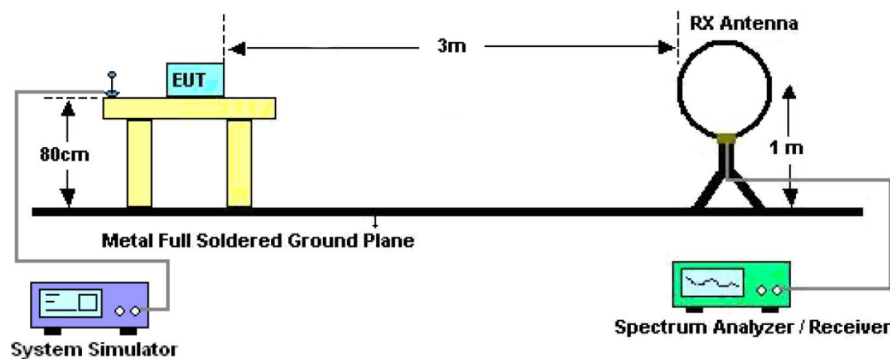

The test setup for emission measurement from 30 MHz to 1 GHz.

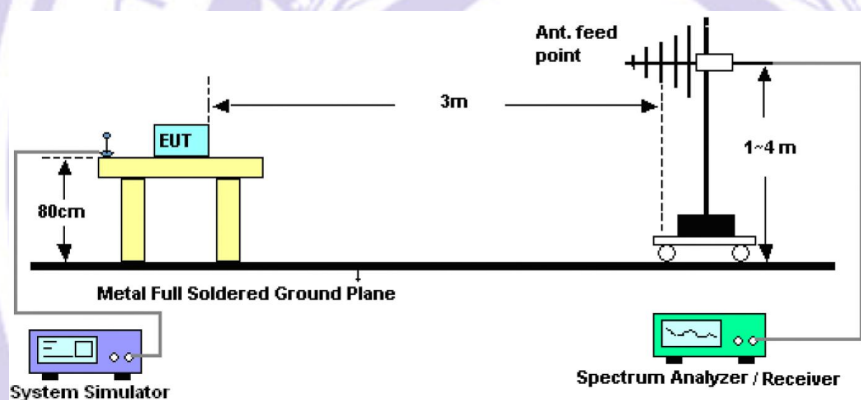

The test setup for emission measurement above 1 GHz.

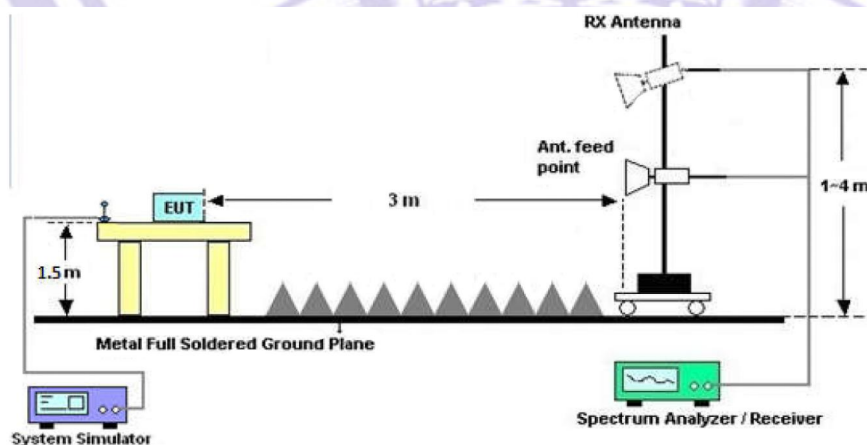

### 7.3 Spectrum Analyzer Setup

| Spectrum Parameter                    | Setting                                          |
|---------------------------------------|--------------------------------------------------|
| Attenuation                           | Auto                                             |
| Start Frequency                       | 1000 MHz                                         |
| Stop Frequency                        | 10th carrier harmonic                            |
| RB / VB (emission in restricted band) | 1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average |

| Receiver Parameter     | Setting                          |
|------------------------|----------------------------------|
| Attenuation            | Auto                             |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP    |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP    |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP |



## 7.4 Test Procedure

1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10-2020.
2. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degree) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
7. Test Procedure of measurement (For Above 1GHz):
  - 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
  - 2) Change the antenna polarization and repeat 1) with vertical polarization.
  - 3) Make a hardcopy of the spectrum.
  - 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
  - 5) Change the analyser mode to Clear/ Write and found the cone of emission.
  - 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
  - 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
  - 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

## 7.5 Summary of Test Results

### Test Frequency: 9KHz-30MHz

| Freq.<br>(MHz) | Ant.Pol.<br>H/V | Emission Level<br>(dBuV/m) | Limit 3m<br>(dBuV/m) | Over<br>(dB) |
|----------------|-----------------|----------------------------|----------------------|--------------|
| --             | --              | --                         | --                   | >20          |

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.


Distance extrapolation factor =  $40\log(\text{Specific distance} / \text{test distance})$  (dB);

Limit line = Specific limits (dBuV) + distance extrapolation factor.

### Test Frequency: 30MHz ~ 1GHz

Please refer to the following test plots, Low Channel (2402MHz) Worst case GFSK for record:


Test plot for Horizontal

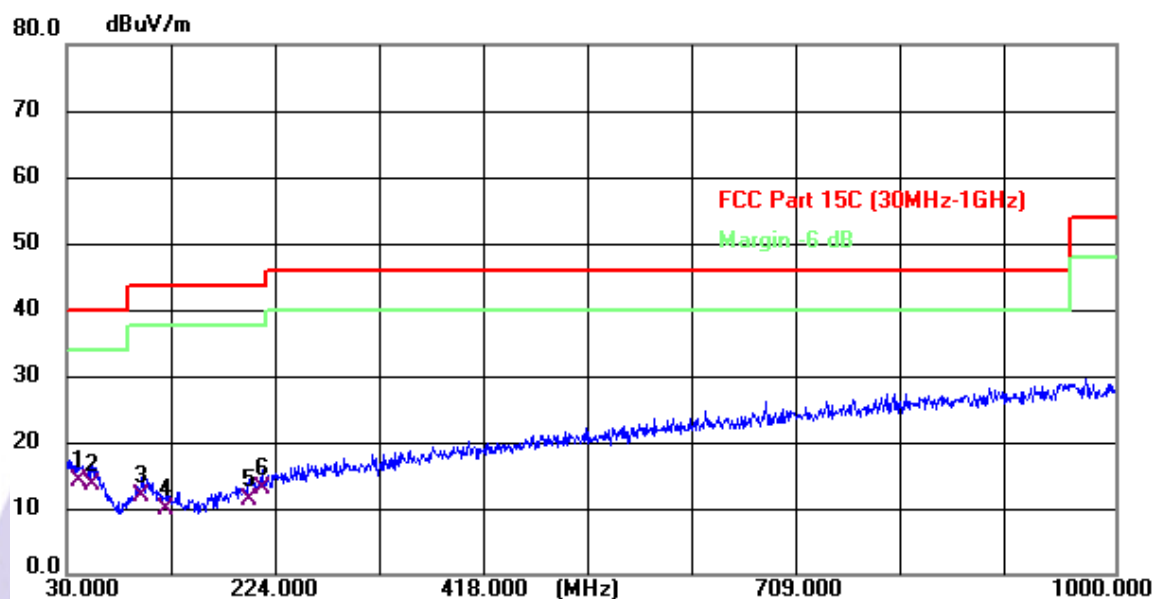

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1 * | 40.670          | 22.69          | -8.60         | 14.09          | 40.00          | -25.91      | QP       |
| 2   | 53.280          | 23.47          | -9.79         | 13.68          | 40.00          | -26.32      | QP       |
| 3   | 99.840          | 22.99          | -11.27        | 11.72          | 43.50          | -31.78      | QP       |
| 4   | 122.150         | 22.94          | -13.00        | 9.94           | 43.50          | -33.56      | QP       |
| 5   | 198.780         | 22.54          | -11.23        | 11.31          | 43.50          | -32.19      | QP       |
| 6   | 210.420         | 23.67          | -10.75        | 12.92          | 43.50          | -30.58      | QP       |

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor

Test plot for Vertical

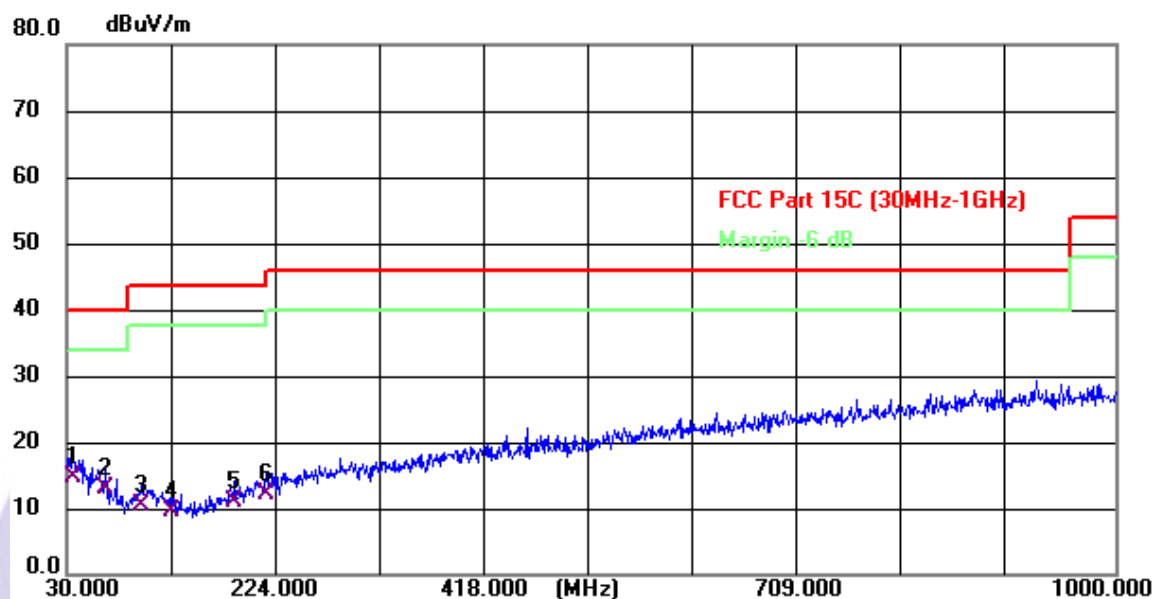

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1 * | 36.790          | 23.14          | -8.45         | 14.69          | 40.00          | -25.31      | QP       |
| 2   | 65.890          | 25.18          | -12.24        | 12.94          | 40.00          | -27.06      | QP       |
| 3   | 99.840          | 21.83          | -11.27        | 10.56          | 43.50          | -32.94      | QP       |
| 4   | 127.970         | 22.84          | -13.24        | 9.60           | 43.50          | -33.90      | QP       |
| 5   | 185.200         | 23.18          | -12.14        | 11.04          | 43.50          | -32.46      | QP       |
| 6   | 214.300         | 22.88          | -10.61        | 12.27          | 43.50          | -31.23      | QP       |

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor



**Test Frequency 1GHz-25GHz: (Left earphone)**

GFSK

| Polar<br>(H/V)      | Frequency<br>(MHz) | Meter<br>Reading<br>(dBuV) | Pre-<br>amplifier<br>(dB) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Detector<br>Type |
|---------------------|--------------------|----------------------------|---------------------------|-----------------------|---------------------------|-------------------------------|--------------------|----------------|------------------|
| Low Channel:2402MHz |                    |                            |                           |                       |                           |                               |                    |                |                  |
| V                   | 4804.00            | 58.55                      | 30.55                     | 5.77                  | 24.66                     | 58.43                         | 74                 | -15.57         | Pk               |
| V                   | 4804.00            | 43.7                       | 30.55                     | 5.77                  | 24.66                     | 43.58                         | 54                 | -10.42         | AV               |
| V                   | 7206.00            | 56.11                      | 30.33                     | 6.32                  | 24.55                     | 56.65                         | 74                 | -17.35         | Pk               |
| V                   | 7206.00            | 44.95                      | 30.33                     | 6.32                  | 24.55                     | 45.49                         | 54                 | -8.51          | AV               |
| V                   | 9608.00            | 55.65                      | 30.55                     | 5.77                  | 24.66                     | 55.53                         | 74                 | -18.47         | Pk               |
| V                   | 9608.00            | 41.33                      | 30.55                     | 5.77                  | 24.66                     | 41.21                         | 54                 | -12.79         | AV               |
| V                   | 12010.00           | 59.8                       | 30.33                     | 6.32                  | 24.55                     | 60.34                         | 74                 | -13.66         | Pk               |
| V                   | 12010.00           | 42.48                      | 30.33                     | 6.32                  | 24.55                     | 43.02                         | 54                 | -10.98         | AV               |
| H                   | 4804.00            | 58.94                      | 30.55                     | 5.77                  | 24.66                     | 58.82                         | 74                 | -15.18         | Pk               |
| H                   | 4804.00            | 41.1                       | 30.55                     | 5.77                  | 24.66                     | 40.98                         | 54                 | -13.02         | AV               |
| H                   | 7206.00            | 56.03                      | 30.33                     | 6.32                  | 24.55                     | 56.57                         | 74                 | -17.43         | Pk               |
| H                   | 7206.00            | 43.47                      | 30.33                     | 6.32                  | 24.55                     | 44.01                         | 54                 | -9.99          | AV               |
| H                   | 9608.00            | 56.33                      | 30.55                     | 5.77                  | 24.66                     | 56.21                         | 74                 | -17.79         | Pk               |
| H                   | 9608.00            | 41.62                      | 30.55                     | 5.77                  | 24.66                     | 41.5                          | 54                 | -12.5          | AV               |
| H                   | 12010.00           | 58                         | 30.33                     | 6.32                  | 24.55                     | 58.54                         | 74                 | -15.46         | Pk               |
| H                   | 12010.00           | 41.5                       | 30.33                     | 6.32                  | 24.55                     | 42.04                         | 54                 | -11.96         | AV               |

| Polar<br>(H/V)         | Frequency | Meter<br>Reading | Pre-<br>amplifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detector<br>Type |
|------------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|------------------|
|                        | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/m) | (dB)   |                  |
| Middle Channel:2441MHz |           |                  |                   |               |                   |                   |          |        |                  |
| V                      | 4882.00   | 56.84            | 30.55             | 5.77          | 24.66             | 56.72             | 74       | -17.28 | Pk               |
| V                      | 4882.00   | 41               | 30.55             | 5.77          | 24.66             | 40.88             | 54       | -13.12 | AV               |
| V                      | 7323.00   | 58.61            | 30.33             | 6.32          | 24.55             | 59.15             | 74       | -14.85 | Pk               |
| V                      | 7323.00   | 41.27            | 30.33             | 6.32          | 24.55             | 41.81             | 54       | -12.19 | AV               |
| V                      | 9764.00   | 56.18            | 30.55             | 5.77          | 24.66             | 56.06             | 74       | -17.94 | Pk               |
| V                      | 9764.00   | 43.75            | 30.55             | 5.77          | 24.66             | 43.63             | 54       | -10.37 | AV               |
| V                      | 12205.00  | 57.48            | 30.33             | 6.32          | 24.55             | 58.02             | 74       | -15.98 | Pk               |
| V                      | 12205.00  | 44               | 30.33             | 6.32          | 24.55             | 44.54             | 54       | -9.46  | AV               |
| H                      | 4882.00   | 55.7             | 30.55             | 5.77          | 24.66             | 55.58             | 74       | -18.42 | Pk               |
| H                      | 4882.00   | 43.5             | 30.55             | 5.77          | 24.66             | 43.38             | 54       | -10.62 | AV               |
| H                      | 7323.00   | 57.53            | 30.33             | 6.32          | 24.55             | 58.07             | 74       | -15.93 | Pk               |
| H                      | 7323.00   | 43.22            | 30.33             | 6.32          | 24.55             | 43.76             | 54       | -10.24 | AV               |
| H                      | 9764.00   | 58.57            | 30.55             | 5.77          | 24.66             | 58.45             | 74       | -15.55 | Pk               |
| H                      | 9764.00   | 41.66            | 30.55             | 5.77          | 24.66             | 41.54             | 54       | -12.46 | AV               |
| H                      | 12205.00  | 57.44            | 30.33             | 6.32          | 24.55             | 57.98             | 74       | -16.02 | Pk               |
| H                      | 12205.00  | 43.22            | 30.33             | 6.32          | 24.55             | 43.76             | 54       | -10.24 | AV               |

| Polar<br>(H/V)       | Frequency<br>(MHz) | Meter<br>Reading<br>(dBuV) | Pre-<br>amplifier<br>(dB) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Detector<br>Type |
|----------------------|--------------------|----------------------------|---------------------------|-----------------------|---------------------------|-------------------------------|--------------------|----------------|------------------|
| High Channel:2480MHz |                    |                            |                           |                       |                           |                               |                    |                |                  |
| V                    | 4960.00            | 58.6                       | 30.55                     | 5.77                  | 24.66                     | 58.48                         | 74                 | -15.52         | Pk               |
| V                    | 4960.00            | 41.54                      | 30.55                     | 5.77                  | 24.66                     | 41.42                         | 54                 | -12.58         | AV               |
| V                    | 7440.00            | 57.96                      | 30.33                     | 6.32                  | 24.55                     | 58.5                          | 74                 | -15.5          | Pk               |
| V                    | 7440.00            | 43.79                      | 30.33                     | 6.32                  | 24.55                     | 44.33                         | 54                 | -9.67          | AV               |
| V                    | 9920.00            | 59.03                      | 30.55                     | 5.77                  | 24.66                     | 58.91                         | 74                 | -15.09         | Pk               |
| V                    | 9920.00            | 43.08                      | 30.55                     | 5.77                  | 24.66                     | 42.96                         | 54                 | -11.04         | AV               |
| V                    | 12400.00           | 56.14                      | 30.33                     | 6.32                  | 24.55                     | 56.68                         | 74                 | -17.32         | Pk               |
| V                    | 12400.00           | 41.44                      | 30.33                     | 6.32                  | 24.55                     | 41.98                         | 54                 | -12.02         | AV               |
| H                    | 4960.00            | 58.14                      | 30.55                     | 5.77                  | 24.66                     | 58.02                         | 74                 | -15.98         | Pk               |
| H                    | 4960.00            | 41.63                      | 30.55                     | 5.77                  | 24.66                     | 41.51                         | 54                 | -12.49         | AV               |
| H                    | 7440.00            | 55.12                      | 30.33                     | 6.32                  | 24.55                     | 55.66                         | 74                 | -18.34         | Pk               |
| H                    | 7440.00            | 41.7                       | 30.33                     | 6.32                  | 24.55                     | 42.24                         | 54                 | -11.76         | AV               |
| H                    | 9920.00            | 55.7                       | 30.55                     | 5.77                  | 24.66                     | 55.58                         | 74                 | -18.42         | Pk               |
| H                    | 9920.00            | 41.48                      | 30.55                     | 5.77                  | 24.66                     | 41.36                         | 54                 | -12.64         | AV               |
| H                    | 12400.00           | 56.81                      | 30.33                     | 6.32                  | 24.55                     | 57.35                         | 74                 | -16.65         | Pk               |
| H                    | 12400.00           | 41.6                       | 30.33                     | 6.32                  | 24.55                     | 42.14                         | 54                 | -11.86         | AV               |

Note: 1. The testing has been conformed to 10\*2480MHz=24800MHz.

2. All other emissions more than 30dB below the limit.

3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Reading + Factor

Margin=Emission Level-Limit

4. All the modes have tested and recorded the worst mode(GFSK) in the report



## Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

|               | Polar<br>(H/V)        | Frequenc<br>y<br>(MHz) | Meter<br>Reading<br>(dBuV) | Pre-<br>amplifier<br>(dB) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB/m) | Emission<br>level<br>(dBuV/m) | Limit<br>(dBuV<br>/m) | Margin<br>(dB) | Detect<br>or<br>Type | Result |
|---------------|-----------------------|------------------------|----------------------------|---------------------------|-----------------------|-----------------------------|-------------------------------|-----------------------|----------------|----------------------|--------|
| GFSK          | Low Channel: 2402MHz  |                        |                            |                           |                       |                             |                               |                       |                |                      |        |
|               | H                     | 2390.00                | 60.16                      | 30.22                     | 4.85                  | 23.98                       | 58.77                         | 74.00                 | -15.23         | PK                   | PASS   |
|               | H                     | 2390.00                | 48.59                      | 30.22                     | 4.85                  | 23.98                       | 47.20                         | 54.00                 | -6.8           | AV                   | PASS   |
|               | H                     | 2400.00                | 62.82                      | 30.22                     | 4.85                  | 23.98                       | 61.43                         | 74.00                 | -12.57         | PK                   | PASS   |
|               | H                     | 2400.00                | 47.25                      | 30.22                     | 4.85                  | 23.98                       | 45.86                         | 54.00                 | -8.14          | AV                   | PASS   |
|               | V                     | 2390.00                | 59.22                      | 30.22                     | 4.85                  | 23.98                       | 57.83                         | 74.00                 | -16.17         | PK                   | PASS   |
|               | V                     | 2390.00                | 47.82                      | 30.22                     | 4.85                  | 23.98                       | 46.43                         | 54.00                 | -7.57          | AV                   | PASS   |
|               | V                     | 2400.00                | 59.89                      | 30.22                     | 4.85                  | 23.98                       | 58.50                         | 74.00                 | -15.5          | PK                   | PASS   |
|               | V                     | 2400.00                | 47.86                      | 30.22                     | 4.85                  | 23.98                       | 46.47                         | 54.00                 | -7.53          | AV                   | PASS   |
|               | High Channel: 2480MHz |                        |                            |                           |                       |                             |                               |                       |                |                      |        |
|               | H                     | 2483.50                | 61.15                      | 30.22                     | 4.85                  | 23.98                       | 59.76                         | 74.00                 | -14.24         | PK                   | PASS   |
|               | H                     | 2483.50                | 48.16                      | 30.22                     | 4.85                  | 23.98                       | 46.77                         | 54.00                 | -7.23          | AV                   | PASS   |
|               | H                     | 2500.00                | 59.51                      | 30.22                     | 4.85                  | 23.98                       | 58.12                         | 74.00                 | -15.88         | PK                   | PASS   |
|               | H                     | 2500.00                | 48.69                      | 30.22                     | 4.85                  | 23.98                       | 47.30                         | 54.00                 | -6.7           | AV                   | PASS   |
|               | V                     | 2483.50                | 59.35                      | 30.22                     | 4.85                  | 23.98                       | 57.96                         | 74.00                 | -16.04         | PK                   | PASS   |
|               | V                     | 2483.50                | 46.99                      | 30.22                     | 4.85                  | 23.98                       | 45.60                         | 54.00                 | -8.4           | AV                   | PASS   |
|               | V                     | 2500.00                | 62.43                      | 30.22                     | 4.85                  | 23.98                       | 61.04                         | 74.00                 | -12.96         | PK                   | PASS   |
|               | V                     | 2500.00                | 48.79                      | 30.22                     | 4.85                  | 23.98                       | 47.40                         | 54.00                 | -6.6           | AV                   | PASS   |
| π/4-<br>DQPSK | Low Channel: 2402MHz  |                        |                            |                           |                       |                             |                               |                       |                |                      |        |
|               | H                     | 2390.00                | 60.99                      | 30.22                     | 4.85                  | 23.98                       | 59.60                         | 74.00                 | -14.4          | PK                   | PASS   |
|               | H                     | 2390.00                | 48.44                      | 30.22                     | 4.85                  | 23.98                       | 47.05                         | 54.00                 | -6.95          | AV                   | PASS   |
|               | H                     | 2400.00                | 61.66                      | 30.22                     | 4.85                  | 23.98                       | 60.27                         | 74.00                 | -13.73         | PK                   | PASS   |



|        |                       |         |       |       |      |       |       |       |        |    |      |
|--------|-----------------------|---------|-------|-------|------|-------|-------|-------|--------|----|------|
|        | H                     | 2400.00 | 48.99 | 30.22 | 4.85 | 23.98 | 47.60 | 54.00 | -6.4   | AV | PASS |
|        | V                     | 2390.00 | 62.07 | 30.22 | 4.85 | 23.98 | 60.68 | 74.00 | -13.32 | PK | PASS |
|        | V                     | 2390.00 | 46.61 | 30.22 | 4.85 | 23.98 | 45.22 | 54.00 | -8.78  | AV | PASS |
|        | V                     | 2400.00 | 61.07 | 30.22 | 4.85 | 23.98 | 59.68 | 74.00 | -14.32 | PK | PASS |
|        | V                     | 2400.00 | 47.31 | 30.22 | 4.85 | 23.98 | 45.92 | 54.00 | -8.08  | AV | PASS |
|        | High Channel: 2480MHz |         |       |       |      |       |       |       |        |    |      |
|        | H                     | 2483.50 | 59.23 | 30.22 | 4.85 | 23.98 | 57.84 | 74.00 | -16.16 | PK | PASS |
|        | H                     | 2483.50 | 46.39 | 30.22 | 4.85 | 23.98 | 45.00 | 54.00 | -9     | AV | PASS |
|        | H                     | 2500.00 | 61.71 | 30.22 | 4.85 | 23.98 | 60.32 | 74.00 | -13.68 | PK | PASS |
|        | H                     | 2500.00 | 47.32 | 30.22 | 4.85 | 23.98 | 45.93 | 54.00 | -8.07  | AV | PASS |
|        | V                     | 2483.50 | 62.87 | 30.22 | 4.85 | 23.98 | 61.48 | 74.00 | -12.52 | PK | PASS |
|        | V                     | 2483.50 | 48.12 | 30.22 | 4.85 | 23.98 | 46.73 | 54.00 | -7.27  | AV | PASS |
|        | V                     | 2500.00 | 62.71 | 30.22 | 4.85 | 23.98 | 61.32 | 74.00 | -12.68 | PK | PASS |
|        | V                     | 2500.00 | 47.73 | 30.22 | 4.85 | 23.98 | 46.34 | 54.00 | -7.66  | AV | PASS |
| 8-DPSK | Low Channel: 2402MHz  |         |       |       |      |       |       |       |        |    |      |
|        | H                     | 2390.00 | 62.19 | 30.22 | 4.85 | 23.98 | 60.80 | 74.00 | -13.2  | PK | PASS |
|        | H                     | 2390.00 | 48.64 | 30.22 | 4.85 | 23.98 | 47.25 | 54.00 | -6.75  | AV | PASS |
|        | H                     | 2400.00 | 61.33 | 30.22 | 4.85 | 23.98 | 59.94 | 74.00 | -14.06 | PK | PASS |
|        | H                     | 2400.00 | 48.38 | 30.22 | 4.85 | 23.98 | 46.99 | 54.00 | -7.01  | AV | PASS |
|        | V                     | 2390.00 | 61.38 | 30.22 | 4.85 | 23.98 | 59.99 | 74.00 | -14.01 | PK | PASS |
|        | V                     | 2390.00 | 46.12 | 30.22 | 4.85 | 23.98 | 44.73 | 54.00 | -9.27  | AV | PASS |
|        | V                     | 2400.00 | 62.09 | 30.22 | 4.85 | 23.98 | 60.70 | 74.00 | -13.3  | PK | PASS |
|        | V                     | 2400.00 | 48.74 | 30.22 | 4.85 | 23.98 | 47.35 | 54.00 | -6.65  | AV | PASS |
|        | High Channel: 2480MHz |         |       |       |      |       |       |       |        |    |      |
|        | H                     | 2483.50 | 61.55 | 30.22 | 4.85 | 23.98 | 60.16 | 74.00 | -13.84 | PK | PASS |
|        | H                     | 2483.50 | 49.00 | 30.22 | 4.85 | 23.98 | 47.61 | 54.00 | -6.39  | AV | PASS |
|        | H                     | 2500.00 | 59.62 | 30.22 | 4.85 | 23.98 | 58.23 | 74.00 | -15.77 | PK | PASS |

|  |   |         |       |       |      |       |       |       |        |    |      |
|--|---|---------|-------|-------|------|-------|-------|-------|--------|----|------|
|  | H | 2500.00 | 46.63 | 30.22 | 4.85 | 23.98 | 45.24 | 54.00 | -8.76  | AV | PASS |
|  | V | 2483.50 | 62.73 | 30.22 | 4.85 | 23.98 | 61.34 | 74.00 | -12.66 | PK | PASS |
|  | V | 2483.50 | 46.46 | 30.22 | 4.85 | 23.98 | 45.07 | 54.00 | -8.93  | AV | PASS |
|  | V | 2500.00 | 60.98 | 30.22 | 4.85 | 23.98 | 59.59 | 74.00 | -14.41 | PK | PASS |
|  | V | 2500.00 | 47.34 | 30.22 | 4.85 | 23.98 | 45.95 | 54.00 | -8.05  | AV | PASS |

**Remark:**

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit

**Test Frequency 1GHz-25GHz: (Right earphone)**

GFSK

| Polar<br>(H/V)      | Frequency<br>(MHz) | Meter<br>Reading<br>(dBuV) | Pre-<br>amplifier<br>(dB) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Detector<br>Type |
|---------------------|--------------------|----------------------------|---------------------------|-----------------------|---------------------------|-------------------------------|--------------------|----------------|------------------|
| Low Channel:2402MHz |                    |                            |                           |                       |                           |                               |                    |                |                  |
| V                   | 4804.00            | 55.03                      | 30.55                     | 5.77                  | 24.66                     | 54.91                         | 74                 | -19.09         | Pk               |
| V                   | 4804.00            | 41.9                       | 30.55                     | 5.77                  | 24.66                     | 41.78                         | 54                 | -12.22         | AV               |
| V                   | 7206.00            | 58.41                      | 30.33                     | 6.32                  | 24.55                     | 58.95                         | 74                 | -15.05         | Pk               |
| V                   | 7206.00            | 42                         | 30.33                     | 6.32                  | 24.55                     | 42.54                         | 54                 | -11.46         | AV               |
| V                   | 9608.00            | 56.99                      | 30.55                     | 5.77                  | 24.66                     | 56.87                         | 74                 | -17.13         | Pk               |
| V                   | 9608.00            | 41.49                      | 30.55                     | 5.77                  | 24.66                     | 41.37                         | 54                 | -12.63         | AV               |
| V                   | 12010.00           | 58.44                      | 30.33                     | 6.32                  | 24.55                     | 58.98                         | 74                 | -15.02         | Pk               |
| V                   | 12010.00           | 44.83                      | 30.33                     | 6.32                  | 24.55                     | 45.37                         | 54                 | -8.63          | AV               |
| H                   | 4804.00            | 59.82                      | 30.55                     | 5.77                  | 24.66                     | 59.7                          | 74                 | -14.3          | Pk               |
| H                   | 4804.00            | 41.67                      | 30.55                     | 5.77                  | 24.66                     | 41.55                         | 54                 | -12.45         | AV               |
| H                   | 7206.00            | 57.72                      | 30.33                     | 6.32                  | 24.55                     | 58.26                         | 74                 | -15.74         | Pk               |
| H                   | 7206.00            | 44.57                      | 30.33                     | 6.32                  | 24.55                     | 45.11                         | 54                 | -8.89          | AV               |
| H                   | 9608.00            | 55.06                      | 30.55                     | 5.77                  | 24.66                     | 54.94                         | 74                 | -19.06         | Pk               |
| H                   | 9608.00            | 41.75                      | 30.55                     | 5.77                  | 24.66                     | 41.63                         | 54                 | -12.37         | AV               |
| H                   | 12010.00           | 58.55                      | 30.33                     | 6.32                  | 24.55                     | 59.09                         | 74                 | -14.91         | Pk               |
| H                   | 12010.00           | 41.62                      | 30.33                     | 6.32                  | 24.55                     | 42.16                         | 54                 | -11.84         | AV               |



| Polar<br>(H/V)         | Frequency | Meter<br>Reading | Pre-<br>amplifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detector<br>Type |
|------------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|------------------|
|                        | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/m) | (dB)   |                  |
| Middle Channel:2441MHz |           |                  |                   |               |                   |                   |          |        |                  |
| V                      | 4882.00   | 56.3             | 30.55             | 5.77          | 24.66             | 56.18             | 74       | -17.82 | Pk               |
| V                      | 4882.00   | 41.9             | 30.55             | 5.77          | 24.66             | 41.78             | 54       | -12.22 | AV               |
| V                      | 7323.00   | 59.26            | 30.33             | 6.32          | 24.55             | 59.8              | 74       | -14.2  | Pk               |
| V                      | 7323.00   | 42.26            | 30.33             | 6.32          | 24.55             | 42.8              | 54       | -11.2  | AV               |
| V                      | 9764.00   | 59.64            | 30.55             | 5.77          | 24.66             | 59.52             | 74       | -14.48 | Pk               |
| V                      | 9764.00   | 42               | 30.55             | 5.77          | 24.66             | 41.88             | 54       | -12.12 | AV               |
| V                      | 12205.00  | 59.81            | 30.33             | 6.32          | 24.55             | 60.35             | 74       | -13.65 | Pk               |
| V                      | 12205.00  | 41.35            | 30.33             | 6.32          | 24.55             | 41.89             | 54       | -12.11 | AV               |
| H                      | 4882.00   | 56.47            | 30.55             | 5.77          | 24.66             | 56.35             | 74       | -17.65 | Pk               |
| H                      | 4882.00   | 44.39            | 30.55             | 5.77          | 24.66             | 44.27             | 54       | -9.73  | AV               |
| H                      | 7323.00   | 59.63            | 30.33             | 6.32          | 24.55             | 60.17             | 74       | -13.83 | Pk               |
| H                      | 7323.00   | 43.68            | 30.33             | 6.32          | 24.55             | 44.22             | 54       | -9.78  | AV               |
| H                      | 9764.00   | 58.61            | 30.55             | 5.77          | 24.66             | 58.49             | 74       | -15.51 | Pk               |
| H                      | 9764.00   | 44.33            | 30.55             | 5.77          | 24.66             | 44.21             | 54       | -9.79  | AV               |
| H                      | 12205.00  | 55.79            | 30.33             | 6.32          | 24.55             | 56.33             | 74       | -17.67 | Pk               |
| H                      | 12205.00  | 41.85            | 30.33             | 6.32          | 24.55             | 42.39             | 54       | -11.61 | AV               |



| Polar<br>(H/V)       | Frequency<br>(MHz) | Meter<br>Reading<br>(dBuV) | Pre-<br>amplifier<br>(dB) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Detector<br>Type |
|----------------------|--------------------|----------------------------|---------------------------|-----------------------|---------------------------|-------------------------------|--------------------|----------------|------------------|
| High Channel:2480MHz |                    |                            |                           |                       |                           |                               |                    |                |                  |
| V                    | 4960.00            | 58.16                      | 30.55                     | 5.77                  | 24.66                     | 58.04                         | 74                 | -15.96         | Pk               |
| V                    | 4960.00            | 41.95                      | 30.55                     | 5.77                  | 24.66                     | 41.83                         | 54                 | -12.17         | AV               |
| V                    | 7440.00            | 57.67                      | 30.33                     | 6.32                  | 24.55                     | 58.21                         | 74                 | -15.79         | Pk               |
| V                    | 7440.00            | 42.03                      | 30.33                     | 6.32                  | 24.55                     | 42.57                         | 54                 | -11.43         | AV               |
| V                    | 9920.00            | 59.83                      | 30.55                     | 5.77                  | 24.66                     | 59.71                         | 74                 | -14.29         | Pk               |
| V                    | 9920.00            | 41.71                      | 30.55                     | 5.77                  | 24.66                     | 41.59                         | 54                 | -12.41         | AV               |
| V                    | 12400.00           | 58.37                      | 30.33                     | 6.32                  | 24.55                     | 58.91                         | 74                 | -15.09         | Pk               |
| V                    | 12400.00           | 41.38                      | 30.33                     | 6.32                  | 24.55                     | 41.92                         | 54                 | -12.08         | AV               |
| H                    | 4960.00            | 56.25                      | 30.55                     | 5.77                  | 24.66                     | 56.13                         | 74                 | -17.87         | Pk               |
| H                    | 4960.00            | 41.33                      | 30.55                     | 5.77                  | 24.66                     | 41.21                         | 54                 | -12.79         | AV               |
| H                    | 7440.00            | 57.43                      | 30.33                     | 6.32                  | 24.55                     | 57.97                         | 74                 | -16.03         | Pk               |
| H                    | 7440.00            | 42.28                      | 30.33                     | 6.32                  | 24.55                     | 42.82                         | 54                 | -11.18         | AV               |
| H                    | 9920.00            | 59.37                      | 30.55                     | 5.77                  | 24.66                     | 59.25                         | 74                 | -14.75         | Pk               |
| H                    | 9920.00            | 44.83                      | 30.55                     | 5.77                  | 24.66                     | 44.71                         | 54                 | -9.29          | AV               |
| H                    | 12400.00           | 56.77                      | 30.33                     | 6.32                  | 24.55                     | 57.31                         | 74                 | -16.69         | Pk               |
| H                    | 12400.00           | 42.92                      | 30.33                     | 6.32                  | 24.55                     | 43.46                         | 54                 | -10.54         | AV               |

Note: 1. The testing has been conformed to 10\*2480MHz=24800MHz.

2. All other emissions more than 30dB below the limit.

3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Reading + Factor

Margin=Emission Level-Limit

4. All the modes have tested and recorded the worst mode(GFSK) in the report

### Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

|               | Polar<br>(H/V)        | Frequenc<br>y<br>(MHz) | Meter<br>Reading<br>(dBuV) | Pre-<br>amplifier<br>(dB) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB/m) | Emission<br>level<br>(dBuV/m) | Limit<br>(dBuV<br>/m) | Margin<br>(dB) | Detect<br>or<br>Type | Result |
|---------------|-----------------------|------------------------|----------------------------|---------------------------|-----------------------|-----------------------------|-------------------------------|-----------------------|----------------|----------------------|--------|
| GFSK          | Low Channel: 2402MHz  |                        |                            |                           |                       |                             |                               |                       |                |                      |        |
|               | H                     | 2390.00                | 60.87                      | 30.22                     | 4.85                  | 23.98                       | 59.48                         | 74.00                 | -14.52         | PK                   | PASS   |
|               | H                     | 2390.00                | 46.35                      | 30.22                     | 4.85                  | 23.98                       | 44.96                         | 54.00                 | -9.04          | AV                   | PASS   |
|               | H                     | 2400.00                | 59.43                      | 30.22                     | 4.85                  | 23.98                       | 58.04                         | 74.00                 | -15.96         | PK                   | PASS   |
|               | H                     | 2400.00                | 47.97                      | 30.22                     | 4.85                  | 23.98                       | 46.58                         | 54.00                 | -7.42          | AV                   | PASS   |
|               | V                     | 2390.00                | 62.73                      | 30.22                     | 4.85                  | 23.98                       | 61.34                         | 74.00                 | -12.66         | PK                   | PASS   |
|               | V                     | 2390.00                | 48.70                      | 30.22                     | 4.85                  | 23.98                       | 47.31                         | 54.00                 | -6.69          | AV                   | PASS   |
|               | V                     | 2400.00                | 60.59                      | 30.22                     | 4.85                  | 23.98                       | 59.20                         | 74.00                 | -14.8          | PK                   | PASS   |
|               | V                     | 2400.00                | 46.71                      | 30.22                     | 4.85                  | 23.98                       | 45.32                         | 54.00                 | -8.68          | AV                   | PASS   |
|               | High Channel: 2480MHz |                        |                            |                           |                       |                             |                               |                       |                |                      |        |
|               | H                     | 2483.50                | 62.16                      | 30.22                     | 4.85                  | 23.98                       | 60.77                         | 74.00                 | -13.23         | PK                   | PASS   |
|               | H                     | 2483.50                | 46.31                      | 30.22                     | 4.85                  | 23.98                       | 44.92                         | 54.00                 | -9.08          | AV                   | PASS   |
|               | H                     | 2500.00                | 59.12                      | 30.22                     | 4.85                  | 23.98                       | 57.73                         | 74.00                 | -16.27         | PK                   | PASS   |
|               | H                     | 2500.00                | 47.48                      | 30.22                     | 4.85                  | 23.98                       | 46.09                         | 54.00                 | -7.91          | AV                   | PASS   |
|               | V                     | 2483.50                | 60.85                      | 30.22                     | 4.85                  | 23.98                       | 59.46                         | 74.00                 | -14.54         | PK                   | PASS   |
|               | V                     | 2483.50                | 48.17                      | 30.22                     | 4.85                  | 23.98                       | 46.78                         | 54.00                 | -7.22          | AV                   | PASS   |
|               | V                     | 2500.00                | 61.96                      | 30.22                     | 4.85                  | 23.98                       | 60.57                         | 74.00                 | -13.43         | PK                   | PASS   |
|               | V                     | 2500.00                | 48.22                      | 30.22                     | 4.85                  | 23.98                       | 46.83                         | 54.00                 | -7.17          | AV                   | PASS   |
| π/4-<br>DQPSK | Low Channel: 2402MHz  |                        |                            |                           |                       |                             |                               |                       |                |                      |        |
|               | H                     | 2390.00                | 60.16                      | 30.22                     | 4.85                  | 23.98                       | 58.77                         | 74.00                 | -15.23         | PK                   | PASS   |
|               | H                     | 2390.00                | 46.45                      | 30.22                     | 4.85                  | 23.98                       | 45.06                         | 54.00                 | -8.94          | AV                   | PASS   |
|               | H                     | 2400.00                | 59.47                      | 30.22                     | 4.85                  | 23.98                       | 58.08                         | 74.00                 | -15.92         | PK                   | PASS   |

|        |                       |         |       |       |      |       |       |       |        |    |      |
|--------|-----------------------|---------|-------|-------|------|-------|-------|-------|--------|----|------|
|        | H                     | 2400.00 | 48.15 | 30.22 | 4.85 | 23.98 | 46.76 | 54.00 | -7.24  | AV | PASS |
|        | V                     | 2390.00 | 61.60 | 30.22 | 4.85 | 23.98 | 60.21 | 74.00 | -13.79 | PK | PASS |
|        | V                     | 2390.00 | 47.23 | 30.22 | 4.85 | 23.98 | 45.84 | 54.00 | -8.16  | AV | PASS |
|        | V                     | 2400.00 | 61.95 | 30.22 | 4.85 | 23.98 | 60.56 | 74.00 | -13.44 | PK | PASS |
|        | V                     | 2400.00 | 46.56 | 30.22 | 4.85 | 23.98 | 45.17 | 54.00 | -8.83  | AV | PASS |
|        | High Channel: 2480MHz |         |       |       |      |       |       |       |        |    |      |
|        | H                     | 2483.50 | 59.87 | 30.22 | 4.85 | 23.98 | 58.48 | 74.00 | -15.52 | PK | PASS |
|        | H                     | 2483.50 | 48.40 | 30.22 | 4.85 | 23.98 | 47.01 | 54.00 | -6.99  | AV | PASS |
|        | H                     | 2500.00 | 60.35 | 30.22 | 4.85 | 23.98 | 58.96 | 74.00 | -15.04 | PK | PASS |
|        | H                     | 2500.00 | 47.02 | 30.22 | 4.85 | 23.98 | 45.63 | 54.00 | -8.37  | AV | PASS |
|        | V                     | 2483.50 | 61.61 | 30.22 | 4.85 | 23.98 | 60.22 | 74.00 | -13.78 | PK | PASS |
|        | V                     | 2483.50 | 47.27 | 30.22 | 4.85 | 23.98 | 45.88 | 54.00 | -8.12  | AV | PASS |
|        | V                     | 2500.00 | 59.95 | 30.22 | 4.85 | 23.98 | 58.56 | 74.00 | -15.44 | PK | PASS |
|        | V                     | 2500.00 | 48.34 | 30.22 | 4.85 | 23.98 | 46.95 | 54.00 | -7.05  | AV | PASS |
| 8-DPSK | Low Channel: 2402MHz  |         |       |       |      |       |       |       |        |    |      |
|        | H                     | 2390.00 | 62.19 | 30.22 | 4.85 | 23.98 | 60.80 | 74.00 | -13.2  | PK | PASS |
|        | H                     | 2390.00 | 47.54 | 30.22 | 4.85 | 23.98 | 46.15 | 54.00 | -7.85  | AV | PASS |
|        | H                     | 2400.00 | 59.01 | 30.22 | 4.85 | 23.98 | 57.62 | 74.00 | -16.38 | PK | PASS |
|        | H                     | 2400.00 | 48.15 | 30.22 | 4.85 | 23.98 | 46.76 | 54.00 | -7.24  | AV | PASS |
|        | V                     | 2390.00 | 60.87 | 30.22 | 4.85 | 23.98 | 59.48 | 74.00 | -14.52 | PK | PASS |
|        | V                     | 2390.00 | 48.21 | 30.22 | 4.85 | 23.98 | 46.82 | 54.00 | -7.18  | AV | PASS |
|        | V                     | 2400.00 | 59.99 | 30.22 | 4.85 | 23.98 | 58.60 | 74.00 | -15.4  | PK | PASS |
|        | V                     | 2400.00 | 48.52 | 30.22 | 4.85 | 23.98 | 47.13 | 54.00 | -6.87  | AV | PASS |
|        | High Channel: 2480MHz |         |       |       |      |       |       |       |        |    |      |
|        | H                     | 2483.50 | 60.90 | 30.22 | 4.85 | 23.98 | 59.51 | 74.00 | -14.49 | PK | PASS |
|        | H                     | 2483.50 | 46.76 | 30.22 | 4.85 | 23.98 | 45.37 | 54.00 | -8.63  | AV | PASS |
|        | H                     | 2500.00 | 59.98 | 30.22 | 4.85 | 23.98 | 58.59 | 74.00 | -15.41 | PK | PASS |



|                                                                                                                                   |   |         |       |       |      |       |       |       |        |    |      |
|-----------------------------------------------------------------------------------------------------------------------------------|---|---------|-------|-------|------|-------|-------|-------|--------|----|------|
|                                                                                                                                   | H | 2500.00 | 48.56 | 30.22 | 4.85 | 23.98 | 47.17 | 54.00 | -6.83  | AV | PASS |
|                                                                                                                                   | V | 2483.50 | 60.18 | 30.22 | 4.85 | 23.98 | 58.79 | 74.00 | -15.21 | PK | PASS |
|                                                                                                                                   | V | 2483.50 | 47.01 | 30.22 | 4.85 | 23.98 | 45.62 | 54.00 | -8.38  | AV | PASS |
|                                                                                                                                   | V | 2500.00 | 59.53 | 30.22 | 4.85 | 23.98 | 58.14 | 74.00 | -15.86 | PK | PASS |
|                                                                                                                                   | V | 2500.00 | 46.95 | 30.22 | 4.85 | 23.98 | 45.56 | 54.00 | -8.44  | AV | PASS |
| <b>Remark:</b><br>1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit |   |         |       |       |      |       |       |       |        |    |      |



## 8 Maximum Peak Output Power Test

### 8.1 Test Standard and Limit

|               |                                                                                                                                                                                                                                                                                    |
|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Standard | FCC Part15 C Section 15.247 (b)(3), RSS-247 § 5.4(b)& RSS-Gen§6.12                                                                                                                                                                                                                 |
| Test Limit    | For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts. |

### 8.2 Test Setup



### 8.3 Test Procedure

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

### 8.4 Test Data


Please see the attachment for data.

## 9 20DB Occupy Bandwidth Test

### 9.1 Test Standard

|               |                                                              |
|---------------|--------------------------------------------------------------|
| Test Standard | FCC Part15 C Section 15.247 (a)(1), RSS-247 §5.1&RSS-Gen§6.7 |
|---------------|--------------------------------------------------------------|

### 9.2 Test Setup



### 9.3 Test Procedure

For 20dB Bandwidth Measurement

Using the following spectrum analyzer settings:

1. Span= approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel.
2. Set the RBW = 30 kHz.
3. Set the VBW = 100 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

For 99% Bandwidth Measurement

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 1%-5% OBW, VBW  $\geq$  3RBW

### 9.4 Test Data


Please see the attachment for data.

## 10 Carrier Frequency Separation Test

### 10.1 Test Standard and Limit

|               |                                                     |
|---------------|-----------------------------------------------------|
| Test Standard | FCC Part15 C Section 15.247 (a)(1), RSS-247 §5.1(4) |
| Test Limit    | >25KHz or >two-thirds of the 20 dB bandwidth        |

### 10.2 Test Setup



### 10.3 Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer settings:

1. Span= Wide enough to capture the peaks of two adjacent channels
2. Set the RBW = 30 kHz.
3. Set the VBW = 100 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

### 10.4 Test Data

Please see the attachment for data.




## 11 Number of Hopping Channel Test

### 11.1 Test Standard and Limit

|               |                                                  |
|---------------|--------------------------------------------------|
| Test Standard | FCC Part15 C Section 15.247 (a)(1), RSS-247 §5.1 |
| Test Limit    | >15 channels                                     |

### 11.2 Test Setup



### 11.3 Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer setting:

1. Span= the frequency band of operation
2. Set the RBW = 100kHz.
3. Set the VBW = 300kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

### 11.4 Test Data


Please see the attachment for data.

## 12 Dwell Time Test

### 12.1 Test Standard and Limit

|               |                                                  |
|---------------|--------------------------------------------------|
| Test Standard | FCC Part15 C Section 15.247 (a)(1), RSS-247 §5.1 |
| Test Limit    | 0.4 sec                                          |

### 12.2 Test Setup



### 12.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span= zero span, centered on a hopping channel
2. Set the RBW = 1 MHz.
3. Set the VBW = 1 MHz.
4. Sweep time = as necessary to capture the entire dwell time per hopping channel.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

### 12.4 Test Data


Please see the attachment for data.

## 13 100kHz Bandwidth of Frequency Band Edge Requirement

### 13.1 Test Standard and Limit

|               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Standard | FCC Part15 C Section 15.247 (d), RSS-247 §5.5                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Test Limit    | in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a). |

### 13.2 Test Setup



### 13.3 Test Procedure

The EUT must have its hopping/Non-hopping function enabled. Using the following spectrum analyzer setting:

1. Set the RBW = 100kHz.
2. Set the VBW = 300kHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.

### 13.4 Test Data

Please see the attachment for data.

## 14 Antenna Requirement

### 14.1 Test Standard and Requirement

|               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Standard | FCC Part15 Section 15.203 /247(c), RSS-GEN section 6.8                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Requirement   | <p>1) 15.203 requirement:</p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>2) 15.247(c) (1)(i) requirement:</p> <p>Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.</p> |



|               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Standard | RSS-GEN section 6.8                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Requirement   | <p>According to RSS-GEN section 6.8</p> <p>The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.</p> <p>For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).</p> <p>When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.</p> <p>The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.</p> <p>For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:</p> <p>This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.</p> |

## 14.2 Antenna Connected Construction

The antenna is Chip Antenna which permanently attached, and the best case gain of the antenna is 2.7dBi. It complies with the standard requirement.

## 15 TEST SETUP & EUT PHOTOGRAPH

Please see the attachment for details.

----- End of Report -----

