


## REVISIONS

| REV. | EN            | DATE | DESCRIPTION         | DWN | CHK | APVD |
|------|---------------|------|---------------------|-----|-----|------|
| A    | MB-2402-14971 |      | PRODUCTION RELEASE. | FOB |     |      |

B

B

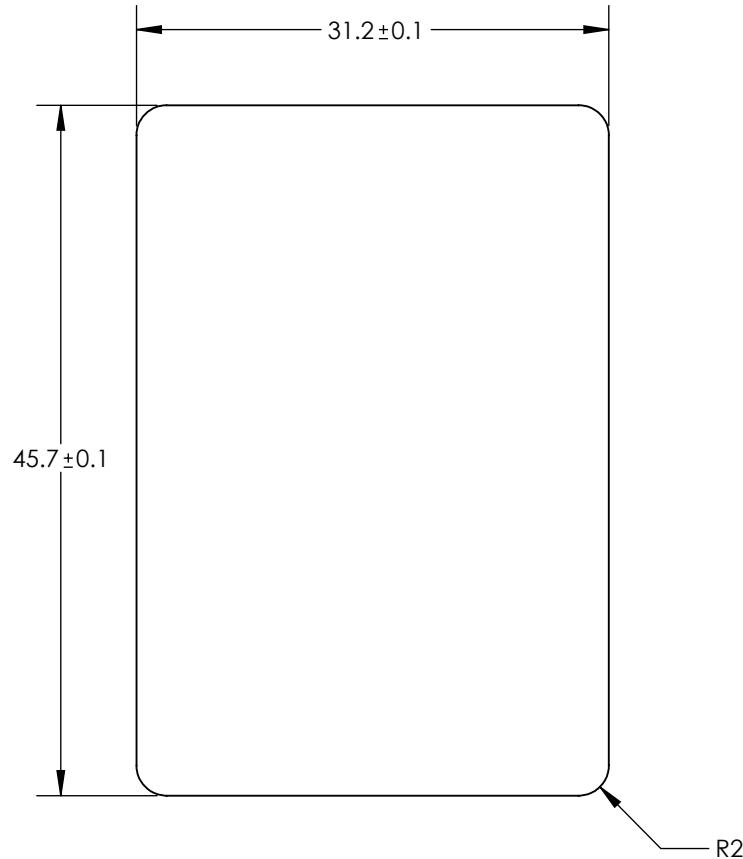

A

A

## Notes:

1. Material shall be 2 mil white polyester stock with 2 mil liner, 1 mil clear cap and 2 mil Flexmount L-778/V-778 permanent adhesive.
2. Adhesive system must be qualitized in accordance with UL969 for -20°F to 212°F service temp range, use indoors, high humidity or occasional exposure to water.
3. Contact U.S. Boiler Company, Inc. Engineering Department for artwork file, 111663-01(ART).PDF.

UNLESS OTHERWISE NOTED:  
ALL DIMENSIONS IN  
MILLIMETERS.  
TOLERANCES:  
 $X \pm 1$   $X.X \pm .5$   $ANGLE \pm 1^\circ$

THIRD ANGLE  
PROJECTION  


MATERIAL:

ITEM NUMBER:  
111663-01FIRST USE:  
USBC, PAT, NYB

DES: FOB

SCALE: 2:1

CHK:

SIZE: A

APVD:

SHEET: 1 OF 1

PROPERTY OF  
U.S. Boiler Company, Inc.  
LANCASTER, PA

THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION  
AND ITS CONTENTS ARE THE SOLE PROPERTY OF U.S. BOILER  
COMPANY, INC. ANY REPRODUCTION IN PART OR AS A  
WHOLE WITHOUT THE WRITTEN PERMISSION OF U.S. BOILER  
COMPANY, INC. IS STRICTLY PROHIBITED.

TITLE:  
**CONNECTED SERVICE TOOL  
BACK LABEL**

DATE:

REVISION:

**A**

DRAWING NUMBER:

**111663-01**