


Multilayer Chip Antenna – SLDA Series

Operating Temp. : -40℃~+85℃



FEATURES

- Light weight, compact
- Wide bandwidth, low cost
- Built-in antenna with high gain

APPLICATIONS

- Bluetooth, Wireless LAN, Mobile TV
- Home RF system, etc.

PRODUCT IDENTIFICATION

<u>SLDA</u> ①	<u>31</u> ②	<u>-2R800G</u> ③	<u>-S1</u> ④	<u>I</u> ⑤	<u>F</u> ⑥																
①	②	③	④	⑤	⑥																
<table><tr><th colspan="2">Type</th></tr><tr><td>SLDA</td><td>Multilayer Chip Antenna</td></tr></table>		Type		SLDA	Multilayer Chip Antenna	<table><tr><th colspan="2">External Dimensions (L×W) (mm)</th></tr><tr><td>31</td><td>3.2×1.6</td></tr></table>	External Dimensions (L×W) (mm)		31	3.2×1.6	<table><tr><th colspan="2">Center Frequency</th></tr><tr><td>Example</td><td>Nominal Value</td></tr><tr><td>2R800G</td><td>2800.0MHz</td></tr><tr><td>2R450G</td><td>2450.0MHz</td></tr></table>			Center Frequency		Example	Nominal Value	2R800G	2800.0MHz	2R450G	2450.0MHz
Type																					
SLDA	Multilayer Chip Antenna																				
External Dimensions (L×W) (mm)																					
31	3.2×1.6																				
Center Frequency																					
Example	Nominal Value																				
2R800G	2800.0MHz																				
2R450G	2450.0MHz																				
④		⑤	⑥																		
<table><tr><th>Series Code</th></tr><tr><td>S1, 01, etc.</td></tr></table>		Series Code	S1, 01, etc.	<table><tr><th colspan="2">Packing</th></tr><tr><td>T</td><td>Tape & Reel</td></tr></table>	Packing		T	Tape & Reel	<table><tr><th colspan="2">Hazardous Substance Free Products</th></tr><tr><td colspan="2">F</td></tr></table>			Hazardous Substance Free Products		F							
Series Code																					
S1, 01, etc.																					
Packing																					
T	Tape & Reel																				
Hazardous Substance Free Products																					
F																					

SHAPE AND LAND PATTERN

Type:	Dimensions (mm)
SLDA31-2R800G-S1TF	Land Pattern (mm)

SHAPE AND DIMENSIONS

Series	A	B	C	D	E	F	G	H	I	J
SLDA31	3.2±0.2	1.6±0.2	1.2±0.2	0.5±0.2	1.6±0.2	0.8±0.2	0.8±0.2	2.2±0.2	1.4	1.6±0.2

TERINAL-CONFIGURATION


(1)



(2)

No.	Terminal Name	No.	Terminal Name
(1)	Feeding Point	(2)	NC

EVALUATION BOARD

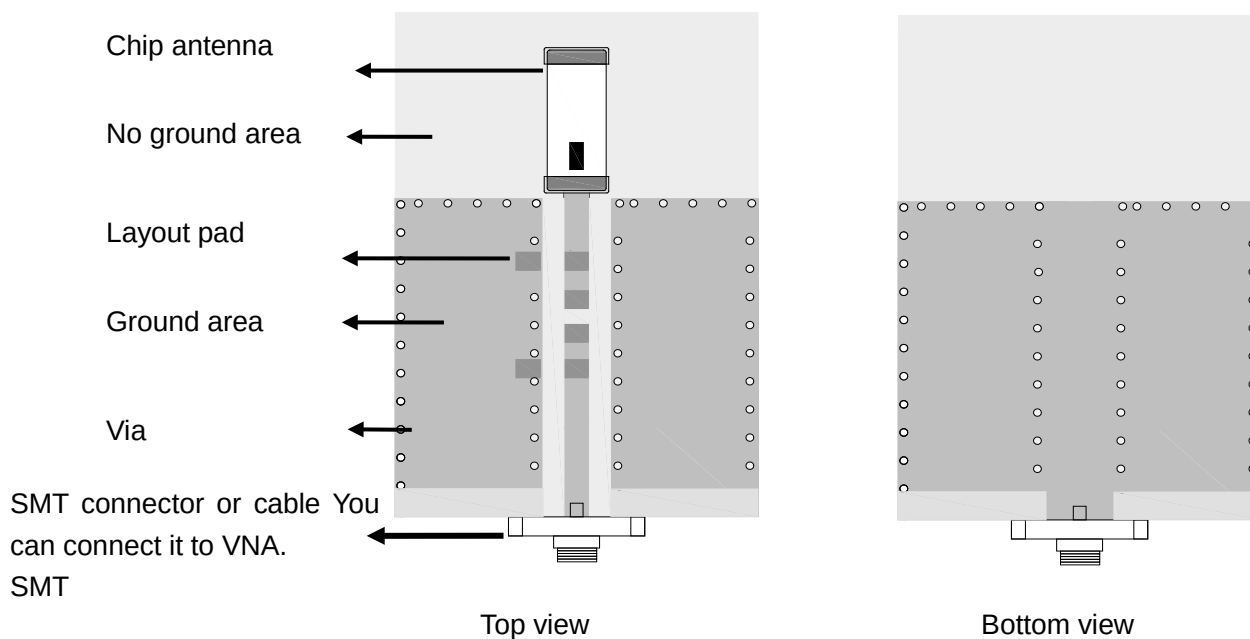

APPLICATION GUIDE

