

TEST REPORT

Report No.: BCTC2207600963-2E

Applicant: Soliton Systems K.K.

Product Name: Multi link Unit

Model/Type
reference: IFC-MLU-G-H

Tested Date: 2022-07-26 to 2022-08-26

Issued Date: 2022-12-13



Shenzhen BCTC Testing Co., Ltd.

FCC ID: 2A9GJIFC-MLU-G-H

Product Name: Multi link Unit

Trademark: 

Model/Type reference: IFC-MLU-G-H, IFC-MLU-JC-H

Prepared For: Soliton Systems K.K.

Address: 2-4-3 Shinjuku, Shinjuku-ku, Tokyo, Japan

Manufacturer: Soliton Systems K.K.

Address: 2-4-3 Shinjuku, Shinjuku-ku, Tokyo, Japan

Prepared By: Shenzhen BCTC Testing Co., Ltd.

Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Sample Received Date: 2022-07-26

Sample tested Date: 2022-07-26 to 2022-08-26


Report No.: BCTC2207600963-2E

Test Standards: FCC CFR Title 47 Part 2
FCC CFR Title 47 Part 24
FCC CFR Title 47 Part 27

Test Results: PASS

Remark: This is radio test report for 4G in US full bands.

Tested by:



Brave Zeng/ Project Handler

Approved by:




Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

Table Of Content

Test Report Declaration	Page
1. Version	5
2. Test Summary	6
3. Measurement Uncertainty	7
4. Product Information and Test Setup	8
4.1 Product Information	8
4.2 Test Setup Configuration	8
4.2 Emission Designator	9
4.3 Description Operation Frequency	10
4.4 Test Mode	12
4.5 Support Equipment	14
4.6 Measurement Results Explanation Example	14
5. Test Facility And Test Instrument Used	15
5.1 Test Facility	15
5.2 Test Instrument Used	15
6. RF Output Power	16
6.1 Block Diagram Of Test Setup	16
6.2 Limit	18
6.3 Test procedure	18
6.4 Test Result	19
7. Peak-To-Average Ratio (PAR) Of Transmitter	31
7.1 Block Diagram Of Test Setup	31
7.2 Limit	31
7.3 Test procedure	31
7.4 Test Result	31
8. Emission Bandwidth	32
8.1 Block Diagram Of Test Setup	32
8.2 Standard Applicable	32
8.3 Test procedure	32
8.4 Test Result	32
9. Out of Band Emissions at Antenna Terminal	33
9.1 Block Diagram Of Test Setup	33
9.2 Limit	33
9.3 Test procedure	33
9.4 Test Result	33
10. Spurious Radiated Emissions	34
10.1 Block Diagram Of Test Setup	34
10.2 Limit	35
10.3 Test procedure	35
10.4 Test Result	36
11. Frequency Stability	38
11.1 Block Diagram Of Test Setup	38
11.2 Limit	38

11.3	Test procedure	38
11.4	Test Result	38
12.	EUT Test Setup Photographs.....	39

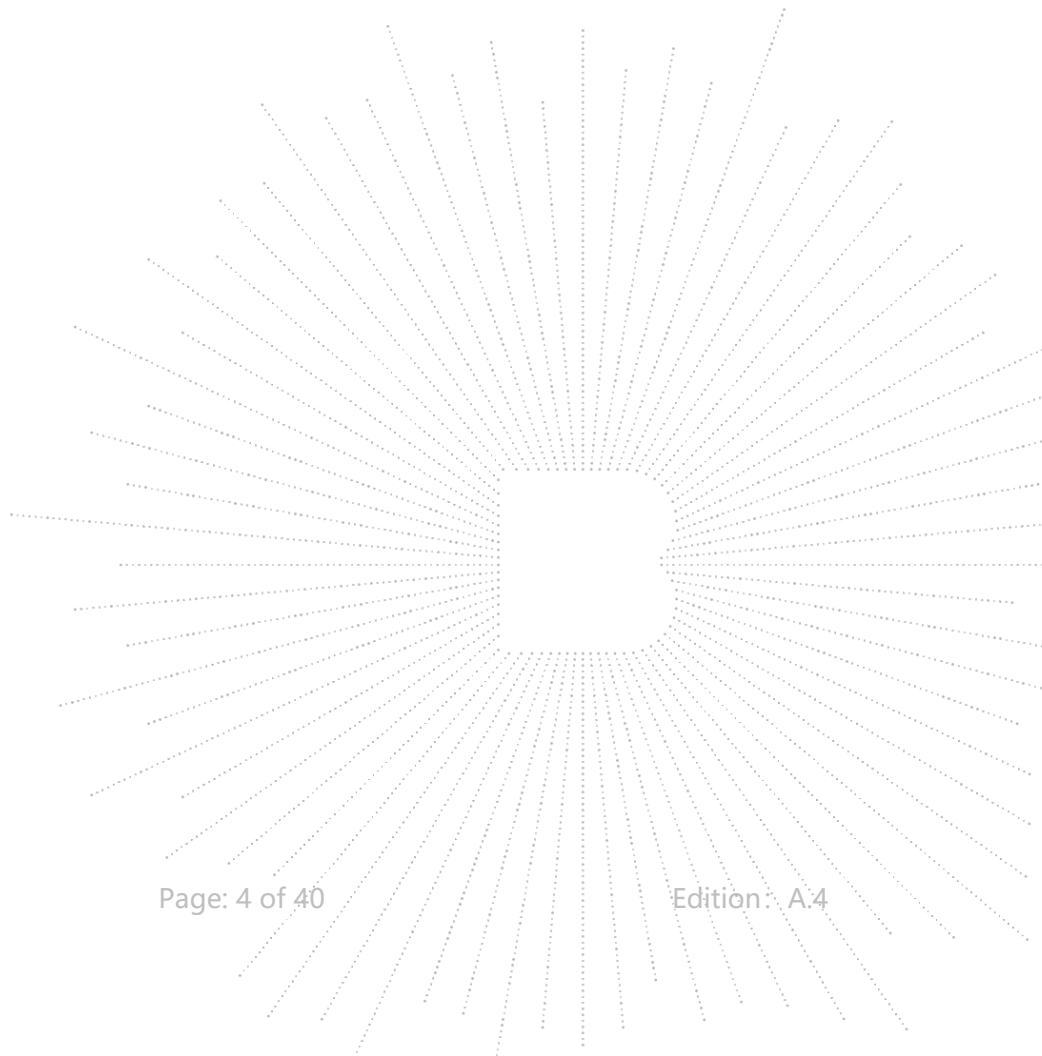

1. Version

Report No.	Issue Date	Description	Approved
BCTC2207600963-2E	2022-12-13	Original	Valid

2. Test Summary

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No	Results
1	RF Exposure	§1.1307, §2.1093	PASS
2	RF Output Power	§2.1046; §24.232(c); §27.50(d); §27.50(c); §27.50(b);	PASS
3	Peak-to-average Ratio(PAR) of Transmitter	§2.1046; §24.232(d) §27.50(d); §27.50(c); §27.50(b);	PASS
4	Emission Bandwidth	§2.1049; §24.238(b); §27.53;	PASS
5	Spurious Emissions at Antenna Terminal	§22.917 (a), §24.238 (a), §27.53(g), §27.53(h)	PASS
6	Spurious Radiation Emissions	§2.1051; §22.917(a); §27.53(h); §27.53(g); §27.53(c); §24.238(a);	PASS
7	Out of Band Emissions	§2.1051; §22.917(a); §27.53(h); §27.53(c); §27.53(g); §24.238(a);	PASS
8	Frequency Stability	§2.1055; §22.355; §27.54; §24.235;	PASS

3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
2	3m chamber Radiated spurious emission(9KHz-30MHz)	U=3.7dB
3	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
4	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
5	Conducted Emission (150kHz-30MHz)	U=3.20dB
6	Conducted Adjacent channel power	U=1.38dB
7	Conducted output power uncertainty Above 1G	U=1.576dB
8	Conducted output power uncertainty below 1G	U=1.28dB
9	humidity uncertainty	U=5.3%
10	Temperature uncertainty	U=0.59°C

4. Product Information and Test Setup

4.1 Product Information


Model/Type reference:	IFC-MLU-G-H, IFC-MLU-JC-H
Model differences:	All models covered in this report are the same with each other, except for different model and appearance (for color, silk-screen) only for trading purpose. We choose IFC-MLU-G-H as the final test prototype
Hardware Version:	N/A
Software Version:	N/A
Tx Frequency:	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 41: 2496 MHz ~ 2690 MHz
Rx Frequency:	LTE Band 2: 1930 MHz ~ 1990 MHz LTE Band 4: 2110 MHz ~ 2155 MHz LTE Band 41: 2496 MHz ~ 2690 MHz
Bandwidth:	LTE Band 2: 1.4MHz /3MHz /5MHz /10MHz /15MHz /20MHz LTE Band 4: 1.4MHz /3MHz /5MHz /10MHz /15MHz /20MHz LTE Band 41: 5MHz /10MHz /15MHz /20MHz
Maximum Output Power to Antenna:	LTE Band 2: 22.34 dBm LTE Band 4: 23.79 dBm LTE Band 41: 22.65 dBm
99% Occupied Bandwidth:	LTE Band 2: 18M0G7D LTE Band 4: 18M0W7D LTE Band 41: 18M0G7D
Type of Modulation:	QPSK/16QAM
Antenna Type:	Internal Antenna
Antenna Gain:	LTE Band 2: -0.03 dBi LTE Band 4: -0.05 dBi LTE Band 41: 1.07 dBi
Connecting I/O Port(s):	Please refer to the User's Manual
Ratings:	Input: DC15V/3A Output: DC12V/2A

The product has 4 identical LTE 4G modules. Through power screening, we choose the worst module for testing.

4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

Radiated Spurious Emission



4.2 Emission Designator

LTE Band 2	QPSK		16QAM	
BW(MHz)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)
1.4	1M10G7D	0.198	1M10W7D	0.169
3	2M70G7D	0.199	2M71W7D	0.184
5	4M52G7D	0.195	4M52W7D	0.190
10	8M98G7D	0.199	9M03W7D	0.163
15	13M5G7D	0.159	13M5W7D	0.170
20	18M0G7D	0.192	17M9W7D	0.179

LTE Band 4	QPSK		16QAM	
BW(MHz)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)
1.4	1M10G7D	0.153	1M10W7D	0.185
3	2M70G7D	0.186	2M72W7D	0.198
5	4M51G7D	0.175	4M52W7D	0.176
10	8M97G7D	0.155	8M97W7D	0.195
15	13M5G7D	0.186	13M6W7D	0.186
20	18M0G7D	0.196	18M0W7D	0.176


LTE Band 41	QPSK		16QAM	
BW(MHz)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)
5	4M51G7D	0.184	4M52W7D	0.176
10	8M98G7D	0.193	8M99W7D	0.151
15	13M4G7D	0.177	13M5W7D	0.197
20	17M9G7D	0.185	18M0W7D	0.187

4.3 Description Operation Frequency

LTE Band 2(1.4MHz)		LTE Band 2(3MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
18607	1850.7	18615	1851.5
18900	1880	18900	1880
19193	1909.3	19185	1908.5
LTE Band 2(5MHz)		LTE Band 2(10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
18625	1852.5	18650	1855
18900	1880	18900	1880
19175	1907.5	19150	1905
LTE Band 2(15MHz)		LTE Band 2(20MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
18675	1857.5	18700	1860
18900	1880	18900	1880
19125	1902.5	19100	1900

LTE Band 4(1.4MHz)		LTE Band 4(3MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
19957	1710.7	19965	1711.5
20175	1732.5	20175	1732.5
20393	1754.3	20385	1753.5
LTE Band 4(5MHz)		LTE Band 4(10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
19975	1712.5	20000	1715
20175	1732.5	20175	1732.5
20375	1752.5	20350	1750
LTE Band 4(15MHz)		LTE Band 4(20MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
20025	1717.5	20050	1720
20175	1732.5	20175	1732.5
20325	1747.5	20300	1745

LTE Band 41(5MHz)		LTE Band 41(10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
39675	2498.5	39700	2501
40620	2593	40620	2593
41565	2687.5	41540	2685
LTE Band 41(15MHz)		LTE Band 41(20MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
39725	2503.5	39750	2506
40620	2593	40620	2593
41515	2682.5	41490	2680

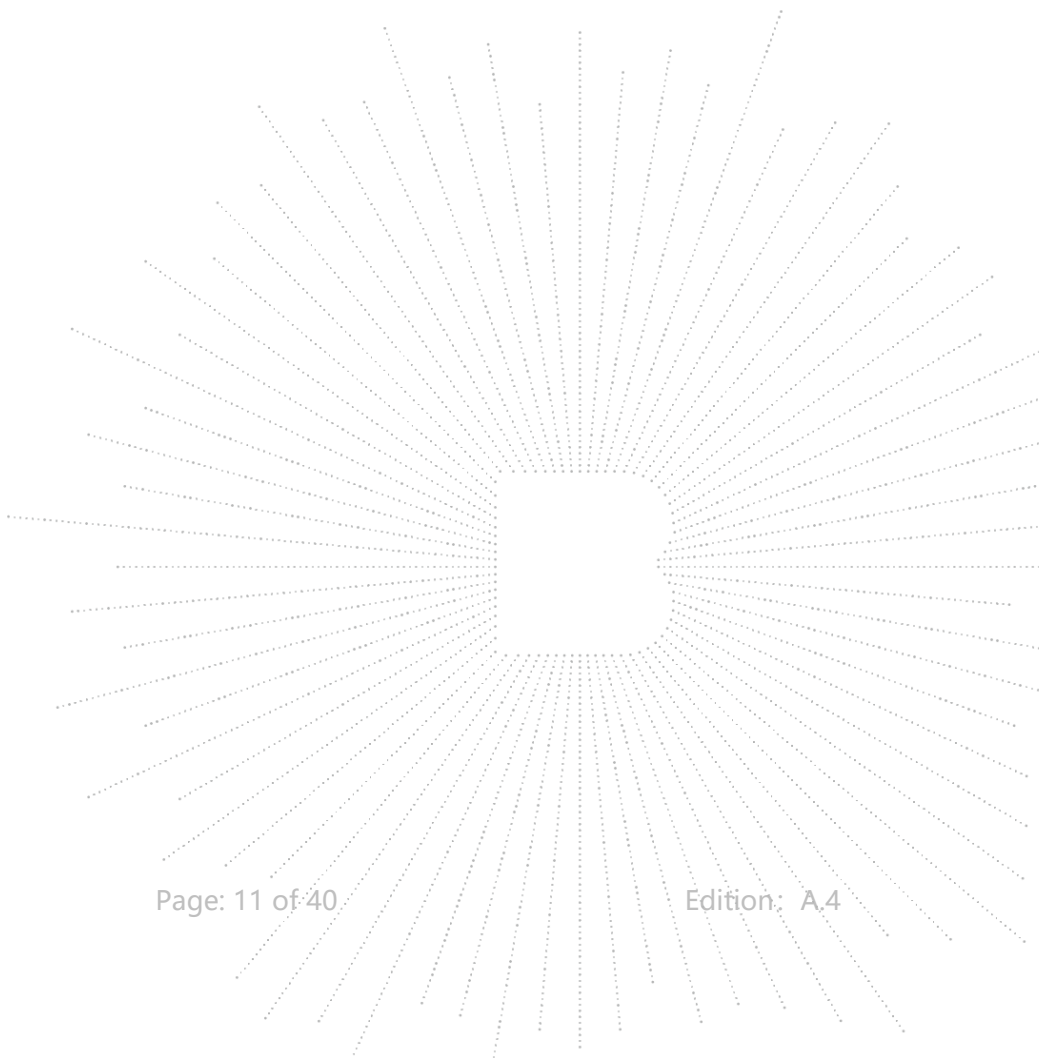

4.4 Test Mode

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Mode		
Band	Radiated TCs	Conducted TCs
LTE Band 2	QPSK Link (1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz)	16QAM Link (1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz)
LTE Band 4	QPSK Link (1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz)	16QAM Link (1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz)
LTE Band 41	QPSK Link (5MHz / 10MHz / 15MHz / 20MHz)	16QAM Link (5MHz / 10MHz / 15MHz / 20MHz)

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas License Digital Systems v03 with maximum output power.

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/
/	/	/	/

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
/	/	/	/

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Test Items	Band	Bandwidth (MHz)						Modulation		RB#			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max.Output Power	2	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	4	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	41	-	-	v	v	v	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	2	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	4	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	41							v	v	v	v	v	v	v	v
26dB and 99% Bandwidth	2	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	4	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	41	-	-	v	v	v	v	v	v	v	v	v	v	v	v
Conducted Band Edge	2	v	v	v	v	v	v	v	v	v	v	v	v	-	v
	4	v	v	v	v	v	v	v	v	v	v	v	v	-	v
	41							v	v	v	v	v	v	-	v
Conducted Spurious Emission	2	v	v	v	v	v	v	v	v	v	-	-	v	v	v
	4	v	v	v	v	v	v	v	v	v	-	-	v	v	v
	41							v	v	v	-	-	v	v	v
Frequency stability	2	v	-	-	-	-	-	v	v	v	-	-	v	v	v
	4	v	-	-	-	-	-	v	v	v	-	-	v	v	v
	41							v	v	v	-	-	v	v	v
E.R.P./ E.I.R.P.	2	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	4	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	41	-	-	v	v	v	v	v	v	v	v	v	v	v	v
Radiated Spurious Emission	2	v	-	-	-	-	-	v	v	v	-	-	v	v	v
	4	v	-	-	-	-	-	v	v	v	-	-	v	v	v
	41							v	v	v	-	-	v	v	v
Note	1.The mark “v ” means that this configuration is chosen for testing 2.The mark “-” means that this bandwidth is not supported.														

4.5 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	Multi link Unit	N/A	IFC-MLU-G-H	N/A	EUT
E-2	DC power	ZHAOXIN	RXN-6050	19R605D1200599	N/A

Item	Shielded Type	Ferrite Core	Length	Note
N/A	N/A	N/A	N/A	N/A

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level. The spectrum analyzer offset is derived from RF cable loss and attenuator factor. Offset = RF cable loss + attenuator factor.

5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

IC Registered No.: 23583

5.2 Test Instrument Used

Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
966 chamber	ChengYu	966 Room	966	Jun. 06. 2020	Jun. 05, 2023
Receiver	R&S	ESR3	102075	May 24, 2022	May 23, 2023
Receiver	R&S	ESRP	101154	May 24, 2022	May 23, 2023
Amplifier	SKET	LAPA_01G18G-45dB	\	May 24, 2022	May 23, 2023
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 24, 2022	May 23, 2023
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	942	May 26, 2022	May 25, 2023
Horn Antenna	Schwarzbeck	BBHA9120D	1541	May 26, 2022	May 25, 2023
band rejection filter	ZBSF	ZBSF-C2441.5	1706003606	May 24, 2022	May 23, 2023
Horn antenna	Schwarzbeck	BBHA9170	822	May 24, 2022	May 23, 2023
Preamplifier	MITEQ	TTA1840-35-HG	2034381	May 24, 2022	May 23, 2023
Loop Antenna	Schwarzbeck	FMZB1519B	14	May 24, 2022	May 23, 2023
RF cables1 (9kHz-30MHz)	Huber+Suhner	9kHz-30MHz	B1702988-0008	May 24, 2022	May 23, 2023
RF cables2 (30MHz-1GHz)	Huber+Suhner	30MHz-1GHz	1486150	May 24, 2022	May 23, 2023
RF cables3 (1GHz-40GHz)	Huber+Suhner	1GHz-40GHz	1607106	May 24, 2022	May 23, 2023
Software	Frad	EZ-EMC	FA-03A2 RE	\	\
Spectrum Analyzer	Keysight	N9020A	MY49100060	May 24, 2022	May 23, 2023
Spectrum Analyzer 9kHz-40GHz	R&S	FSP 40	\	May 24, 2022	May 23, 2023
Communication test set	R&S	CMW500	126173	Nov 11, 2022	Nov 10, 2023
Signal Generator	Keysight	N5182B	MY56200519	May 26, 2022	May 25, 2023
RF Room	SKET	RF Room	RF ROOM-1	Nov 04, 2022	Nov 03, 2023
Radio frequency control box	MAIWEI	MW200-RFCB	\	\	\
D.C. Power Supply	Keysight	E3642A	MY40003053	\	\
Programmable constant temperature and humidity test chamber	DGBELL	BTKS5-150C	\	May 26, 2022	May 25, 2023

6. RF Output Power


6.1 Block Diagram Of Test Setup

Conducted output power test method:




Radiated power test method:


(A) Radiated Emission Test-Up Frequency Below 30MHz

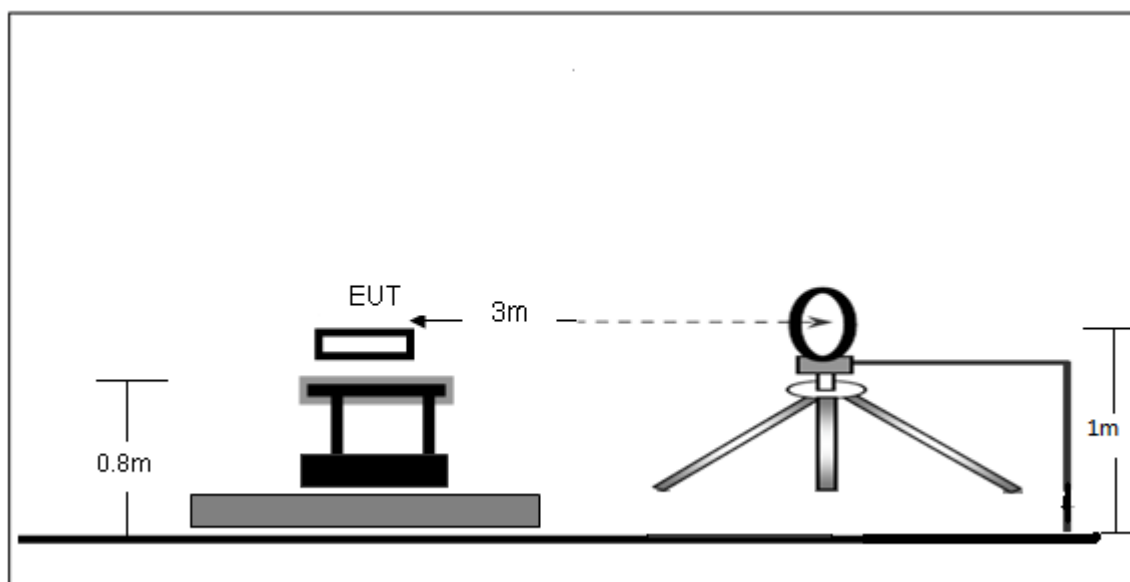

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

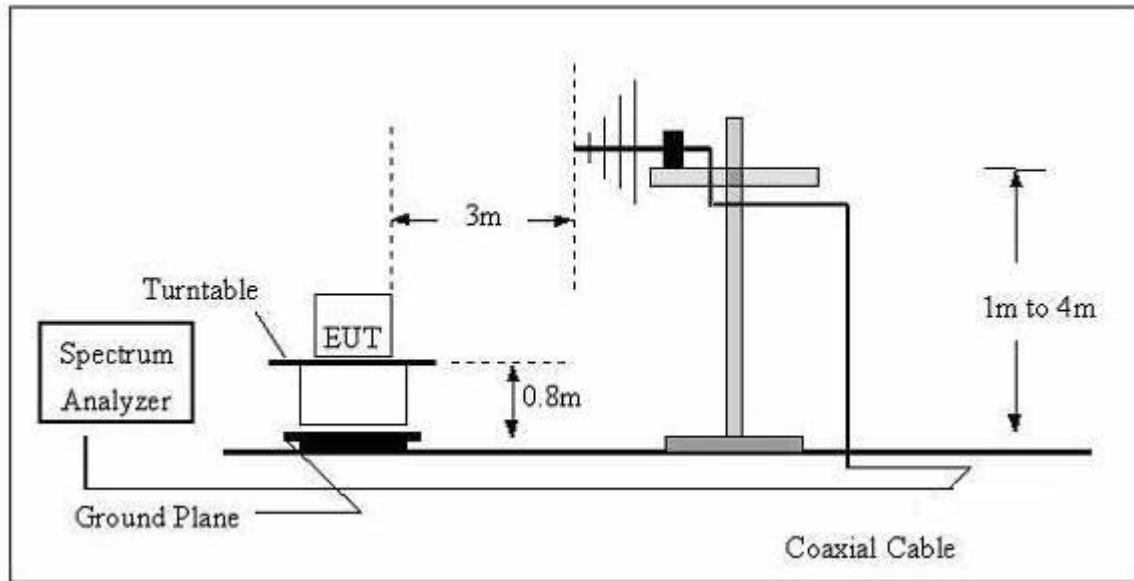

(C) Radiated Emission Test-Up Frequency Above 1GHz

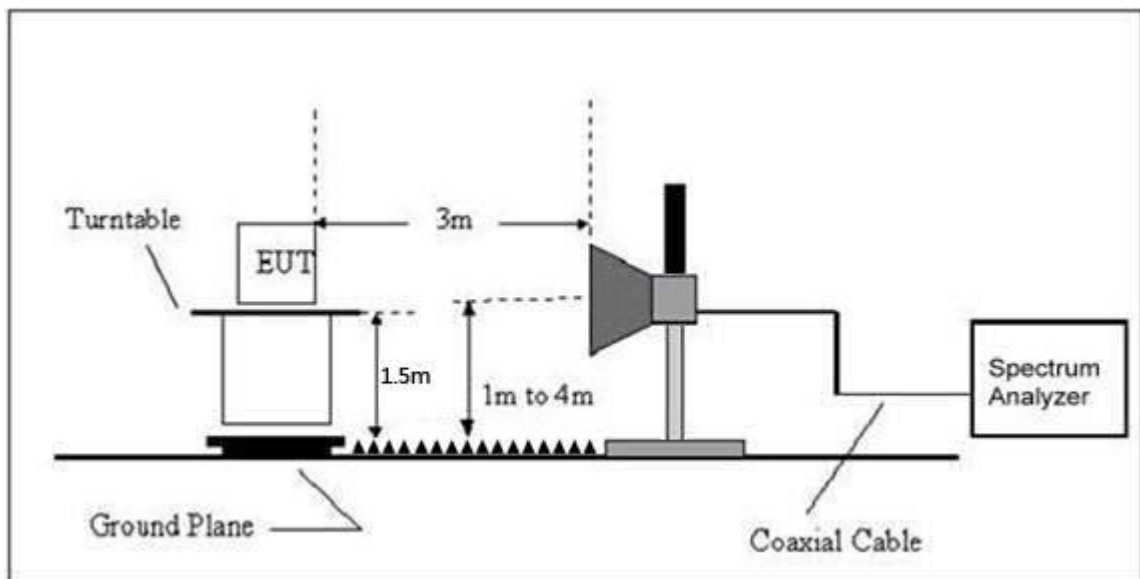

6.2 Limit


According to §24.232 (c), Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §27.50(d)(4), Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

6.3 Test procedure

Radiated power test method:

1. The setup of EUT is according with per ANSI/TIA Standard 603D and ANSI C63.4-2014 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

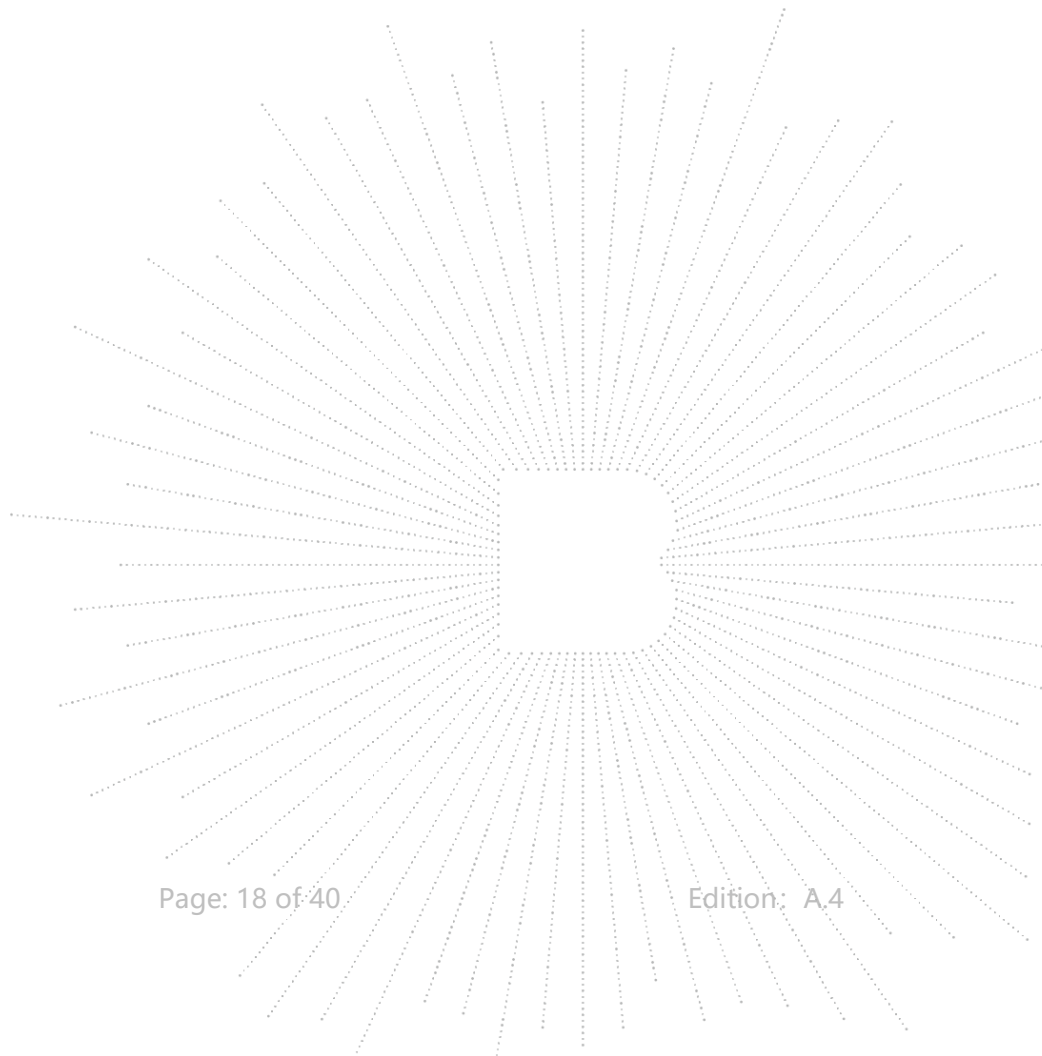

6.4 Test Result

The product has 4 identical LTE 4G modules. Through power screening, we choose the worst module 1 for testing.

Module 1 Max Radiated Power:

FDD-LTE Band 2

Channel Bandwidth: 1.4MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	22.97	PASS
	MCK	21.84	PASS
	HCH	21.77	PASS
16QAM	LCH	21.05	PASS
	MCK	22.29	PASS
	HCH	21.92	PASS
Channel Bandwidth: 3MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	22.98	PASS
	MCK	22.55	PASS
	HCH	22.80	PASS
16QAM	LCH	21.52	PASS
	MCK	22.64	PASS
	HCH	22.59	PASS
Channel Bandwidth: 5MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	21.94	PASS
	MCK	22.89	PASS
	HCH	21.19	PASS
16QAM	LCH	21.28	PASS
	MCK	22.45	PASS
	HCH	22.79	PASS
Channel Bandwidth: 10MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	21.54	PASS
	MCK	21.34	PASS
	HCH	22.99	PASS
16QAM	LCH	21.51	PASS
	MCK	21.80	PASS
	HCH	22.13	PASS
Channel Bandwidth: 15MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	22.01	PASS
	MCK	21.42	PASS
	HCH	21.16	PASS
16QAM	LCH	21.80	PASS
	MCK	22.30	PASS
	HCH	21.37	PASS
Channel Bandwidth: 20MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	22.76	PASS
	MCK	22.71	PASS
	HCH	22.84	PASS
16QAM	LCH	22.32	PASS
	MCK	21.52	PASS
	HCH	22.53	PASS

FDD-LTE Band 4

Channel Bandwidth: 1.4MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	21.85	PASS
	MCK	21.44	PASS
	HCH	21.71	PASS
16QAM	LCH	22.68	PASS
	MCK	21.92	PASS
	HCH	21.58	PASS
Channel Bandwidth: 3MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	21.71	PASS
	MCK	21.70	PASS
	HCH	22.70	PASS
16QAM	LCH	21.92	PASS
	MCK	22.97	PASS
	HCH	21.86	PASS
Channel Bandwidth: 5MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	22.44	PASS
	MCK	21.21	PASS
	HCH	22.44	PASS
16QAM	LCH	21.21	PASS
	MCK	21.32	PASS
	HCH	22.45	PASS
Channel Bandwidth: 10MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	21.22	PASS
	MCK	21.74	PASS
	HCH	21.90	PASS
16QAM	LCH	21.01	PASS
	MCK	21.31	PASS
	HCH	22.89	PASS
Channel Bandwidth: 15MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	21.52	PASS
	MCK	22.69	PASS
	HCH	21.43	PASS
16QAM	LCH	22.70	PASS
	MCK	21.37	PASS
	HCH	22.37	PASS
Channel Bandwidth: 20MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	22.93	PASS
	MCK	21.21	PASS
	HCH	22.35	PASS
16QAM	LCH	22.06	PASS
	MCK	21.66	PASS
	HCH	22.45	PASS

FDD-LTE Band 41

Channel Bandwidth: 5MHz			
Modulation	Channel	E.R.P(dBm)	Verdict
QPSK	LCH	22.25	PASS
	MCK	22.64	PASS
	HCH	22.60	PASS
16QAM	LCH	21.08	PASS
	MCK	22.45	PASS
	HCH	21.80	PASS
Channel Bandwidth: 10MHz			
Modulation	Channel	E.R.P(dBm)	Verdict
QPSK	LCH	21.23	PASS
	MCK	21.15	PASS
	HCH	22.86	PASS
16QAM	LCH	21.78	PASS
	MCK	21.65	PASS
	HCH	21.21	PASS
Channel Bandwidth: 15MHz			
Modulation	Channel	E.R.P(dBm)	Verdict
QPSK	LCH	22.48	PASS
	MCK	22.17	PASS
	HCH	22.51	PASS
16QAM	LCH	22.94	PASS
	MCK	22.87	PASS
	HCH	21.02	PASS
Channel Bandwidth: 20MHz			
Modulation	Channel	E.R.P(dBm)	Verdict
QPSK	LCH	22.20	PASS
	MCK	22.22	PASS
	HCH	22.68	PASS
16QAM	LCH	22.72	PASS
	MCK	22.10	PASS
	HCH	21.37	PASS

Module 2 Max Radiated Power:
FDD-LTE Band 2

Channel Bandwidth: 1.4MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	20.95	PASS
	MCK	21.45	PASS
	HCH	20.52	PASS
16QAM	LCH	21.20	PASS
	MCK	20.61	PASS
	HCH	20.41	PASS
Channel Bandwidth: 3MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	21.42	PASS
	MCK	21.91	PASS
	HCH	20.37	PASS
16QAM	LCH	20.40	PASS
	MCK	20.60	PASS
	HCH	20.15	PASS
Channel Bandwidth: 5MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	20.65	PASS
	MCK	20.05	PASS
	HCH	21.09	PASS
16QAM	LCH	21.56	PASS
	MCK	21.60	PASS
	HCH	20.06	PASS
Channel Bandwidth: 10MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	20.91	PASS
	MCK	21.77	PASS
	HCH	21.32	PASS
16QAM	LCH	21.60	PASS
	MCK	20.74	PASS
	HCH	20.35	PASS
Channel Bandwidth: 15MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	21.30	PASS
	MCK	21.52	PASS
	HCH	20.97	PASS
16QAM	LCH	21.74	PASS
	MCK	20.43	PASS
	HCH	21.01	PASS
Channel Bandwidth: 20MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	20.24	PASS
	MCK	21.46	PASS
	HCH	20.93	PASS
16QAM	LCH	20.30	PASS
	MCK	20.06	PASS
	HCH	20.19	PASS

FDD-LTE Band 4

Channel Bandwidth: 1.4MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	21.60	PASS
	MCK	21.07	PASS
	HCH	21.41	PASS
16QAM	LCH	20.27	PASS
	MCK	20.67	PASS
	HCH	20.85	PASS
Channel Bandwidth: 3MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	20.05	PASS
	MCK	21.49	PASS
	HCH	20.86	PASS
16QAM	LCH	21.80	PASS
	MCK	21.69	PASS
	HCH	21.88	PASS
Channel Bandwidth: 5MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	20.49	PASS
	MCK	20.32	PASS
	HCH	21.16	PASS
16QAM	LCH	21.36	PASS
	MCK	20.29	PASS
	HCH	20.58	PASS
Channel Bandwidth: 10MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	20.94	PASS
	MCK	21.15	PASS
	HCH	21.49	PASS
16QAM	LCH	20.34	PASS
	MCK	21.57	PASS
	HCH	21.45	PASS
Channel Bandwidth: 15MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	20.07	PASS
	MCK	21.83	PASS
	HCH	21.02	PASS
16QAM	LCH	20.88	PASS
	MCK	21.27	PASS
	HCH	20.89	PASS
Channel Bandwidth: 20MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	20.45	PASS
	MCK	21.08	PASS
	HCH	20.88	PASS
16QAM	LCH	21.25	PASS
	MCK	20.99	PASS
	HCH	20.78	PASS

FDD-LTE Band 41

Channel Bandwidth: 5MHz			
Modulation	Channel	E.R.P(dBm)	Verdict
QPSK	LCH	21.59	PASS
	MCK	21.22	PASS
	HCH	20.51	PASS
16QAM	LCH	21.03	PASS
	MCK	21.90	PASS
	HCH	21.80	PASS
Channel Bandwidth: 10MHz			
Modulation	Channel	E.R.P(dBm)	Verdict
QPSK	LCH	21.68	PASS
	MCK	20.79	PASS
	HCH	20.10	PASS
16QAM	LCH	21.67	PASS
	MCK	21.81	PASS
	HCH	22.00	PASS
Channel Bandwidth: 15MHz			
Modulation	Channel	E.R.P(dBm)	Verdict
QPSK	LCH	21.05	PASS
	MCK	21.46	PASS
	HCH	21.52	PASS
16QAM	LCH	21.65	PASS
	MCK	21.96	PASS
	HCH	20.84	PASS
Channel Bandwidth: 20MHz			
Modulation	Channel	E.R.P(dBm)	Verdict
QPSK	LCH	21.99	PASS
	MCK	21.05	PASS
	HCH	21.57	PASS
16QAM	LCH	20.47	PASS
	MCK	21.89	PASS
	HCH	21.20	PASS

Module 3 Max Radiated Power:
FDD-LTE Band 2

Channel Bandwidth: 1.4MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	20.97	PASS
	MCK	21.59	PASS
	HCH	20.05	PASS
16QAM	LCH	21.29	PASS
	MCK	20.48	PASS
	HCH	21.54	PASS
Channel Bandwidth: 3MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	21.92	PASS
	MCK	21.45	PASS
	HCH	20.97	PASS
16QAM	LCH	21.26	PASS
	MCK	21.25	PASS
	HCH	20.87	PASS
Channel Bandwidth: 5MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	20.10	PASS
	MCK	20.17	PASS
	HCH	21.76	PASS
16QAM	LCH	20.23	PASS
	MCK	20.82	PASS
	HCH	21.77	PASS
Channel Bandwidth: 10MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	20.79	PASS
	MCK	20.39	PASS
	HCH	20.89	PASS
16QAM	LCH	20.26	PASS
	MCK	21.12	PASS
	HCH	20.21	PASS
Channel Bandwidth: 15MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	20.00	PASS
	MCK	20.93	PASS
	HCH	20.10	PASS
16QAM	LCH	21.74	PASS
	MCK	20.25	PASS
	HCH	21.09	PASS
Channel Bandwidth: 20MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	20.60	PASS
	MCK	20.66	PASS
	HCH	21.45	PASS
16QAM	LCH	20.65	PASS
	MCK	21.45	PASS
	HCH	20.47	PASS

FDD-LTE Band 4

Channel Bandwidth: 1.4MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	20.09	PASS
	MCK	21.94	PASS
	HCH	20.86	PASS
16QAM	LCH	21.54	PASS
	MCK	21.19	PASS
	HCH	21.70	PASS
Channel Bandwidth: 3MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	21.84	PASS
	MCK	21.82	PASS
	HCH	20.30	PASS
16QAM	LCH	21.75	PASS
	MCK	20.29	PASS
	HCH	21.06	PASS
Channel Bandwidth: 5MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	20.38	PASS
	MCK	21.48	PASS
	HCH	20.70	PASS
16QAM	LCH	20.31	PASS
	MCK	21.69	PASS
	HCH	20.39	PASS
Channel Bandwidth: 10MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	20.41	PASS
	MCK	21.13	PASS
	HCH	21.87	PASS
16QAM	LCH	21.13	PASS
	MCK	21.37	PASS
	HCH	21.32	PASS
Channel Bandwidth: 15MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	20.24	PASS
	MCK	21.14	PASS
	HCH	21.28	PASS
16QAM	LCH	21.87	PASS
	MCK	21.09	PASS
	HCH	21.37	PASS
Channel Bandwidth: 20MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	21.80	PASS
	MCK	20.73	PASS
	HCH	20.57	PASS
16QAM	LCH	20.15	PASS
	MCK	21.02	PASS
	HCH	20.69	PASS

FDD-LTE Band 41

Channel Bandwidth: 5MHz			
Modulation	Channel	E.R.P(dBm)	Verdict
QPSK	LCH	20.98	PASS
	MCK	20.73	PASS
	HCH	21.29	PASS
16QAM	LCH	20.78	PASS
	MCK	20.75	PASS
	HCH	20.98	PASS
Channel Bandwidth: 10MHz			
Modulation	Channel	E.R.P(dBm)	Verdict
QPSK	LCH	20.06	PASS
	MCK	21.57	PASS
	HCH	21.28	PASS
16QAM	LCH	21.67	PASS
	MCK	21.32	PASS
	HCH	20.25	PASS
Channel Bandwidth: 15MHz			
Modulation	Channel	E.R.P(dBm)	Verdict
QPSK	LCH	20.44	PASS
	MCK	20.24	PASS
	HCH	21.45	PASS
16QAM	LCH	20.62	PASS
	MCK	20.98	PASS
	HCH	21.12	PASS
Channel Bandwidth: 20MHz			
Modulation	Channel	E.R.P(dBm)	Verdict
QPSK	LCH	20.18	PASS
	MCK	20.27	PASS
	HCH	21.33	PASS
16QAM	LCH	21.61	PASS
	MCK	21.41	PASS
	HCH	21.38	PASS

Module 4 Max Radiated Power:
FDD-LTE Band 2

Channel Bandwidth: 1.4MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	20.85	PASS
	MCK	21.48	PASS
	HCH	21.71	PASS
16QAM	LCH	20.11	PASS
	MCK	20.13	PASS
	HCH	20.30	PASS
Channel Bandwidth: 3MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	20.73	PASS
	MCK	20.51	PASS
	HCH	20.40	PASS
16QAM	LCH	20.23	PASS
	MCK	20.85	PASS
	HCH	21.29	PASS
Channel Bandwidth: 5MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	21.60	PASS
	MCK	20.78	PASS
	HCH	20.05	PASS
16QAM	LCH	20.64	PASS
	MCK	21.58	PASS
	HCH	21.00	PASS
Channel Bandwidth: 10MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	20.43	PASS
	MCK	20.06	PASS
	HCH	21.46	PASS
16QAM	LCH	21.56	PASS
	MCK	20.80	PASS
	HCH	21.37	PASS
Channel Bandwidth: 15MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	20.26	PASS
	MCK	20.77	PASS
	HCH	21.41	PASS
16QAM	LCH	20.50	PASS
	MCK	21.49	PASS
	HCH	20.26	PASS
Channel Bandwidth: 20MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	21.83	PASS
	MCK	20.20	PASS
	HCH	20.81	PASS
16QAM	LCH	21.50	PASS
	MCK	21.47	PASS
	HCH	20.81	PASS

FDD-LTE Band 4

Channel Bandwidth: 1.4MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	20.34	PASS
	MCK	20.51	PASS
	HCH	21.03	PASS
16QAM	LCH	21.13	PASS
	MCK	20.36	PASS
	HCH	21.18	PASS
Channel Bandwidth: 3MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	20.06	PASS
	MCK	20.83	PASS
	HCH	21.32	PASS
16QAM	LCH	21.02	PASS
	MCK	21.27	PASS
	HCH	20.10	PASS
Channel Bandwidth: 5MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	20.46	PASS
	MCK	21.51	PASS
	HCH	20.40	PASS
16QAM	LCH	21.82	PASS
	MCK	21.08	PASS
	HCH	21.83	PASS
Channel Bandwidth: 10MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	21.02	PASS
	MCK	21.37	PASS
	HCH	20.56	PASS
16QAM	LCH	21.24	PASS
	MCK	20.35	PASS
	HCH	20.57	PASS
Channel Bandwidth: 15MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	21.48	PASS
	MCK	21.95	PASS
	HCH	20.41	PASS
16QAM	LCH	21.79	PASS
	MCK	21.28	PASS
	HCH	21.28	PASS
Channel Bandwidth: 20MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	20.34	PASS
	MCK	21.04	PASS
	HCH	21.10	PASS
16QAM	LCH	20.84	PASS
	MCK	20.44	PASS
	HCH	21.92	PASS

FDD-LTE Band 41

Channel Bandwidth: 5MHz			
Modulation	Channel	E.R.P(dBm)	Verdict
QPSK	LCH	21.82	PASS
	MCK	20.08	PASS
	HCH	20.89	PASS
16QAM	LCH	20.32	PASS
	MCK	21.30	PASS
	HCH	20.25	PASS
Channel Bandwidth: 10MHz			
Modulation	Channel	E.R.P(dBm)	Verdict
QPSK	LCH	21.10	PASS
	MCK	21.63	PASS
	HCH	20.91	PASS
16QAM	LCH	21.84	PASS
	MCK	21.68	PASS
	HCH	20.93	PASS
Channel Bandwidth: 15MHz			
Modulation	Channel	E.R.P(dBm)	Verdict
QPSK	LCH	20.60	PASS
	MCK	20.99	PASS
	HCH	20.55	PASS
16QAM	LCH	20.47	PASS
	MCK	21.19	PASS
	HCH	20.85	PASS
Channel Bandwidth: 20MHz			
Modulation	Channel	E.R.P(dBm)	Verdict
QPSK	LCH	20.09	PASS
	MCK	20.45	PASS
	HCH	20.05	PASS
16QAM	LCH	20.19	PASS
	MCK	20.91	PASS
	HCH	20.33	PASS


Max Conducted output Power:

Please refer to appendix A: Conducted Output Power

Test Result: Pass

7. Peak-To-Average Ratio (PAR) Of Transmitter

7.1 Block Diagram Of Test Setup

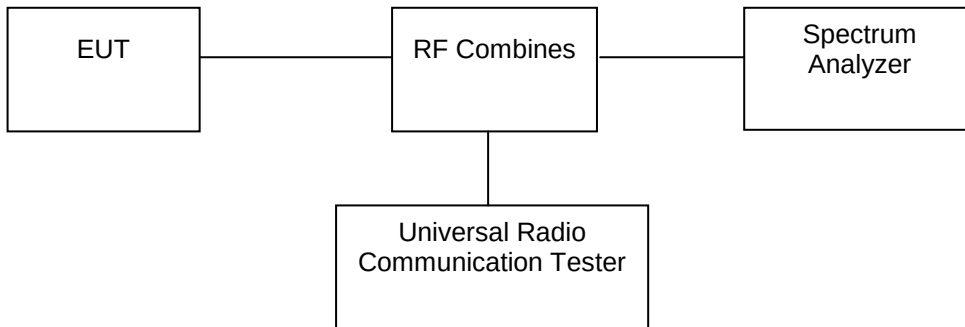

7.2 Limit

According to §24.232(d), Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

According to §27.50(B), the peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

7.3 Test procedure


The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 30kHz and the peak-to-average ratio (PAR) of the transmission was recorded. Record the maximum PAPR level associated with a probability of 0.1%.

7.4 Test Result

Please refer to Appendix 3: Peak-to-Average Ratio
Test Result: Pass

8. Emission Bandwidth

8.1 Block Diagram Of Test Setup

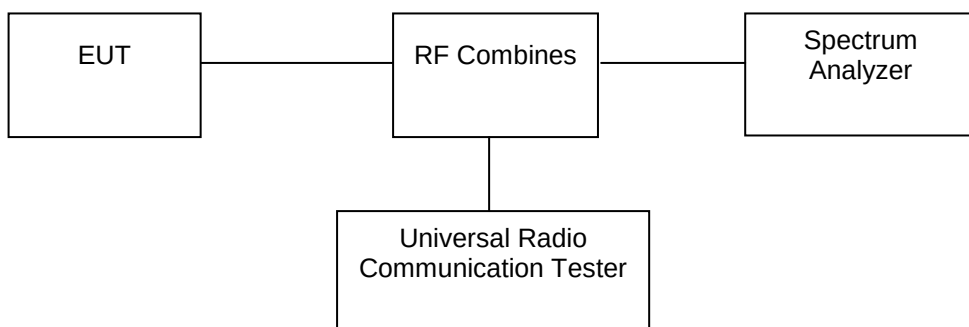

8.2 Standard Applicable

According to §22.917(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

According to §24.238(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

According to §27.53, The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

8.3 Test procedure


1. The testing follows FCC KDB 971168 D01v03 Section 4.2.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of the EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The 99% occupied bandwidth were measured, set RBW= 1% of OBW, VBW= 3*RBW, sample detector, trace maximum hold.
5. The 26dB bandwidth were measured, set RBW= 1% of EBW, VBW= 3*RBW, peak detector, trace maximum hold.

8.4 Test Result

Please refer to Appendix 4: Occupied BandWidth
Test Result: Pass

9. Out of Band Emissions at Antenna Terminal

9.1 Block Diagram Of Test Setup

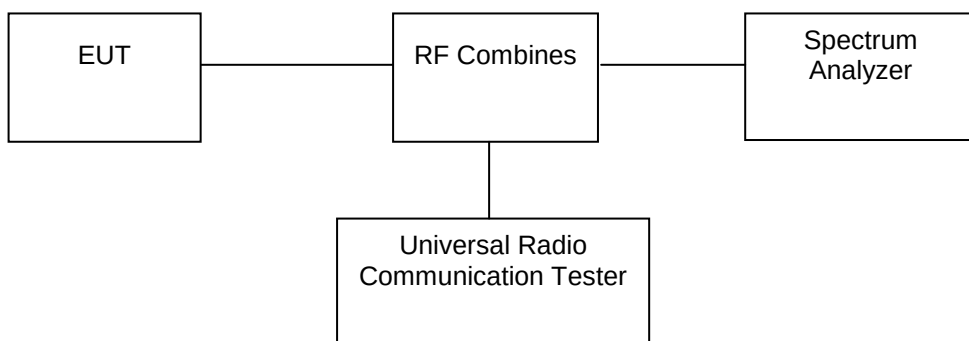

9.2 Limit

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §27.53 (h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

According to §27.53 (m), For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees

9.3 Test procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 100kHz and 1MHz for the scan frequency from 30MHz to 1GHz and the scan frequency from 1GHz to up to 10th harmonic.


9.4 Test Result

Please refer to Appendix 5: Band Edge & Appendix 6: Out-of-band Emissions
Test Result: Pass


10. Spurious Radiated Emissions

10.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

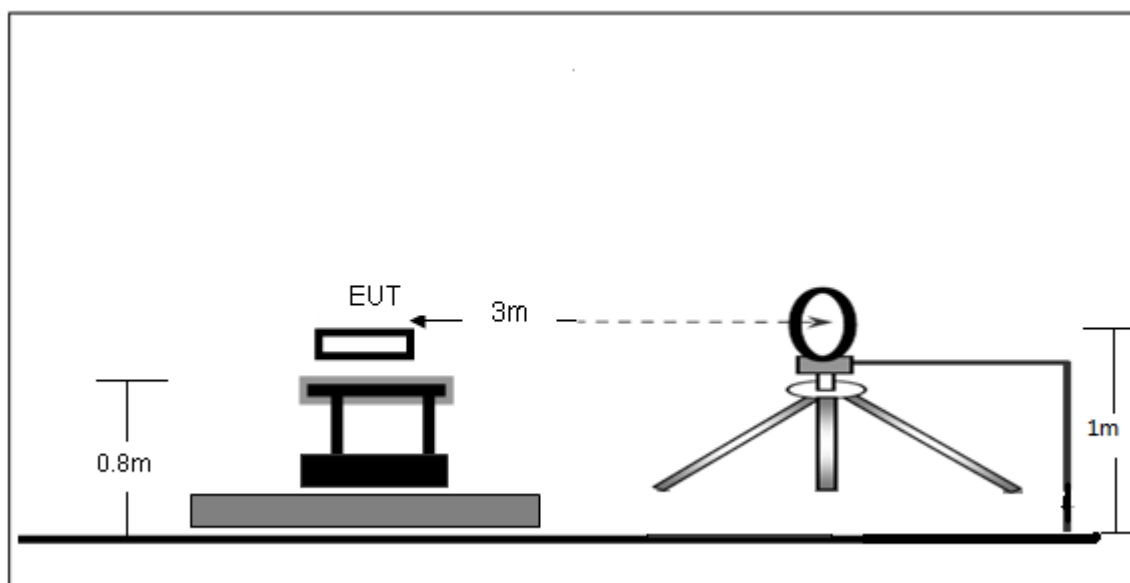

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

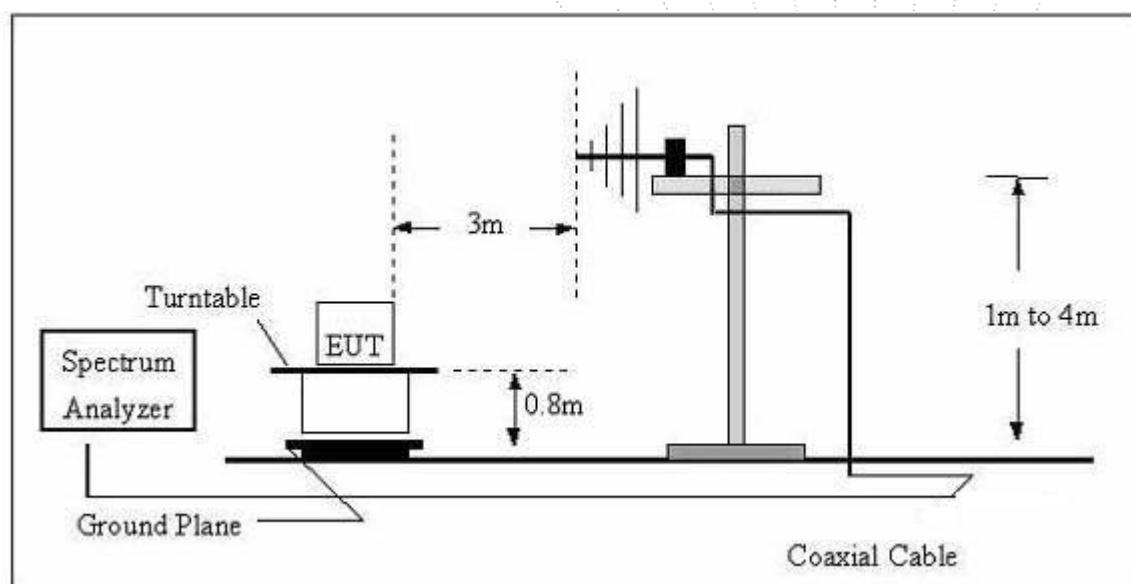

(C) Radiated Emission Test-Up Frequency Above 1GHz

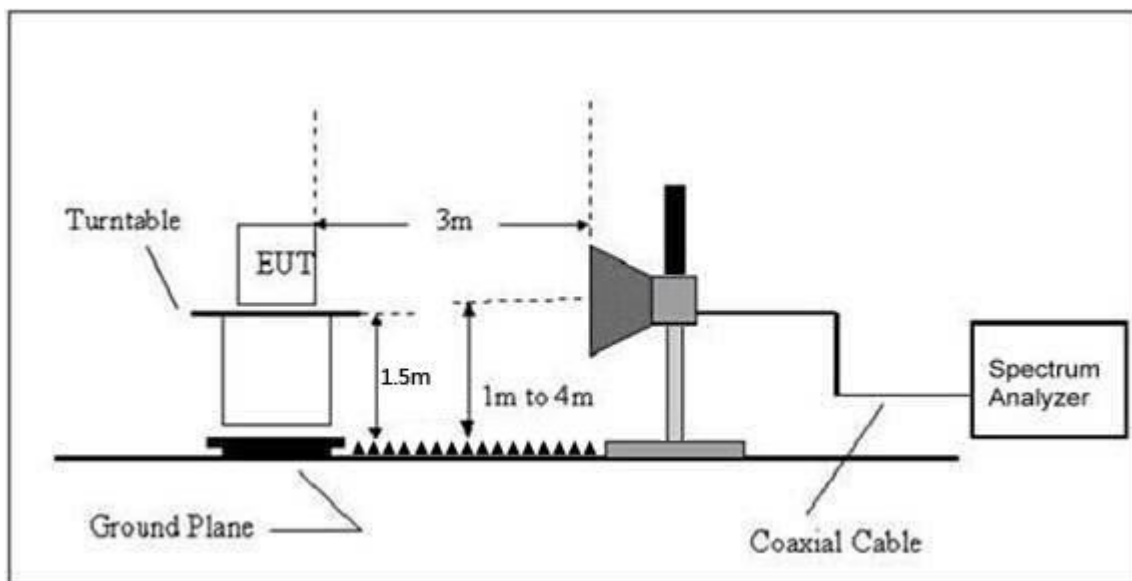

10.2 Limit

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §27.53 (h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

According to §27.53 (m), For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees

10.3 Test procedure

1. The setup of EUT is according with per ANSI/TIA Standard 603D and ANSI C63.4-2014 measurement procedure.
 2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
 3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
 4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.
- Spurious attenuation limit in dB
 $= 43 + 10 \log_{10}(\text{power out in Watts})$

10.4 Test Result

The product has 4 identical LTE 4G modules. Through power screening, we choose the worst module 1 for testing.

For FDD-LTE Band 2 Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (1852.5MHz)						
369.75	-42.16	-19.91	-62.07	-13.00	-49.07	H
3705.00	-18.13	-22.93	-41.06	-13.00	-28.06	H
5557.50	-20.26	-22.45	-42.71	-13.00	-29.71	H
369.75	-43.57	-19.91	-63.48	-13.00	-50.48	V
3705.00	-18.80	-22.93	-41.73	-13.00	-28.73	V
5557.50	-19.27	-22.45	-41.72	-13.00	-28.72	V
Middle Channel (1880MHz)						
369.75	-43.76	-19.91	-63.67	-13.00	-50.67	H
3760.00	-17.11	-22.87	-39.98	-13.00	-26.98	H
5640.00	-21.95	-22.50	-44.45	-13.00	-31.45	H
369.75	-41.30	-19.91	-61.21	-13.00	-48.21	V
3760.00	-16.21	-22.87	-39.08	-13.00	-26.08	V
5640.00	-18.44	-22.50	-40.94	-13.00	-27.94	V
High Channel (1907.5MHz)						
369.75	-41.47	-19.91	-61.38	-13.00	-48.38	H
3815.00	-18.28	-22.79	-41.07	-13.00	-28.07	H
5722.50	-21.41	-22.56	-43.97	-13.00	-30.97	H
369.75	-43.59	-19.91	-63.49	-13.00	-50.49	V
3815.00	-16.42	-22.79	-39.21	-13.00	-26.21	V
5722.50	-18.74	-22.56	-41.30	-13.00	-28.30	V

For FDD-LTE Band 4 Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (1710.7MHz)						
369.75	-42.31	-19.91	-62.21	-13.00	-49.21	H
3421.40	-20.93	-22.93	-43.86	-13.00	-30.86	H
5132.10	-23.82	-22.45	-46.27	-13.00	-33.27	H
369.75	-41.29	-19.91	-61.19	-13.00	-48.19	V
3421.40	-18.15	-22.93	-41.08	-13.00	-28.08	V
5132.10	-24.08	-22.45	-46.53	-13.00	-33.53	V
Middle Channel (1732.5MHz)						
369.75	-42.68	-19.91	-62.58	-13.00	-49.58	H
3465.00	-20.20	-22.87	-43.07	-13.00	-30.07	H
5197.50	-23.98	-22.50	-46.48	-13.00	-33.48	H
369.75	-42.08	-19.91	-61.99	-13.00	-48.99	V
3465.00	-19.71	-22.87	-42.58	-13.00	-29.58	V
5197.50	-25.65	-22.50	-48.15	-13.00	-35.15	V
High Channel (1754.3MHz)						
369.75	-42.58	-19.91	-62.49	-13.00	-49.49	H
3508.60	-18.10	-22.79	-40.89	-13.00	-27.89	H
5262.90	-26.32	-22.56	-48.88	-13.00	-35.88	H
369.75	-42.56	-19.91	-62.47	-13.00	-49.47	V
3508.60	-19.72	-22.79	-42.51	-13.00	-29.51	V
5262.90	-24.27	-22.56	-46.83	-13.00	-33.83	V

For FDD-LTE Band 41 Mode


Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (2498.5MHz)						
369.75	-41.43	-19.91	-61.33	-13.00	-48.33	H
4997.00	-19.91	-22.93	-42.84	-13.00	-29.84	H
7495.50	-19.58	-22.45	-42.03	-13.00	-29.03	H
369.75	-43.58	-19.91	-63.49	-13.00	-50.49	V
4997.00	-17.98	-22.93	-40.91	-13.00	-27.91	V
7495.50	-19.03	-22.45	-41.48	-13.00	-28.48	V
Middle Channel (2593MHz)						
369.75	-42.86	-19.91	-62.76	-13.00	-49.76	H
5186.00	-19.62	-22.87	-42.49	-13.00	-29.49	H
7779.00	-18.29	-22.50	-40.79	-13.00	-27.79	H
369.75	-44.57	-19.91	-64.47	-13.00	-51.47	V
5186.00	-17.59	-22.87	-40.46	-13.00	-27.46	V
7779.00	-21.12	-22.50	-43.62	-13.00	-30.62	V
High Channel (2687.5MHz)						
369.75	-41.90	-19.91	-61.81	-13.00	-48.81	H
5375.00	-18.66	-22.79	-41.45	-13.00	-28.45	H
8062.50	-19.79	-22.56	-42.35	-13.00	-29.35	H
369.75	-44.62	-19.91	-64.53	-13.00	-51.53	V
5375.00	-19.51	-22.79	-42.30	-13.00	-29.30	V
8062.50	-18.35	-22.56	-40.91	-13.00	-27.91	V

Note: Result=Reading+ Correct, Margin= Result- Limit

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

11. Frequency Stability

11.1 Block Diagram Of Test Setup

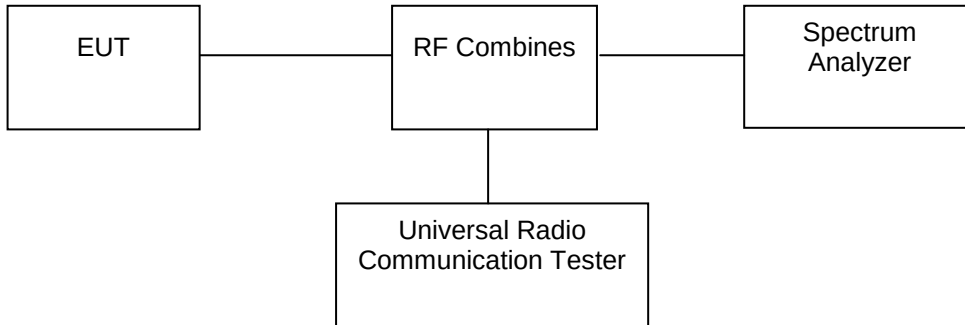

11.2 Limit

±2.5 ppm

11.3 Test procedure

Test Procedures for Temperature Variation

1. The testing follows FCC KDB 971168 D01v03 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C steps up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

Test Procedures for Voltage Variation

1. The testing follows FCC KDB 971168 D01v03 Section 9.0.
2. The EUT was placed in a temperature chamber at 25±5° C and connected with the system simulator.
3. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.
5. The worst case(worst bandwidth) for frequency stability reported in the Test Data.

The worst bandwidth is as follow:



- 1.4M is for LTE Band 2, 1.4M is for LTE Band 4,
1.4M is for LTE Band 5, 1.4M is for LTE Band 12,
5M is for LTE Band 13, 1.4M is for LTE Band 66, 5M is for LTE Band 71

11.4 Test Result

Please refer to Appendix 2: Frequency Stability
Test Result: Pass

12. EUT Test Setup Photographs

Radiated Measurement Photos

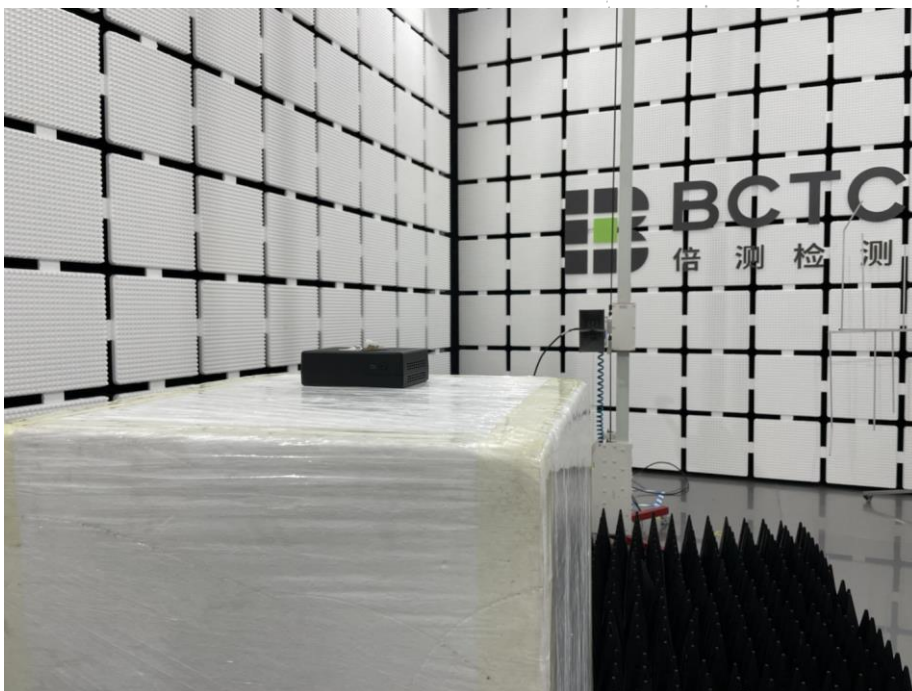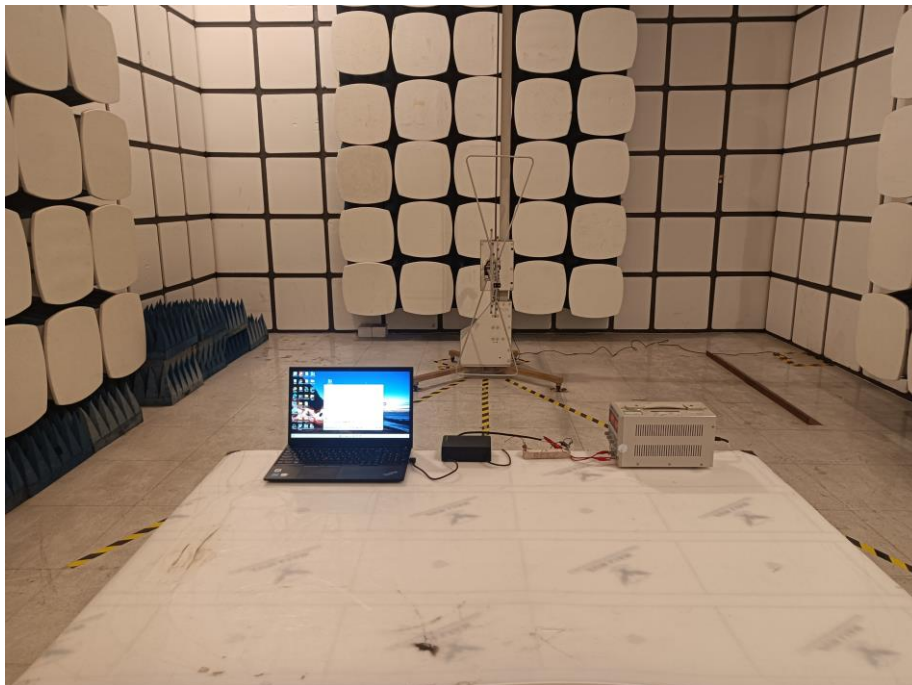

STATEMENT

- 1.The equipment lists are traceable to the national reference standards.
- 2.The test report can not be partially copied unless prior written approval is issued from our lab.
- 3.The test report is invalid without stamp of laboratory.
- 4.The test report is invalid without signature of person(s) testing and authorizing.
- 5.The test process and test result is only related to the Unit Under Test.
- 6.The quality system of our laboratory is in accordance with ISO/IEC17025.
- 7.If there is any objection to report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

E-Mail: bctc@bctc-lab.com.cn

***** END *****