

Product specification

Quick Reference Date

Model name	Bluetooth ANT	
Frequency	2.45GHz ^{*1}	
Ant. Port Input Pwr. (dBm)	0 (Typ. BT class 2 output power)	
Tot. Rad. Pwr. (dBm)	-2.3 (Input pwr – loss pwr)	
Peak EIRP(dBm)	1.3	
Directivity (dBi)	1 (all direction antenna)	
Efficiency (dB)	-2.3 (58.5%)	
Gain (dBi)	1.3 (Peak Gain XY-plane)	
Maximum Power (dBm)	1.3 (XY-plane)	
Minimum Power (dBm)	-4(XY-plane)	
Avg. Power (dBm)	-0.5(XY-plane)	
Max/Min Ratio (dB)	5.3(XY-plane)	
Max/Avg Ratio (dB)	1.8(XY-plane)	
Min/Avg Ratio (dB)	-3.5(XY-plane)	
Average Gain (dB)	-0.5 (Avg Gain XY-plane)	
Manufacturer	NINGBO YOUNKER FASHION ACCESSORY IND. CORP.	
Address	NO. 72, BUILDING 10, NO. 818 QIMING ROAD, YINZHOU DISTRICT, NINGBO, CHINA 315104	


All the technical data and information contained herein are subject to change without prior notice

Antenna Gain



Gain Table

Unit in dBi @2.44GHz	XY-plane		XZ-plane		YZ-plane		Efficiency
	Peak	Avg.	Peak	Avg.	Peak	Avg.	
Module Board	1.3	-0.5	1.7	-3.8	1.1	-3.0	58.5%


Return Loss

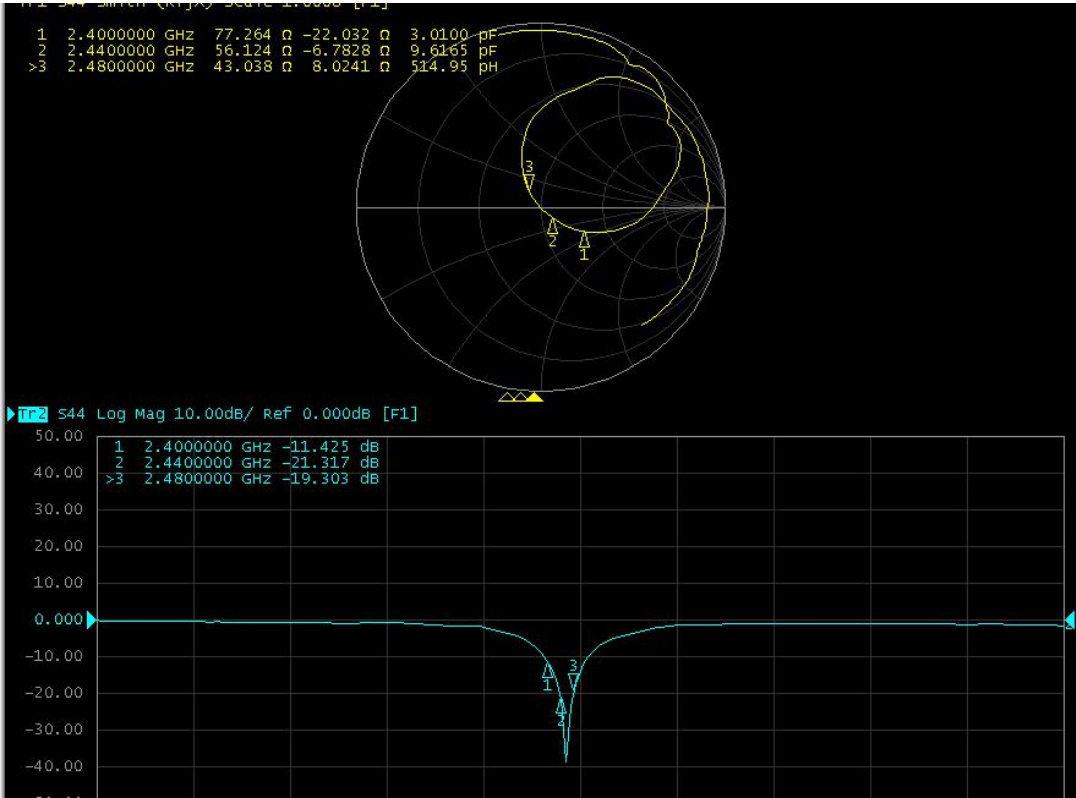


The Environment of Antenna Radiation Pattern

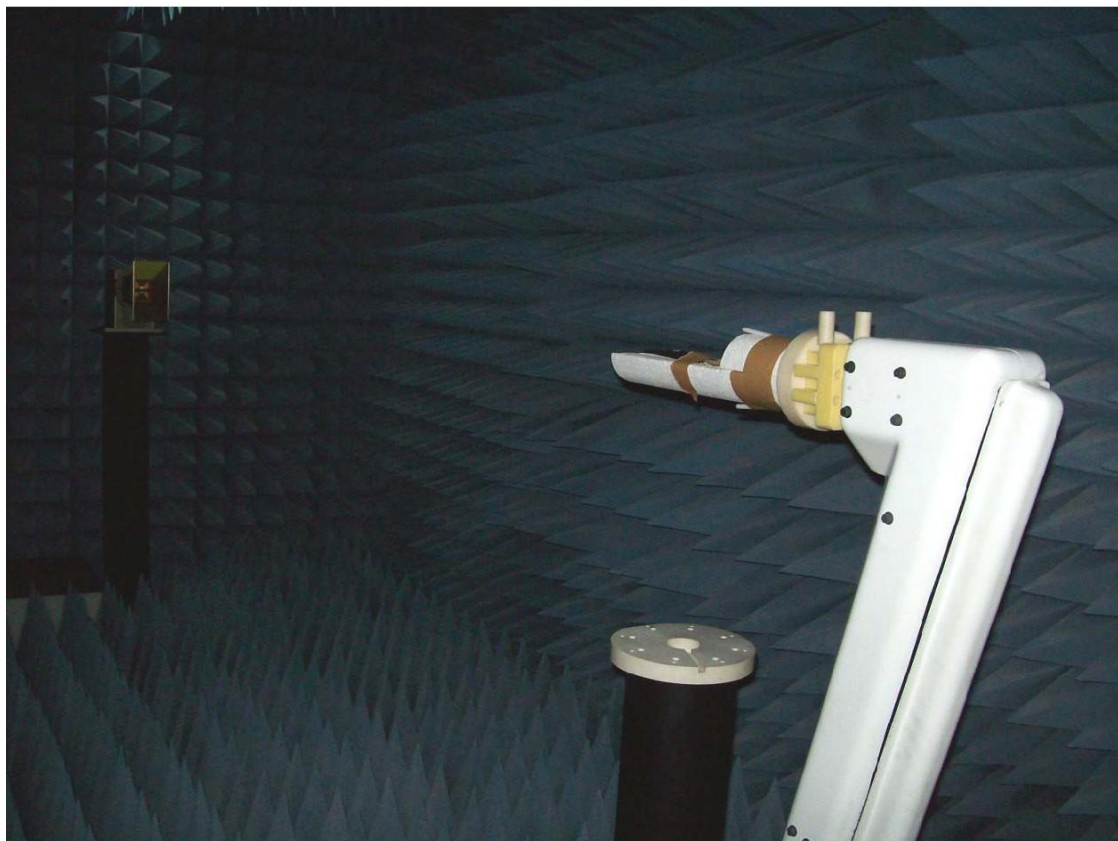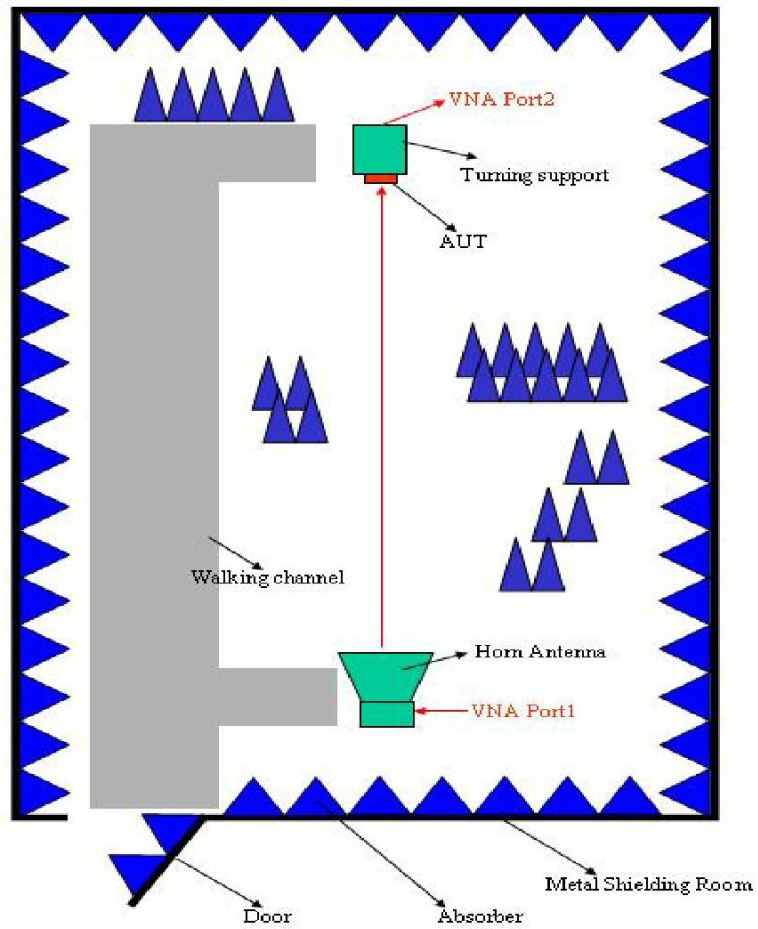


3D radiation pattern diagram

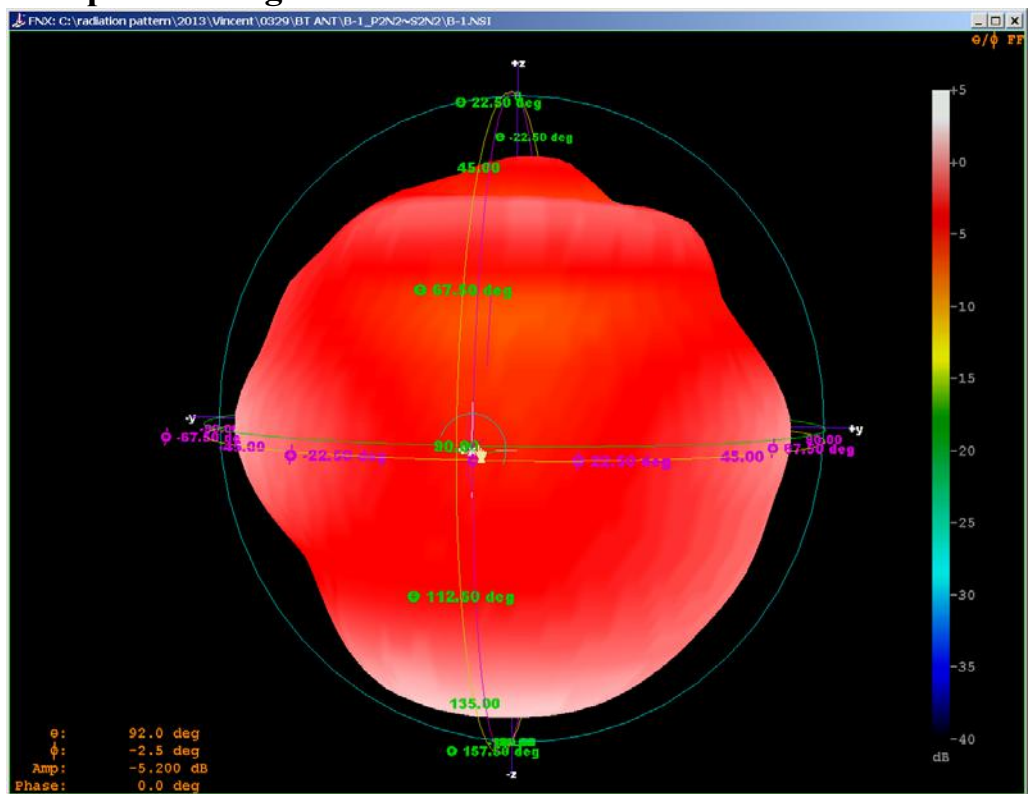

XY-plane

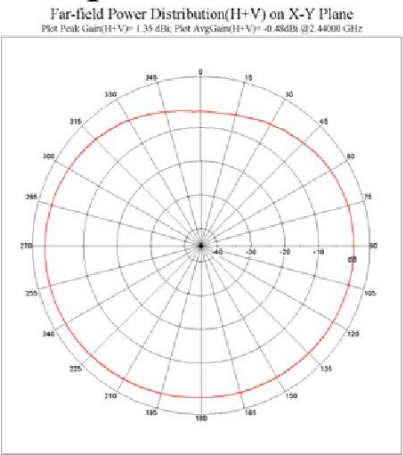

XZ-plane

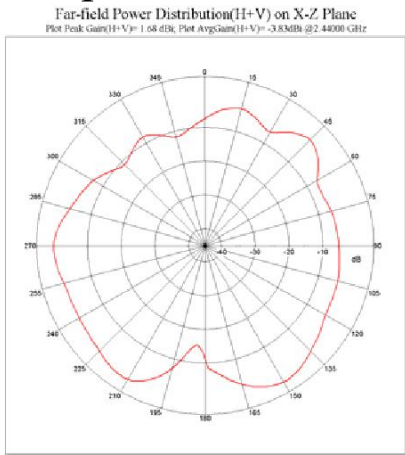

YZ-plane

