



EMC TEST REPORT

Test Report No. : KES-EM-23T0073
Date of Issue : Jan. 27, 2023
Product name : Display
Model/Type No. : BL-D100
Variant Mode : -
Applicant : UNITED SAFETY FRONT BRAKE LIGHT LLC
Applicant Address : 4372 driving Range Rd, Corona CA, 9288
Manufacturer : UNITED SAFETY FRONT BRAKE LIGHT LLC
Manufacturer Address : 4372 driving Range Rd, Corona CA, 9288
FCC ID : 2A9HA-BD-100
Date of Receipt : Nov. 28, 2022
Test date : Dec. 22, 2022
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Min Seong, Kim
EMC Test Engineer

Reviewed by

Dong Hun, Jang
EMC Technical Manager

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0073
Page (2) of (24)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Jan. 27, 2023	KES-EM-23T0073	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	5
1.2	Variant Model Differences	5
1.3	Device Modifications	5
1.4	Equipment Under Test.....	5
1.5	Support Equipments	5
1.6	External I/O Cabling	6
1.7	EUT Operating Mode(s)	6
1.8	Configuration.....	7
1.9	Remarks when standards applied	8
1.10	Calibration Details of Equipment Used for Measurement	8
1.11	Test Facility	8
1.12	Measurement Procedure.....	8
1.13	Laboratory Accreditations and Listings	9
2.0	Test Regulations.....	10
2.1	Conducted Emissions at Mains Power Ports	11
2.2	Radiated Electric Field Emissions(Below 1 GHz)	13
2.3	Radiated Electric Field Emissions(Above 1 GHz)	15
APPENDIX A – TEST DATA.....		17
Conducted Emissions at Mains Power Ports.....		17
Radiated Electric Field Emissions(Below 1 GHz)		19
Radiated Electric Field Emissions(Above 1 GHz).....		20
APPENDIX B - Test Setup Photos and Configuration.....		22
Radiated Electric Field Emissions(Below 1 GHz)		23
Radiated Electric Field Emissions(Above 1 GHz).....		24



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0073
Page (4) of (24)

1.0 General Product Description

Main Specifications of EUT are:

Division	Specification
Input power	DC 12 V
Size	(63 x 33 x 16) mm
I/O Port	2 Pin

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

☒ DC 12 V

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
Display	BL-D100	-	UNITED SAFETY FRONT BRAKE LIGHT LLC	EUT

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
Brake light	BL-M100	-	UNITED SAFETY FRONT BRAKE LIGHT LLC	-
Cigar jack	DAS-CC24U5	-	DONGGUAN CTC ELECTRONICS CO.,LTD	-

1.6 External I/O Cabling

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
Display (EUT)	DC In (2 Pin)	DC Main	DC Out (2 Pin)	1.5	U
	Wireless (GFSK 2.4 GHz)	Brake light	Wireless (GFSK 2.4 GHz)	-	-
Brake light	DC Jack	Cigar jack	USB	1.5	U
Cigar jack	DC In (2 Pin)	DC Main	DC Out (2 Pin)	1.5	U

* Unshielded = U, Shielded = S


1.7 EUT Operating Mode(s)

Test mode	Normal operating	Test Voltages
Operating	After connecting the EUT and Brake light wirelessly(GFSK 2.4 GHz), check whether it operates normally through the LED of Brake light.	DC 12 V

EUT Test operating S/W		
Name	Version	Manufacture Company
-	-	-

1.8 Configuration

■ AC Main
□ DC Main

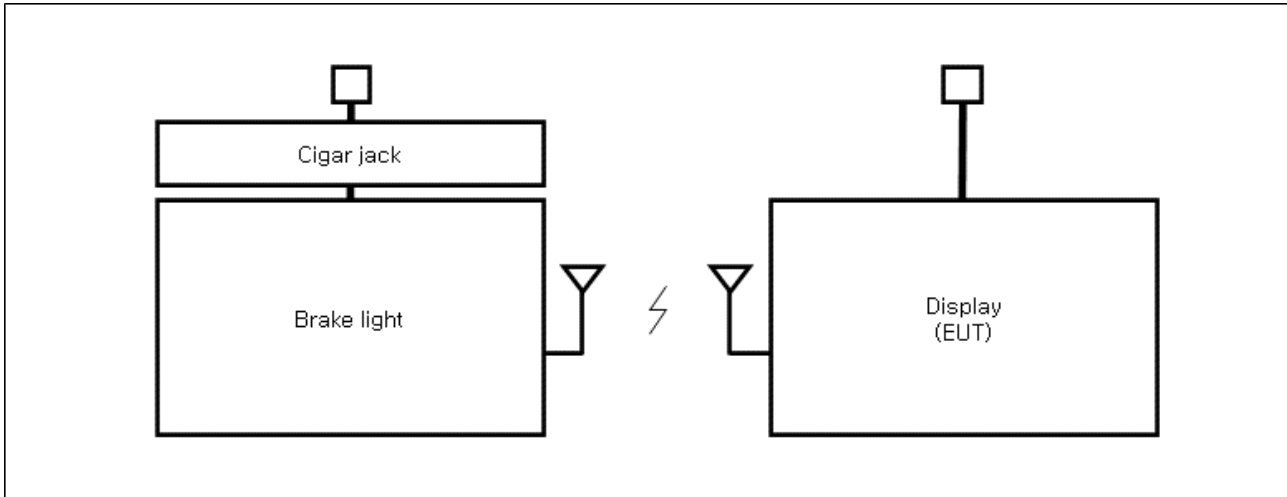

1.9 Remarks when standards applied

N/A

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.12 Measurement Procedure

- Conducted Emissions

The conducted emission levels were measured on each current-carrying line with the spectrum analyzer operating in the CISPR quasi-peak mode (or peak mode if applicable). The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. If the conducted emission exceed the average limit with the instrument set to the quasi-peak mode, the measurements are made in the average mode. The emission spectrum was scanned from 150 kHz to 30 MHz. The highest emission amplitudes relative to the appropriate limits were measured and have been recorded. Quasi-peak readings are distinguished with a "QP".

- Radiated Electric Field Emissions

The test was done at a SEMI ANECHOIC CHAMBER with quasi-peak detector. The final test data was measured using a Quasi-Peak detector below 1GHz at 10 m or 3 m distance and a Peak and Average detector above 1 GHz at 3 m distance. Test was proceeded worst case test mode and cable configuration. Measurements were made with the antenna positioned in both the horizontal and vertical planes of polarization. The antenna height was varied from 1 m to 4 m and the EUT was rotated 360° to find the maximum emitting point for each frequency.

Measurement procedures was In accordance with ANSI C63.4-2014 7.3.3, 7.3.4, 8.3.1.1, 8.3.1.2, 8.3.2.1, 8.3.2.2

1.13 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Aechoic Chamber ,10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Aechoic Chamber , and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Aechoic Chamber, 10 m Open Area and Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Aechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-20056, C-20036 T-20040, G-20057
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Aechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004



2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **47 CFR Part 15, Subpart B**

☐ CISPR 22:2009 +A1:2010

☐ Class A

☐ Class B

☒ ANSI C63.4a-2017

☐ Class A

☒ Class B

2.1 Conducted Emissions at Mains Power Ports

Test Date

N/A


Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due	calibration interval
☐	EMI Test S/W	EMC32	R & S	9.12.00	-	-
☐	EMI TEST RECEIVER	ESR3	R & S	101783	11, 11, 2023	1 Year
☐	LISN	ENV216	R & S	101787	11, 10, 2023	1 Year
☐	LISN	ESH2-Z5	R & S	100450	11, 10, 2023	1 Year
☐	PULSE LIMITER	ESH3-Z2	R & S	101915	11, 10, 2023	1 Year

Diagram of test setup

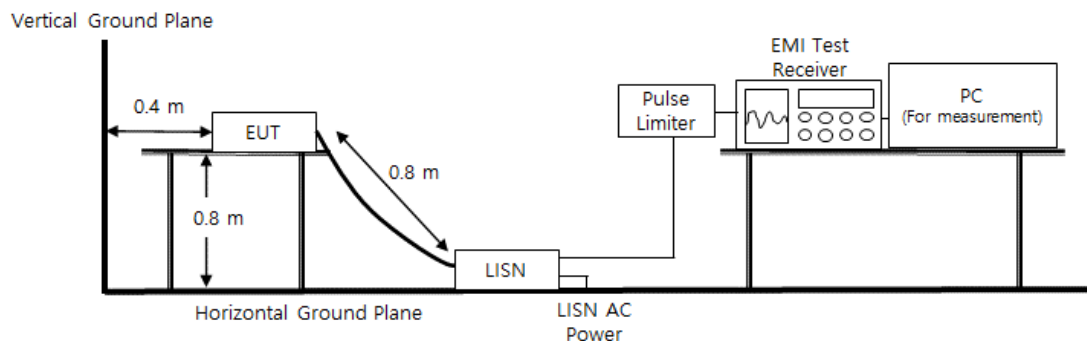

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0073
Page (12) of (24)

Test Conditions

Temperature: (±) °C
Relative Humidity: (±) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☐ PASS
- ☐ NOT PASS
- ☒ NOT APPLICABLE

Remarks

It is not tested apply because it is powered by DC

2.2 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Dec. 22, 2022

Test Location


☐ OPEN AREA TEST SITE #2

☒ SEMI ANECHOIC CHAMBER #4(10m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due	calibration interval
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	03, 31, 2023	1 Year
☒	AMPLIFIER	SCU 01	R & S	100603	11, 10, 2023	1 Year
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	11, 17, 2024	2 Year
☒	ATTENUATOR	8491A	HP	32173	03, 08, 2023	1 Year

Diagram of test setup

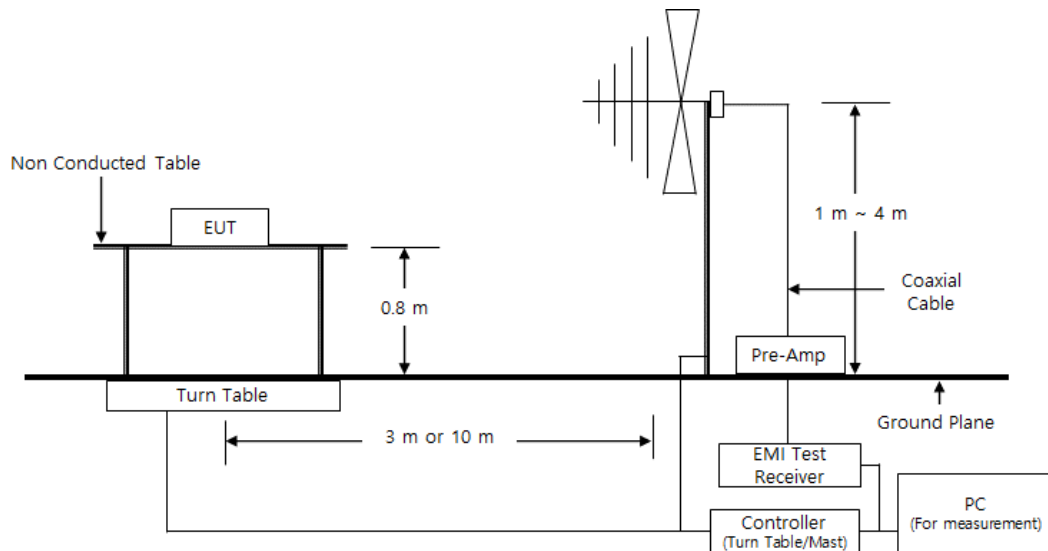

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0073
Page (14) of (24)

Test Conditions

Temperature: (22,9 ± 0,1) °C
Relative Humidity: (44,0 ± 0,3) % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

- ☒ PASS
- ☐ NOT PASS
- ☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

2.3 Radiated Electric Field Emissions(Above 1 GHz)


Test Date
 Dec. 22, 2022

Test Location
 SEMI ANECHOIC CHAMBER #5

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due	calibration interval
☒	EMI Test S/W	ES10/RE	TOYO Corporation	2022.01.000	-	-
☒	EMI TEST RECEIVER	ESU26	Rohde & Schwarz	100552	03, 31, 2023	1 Year
☒	HORN ANTENNA	BBHA 9120D	SCHWARZBECK	9120D-1802	11, 08, 2023	1 Year
☒	PREAMPLIFIER	8449B	HP	3008A00538	06, 02, 2023	1 Year
☒	ATTENUATOR	8491B	HP	23094	04, 21, 2023	1 Year

Diagram of test setup

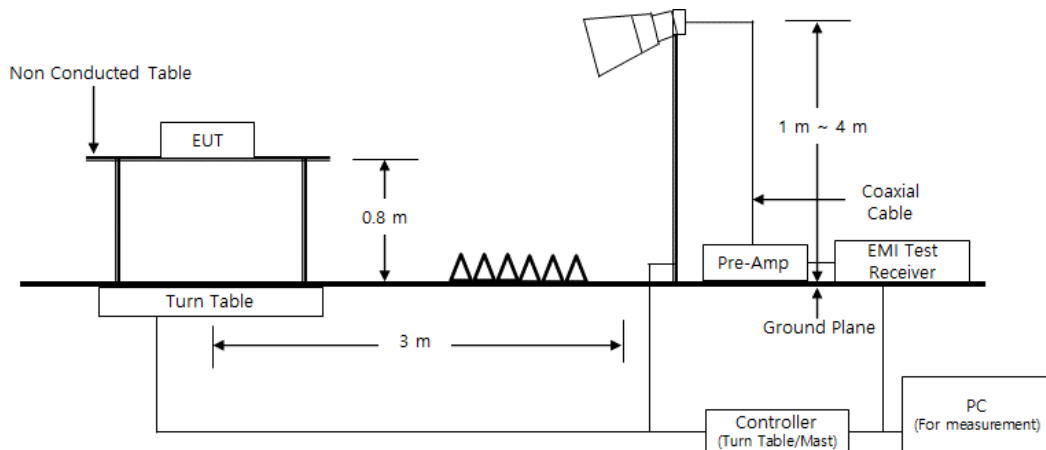



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0073
Page (16) of (24)

Test Conditions

Temperature: (22,5 ± 0,2) °C
Relative Humidity: (44,0 ± 0,5) % R.H.

Frequency Range of Measurement

1 GHz to 5 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
- ☐ NOT PASS
- ☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0073
Page (17) of (24)

APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports HOT LINE

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0073
Page (18) of (24)

NEUTRAL LINE

N/A

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-23T0073

Page (19) of (24)

Radiated Electric Field Emissions(Below 1 GHz)

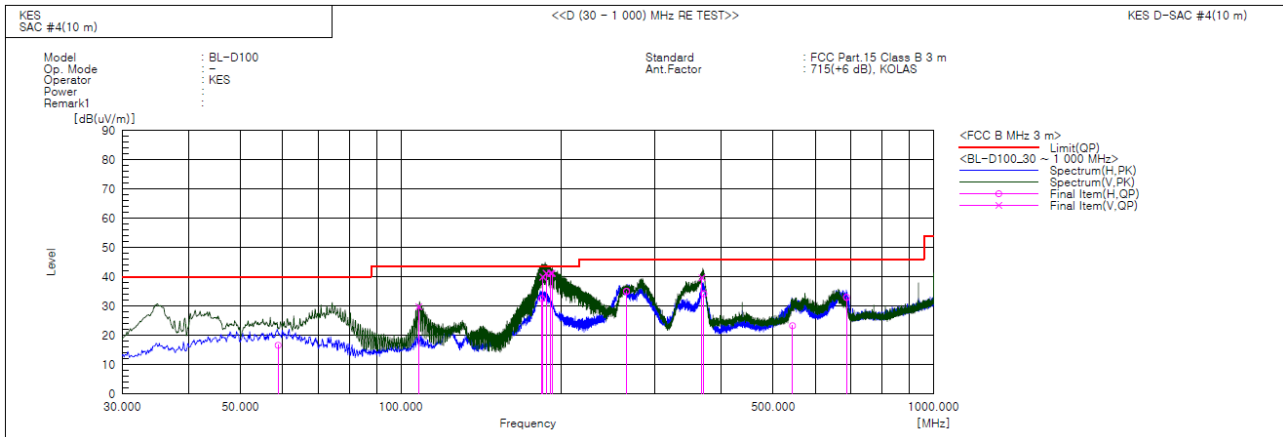

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	58.837	H	38.4	-21.8	16.6	40.0	23.4	295.0	55.0	
2	108.086	V	52.8	-23.0	29.8	43.5	13.7	101.0	70.0	
3	183.916	H	56.0	-23.5	32.5	43.5	11.0	400.0	81.0	
4	184.669	V	63.4	-23.5	39.9	43.5	3.6	107.0	142.0	
5	187.657	V	64.2	-23.1	41.1	43.5	2.4	100.0	161.0	
6	191.277	V	63.9	-22.7	41.2	43.5	2.3	100.0	151.0	
7	192.155	V	63.8	-22.6	41.2	43.5	2.3	100.0	161.0	
8	265.286	H	54.5	-19.5	35.0	46.0	11.0	400.0	109.0	
9	367.435	V	55.0	-15.3	39.7	46.0	6.3	128.0	357.0	
10	370.850	H	49.4	-15.2	34.2	46.0	11.8	314.0	140.0	
11	543.637	H	34.4	-11.1	23.3	46.0	22.7	322.0	247.0	
12	686.724	H	41.8	-8.8	33.0	46.0	13.0	313.0	120.0	

◆ Calculation - SAC #4(10 m)

Result(QP) [dB(μV/m)] = (Reading(QP)[dB(μV)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(μV/m)] - Result(QP) [dB(μV/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamplifier Factor), Margin: Margin value



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Report No.:

KES-EM-23T0073

Page (20) of (24)

Radiated Electric Field Emissions(Above 1 GHz)

- (1 ~ 5) GHz

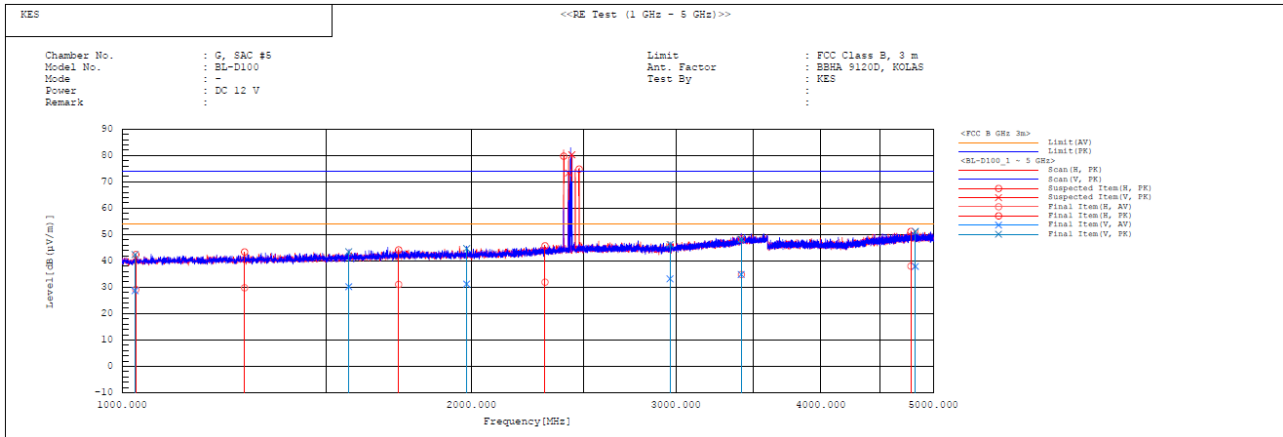

Final Result

No.	Frequency [MHz]	Pol	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]	Remark
1	1026.407	V	31.1	44.8	-2.4	28.7	42.4	54.0	74.0	25.3	31.6	100.0	354.2	
2	1027.925	H	31.6	44.8	-2.4	29.2	42.4	54.0	74.0	24.8	31.6	400.0	277.9	
3	1275.360	H	30.9	44.5	-1.1	29.8	43.4	54.0	74.0	24.2	30.6	363.0	130.1	
4	1568.604	V	30.1	43.4	0.1	30.2	43.5	54.0	74.0	23.8	30.5	112.0	107.1	
5	1731.597	H	30.2	43.3	0.9	31.1	44.2	54.0	74.0	22.9	29.8	400.0	7.3	
6	1981.705	V	29.3	42.8	1.9	31.2	44.7	54.0	74.0	22.8	29.3	135.0	349.1	
7	2314.980	H	28.9	42.7	3.0	31.9	45.7	54.0	74.0	22.1	28.3	349.0	46.1	
8	2966.198	V	28.3	41.3	4.9	33.2	46.2	54.0	74.0	20.8	27.8	100.0	127.3	
9	3416.862	V	29.3	42.7	5.5	34.8	48.2	54.0	74.0	19.2	25.8	110.0	149.5	
10	3418.055	H	29.3	42.8	5.5	34.8	48.3	54.0	74.0	19.2	25.7	361.0	8.1	
11	4784.327	H	28.1	41.3	5.9	38.0	51.2	54.0	74.0	16.0	22.8	361.0	72.7	
12	4826.880	V	27.8	41.1	10.1	37.9	51.2	54.0	74.0	16.1	22.8	106.0	21.3	
13	2402.400	H	-----	-----	3.3	-----	-----	-----	-----	-----	-----	400.0	269.3	
14	2425.600	V	-----	-----	3.3	-----	-----	-----	-----	-----	-----	100.0	230.8	
15	2441.600	V	-----	-----	3.4	-----	-----	-----	-----	-----	-----	100.0	109.6	
16	2477.200	H	-----	-----	3.4	-----	-----	-----	-----	-----	-----	400.0	84.9	

* Exclusion Bands

- Fundamental Frequency: 2 402 MHz, 2 425 MHz, 2 441 MHz, 2 477 MHz

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0073
Page (21) of (24)

- (5 ~ 12,4) GHz

PEAK

Frequency (MHz)	Reading PK (dBuV)	Polarization	Height (m)	ANT Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
6 774.194	41.100	V	1.000	34.800	10.620	34.810	51.710	74.000	22.290
6 807.435	41.200	H	4.000	34.930	11.090	34.810	52.410	74.000	21.590

CISPR AVERAGE

Frequency (MHz)	Reading CISPR AV (dBuV)	Polarization	Height (m)	ANT Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
6 774.194	27.800	V	1.000	34.800	10.620	34.810	38.410	54.000	15.590
6 807.435	27.700	H	4.000	34.930	11.090	34.810	38.910	54.000	15.090

◆ Calculation

Result(PK/CAV) [dB(μV/m)] = (Reading(PK/CAV)[dB(μV)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μV/m)] - Result(PK/CAV) [dB(μV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Marjin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr