


FPC ANTENNA

RFANT Series – RoHS Compliance

2.4 GHz ISM Band Working Frequency

model: CFDL-1

CONSTRUCTION

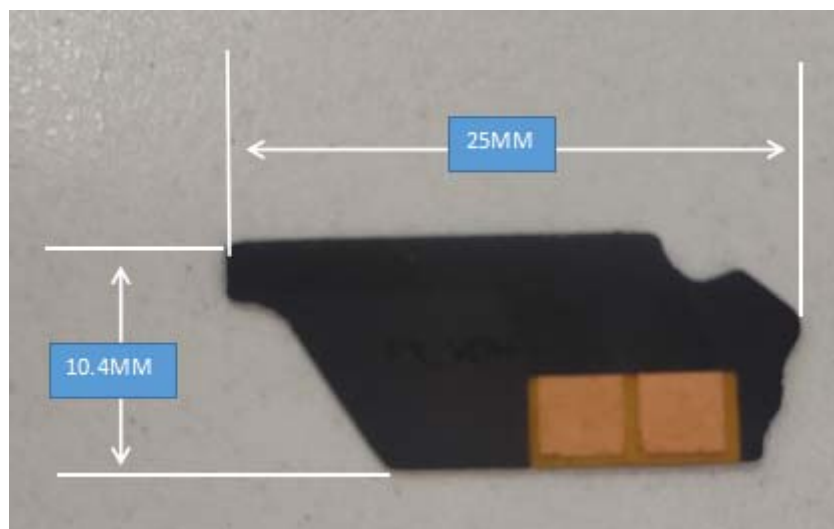


SHEN ZHEN SHI QIN XIN TECHNOLOGY CO., LTD
Shenzhen Nanshan District Hi-tech Industrial park(Central District)Sabrina Gene Therapy
Park Building A 3rd Floor303


ELECTRICAL CHARACTERISTICS

Item	Specification
Working Frequency Range	2.4 GHz ~ 2.5GHz
Gain	1.5 dBi (Typical)
VSWR	2 max.
Polarization	Linear
Azimuth Beamwidth	Omni-directional
Impedance	50Ω
Rated Power (max.)	3 Watts
Maximum Input Power	5 Watts for 5 minutes
Operation Temperature	-40°C ~ +85°C

Remark: The specification is defined based on the test board dimension as in below

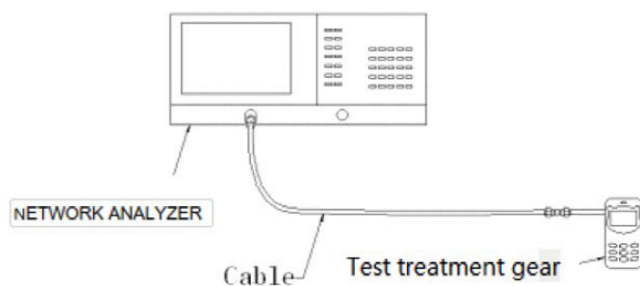


Antenna S11 on Test Board

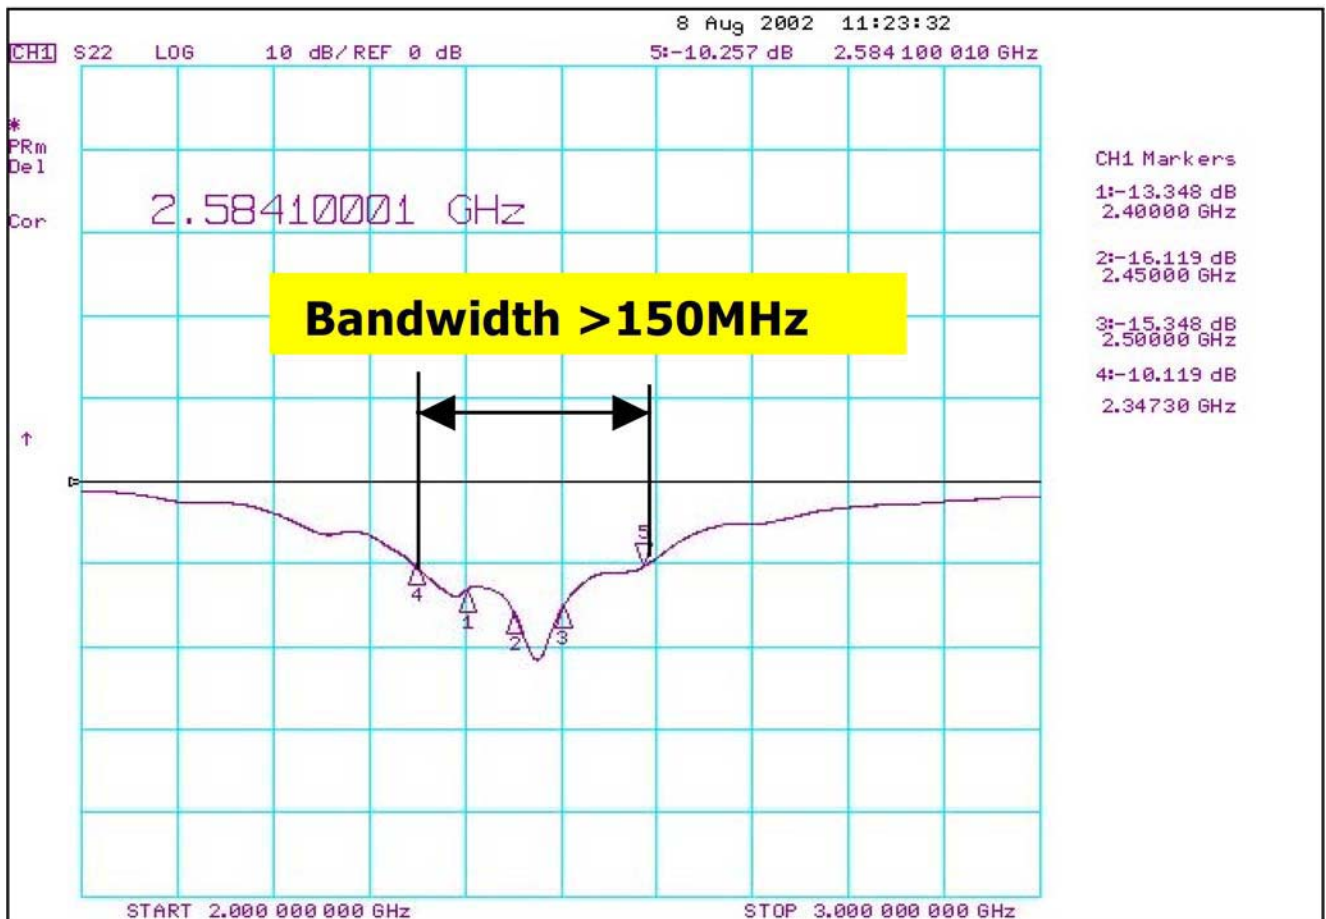


RADIATION PATTERN

Radiation Pattern and Gain were dependent on measurement board design. The specification of RFANT5220110A0T antenna was measured based on the PCB size and installation position as shown in the below figure Test Board


2400.000MHz

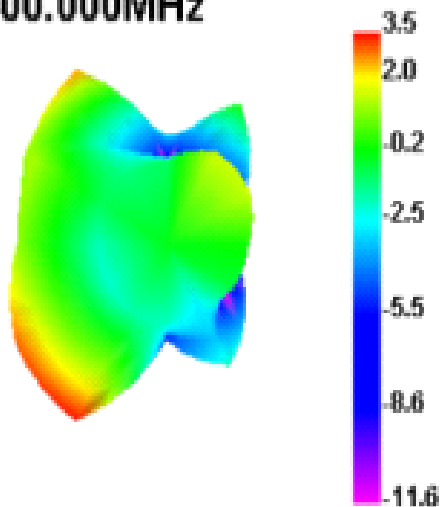


2400.000MHz H

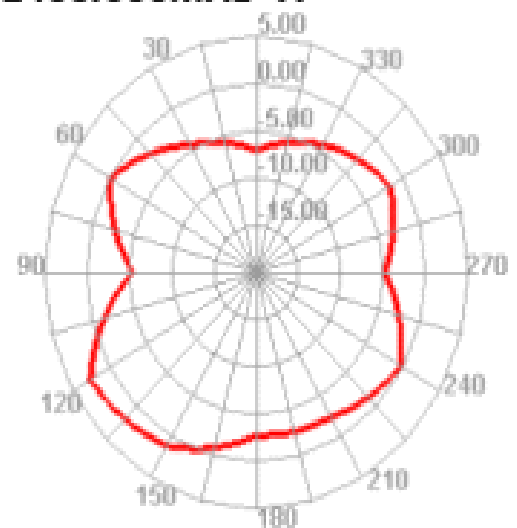



2400.000MHz E1

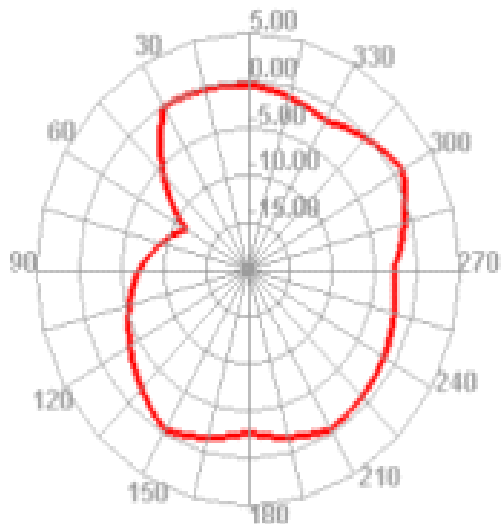


2400.000MHz E2

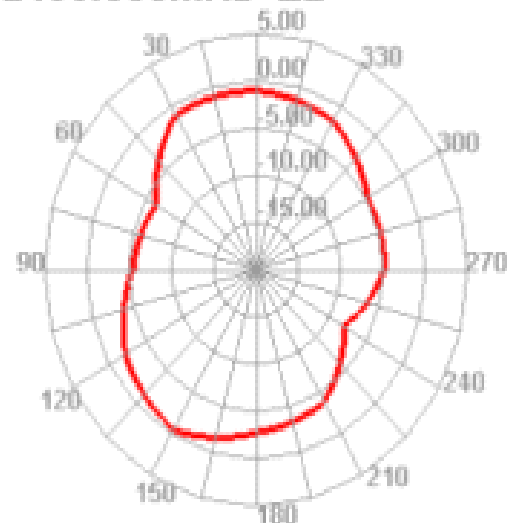


2450.000MHz




2450.000MHz H

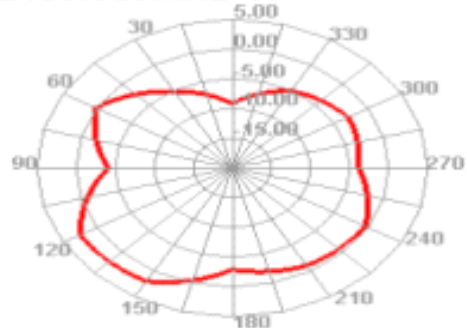



2450.000MHz E1

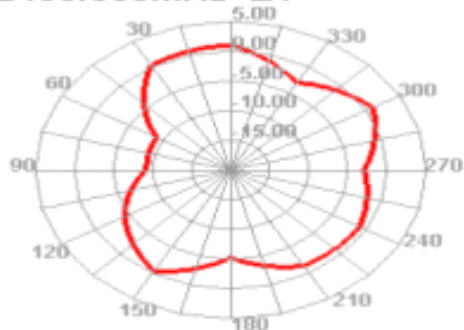


2450.000MHz E2

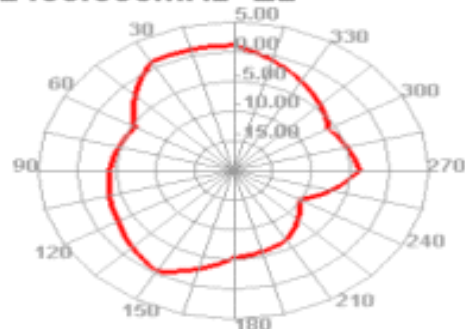


2500.000MHz



2500.000MHz H

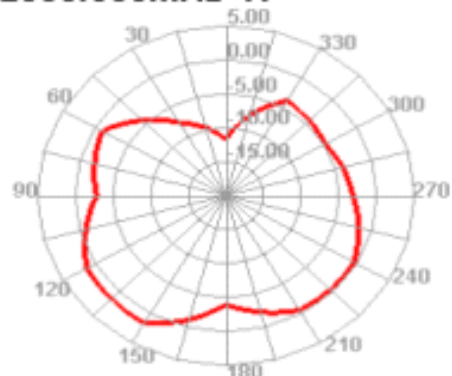

2500.000MHz E1

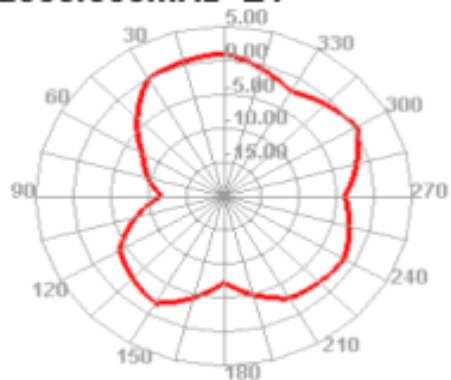

2500.000MHz E2

