

TEST REPORT

Product Name: Interactive Flat Panel
FCC ID: 2A916-FB50-65U
Trademark: Flipbox
Model Number: FB50-65U, FB50-75U, FB50-86U, FB**-*** (* represents 0-10, A-Z.)
Prepared For: Integral POLYMEDIA Systems LLC
Address: 2403, Business Central Towers (B), Dubai Media City, PO Box 75476, Dubai, United Arab Emirates
Manufacturer: Integral POLYMEDIA Systems LLC
Address: 2403, Business Central Towers (B), Dubai Media City, PO Box 75476, Dubai, United Arab Emirates
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, China.
Sample Received Date: Oct. 26, 2022
Sample tested Date: Oct. 26, 2022 to Oct. 31, 2022
Issue Date: Oct. 31, 2022
Report No.: CTB221028006RFX
Test Standards 47 CFR Part 15 Subpart E
Test Results PASS
Remark: This is WIFI-5GHz band radio test report.

Compiled by:

ChenZheng

Chen Zheng

Reviewed by:

Arron Liu

Arron Liu

Approved by:

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	8
4.3 Support Equipment	8
4.5 Test Mode	9
4.6 Test Environment	9
5. TEST FACILITY AND TEST INSTRUMENT USED	10
5.1 Test Facility	10
5.2 Test Instrument Used	10
6. AC POWER LINE CONDUCTED EMISSION	12
6.1 Block Diagram Of Test Setup	12
6.2 Limit	12
6.3 Test procedure	12
6.4 Test Result	14
7. RADIATED SPURIOUS EMISSIONS	16
7.1 Block Diagram Of Test Setup	16
7.2 Limit	17
7.3 Test procedure	18
7.4 Test Result	19
8. BAND EDGE	27
8.1 Block Diagram Of Test Setup	27
8.2 Limit	27
8.3 Test procedure	27
8.4 Test Result	28
9. CONDUCTED PEAK OUTPUT POWER	36
9.1 Block Diagram Of Test Setup	36
9.2 Limit	36
9.3 Test procedure	37
10. EMISSION BANDWIDTH& OCCUPIED BANDWIDTH	50
10.1 Block Diagram Of Test Setup	50
10.2 Limits	50
10.3 Test Procedure	50
10.4 Test Results	52
11. POWER SPECTRAL DENSITY	66
11.1 Block Diagram Of Test Setup	66
11.2 Limit	66
11.3 Test procedure	66
11.4 Test Result	68
12. FREQUENCY STABILITY	81
12.1 Block Diagram Of Test Setup	81
12.2 Limit	81
12.3 Test procedure	81
12.4 Test Result	81
13. OPERATION IN THE ABSENCE OF INFORMATION TO THE TRANSMIT	94
13.1 Requirement	94
13.2 Test Results	94
14. ANTENNA REQUIREMENT	95

15.	EUT PHOTOGRAPHS	96
16.	EUT TEST SETUP PHOTOGRAPHS	97

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB221028006RFX	Oct.31, 2022	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart E Section 15.407 (b)(6)	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart E Section 15.205/15.407(b)	KDB789033	PASS
Band edge	47 CFR Part 15 Subpart E Section 15.205/15.407(b)	KDB789033	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart E Section 15.407 (a)	KDB789033	PASS
Emission Bandwidth & Occupied Bandwidth	47 CFR Part 15 Subpart E Section 15.407 (a)(e)	KDB789033	PASS
Power Spectral Density	47 CFR Part 15 Subpart E Section 15.407 (a)	KDB789033	PASS
Frequency stability	47 CFR Part 15 Subpart E Section 15.407 (g)	KDB789033	PASS
Operation in the absence of information to the transmit	47 CFR Part 15 Subpart E Section 15.407 (b)	47 CFR Part 15 Subpart E	PASS
Antenna Requirement	47 CFR Part 15 Subpart E Section 15.203	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	U=±54.3Hz
Adjacent channel power	U=±1.3dB
Conducted Adjacent channel power	U=±1.38dB
Conducted output power Above 1G	U=±1.0dB
Conducted output power below 1G	U=±0.9dB
Power Spectral Density , Conduction	U=±1.0dB
Conduction spurious emissions	U=±2.8dB
Out of band emission	U=±54Hz
3m camber Radiated spurious emission(9KHz-30MHz)	U=±4.8dB
3m camber Radiated spurious emission(30MHz-1GHz)	U=±4.3dB
3m chamber Radiated spurious emission(1GHz-18GHz)	U=±4.5dB
3m chamber Radiated spurious emission(18GHz-40GHz)	U=±3.4dB
humidity uncertainty	U=±5.3%
Temperature uncertainty	U=±0.59℃
Supply voltages	U=±3%
Time	U=±5%
Conducted emission(150K-30MHz)	3.2dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	FB50-65U, FB50-75U, FB50-86U, FB**-*** (* represents 0-10, A-Z.)
Model Description:	All the model are the same circuit and RF module, only for model name. Test sample model: FB50-65U
Wi-Fi Specification:	IEEE 802.11a/b/g/n/ac
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	IEEE 802.11a/n/ac(20M): 5725MHz ~5850MHz/ 5 channel IEEE 802.11n/ac(40M): 5725MHz ~5850MHz/ 2 channel IEEE 802.11ac(80M): 5725MHz ~5850MHz/ 1 channel
Max. RF output power:	WiFi (5G): 19.45dBm
Type of Modulation:	WiFi: DSSS, CCK and OFDM
Antenna installation:	External antenna
Antenna Gain:	ANT1:4.33dBi ANT2:4.33dBi ANT3:4.33dBi ANT4:4.33dBi
Ratings:	AC 100-240V ~ 50/60Hz

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

For 802.11a/n/ac(20M) Operation in the 5745MHz ~5825 MHz band			
Channel	Frequency	Channel	Frequency
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz	NA	NA

For 802.11n/ac(40M) Operation in the 5745MHz ~5825 MHz band			
Channel	Frequency	Channel	Frequency
151	5755MHz	159	5795MHz

For 802.11ac(80M) Operation in the 5745MHz ~5825 MHz band			
Channel	Frequency	NA	NA
155	5775MHz	NA	NA

NOTE: Dutycycle>98%.

Test mode	rate
802.11a	54M
802.11n	500M
802.11/ac	500M

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
802.11a/n/ac(20M)	5745MHz ~5825 MHz	Channel 149	Channel 157	Channel 165
		5745MHz	5785MHz	5825MHz
802.11n/ac(40M)	5745MHz ~5825 MHz	Channel 151	N/A	Channel 159
		5755MHz	N/A	5795MHz
802.11ac(80M)	5745MHz ~5825 MHz	N/A	Channel 155	N/A
		N/A	5775MHz	N/A

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(AC):NV	120
Normal Temperature(°C):NT	23
Low Temperature(°C):LT	0
High Temperature(°C):HT	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.


5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2023.07.19
2	Power Sensor	Agilent	U2021XA	MY56120032	2023.07.19
3	Power Sensor	Agilent	U2021XA	MY56120034	2023.07.19
4	Communication test set	R&S	CMW500	108058	2023.07.19
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	2023.07.19
6	Signal Generator	Agilent	N5181A	MY50140365	2023.07.19
7	Vector signal generator	Agilent	N5182A	MY47420195	2023.07.19
8	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2023.07.19
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2023.07.19
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	2023.07.19
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2023.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2023.07.19
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/
16	966 chamber	C.R.T.	966	/	2024.08.11
17	Receiver	R&S	ESPI	100362	2023.07.19
18	Amplifier	HP	8447E	2945A02747	2023.07.19
19	Amplifier	Agilent	8449B	3008A01838	2023.07.19
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2023.07.22

21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	2023.07.22
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	2023.07.23
24	loop antenna	ZHINAN	ZN30900A	GTS534	/
25	40G Horn antenna	A/H/System	SAS-574	588	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	2024.10.30

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

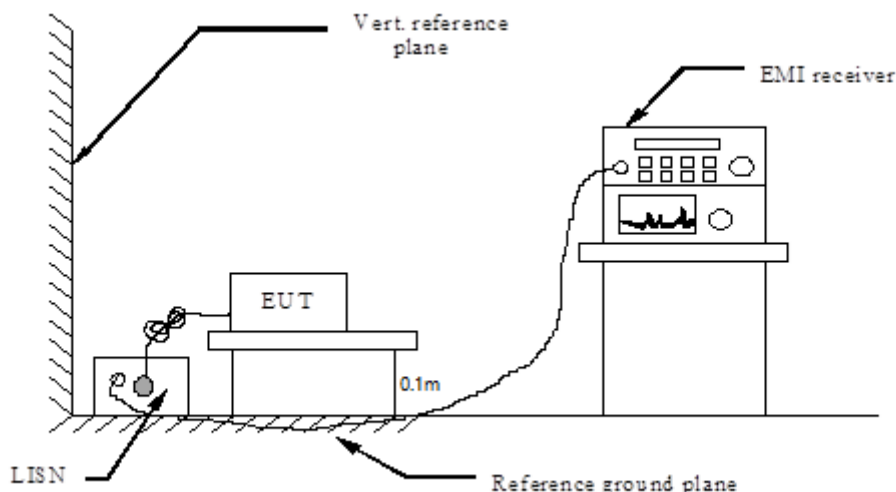

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under

test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result

L:

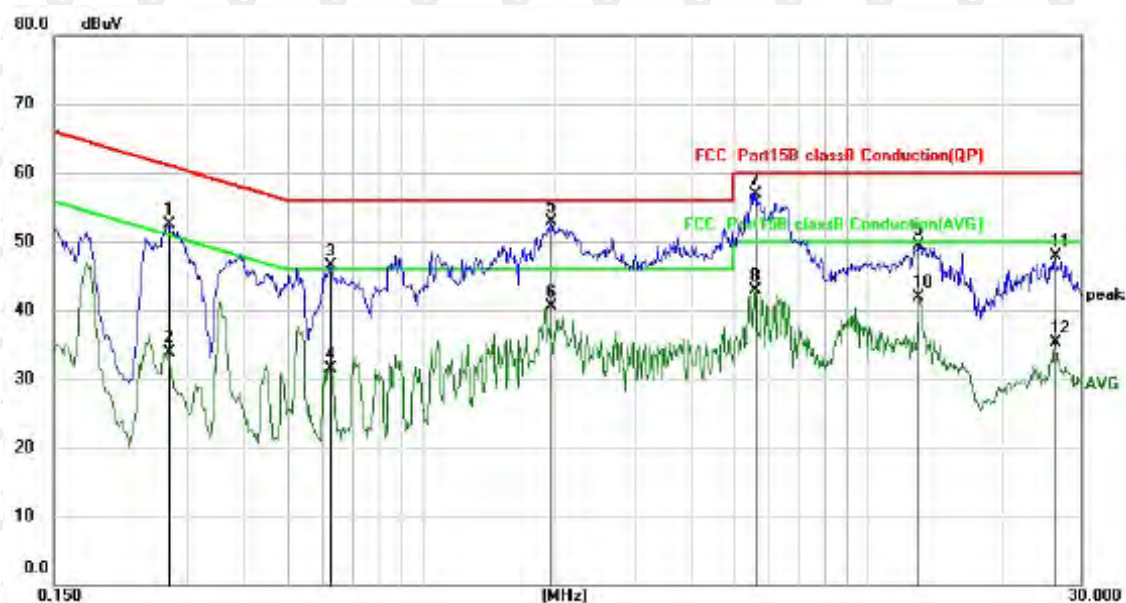


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2701	42.47	10.00	52.47	61.11	-8.64	QP
2		0.2701	23.93	10.00	33.93	51.11	-17.18	AVG
3		0.6260	36.62	9.97	46.59	56.00	-9.41	QP
4		0.6260	21.47	9.97	31.44	46.00	-14.56	AVG
5		1.9455	42.81	10.02	52.83	56.00	-3.17	QP
6		1.9455	30.48	10.02	40.50	46.00	-5.50	AVG
7	*	5.5900	46.74	10.19	56.93	60.00	-3.07	QP
8		5.5900	32.68	10.19	42.87	50.00	-7.13	AVG
9		12.9500	39.06	10.41	49.47	60.00	-10.53	QP
10		12.9500	31.43	10.41	41.84	50.00	-8.16	AVG
11		26.2620	37.37	10.62	47.99	60.00	-12.01	QP
12		26.2620	24.69	10.62	35.31	50.00	-14.69	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N:

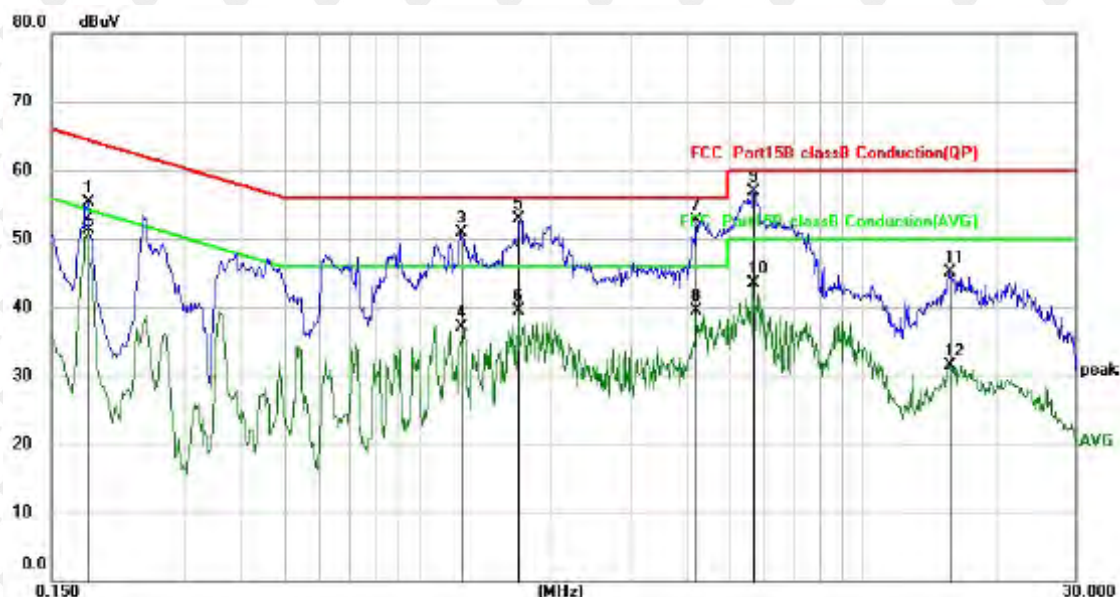

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1		0.1819	45.37	10.01	55.38	64.40	-9.02	QP
2	*	0.1819	41.37	10.01	51.38	54.40	-3.02	AVG
3		1.2459	40.92	9.99	50.91	56.00	-5.09	QP
4		1.2459	27.20	9.99	37.19	46.00	-8.81	AVG
5		1.6814	42.91	10.01	52.92	56.00	-3.08	QP
6		1.6814	29.58	10.01	39.59	46.00	-6.41	AVG
7		4.2057	42.60	10.13	52.73	56.00	-3.27	QP
8		4.2057	29.43	10.13	39.56	46.00	-6.44	AVG
9		5.6619	46.63	10.19	56.82	60.00	-3.18	QP
10		5.6619	33.37	10.19	43.56	50.00	-6.44	AVG
11		15.6577	34.63	10.47	45.10	60.00	-14.90	QP
12		15.6577	21.08	10.47	31.55	50.00	-18.45	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Remark:

1. Factor = Cable loss + LISN factor, Margin = Limit – Level
2. All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
3. All the test modes completed for test. Only the worst result of was reported.

7. RADIATED SPURIOUS EMISSIONS

7.1 Block Diagram Of Test Setup

Figure 1. Below 30MHz

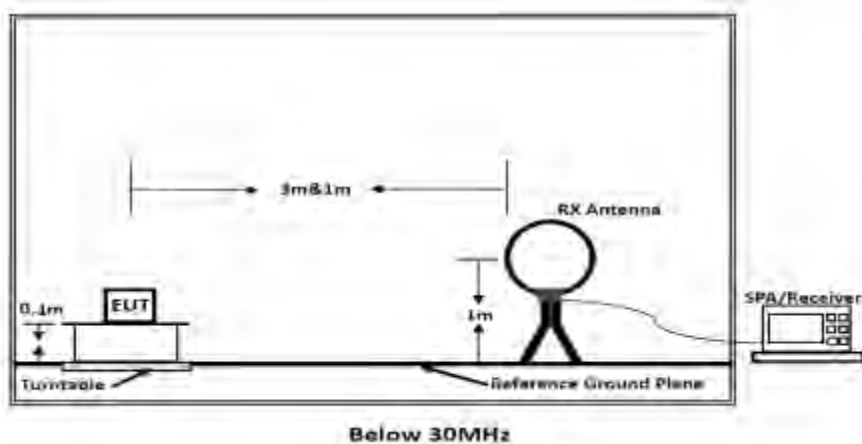


Figure 2. 30MHz to 1GHz


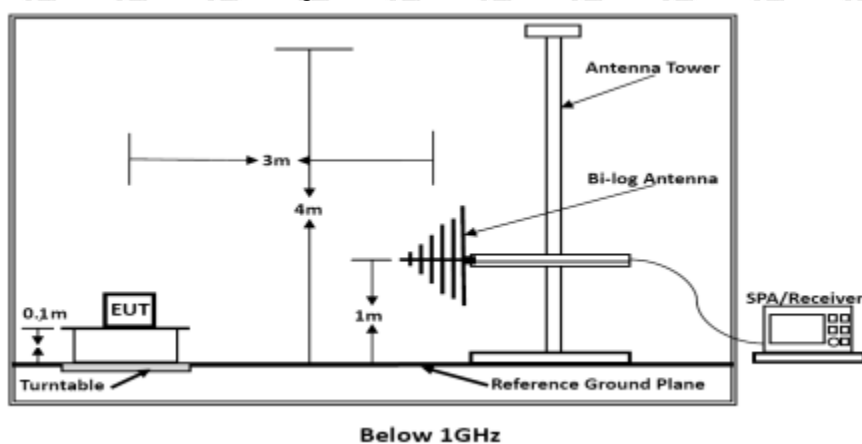


Figure 3. Above 1GHz

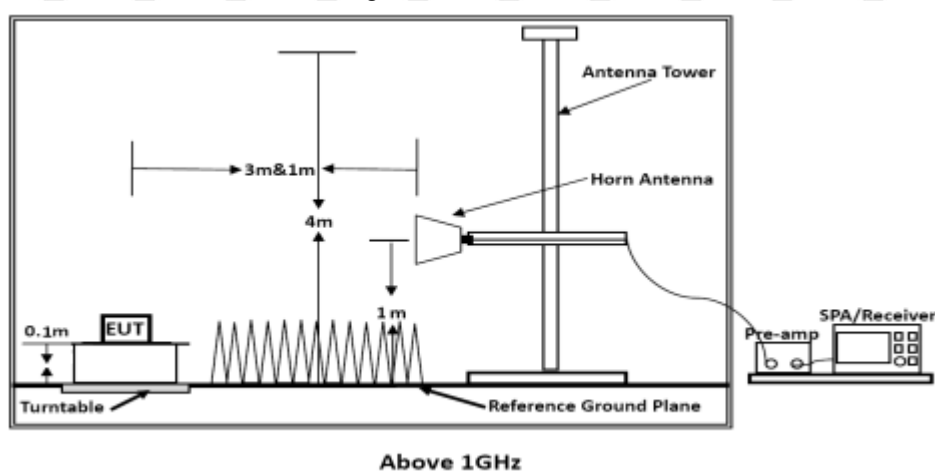

7.2 Limit

Spurious Emissions:

Frequency	Field strength (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	$20\log 2400/F$ (kHz) + 80	Quasi-peak	3
0.490MHz-1.705MHz	$20\log 24000/F$ (kHz) + 40	Quasi-peak	3
1.705MHz-30MHz	$20\log 30 + 40$	Quasi-peak	3
30MHz-88MHz	40.0	Quasi-peak	3
88MHz-216MHz	43.5	Quasi-peak	3
216MHz-960MHz	46.0	Quasi-peak	3
960MHz-1GHz	54.0	Quasi-peak	3
Above 1GHz	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

If radiated measurements are performed, field strength is then converted to EIRP as follows:

(i) $EIRP = ((E \cdot d)^2) / 30$

where:

- E is the field strength in V/m;
 - d is the measurement distance in meters;
 - EIRP is the equivalent isotropically radiated power in watts.
- (ii) Working in dB units, the above equation is equivalent to:
 $EIRP[dBm] = E[dB\mu V/m] + 20 \log(d[meters]) - 104.77$
- (iii) Or, if d is 3 meters:
 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

7.3 Test procedure

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j. Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result

30MHz-1GHz Test Results:

Modulation : 802.11a (the worst data)

Test Channel : 5780MHz

Antenna polarity: H



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		125.2258	36.74	-7.08	29.66	43.50	-13.84	QP
2		208.2143	37.52	-9.24	28.28	43.50	-15.22	QP
3		250.3009	39.53	-7.80	31.73	46.00	-14.27	QP
4		374.6225	39.25	-3.36	35.89	46.00	-10.11	QP
5	*	876.7826	30.62	6.76	37.38	46.00	-8.62	QP
6		1000.000	30.99	8.23	39.22	54.00	-14.78	QP

Antenna polarity: V



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		67.7938	38.36	-8.74	29.62	40.00	-10.38	QP
2		125.2258	42.79	-7.08	35.71	43.50	-7.79	QP
3		151.8632	39.36	-5.46	33.90	43.50	-9.60	QP
4	*	374.6225	42.63	-3.36	39.27	46.00	-6.73	QP
5		522.7178	36.04	0.58	36.62	46.00	-9.38	QP
6		876.7826	32.29	6.76	39.05	46.00	-6.95	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Radiated Spurious Emission (Above 1GHz):

ANT 1

Modulation : 802.11(a) (the worst data)

Freq (MHz)	Rd_level (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	detector	Height	Degree	Antenna polarization
Channel:5180MHz									
10360	42.87	16.15	59.02	74	-14.98	PK	1.90	143	H
10360	25.50	16.15	41.65	54	-12.35	AV	1.76	107	H
10360	41.30	16.15	57.45	74	-16.55	PK	1.38	358	V
10360	28.42	16.15	44.57	54	-9.43	AV	1.56	227	V
Channel:5240MHz									
10480	42.18	16.15	58.33	74	-15.67	PK	1.62	195	H
10480	25.03	16.15	41.18	54	-12.82	AV	1.54	138	H
10480	40.41	16.15	56.56	74	-17.44	PK	1.51	207	V
10480	26.74	16.15	42.89	54	-11.11	AV	1.05	324	V

Modulation : 802.11(n40) (the worst data)

Freq (MHz)	Rd_level (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	detector	Height	Degree	Antenna polarization
Channel:5190MHz									
10380	41.90	16.15	58.05	74	-15.95	PK	1.35	112	H
10380	24.16	16.15	40.31	54	-13.69	AV	1.56	137	H
10380	42.27	16.15	58.42	74	-15.58	PK	1.31	223	V
10380	28.39	16.15	44.54	54	-9.46	AV	1.53	144	V
Channel:5230MHz									
10460	40.86	16.15	57.01	74	-16.99	PK	1.50	206	H
10460	26.72	16.15	42.87	54	-11.13	AV	1.33	164	H
10460	43.66	16.15	59.81	74	-14.19	PK	1.21	70	V
10460	25.24	16.15	41.39	54	-12.61	AV	1.12	69	V

Modulation : 802.11(VH80) (the worst data)

Freq (MHz)	Rd_level (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	detector	Height	Degree	Antenna polarization
Channel:5210MHz									
10420	43.73	16.15	59.88	74	-14.12	PK	1.38	282	H
10420	24.47	16.15	40.62	54	-13.38	AV	1.31	126	H
10420	43.95	16.15	60.10	74	-13.90	PK	1.35	142	V
10420	28.02	16.15	44.17	54	-9.83	AV	1.29	256	V
Channel:5775MHz									
11550	39.60	16.15	55.75	74	-18.25	PK	1.36	144	H
11550	27.92	16.15	44.07	54	-9.93	AV	1.83	332	H
11550	39.74	16.15	55.89	74	-18.11	PK	1.49	206	V
11550	25.78	16.15	41.93	54	-12.07	AV	1.11	126	V

Remark:

- 1.Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits
- 2.The EUT was tested in the low, high channel and the worst case position data was reported.
- 3.Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Radiated Spurious Emission (Above 1GHz):

ANT 2+ANT 3

Modulation : 802.11(a) (the worst data)

Freq (MHz)	Rd_level (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	detector	Height	Degree	Antenna polarization
Channel:5180MHz									
10360	40.54	16.15	56.69	74	-17.31	PK	1.34	287	H
10360	24.49	16.15	40.64	54	-13.36	AV	1.28	109	H
10360	43.99	16.15	60.14	74	-13.86	PK	1.42	297	V
10360	28.94	16.15	45.09	54	-8.91	AV	1.02	112	V
Channel:5240MHz									
10480	43.22	16.34	59.56	74	-14.44	PK	1.83	110	H
10480	26.34	16.34	42.68	54	-11.32	AV	1.76	189	H
10480	41.28	16.34	57.62	74	-16.38	PK	1.35	196	V
10480	26.64	16.34	42.98	54	-11.02	AV	1.73	106	V

Modulation : 802.11(n40) (the worst data)

Freq (MHz)	Rd_level (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	detector	Height	Degree	Antenna polarization
Channel:5190MHz									
10380	42.08	16.34	58.42	74	-15.58	PK	1.19	47	H
10380	27.28	16.34	43.62	54	-10.38	AV	1.82	352	H
10380	42.37	16.34	58.71	74	-15.29	PK	1.40	54	V
10380	27.24	16.34	43.58	54	-10.42	AV	1.43	198	V
Channel:5230MHz									
10460	40.22	16.34	56.56	74	-17.44	PK	1.71	101	H
10460	27.39	16.34	43.73	54	-10.27	AV	1.52	124	H
10460	41.30	16.34	57.64	74	-16.36	PK	1.77	249	V
10460	26.74	16.34	43.08	54	-10.92	AV	1.02	149	V

Modulation : 802.11(VH80) (the worst data)


Freq (MHz)	Rd_level (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	detector	Height	Degree	Antenna polarization
Channel:5210MHz									
10420	41.49	16.34	57.83	74	-16.17	PK	1.18	199	H
10420	26.64	16.34	42.98	54	-11.02	AV	1.03	201	H
10420	40.68	16.34	57.02	74	-16.98	PK	1.06	327	V
10420	28.36	16.34	44.70	54	-9.30	AV	1.45	177	V

Remark:

- 1.Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits
- 2.The EUT was tested in the low, high channel and the worst case position data was reported.
- 3.Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

8. BAND EDGE

8.1 Block Diagram Of Test Setup

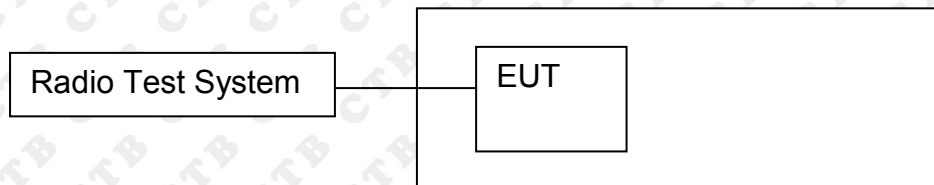

8.2 Limit

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.


8.3 Test procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.


8.4 Test Result

Test Graph

ANT 1

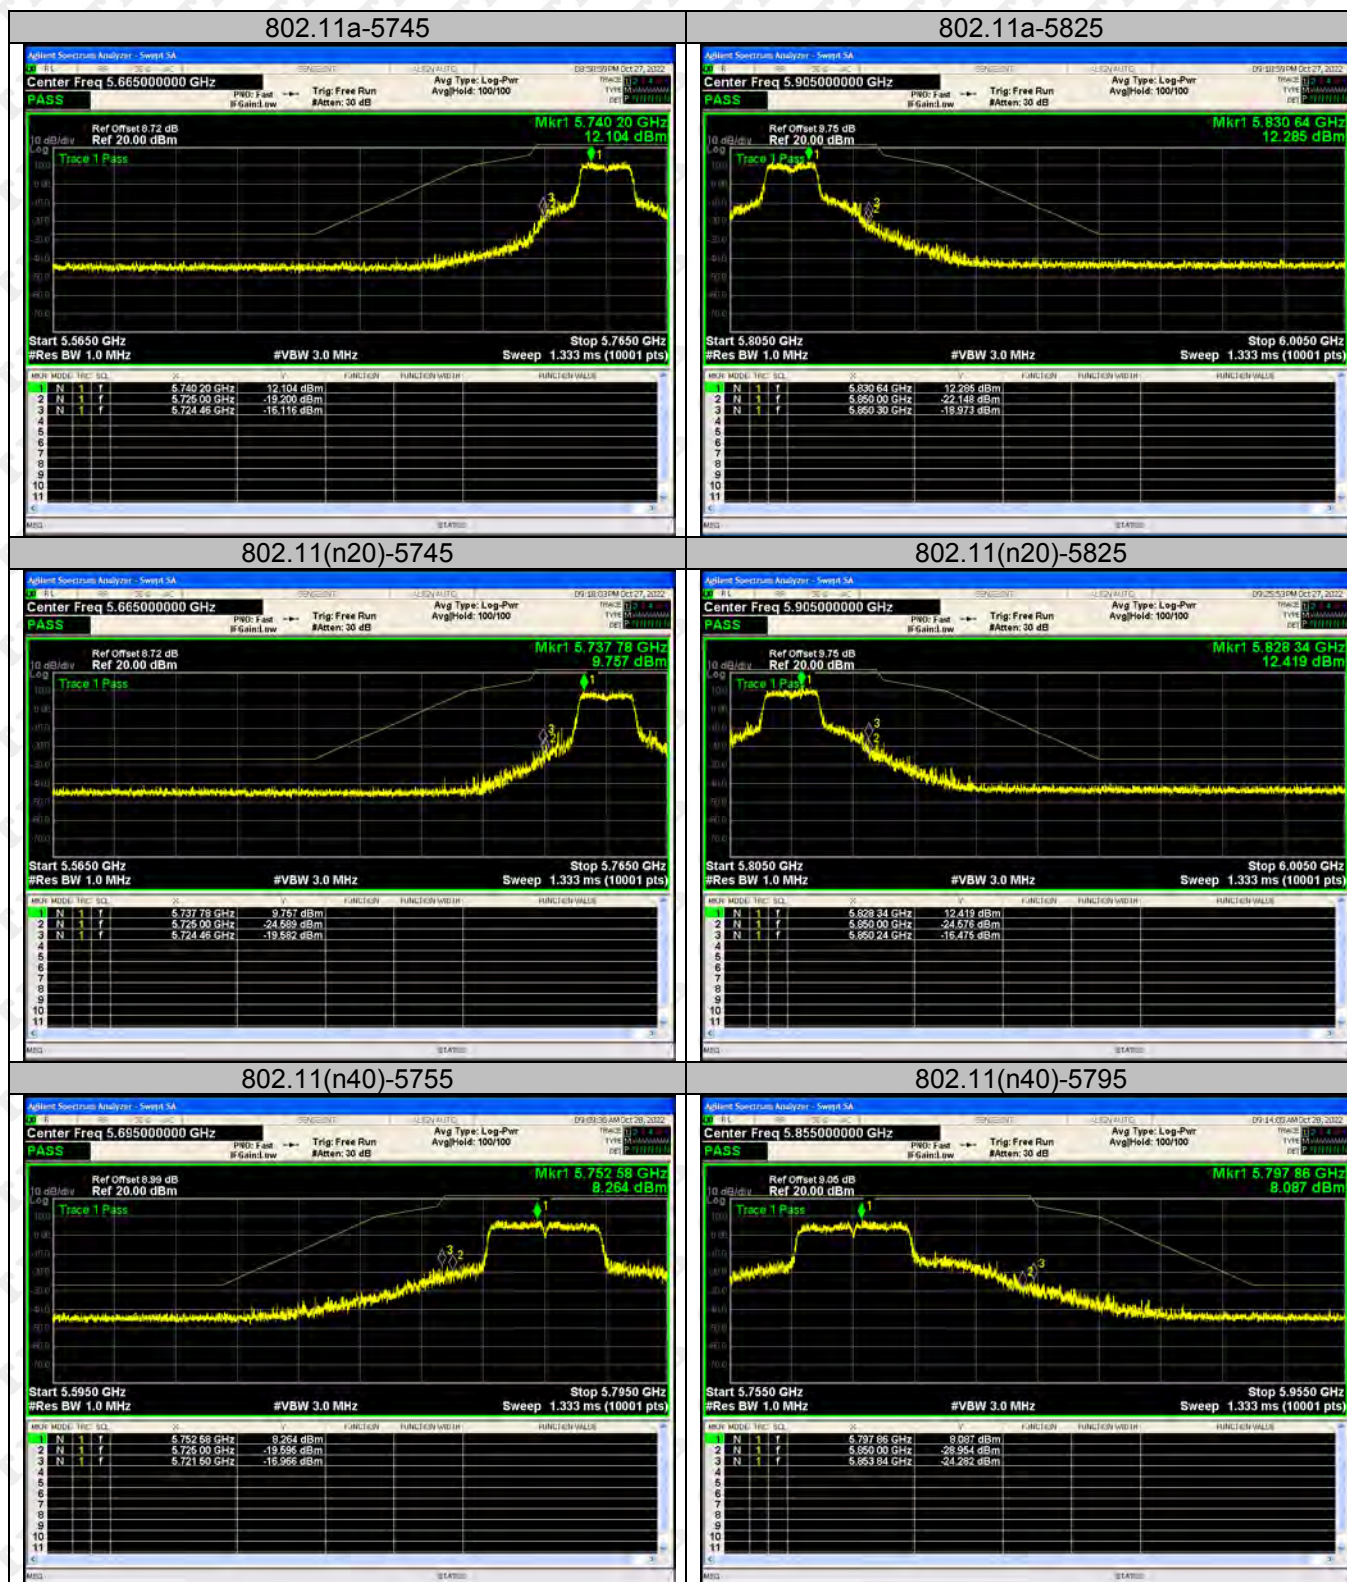

802.11ac(VH20)-5745

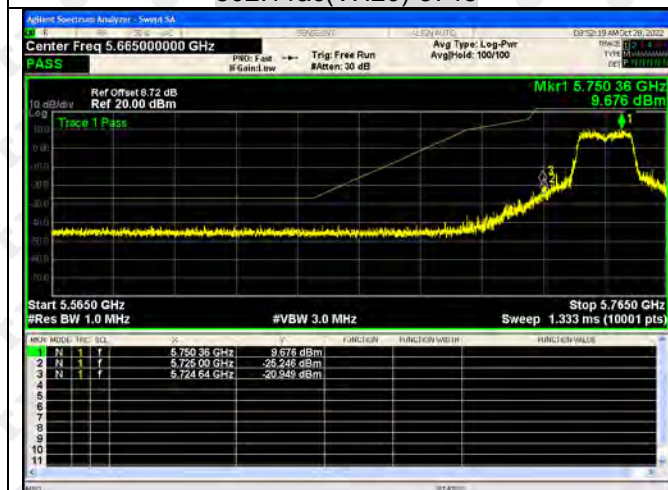

802.11ac(VH20)-5825




802.11ac(VH40)-5755




802.11ac(VH40)-5795



802.11ac(VH80)-5775

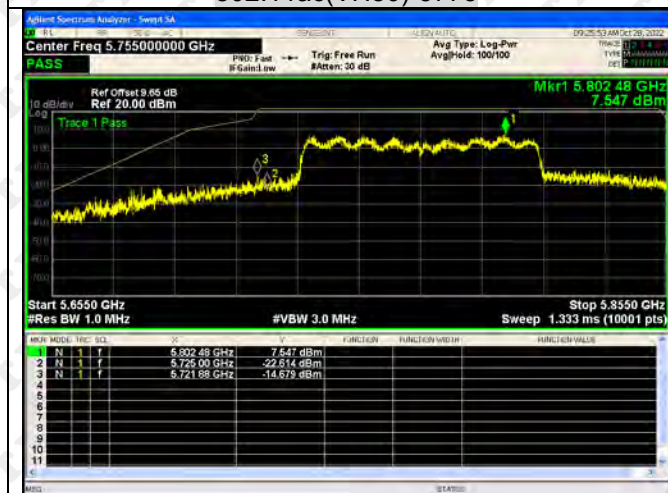

ANT 2

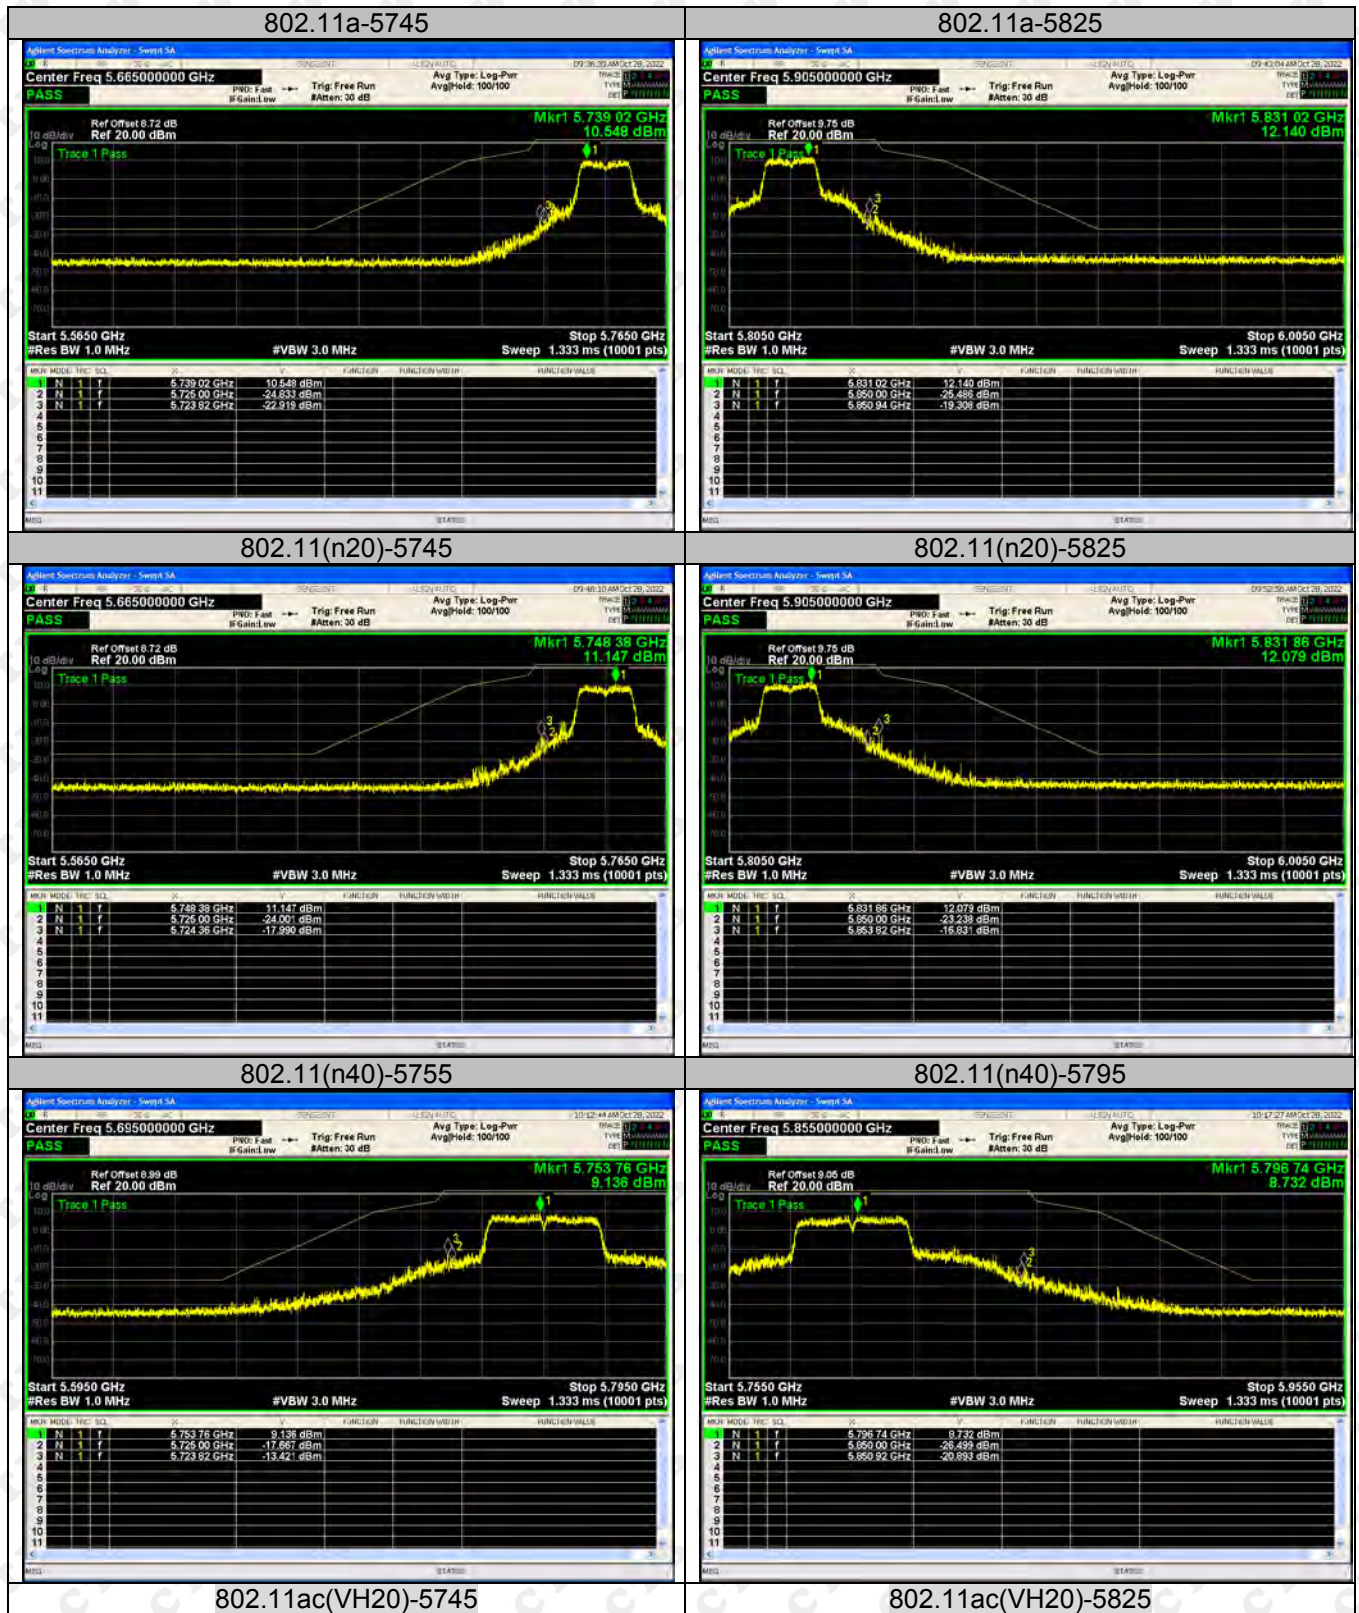




802.11ac(VH40)-5755




802.11ac(VH40)-5795




802.11ac(VH80)-5755

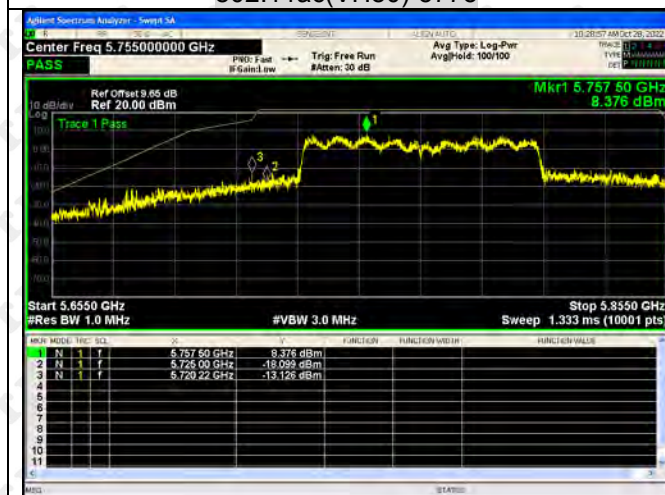

ANT 3

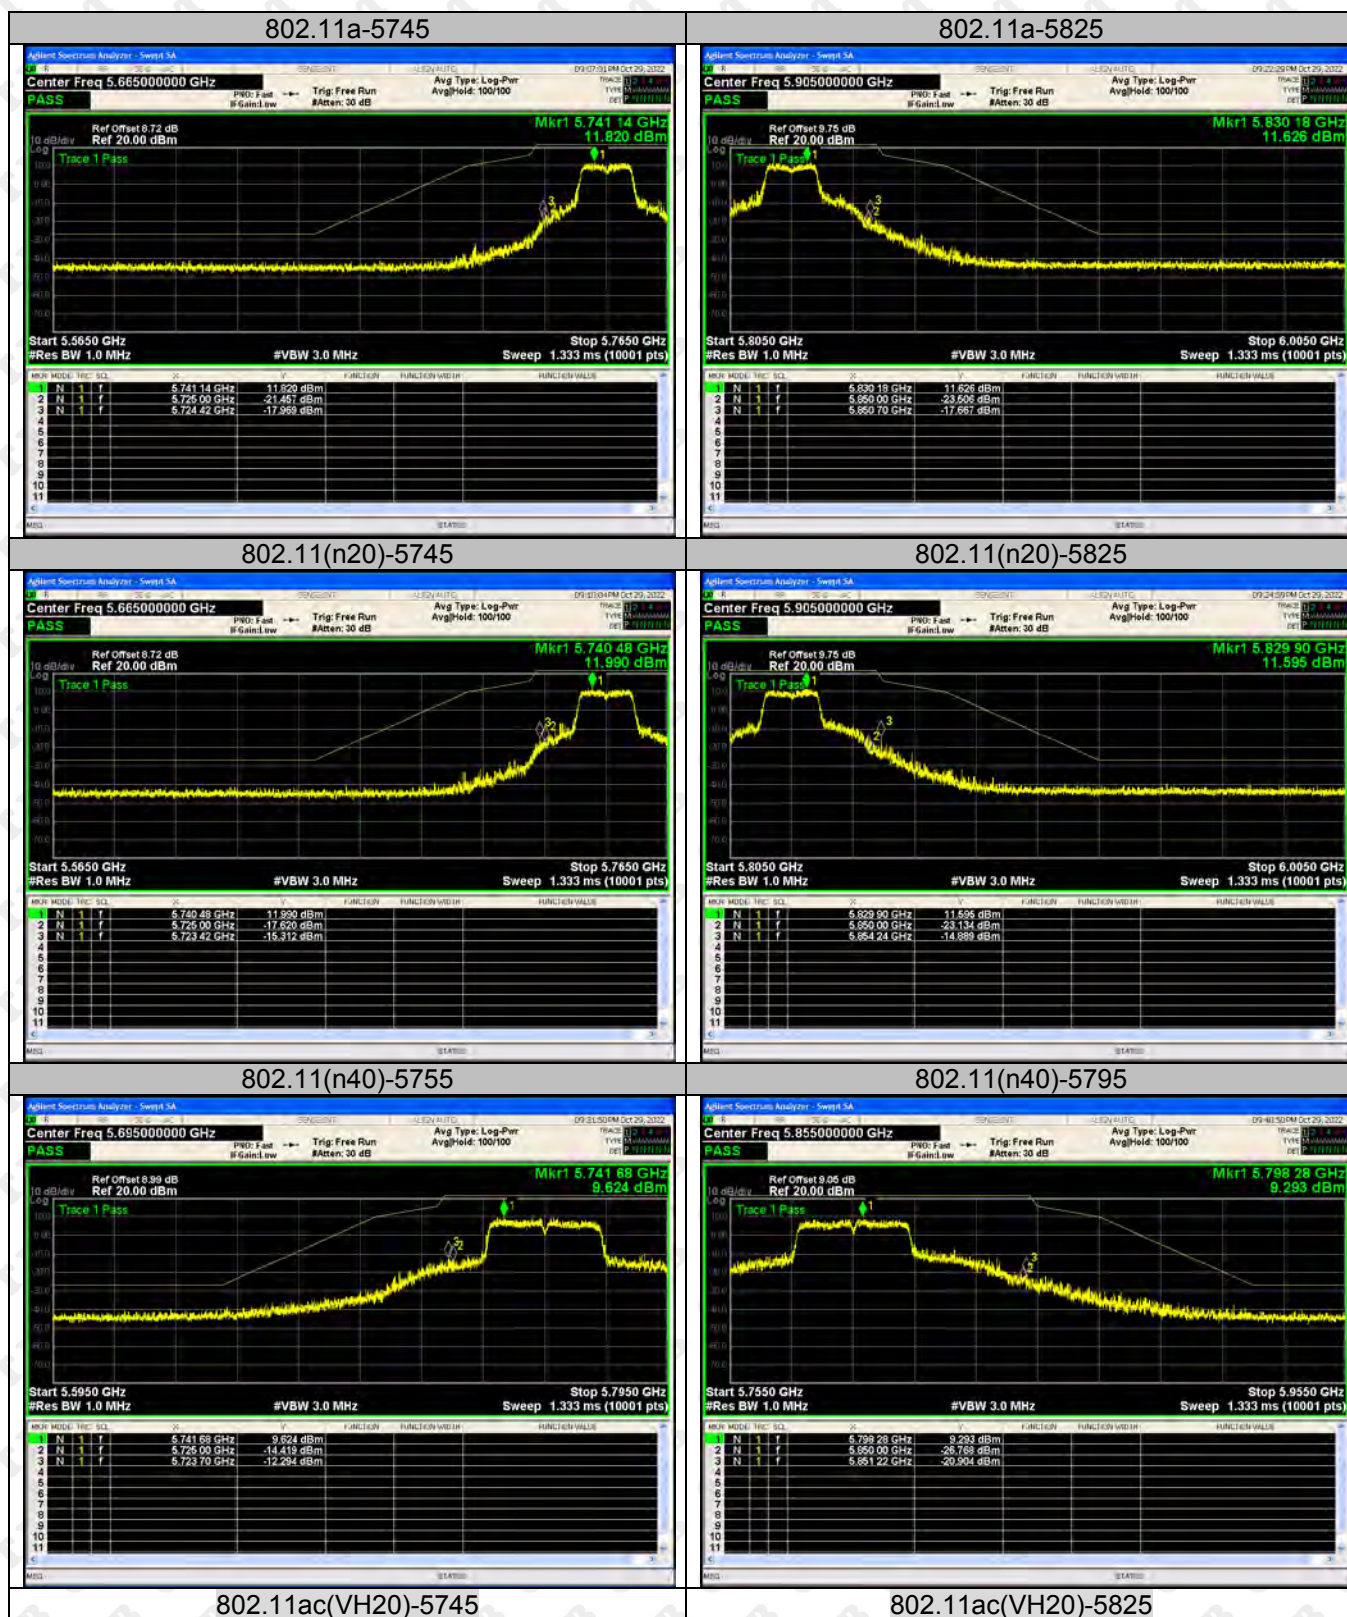

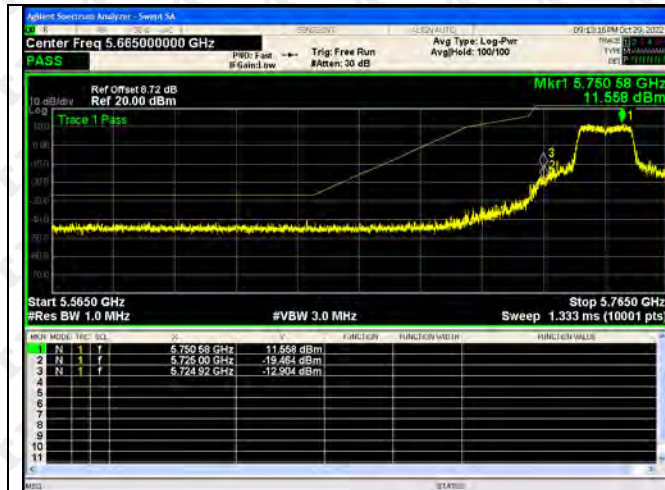


802.11ac(VH40)-5755




802.11ac(VH40)-5795




802.11ac(VH80)-5775

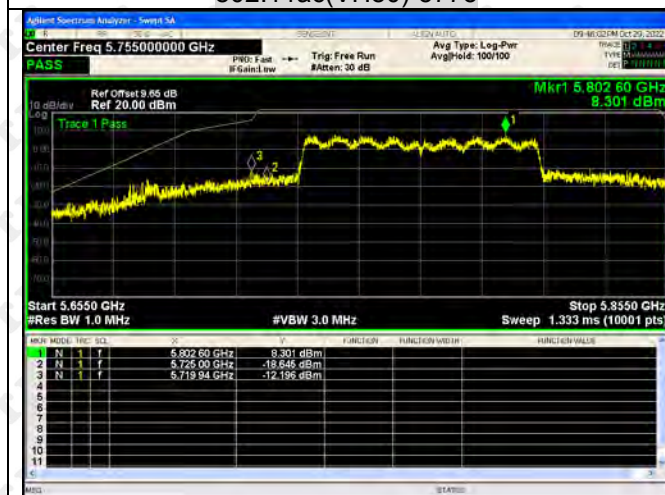

ANT 4

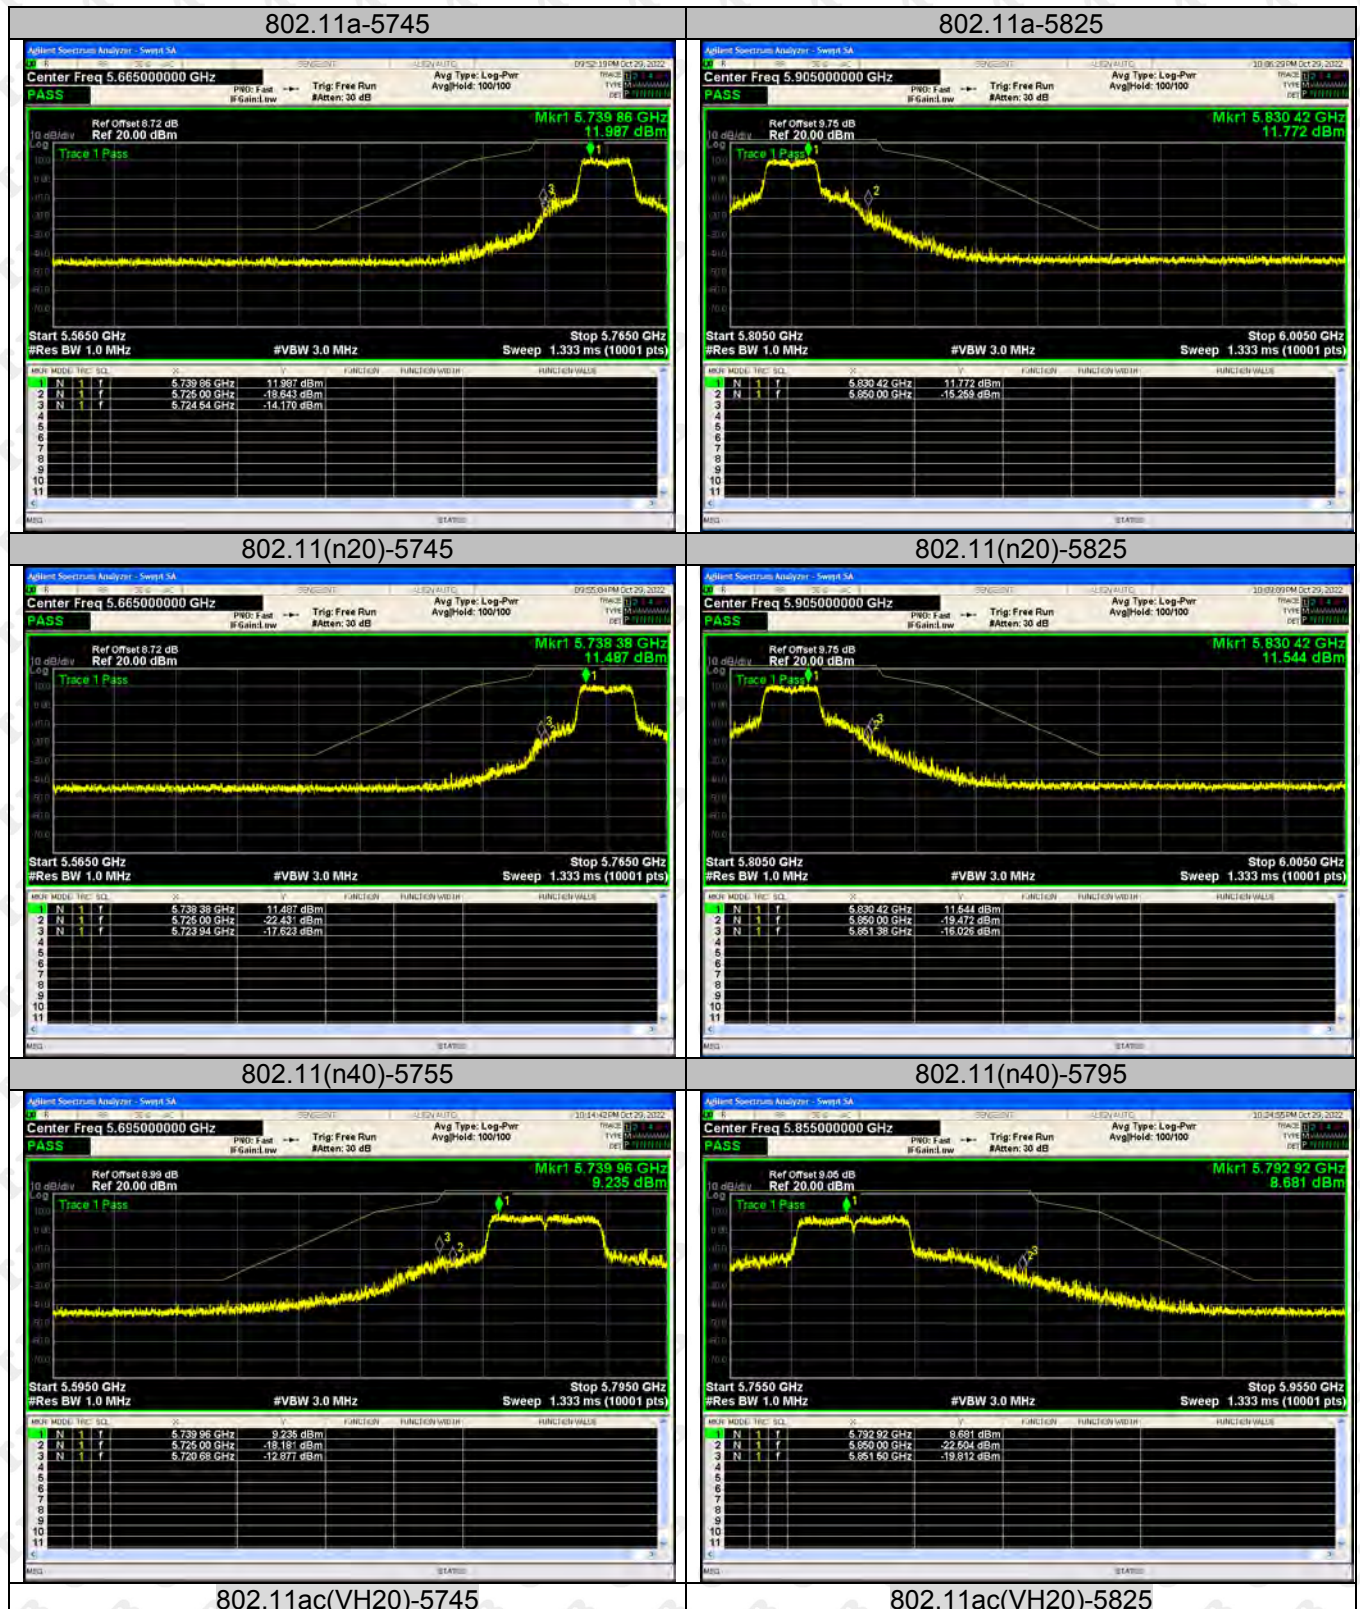


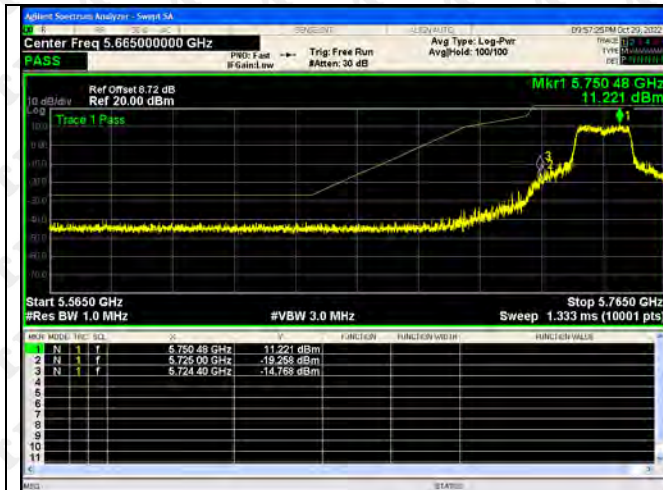


802.11ac(VH40)-5755



802.11ac(VH40)-5795

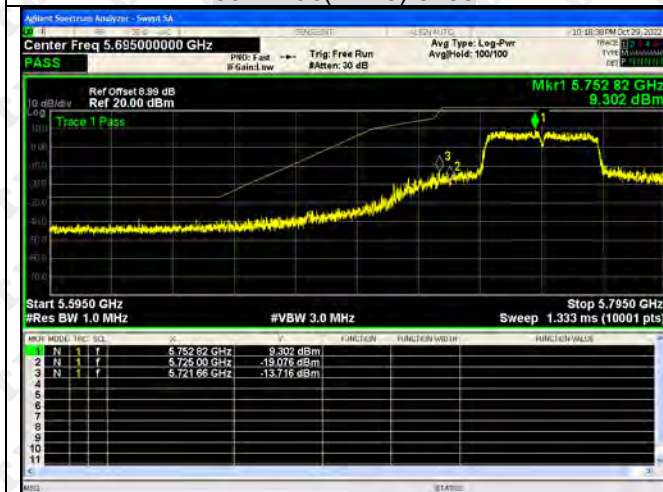


802.11ac(VH80)-5755

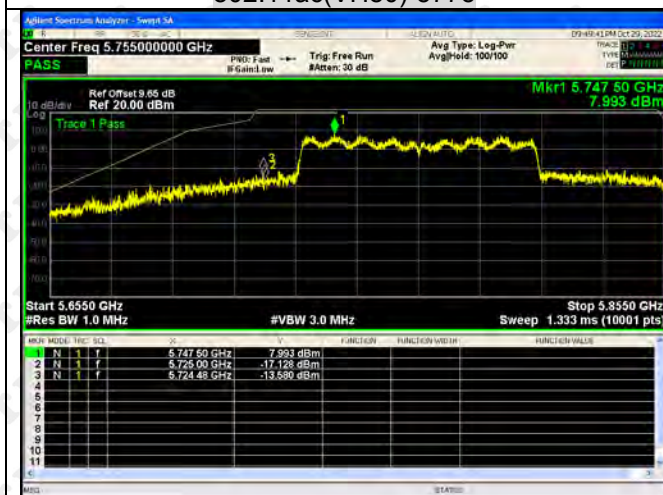

9. CONDUCTED PEAK OUTPUT POWER

9.1 Block Diagram Of Test Setup

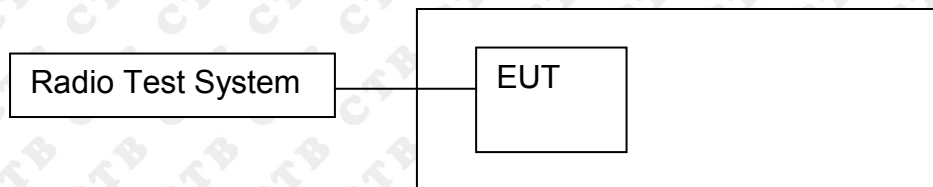

9.2 Limit

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p.

at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(4) The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

(5) The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

(h) Transmit Power Control (TPC) and Dynamic Frequency Selection (DFS).

(1) Transmit power control (TPC). U-NII devices operating in the 5.25-5.35 GHz band and the 5.47-5.725 GHz band shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm. A TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW.

9.3 Test procedure

According to KDB789033 D02v02r01 sectionE, the following is the measurement procedure.

(i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW $\geq$ 3 MHz.

(iv) Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This ensures that bin-to-bin spacing is $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = power averaging (rms), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle $< 98\%$, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run."


(viii) Trace average at least 100 traces in power averaging (rms) mode.


(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

9.4 Test Result

Test mode1	Test Channel (MHz)	Antenna	Output Power(dBm)	Output Power dBm Total	Limit dBm
802.11a	5745	ANT1	13.373	/	30
		ANT2	13.376		
		ANT3	13.047		
		ANT4	13.324		
	5785	ANT1	13.565	/	30
		ANT2	13.391		
		ANT3	12.591		
		ANT4	12.645		
	5825	ANT1	13.756	/	30
		ANT2	13.858		
		ANT3	13.207		
		ANT4	12.927		
802.11ac20	5745	ANT1	13.373	18.85	30
		ANT2	12.815		
		ANT3	12.608		
		ANT4	12.484		
	5785	ANT1	12.903	18.70	30
		ANT2	13.069		
		ANT3	12.332		
		ANT4	12.363		
	5825	ANT1	13.6	19.27	30
		ANT2	13.791		
		ANT3	12.989		
		ANT4	12.492		
802.11ac40	5755	ANT1	12.488	17.94	30
		ANT2	12.223		
		ANT3	11.262		
		ANT4	11.588		
	5795	ANT1	12.571	17.88	30
		ANT2	12.018		
		ANT3	11.393		
		ANT4	11.34		
802.11ac80	5775	ANT1	11.523	16.99	30
		ANT2	11.547		
		ANT3	10.476		
		ANT4	10.153		
802.11n(HT20)	5745	ANT1	13.061	19.16	30
		ANT2	13.277		
		ANT3	13.198		
		ANT4	13.023		
	5785	ANT1	12.565	18.77	30
		ANT2	13.136		
		ANT3	12.712		
		ANT4	12.565		
	5825	ANT1	13.727	19.45	30
		ANT2	13.614		
		ANT3	13.245		
		ANT4	13.107		
802.11n(HT40)	5755	ANT1	12.146	17.78	30
		ANT2	11.842		
		ANT3	11.153		
		ANT4	11.843		
	5795	ANT1	12.326	17.81	30
		ANT2	12.005		
		ANT3	11.288		
		ANT4	11.453		


ANT 1

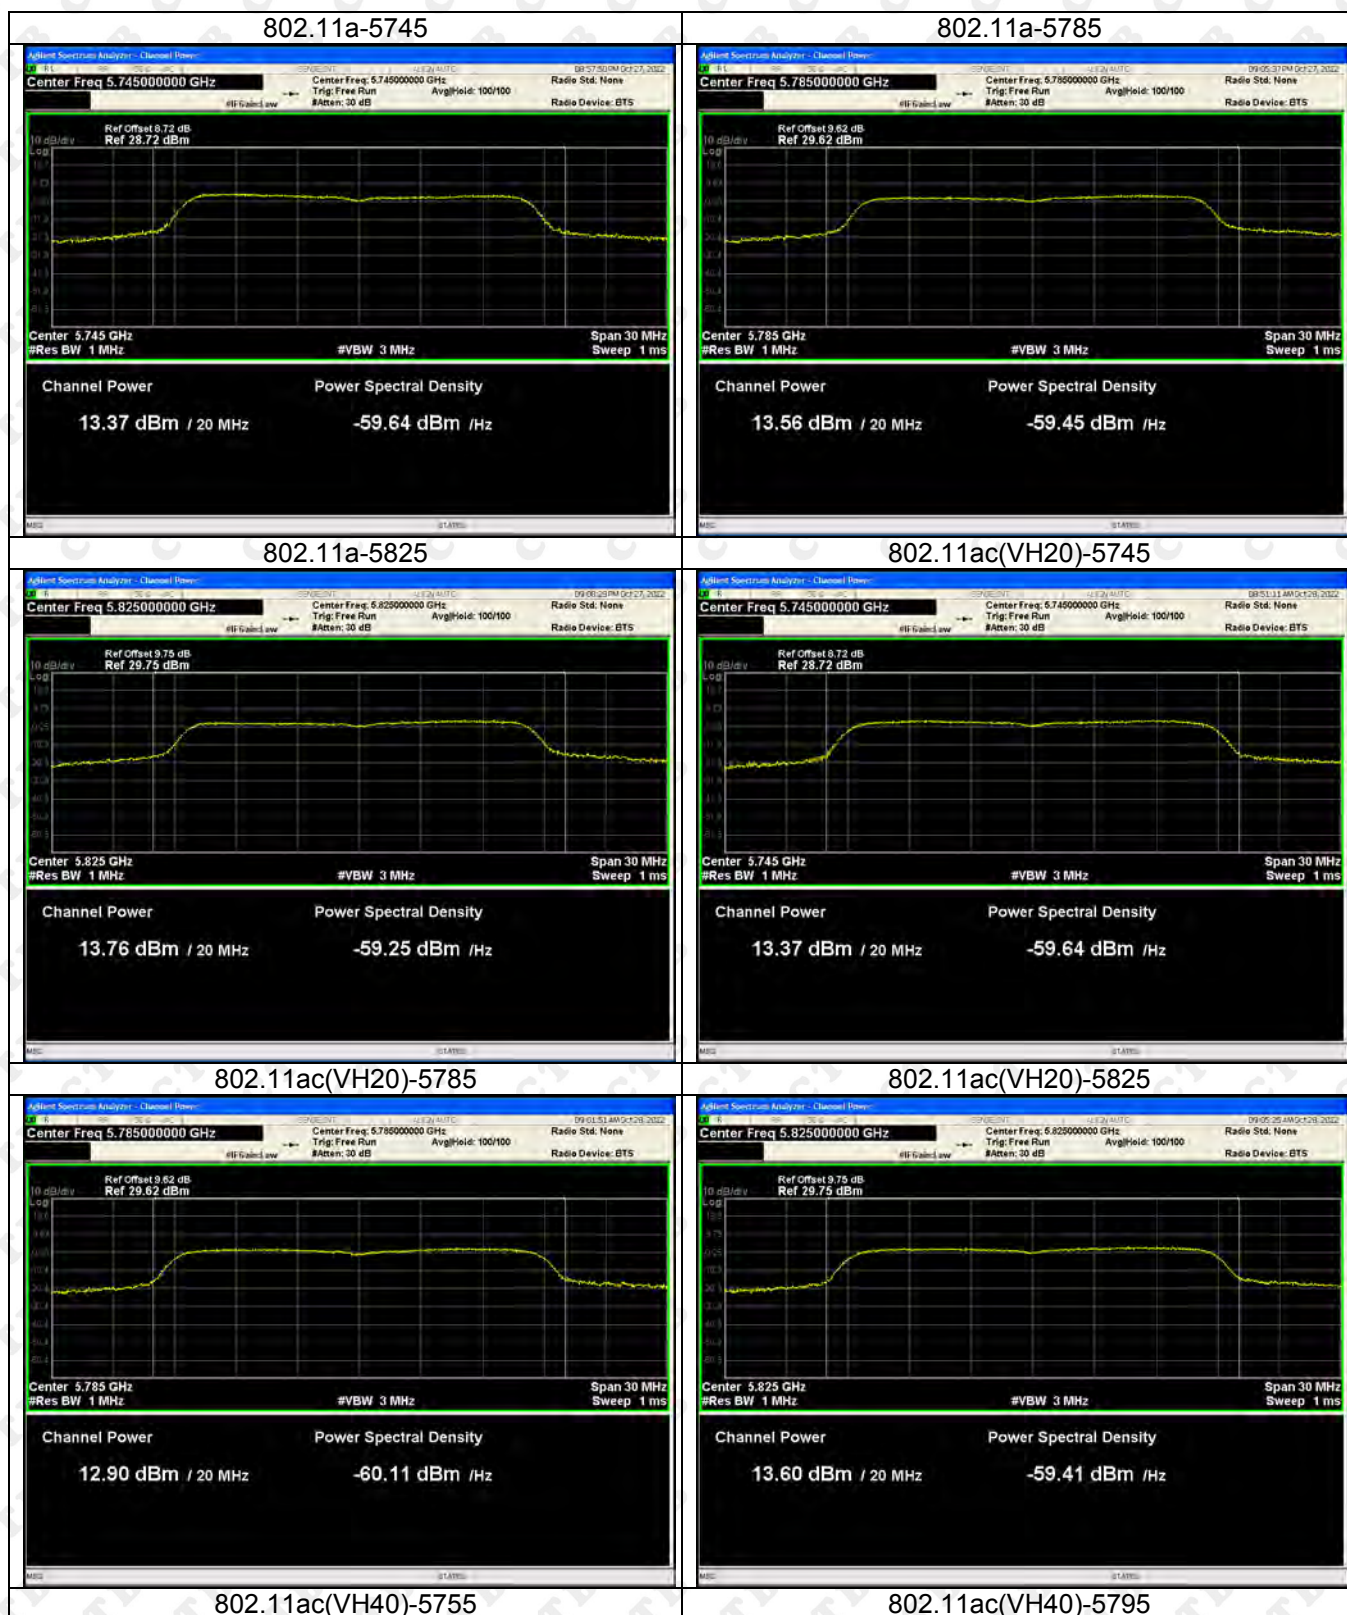


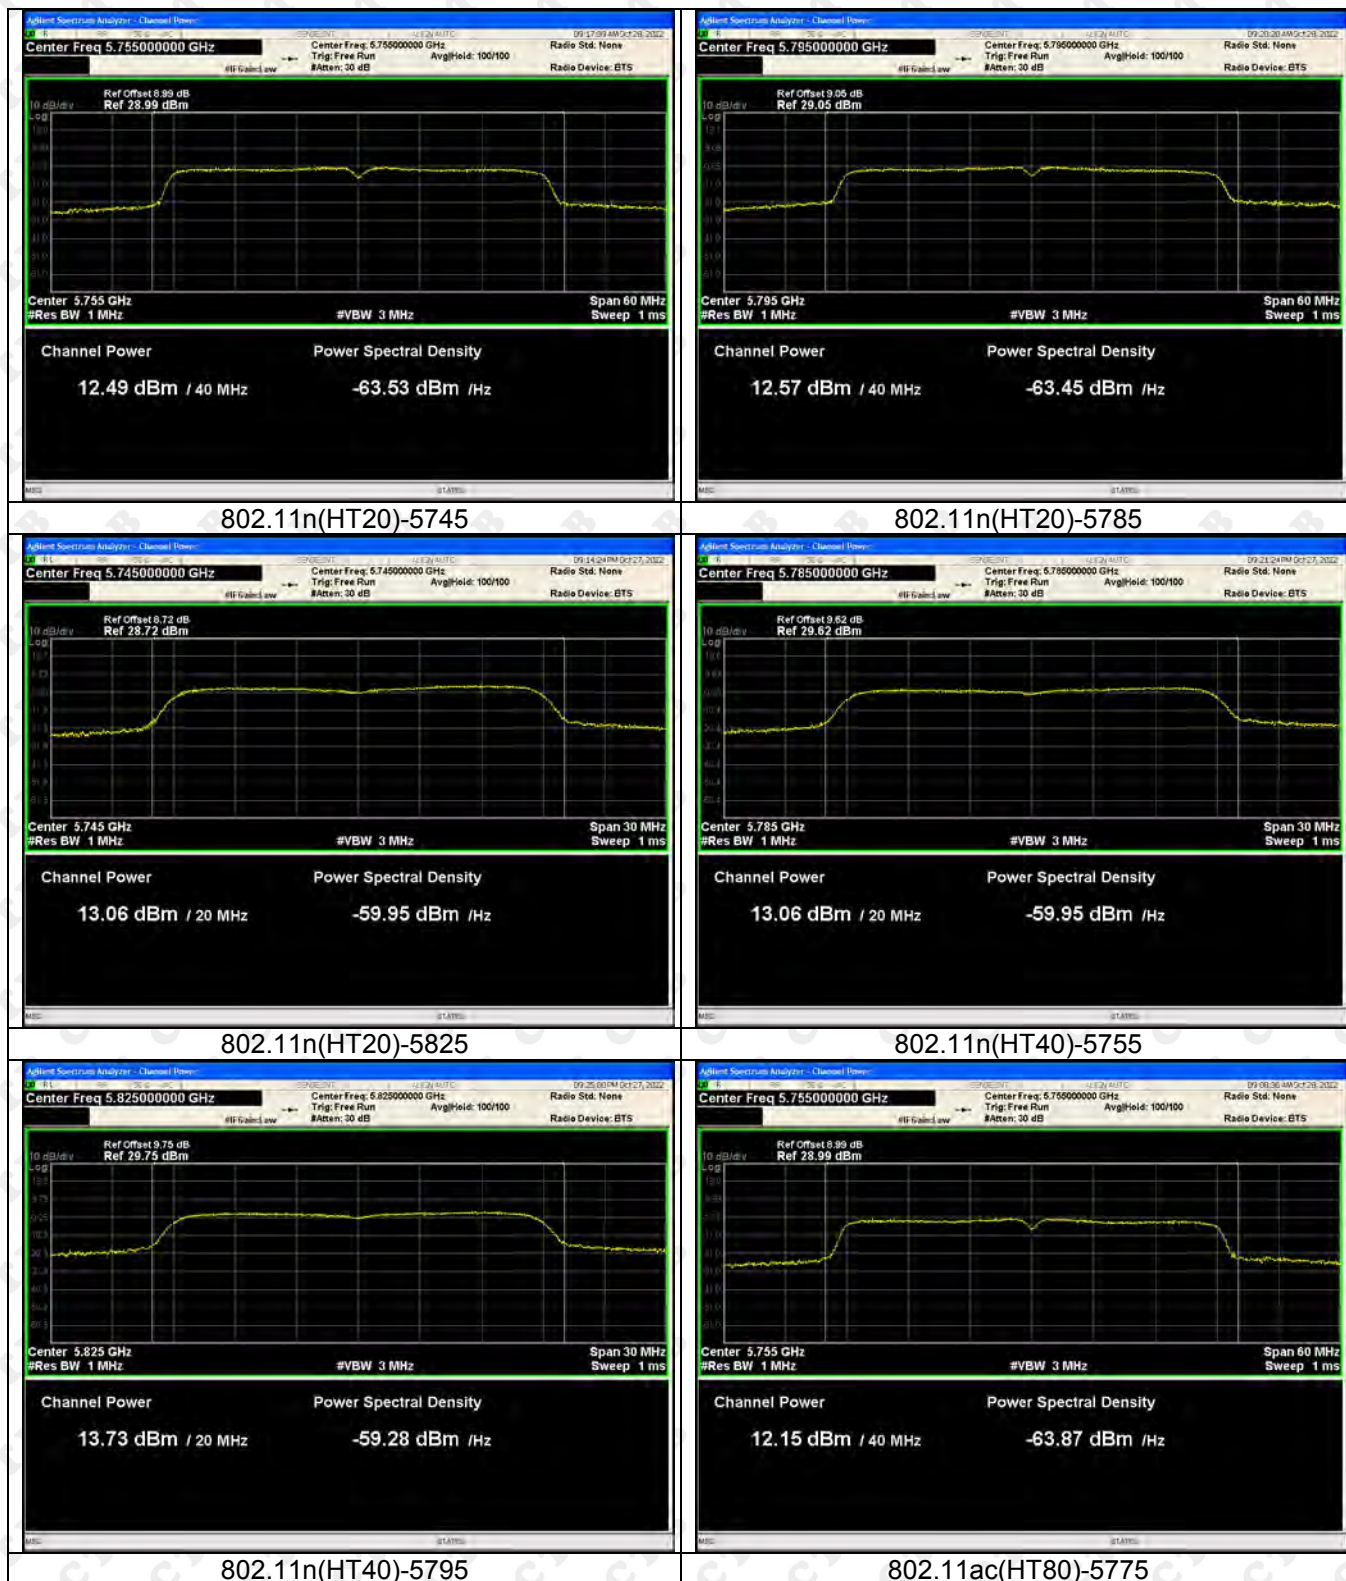




ANT 2

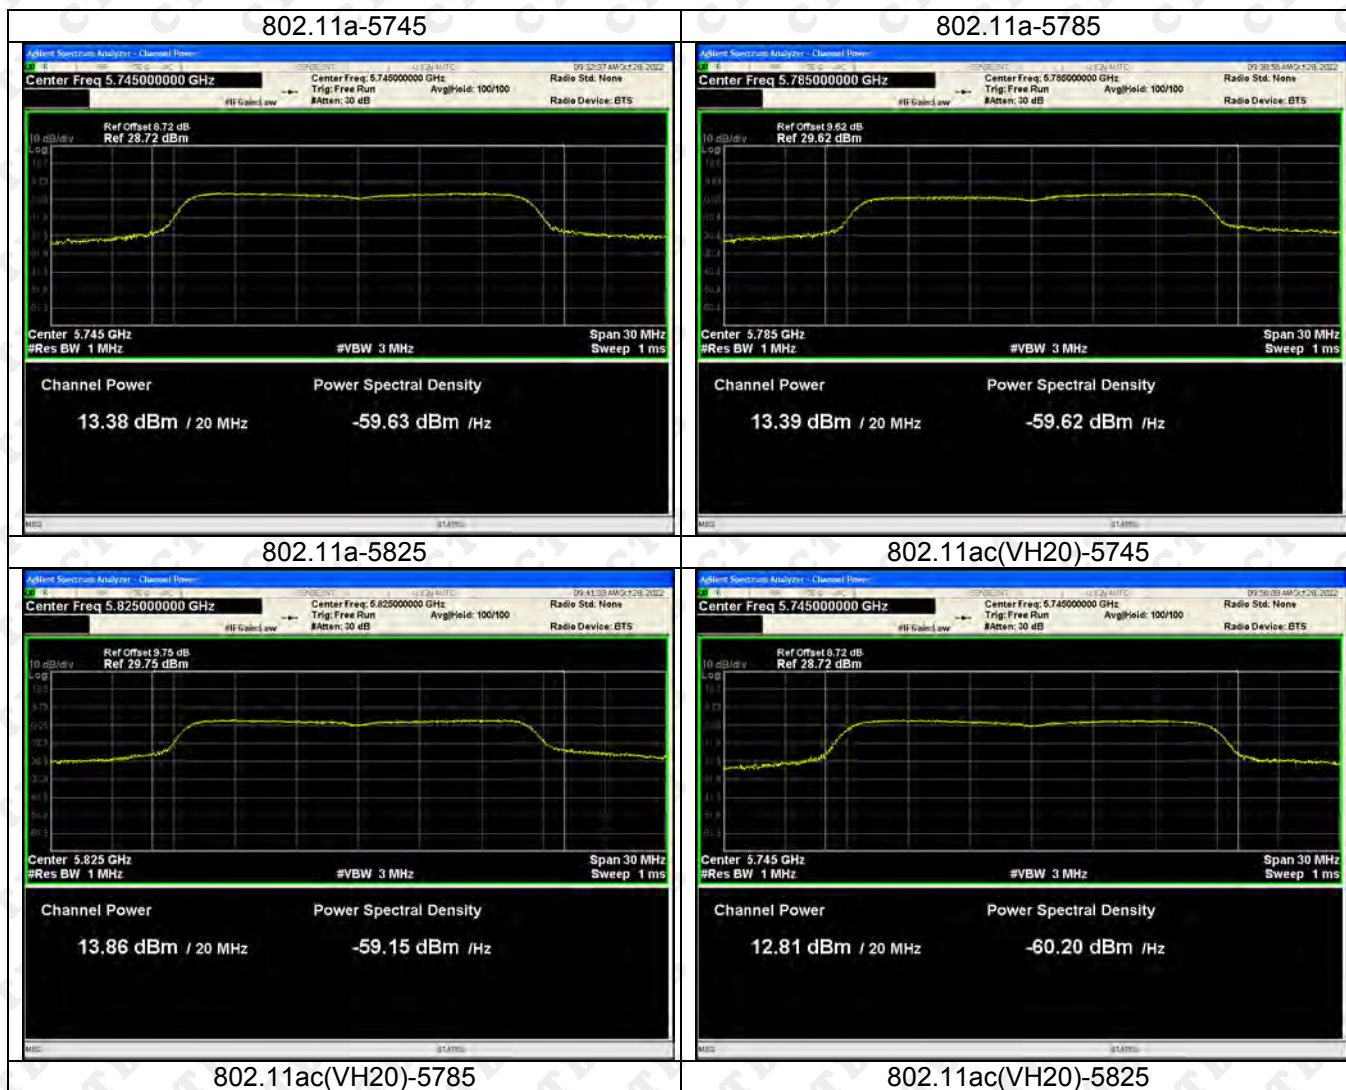


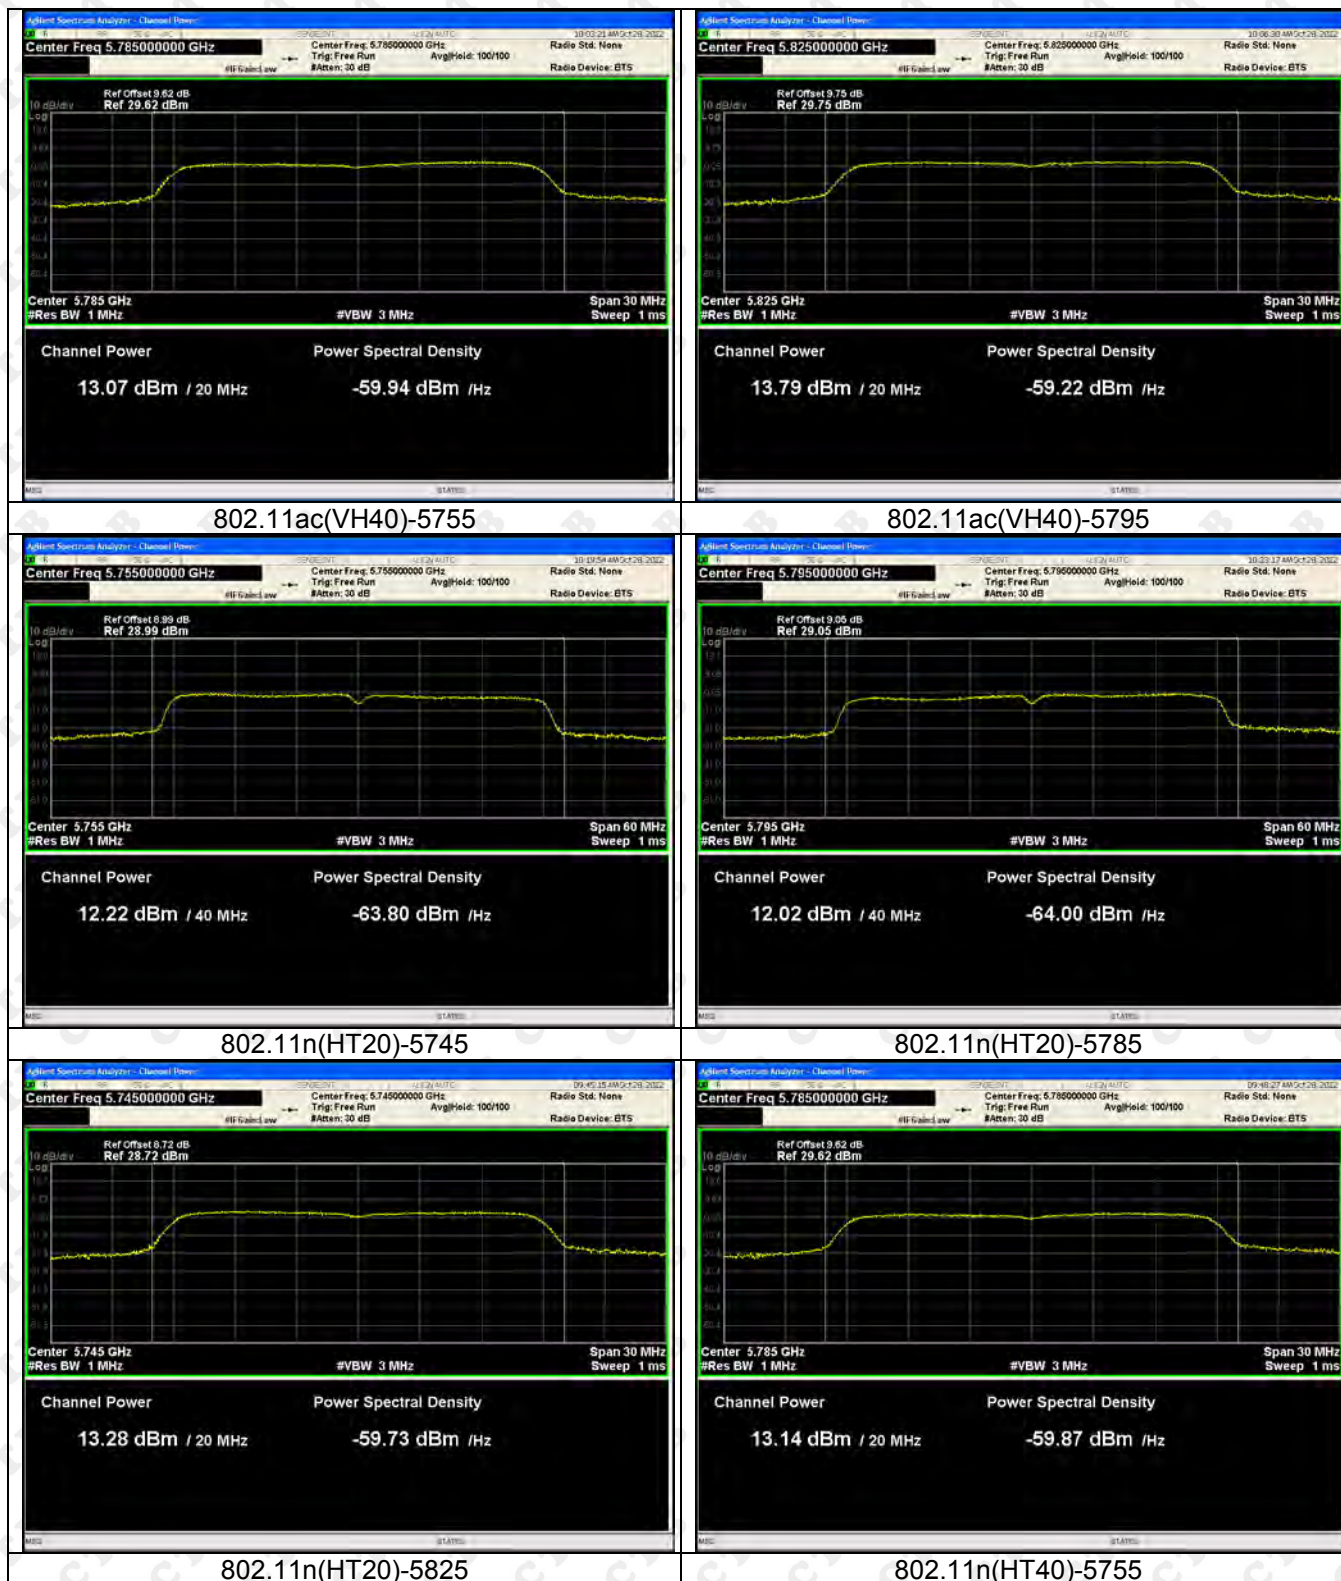





ANT 3

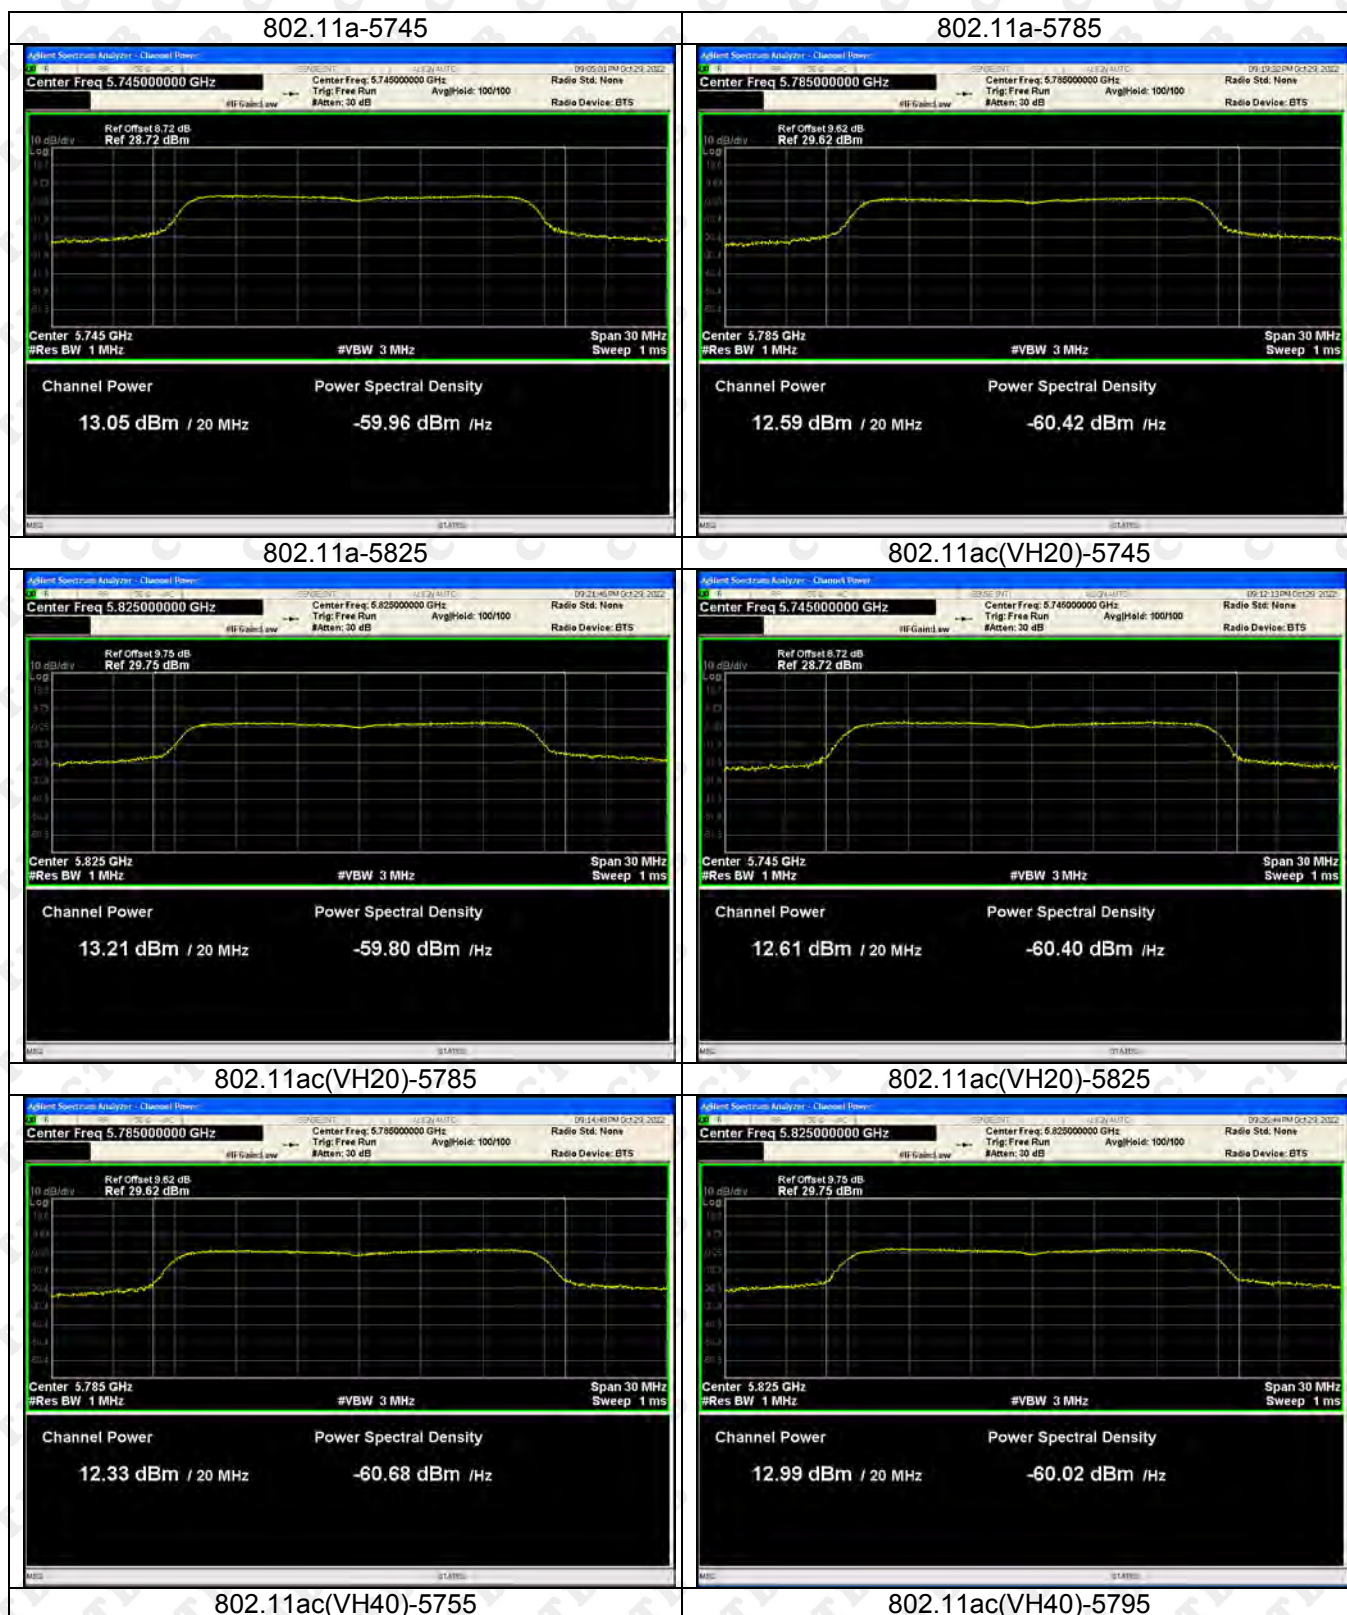


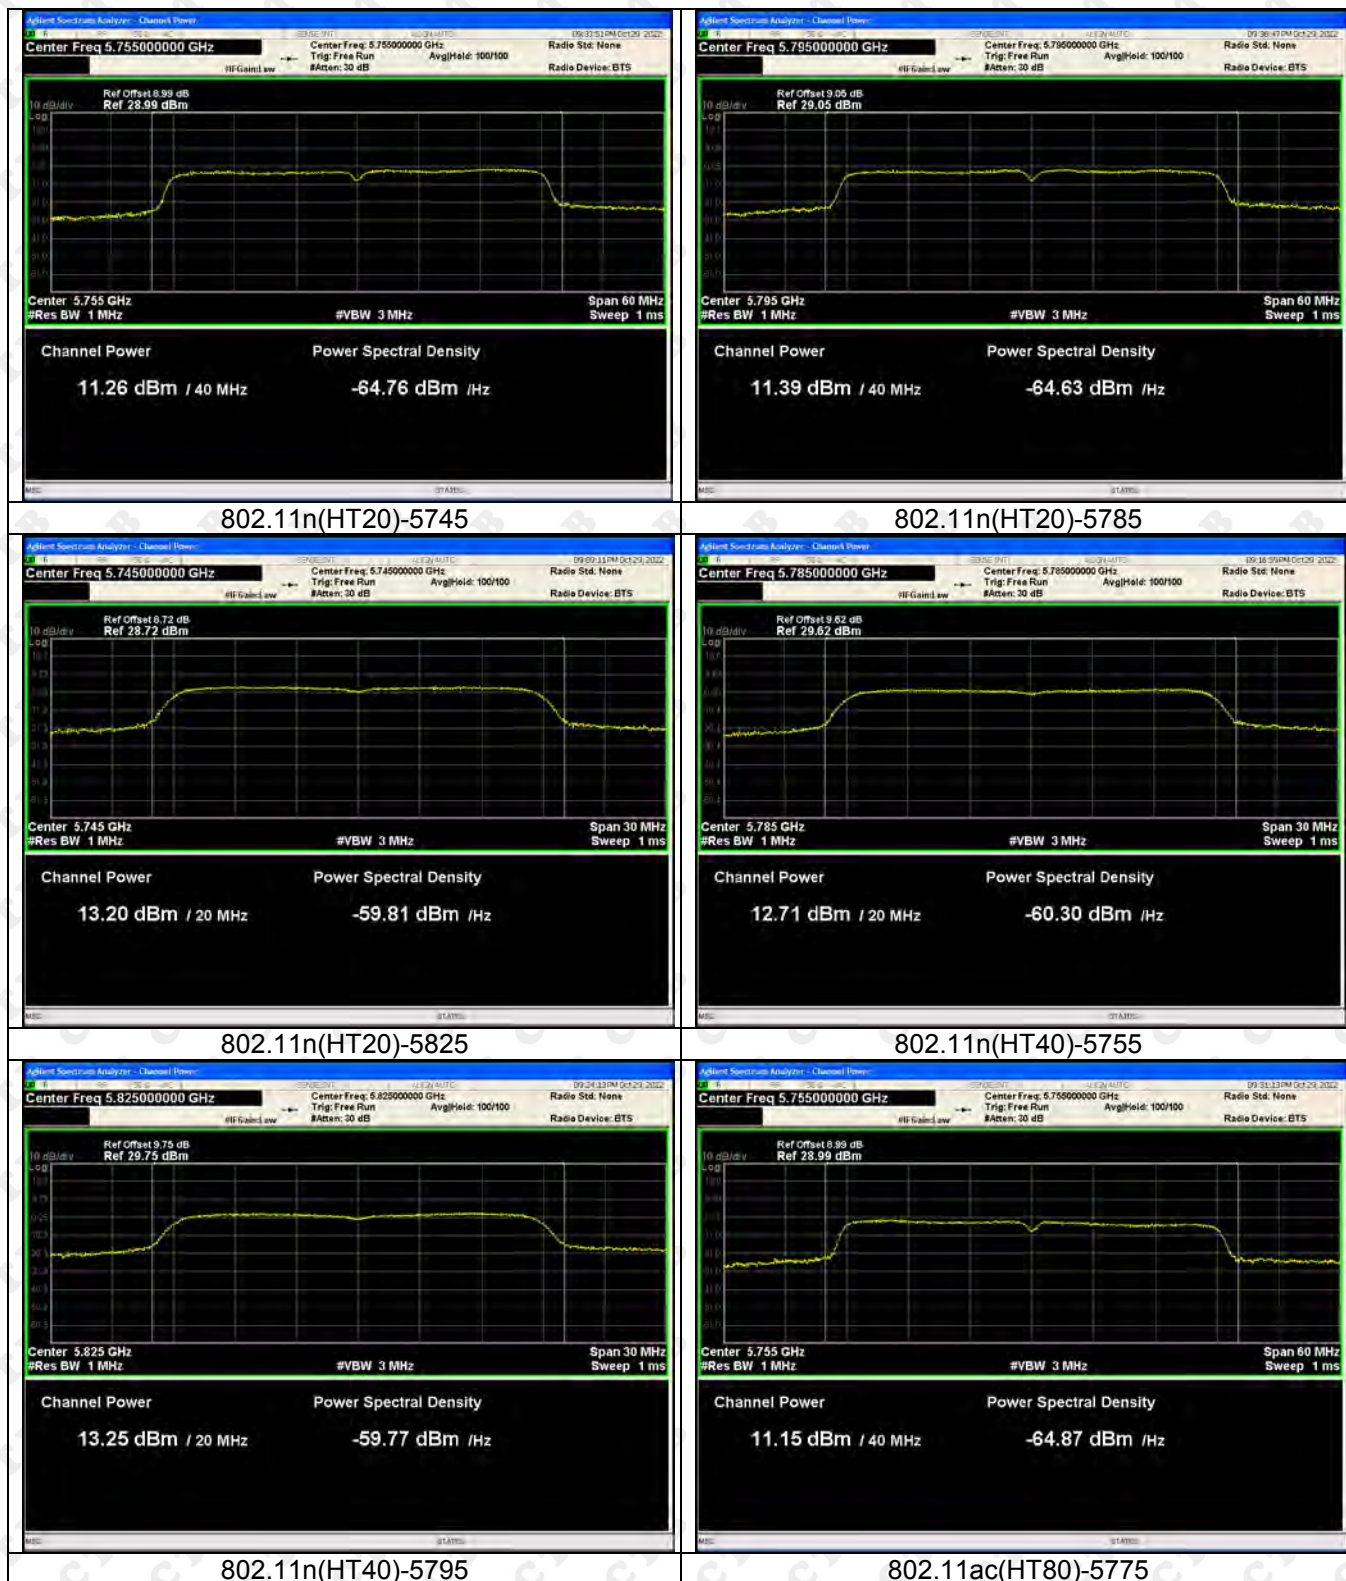


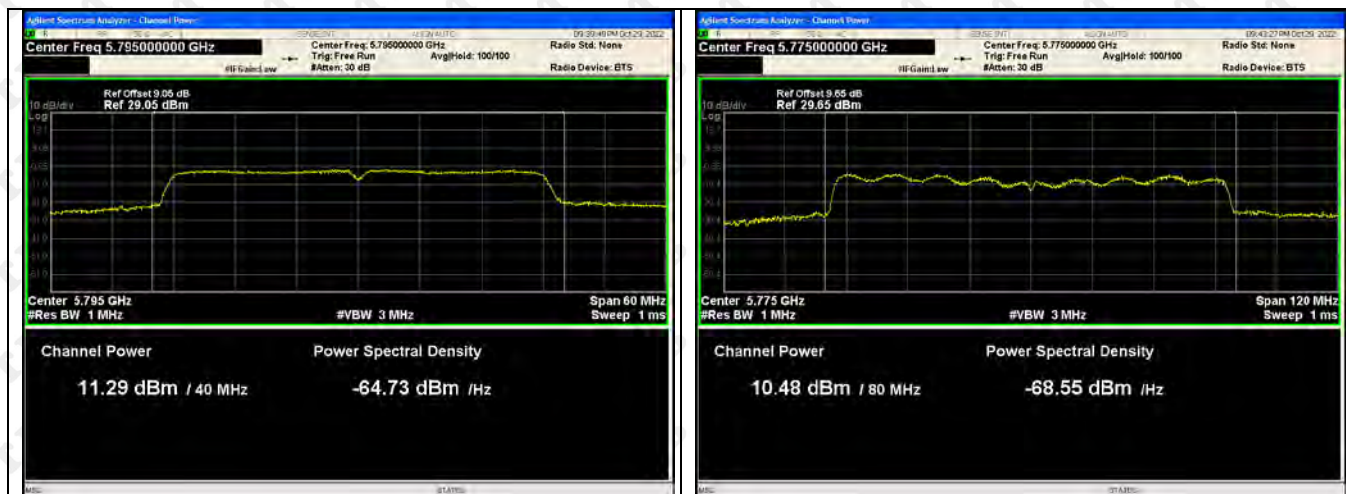

ANT 4

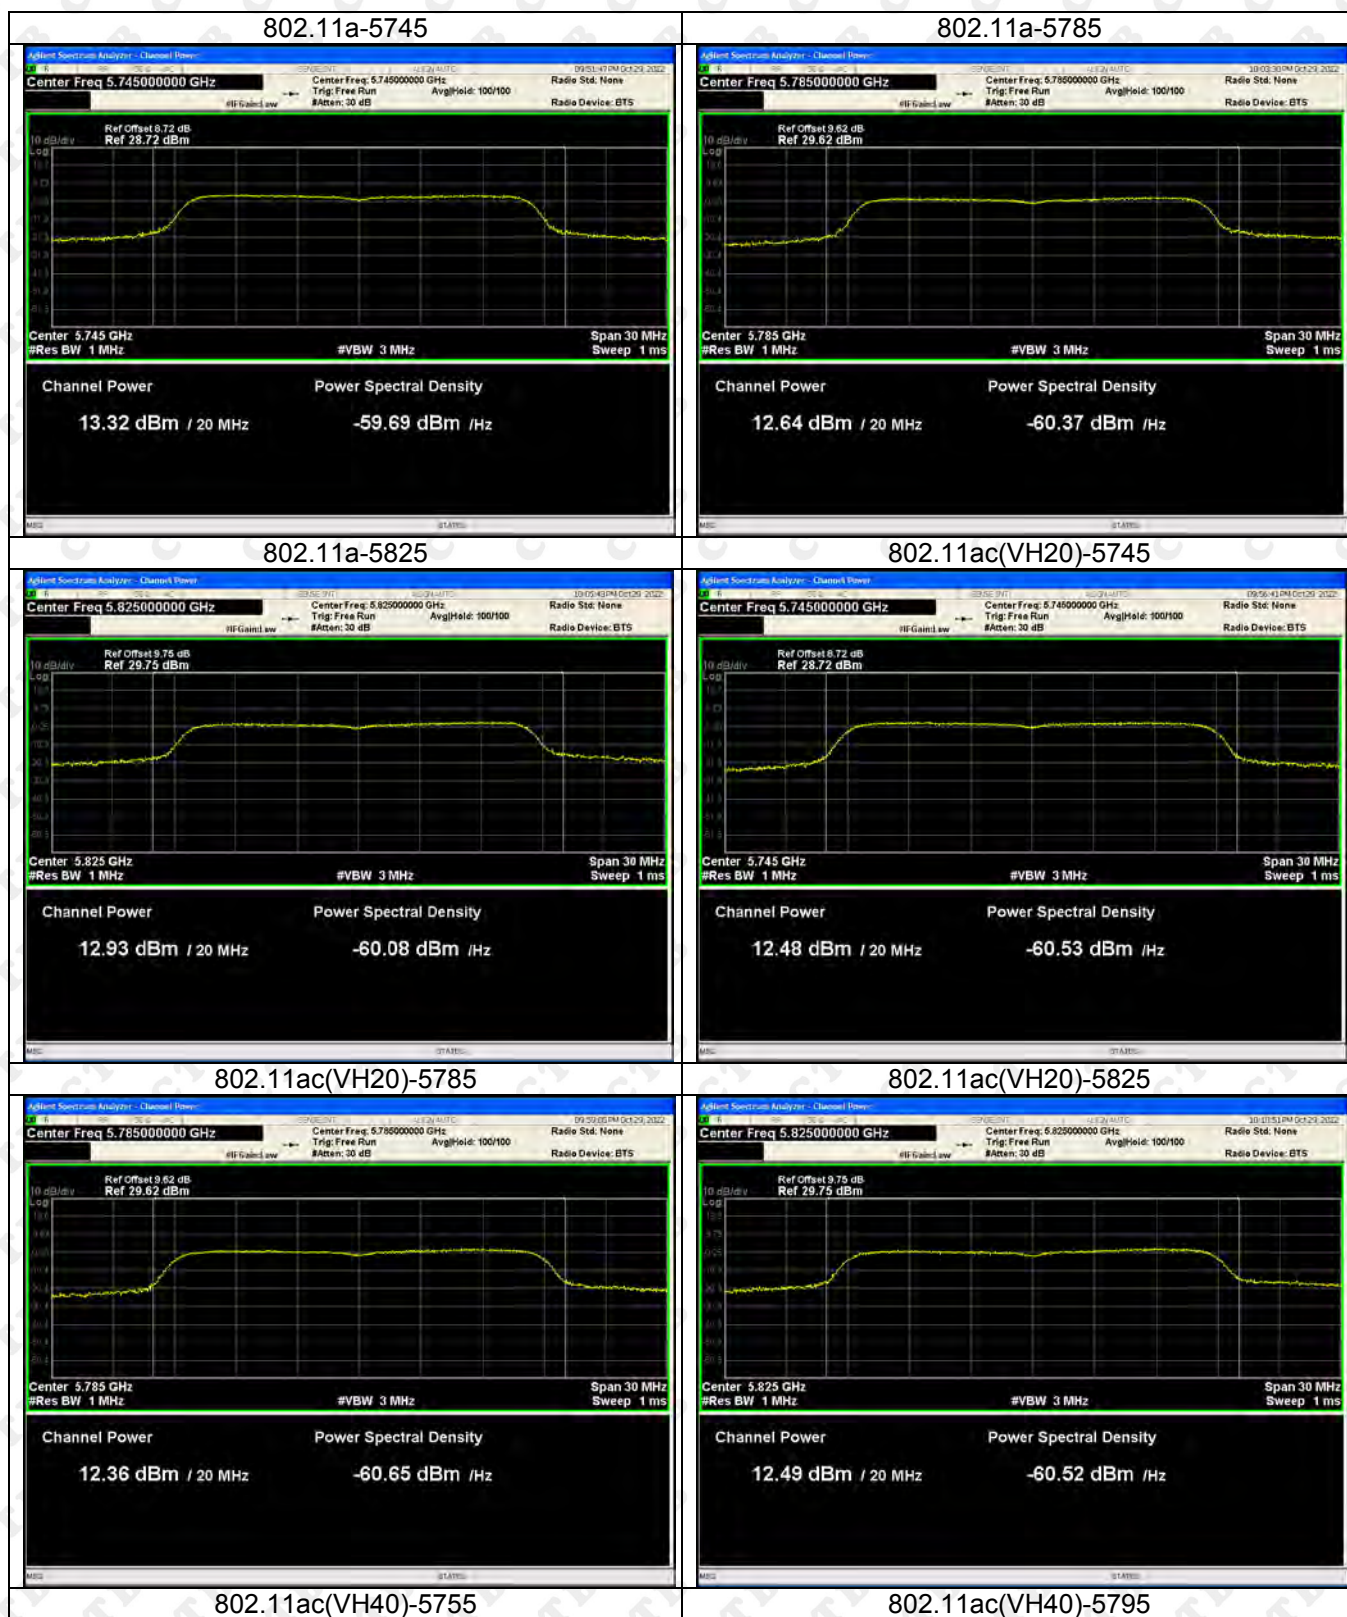


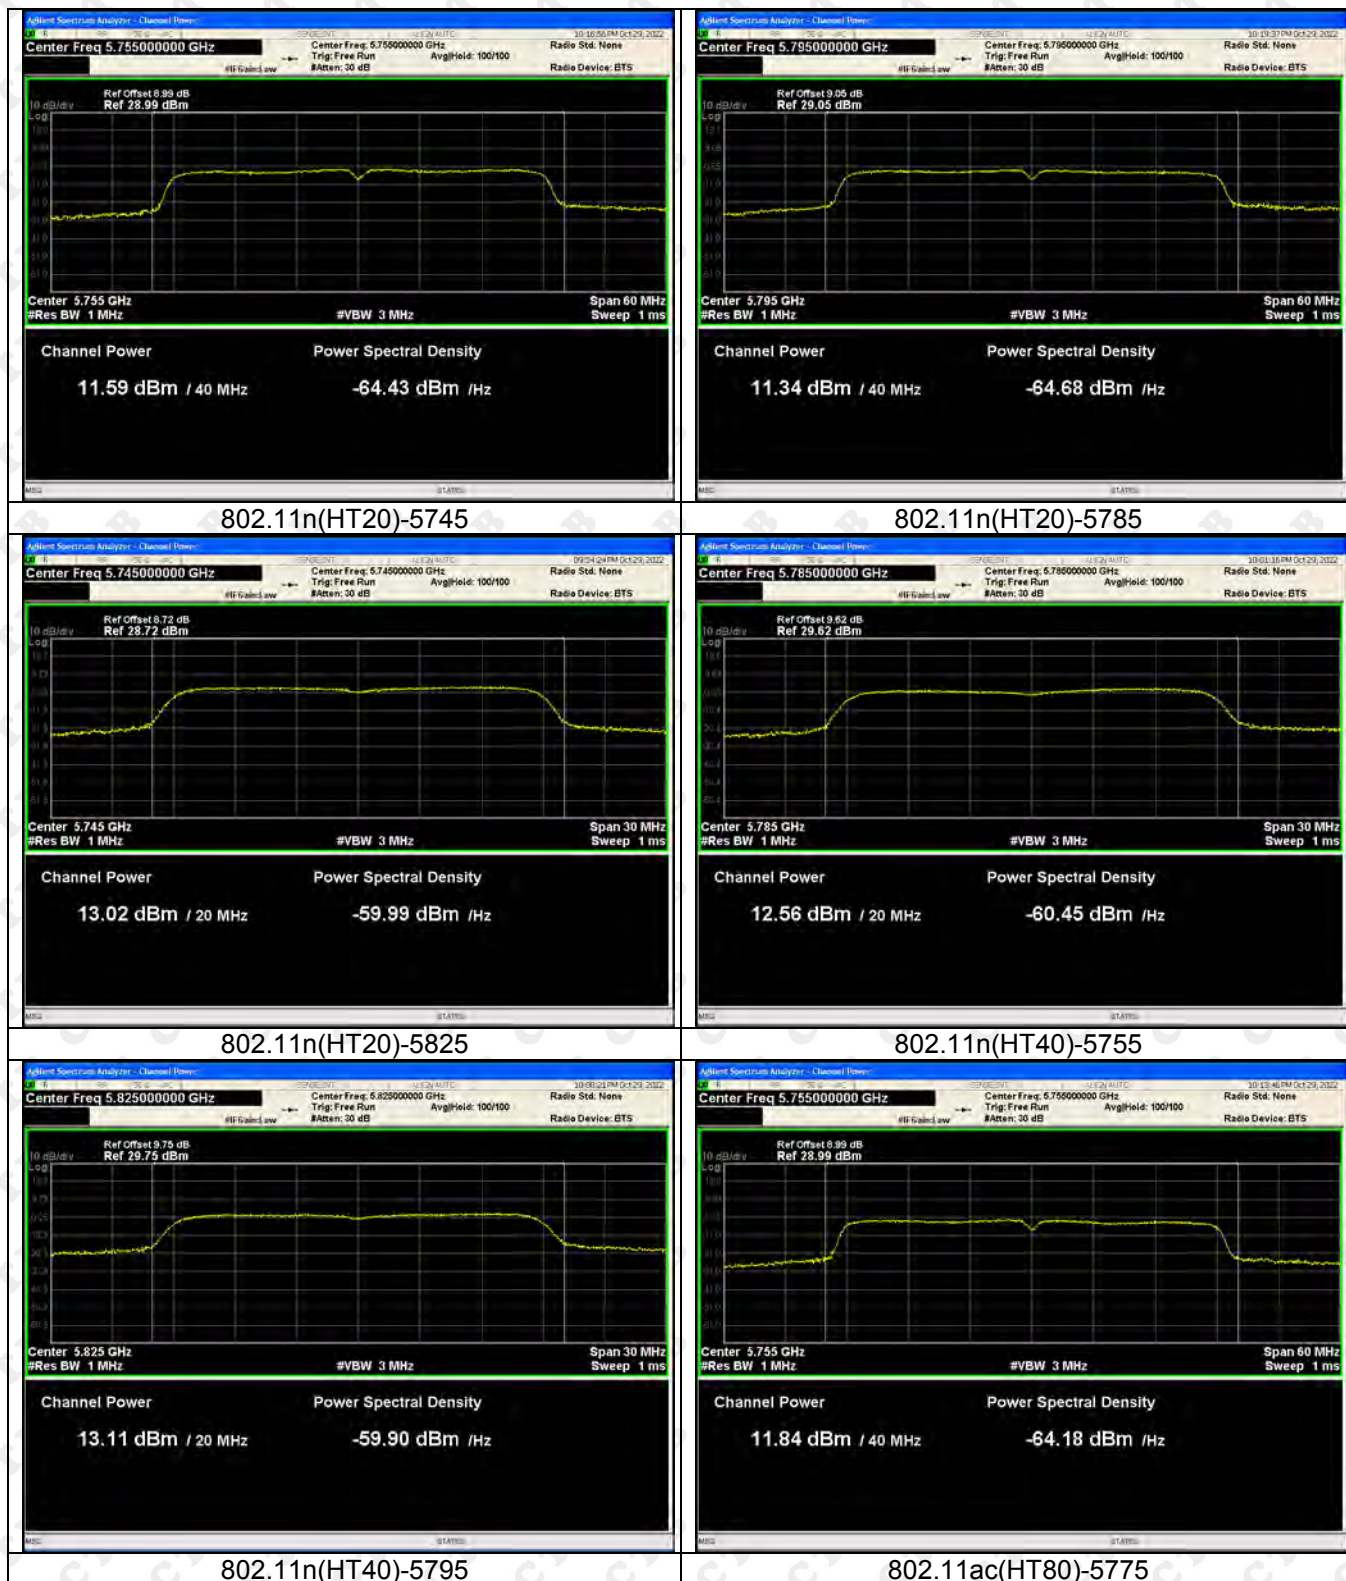

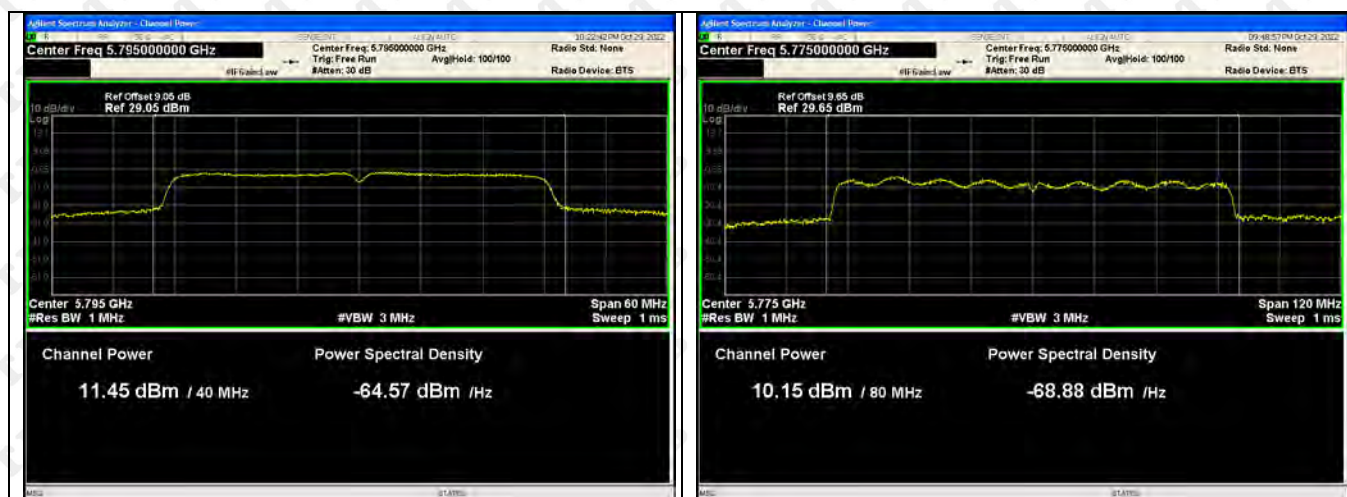

10. EMISSION BANDWIDTH& OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

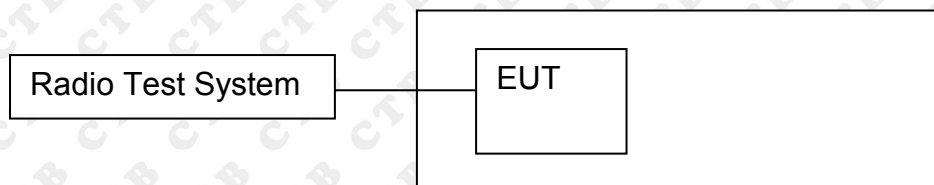

10.2 Limits

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

10.3 Test Procedure

According to KDB789033 D02v02r01 sectionE, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725–5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 kHz for the band 5.725–5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 * \text{RBW}$.
- Detector = Peak.
- Trace mode = max hold.

e) Sweep = auto couple.

f) Allow the trace to stabilize.

g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described in this section. For devices that use channel aggregation refer to III.A and III.C for determining emission bandwidth.

D. 99% Occupied Bandwidth

The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

Measurement of the 99% occupied bandwidth is *required* only as a condition for using the optional band-edge measurement techniques described in II.G.3.d). Measurements of 99% occupied bandwidth may also optionally be used in lieu of the EBW to define the minimum frequency range over which the 789033 D02 General UNII Test Procedures New Rules v02r01 Page 4 spectrum is integrated when measuring maximum conducted output power as described in II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with Section 15.407(a).

The following procedure shall be used for measuring (99%) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1% to 5% of the OBW
4. Set VBW $\geq 3 * \text{RBW}$
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99% power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99% power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

10.4 Test Results

5725-5850 MHz

ANT 1

Test mode Ant 1	Test Channel (MHz)	6dB Bandwidth (MHz)	Result
802.11a	5745	16.339	Pass
	5785	15.688	Pass
	5825	16.303	Pass
802.11ac(VH20)	5745	16.956	Pass
	5785	16.068	Pass
	5825	16.819	Pass
802.11ac(VH40)	5755	35.455	Pass
	5795	34.103	Pass
802.11ac(VH80)	5775	74.587	Pass
802.11n(VH20)	5745	16.794	Pass
	5785	17.192	Pass
	5825	16.67	Pass
802.11n(VH40)	5755	34.184	Pass
	5795	35.217	Pass

ANT 2

Test mode Ant 2	Test Channel (MHz)	6dB Bandwidth (MHz)	Result
802.11a	5745	16.337	Pass
	5785	16.388	Pass
	5825	16.348	Pass
802.11ac(VH20)	5745	16.911	Pass
	5785	17.192	Pass
	5825	16.658	Pass
802.11ac(VH40)	5755	35.092	Pass
	5795	35.336	Pass
802.11ac(VH80)	5775	74.912	Pass
802.11n(VH20)	5745	16.781	Pass
	5785	16.108	Pass
	5825	17.341	Pass
802.11n(VH40)	5755	35.513	Pass
	5795	34.263	Pass

ANT 3

Test mode Ant 2	Test Channel (MHz)	6dB Bandwidth (MHz)	Result
802.11a	5745	16.146	Pass
	5785	16.376	Pass
	5825	16.154	Pass
802.11ac(VH20)	5745	16.557	Pass
	5785	16.694	Pass
	5825	17.17	Pass
802.11ac(VH40)	5755	35.529	Pass
	5795	35.116	Pass
802.11ac(VH80)	5775	73.578	Pass
802.11n(VH20)	5745	16.714	Pass
	5785	17.074	Pass
	5825	16.189	Pass
802.11n(VH40)	5755	35.138	Pass
	5795	34.497	Pass







ANT 4


Test mode Ant 2	Test Channel (MHz)	6dB Bandwidth (MHz)	Result
802.11a	5745	16.395	Pass
	5785	16.312	Pass
	5825	16.304	Pass
802.11ac(VH20)	5745	16.556	Pass
	5785	17.547	Pass
	5825	16.829	Pass
802.11ac(VH40)	5755	33.947	Pass
	5795	35.495	Pass
802.11ac(VH80)	5775	75.203	Pass
802.11n(VH20)	5745	16.543	Pass
	5785	17.307	Pass
	5825	16.737	Pass
802.11n(VH40)	5755	35.518	Pass
	5795	35.059	Pass

Test Graph ANT 1

5725-5850MHz



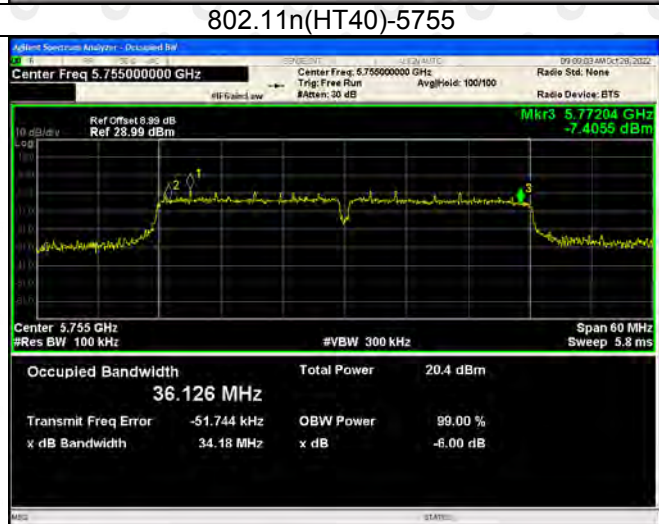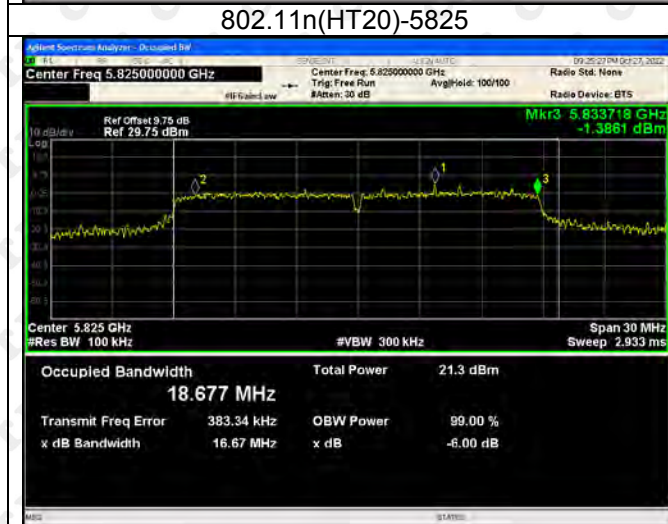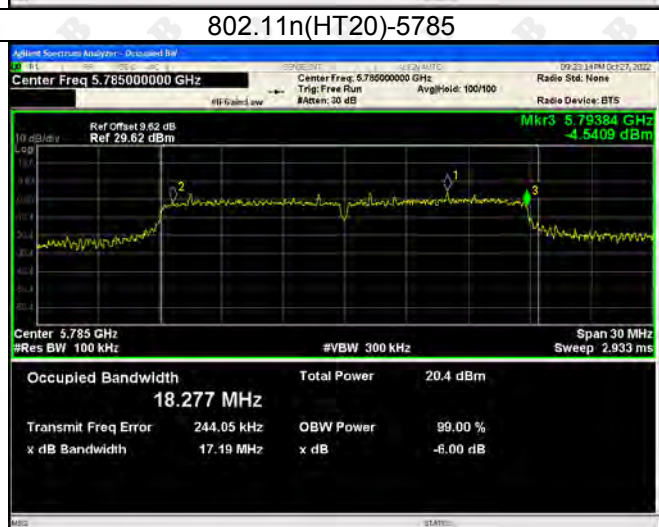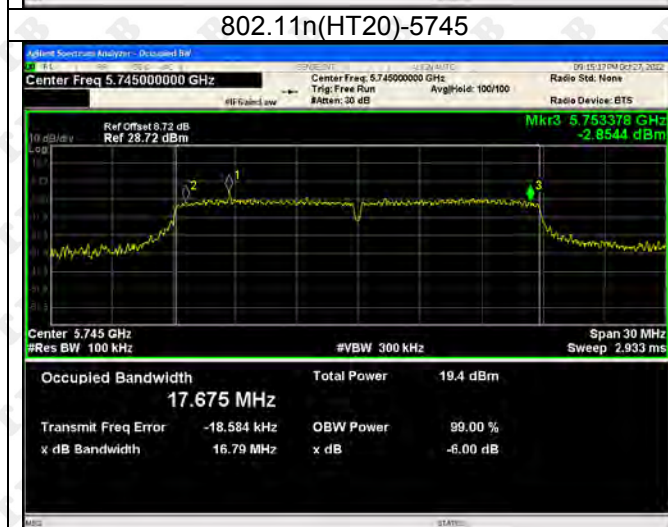

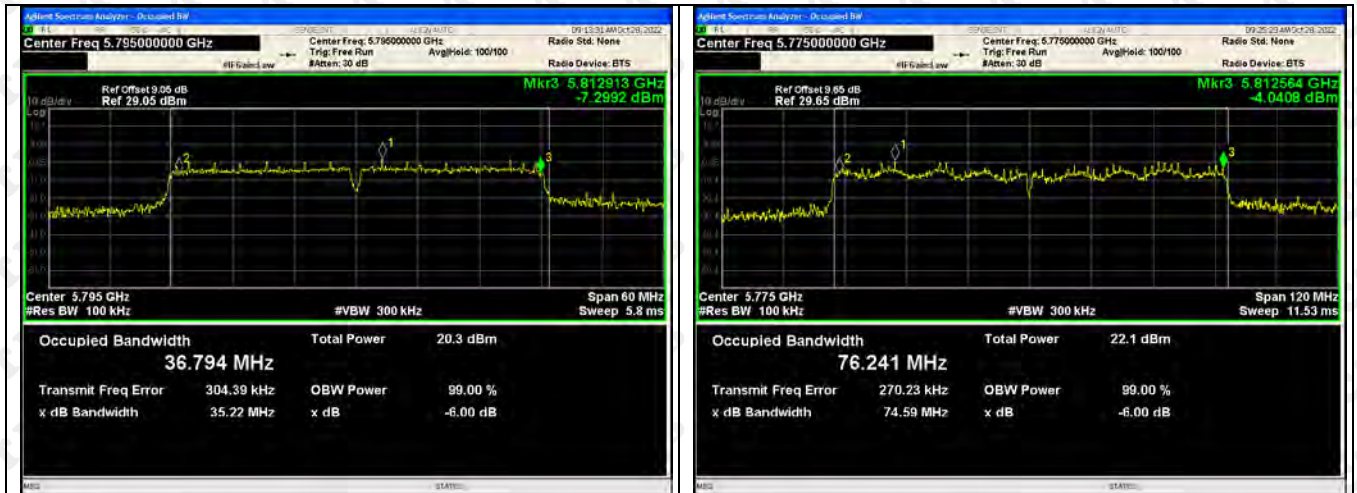

Test Graph ANT 2

5725-5850MHz





802.11n(HT20)-5745




802.11n(HT20)-5785



802.11n(HT20)-5745




802.11n(HT20)-5785

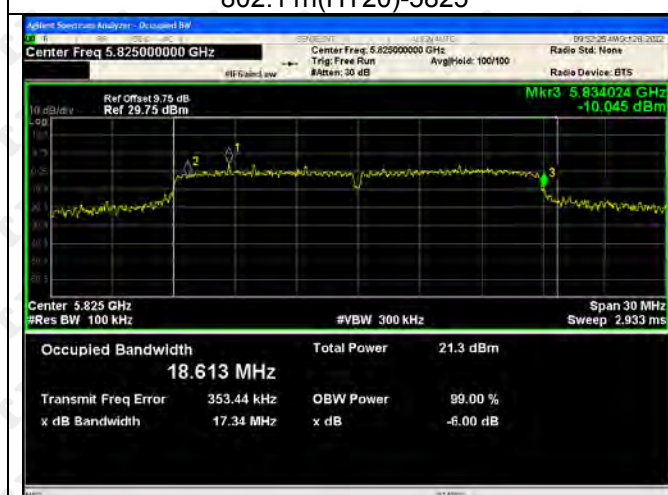

802.11n(HT40)-5795










802.11ac(HT80)-5775

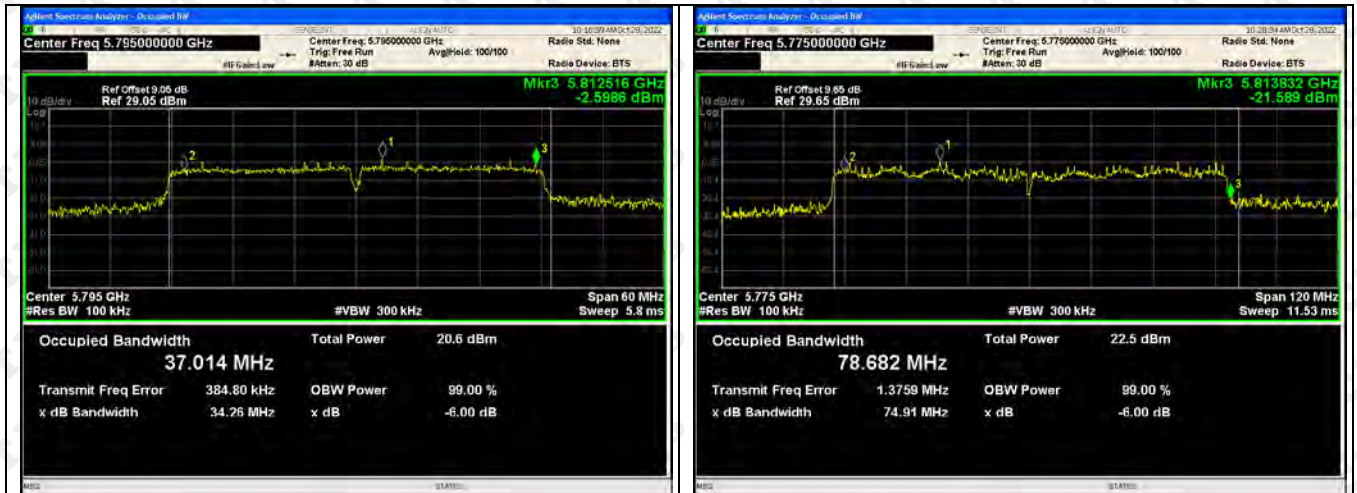

Test Graph ANT 3

5725-5850MHz

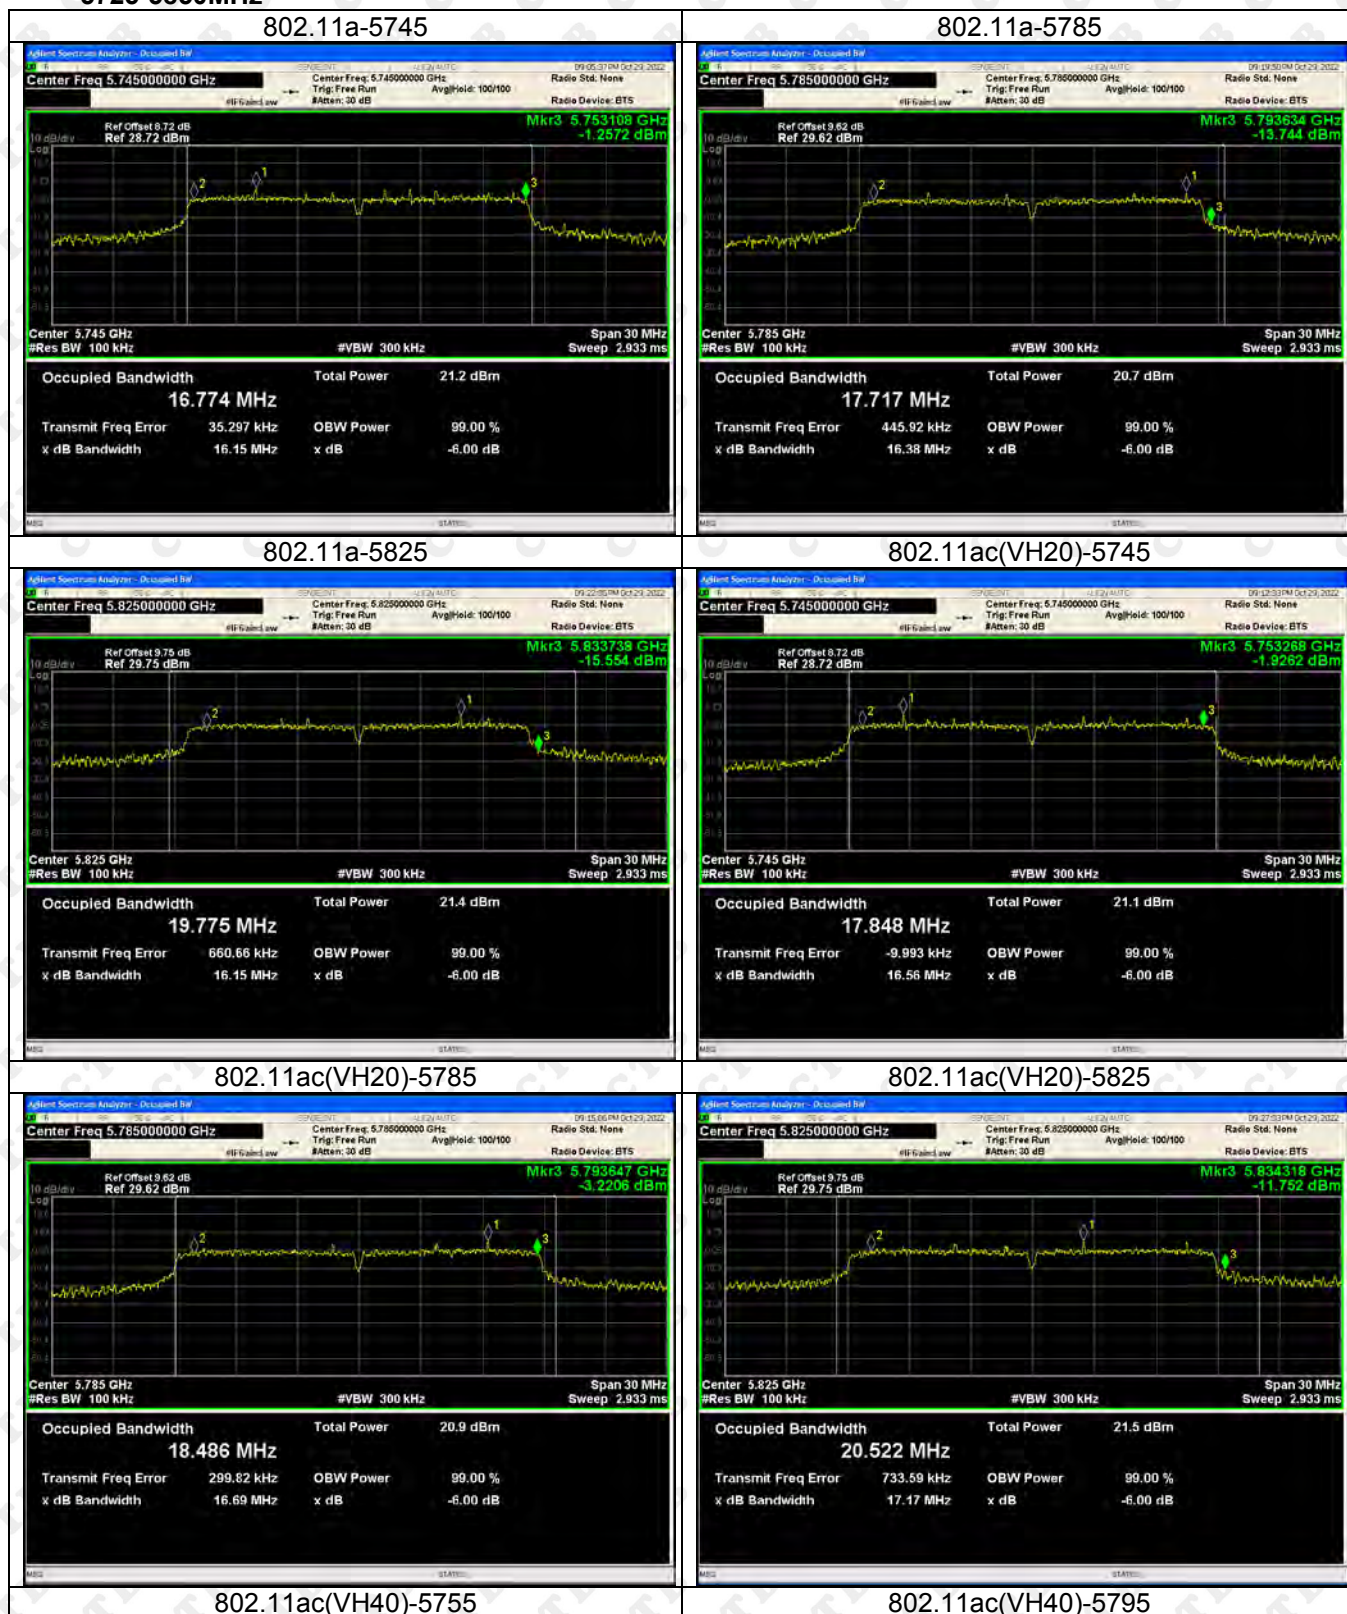



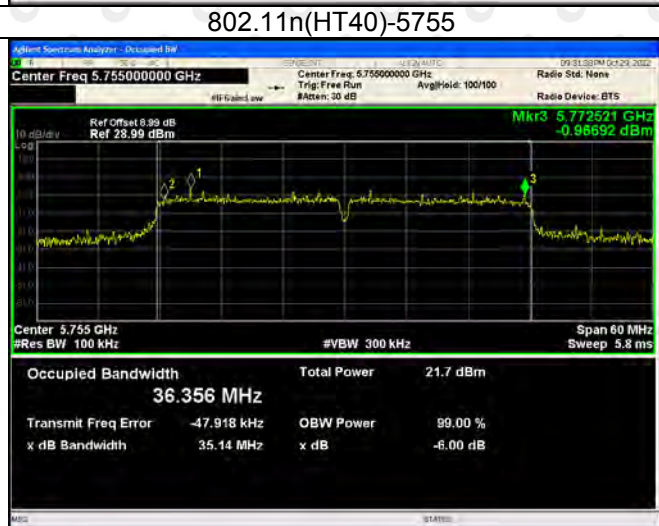
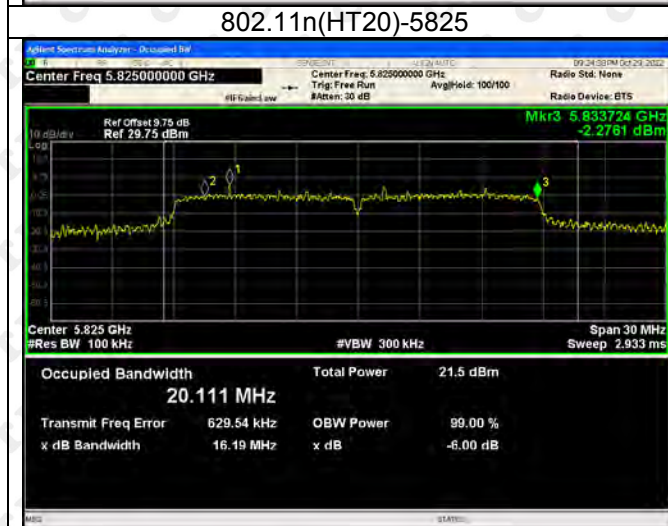
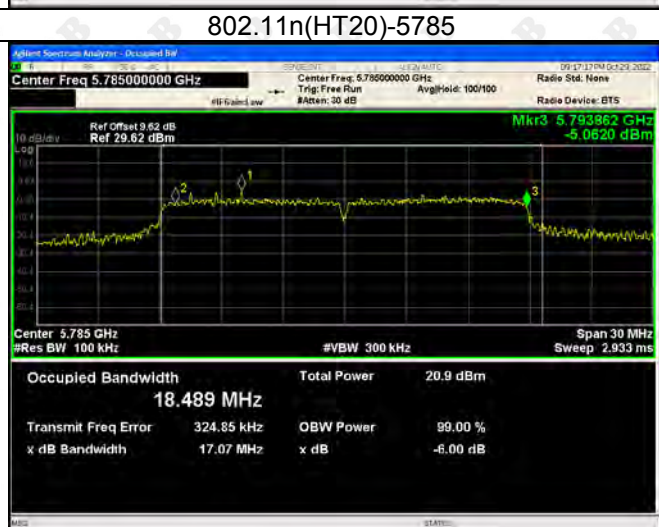
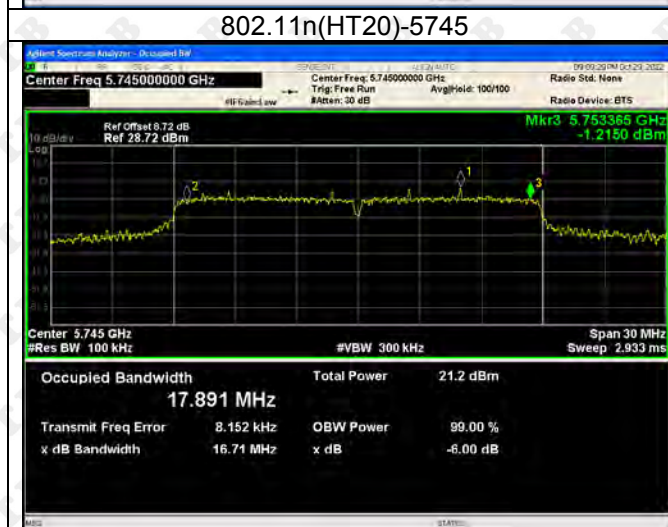
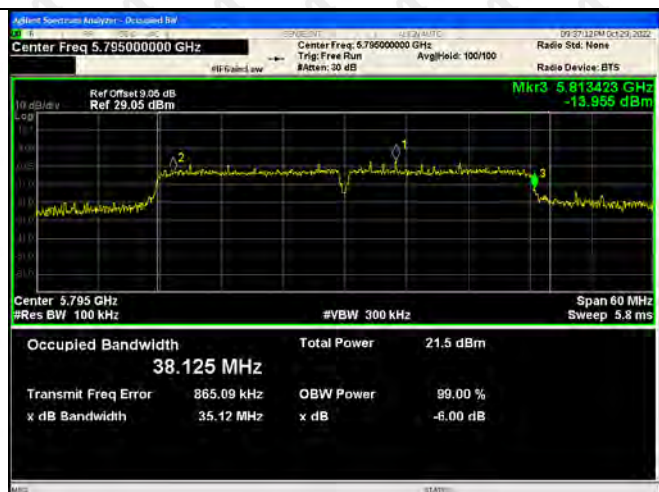




Test Graph ANT 4

5725-5850MHz

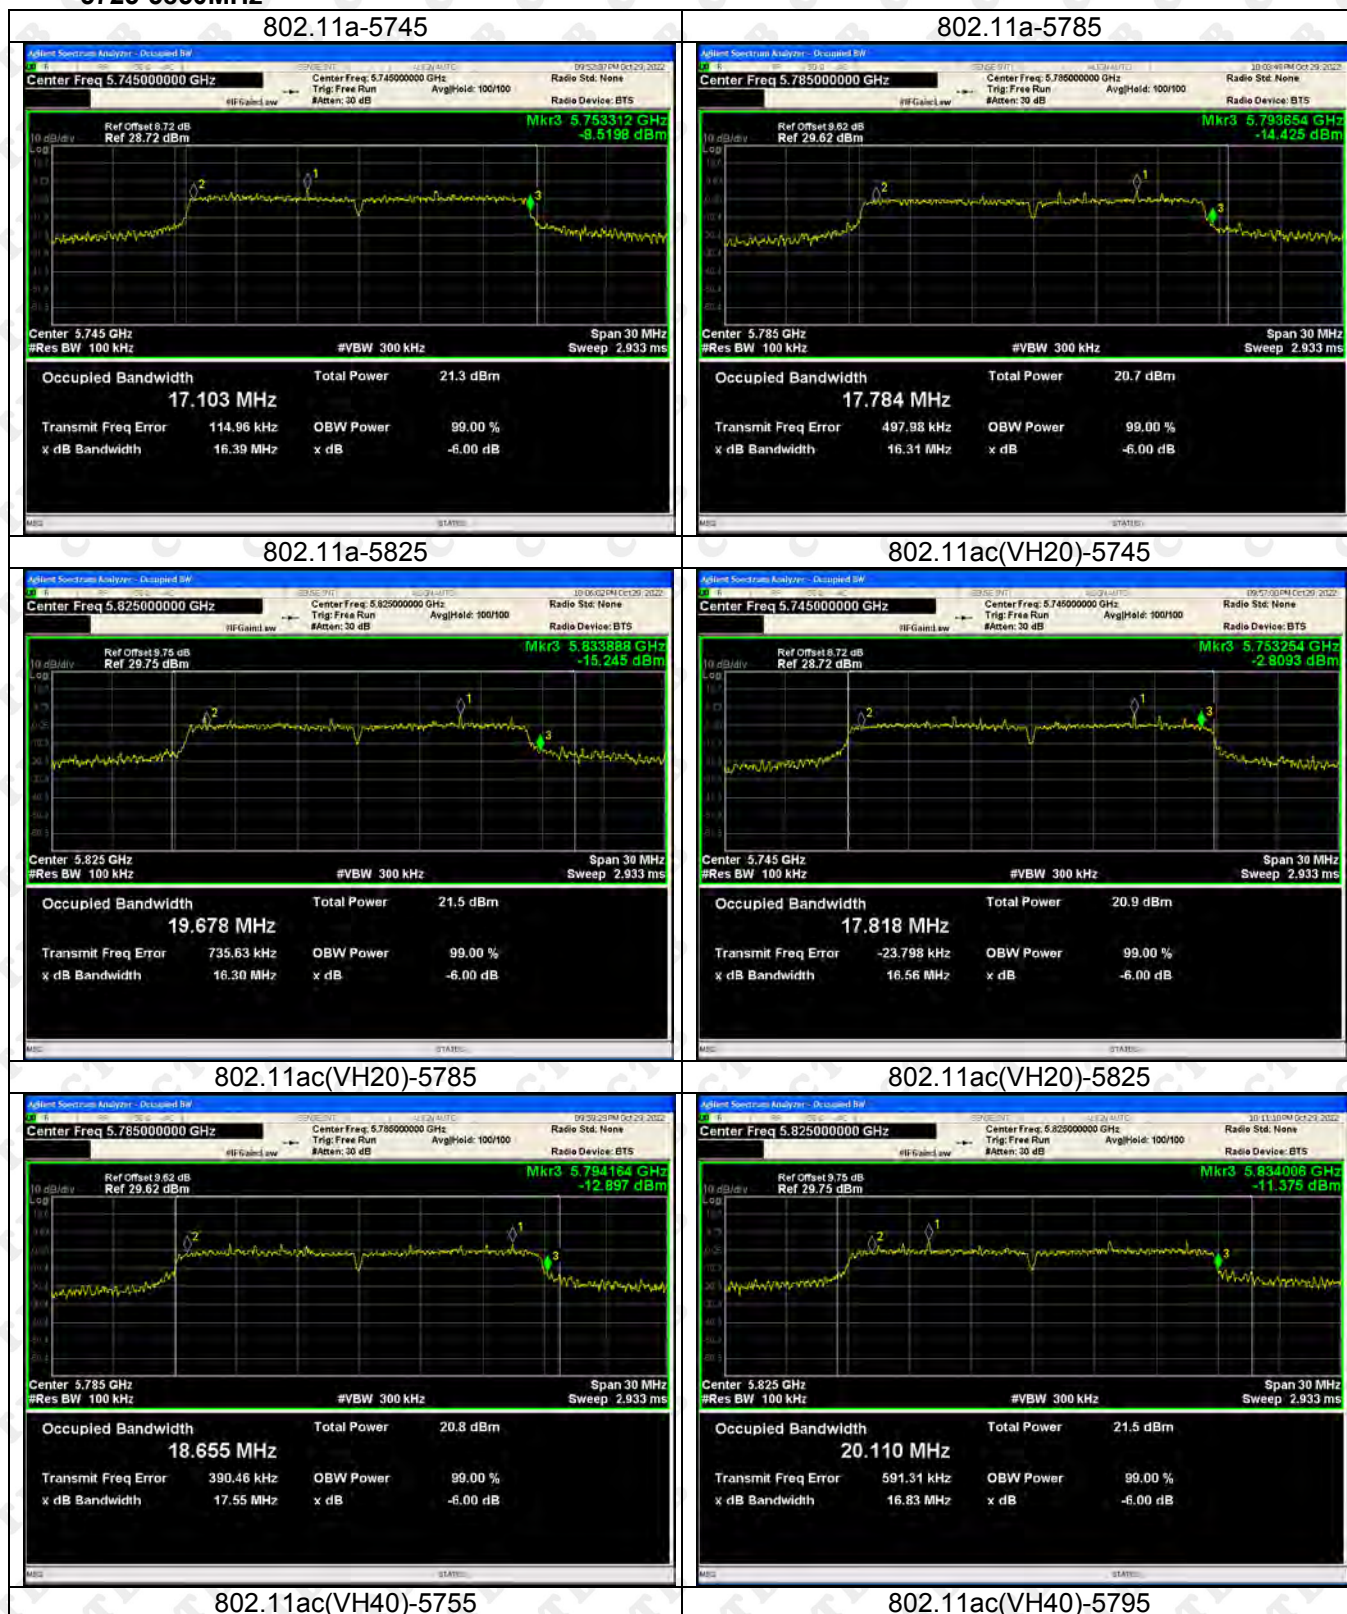


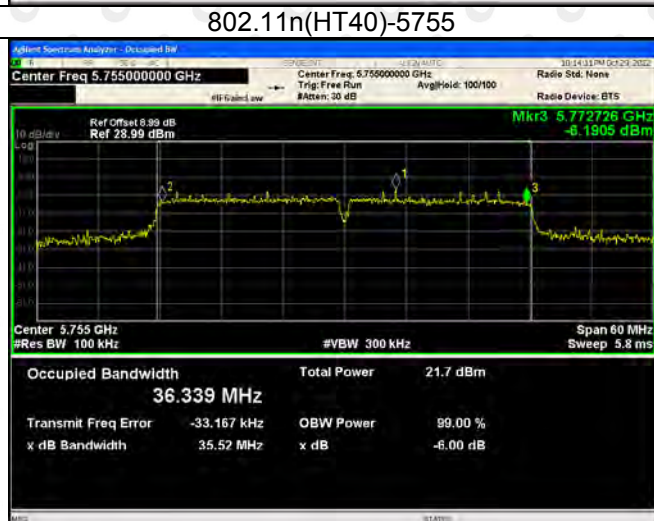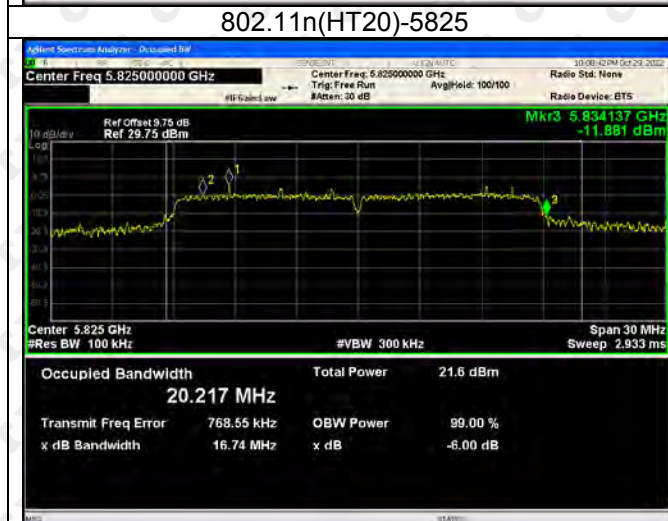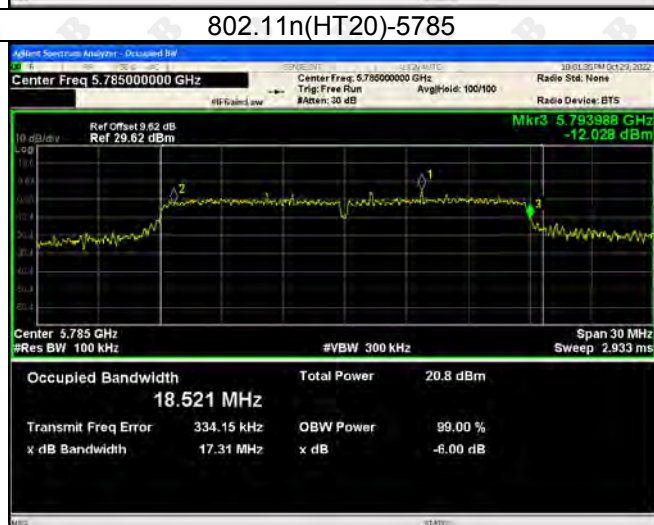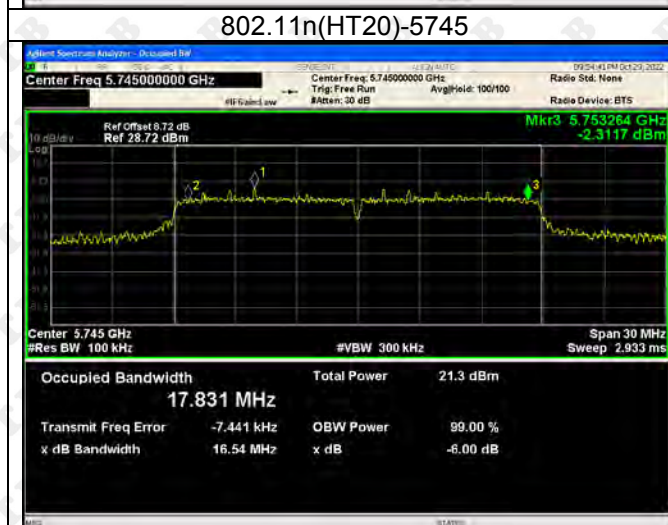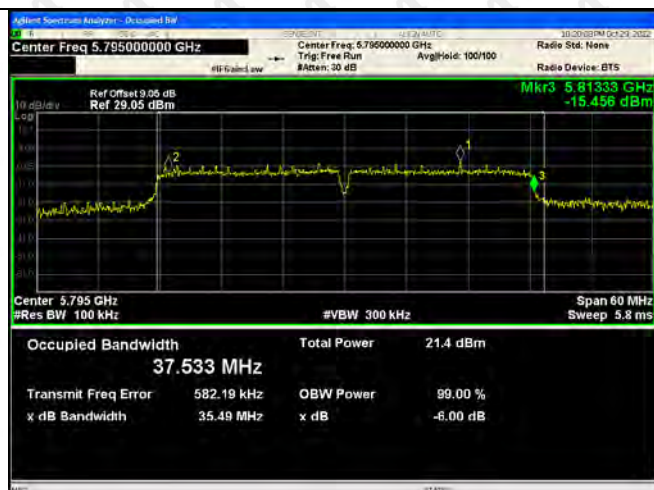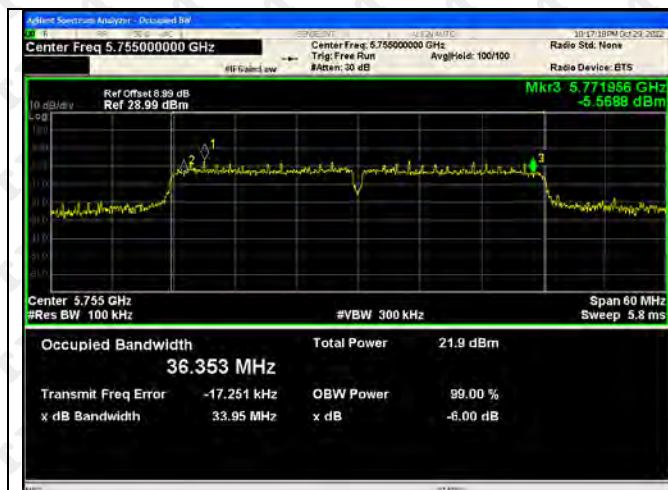



11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

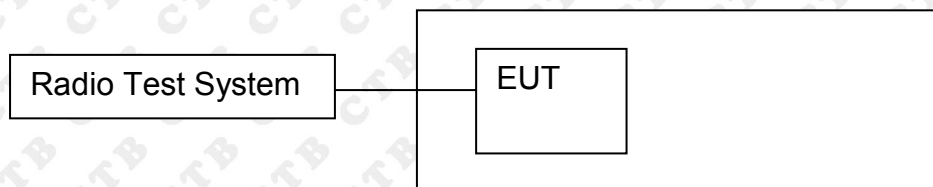

11.2 Limit

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

11.3 Test procedure

According to KDB789033 D02v02r01 sectionE, the following is the measurement procedure.

For devices operating in the bands 5.15–5.25 GHz, 5.25–5.35 GHz, and 5.47–5.725 GHz, the preceding procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in Section 15.407(a)(5). For devices operating in the band 5.725–5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:

a) Set $\text{RBW} \geq 1/T$, where T is defined in II.B.I.a).

b) Set $\text{VBW} \geq 3 \text{ RBW}$.

c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log (500 \text{ kHz}/\text{RBW})$ to the measured result, whereas RBW (<500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.

d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log(1\text{MHz}/\text{RBW})$ to the measured result, whereas RBW ($< 1 \text{ MHz}$) is the reduced resolution bandwidth of spectrum analyzer set during measurement.

e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.


Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the II.F.5.c) and II.F.5.d), since RBW=100 kHz is available on nearly all spectrum analyzers.


11.4 Test Result

Test mode	Test Channel (MHz)	Antenna	PSD [dBm/500kHz]	PSD [dBm/500kHz] Total	Limit (dBm)	Result
802.11a	5745	ANT1	7.391	13.36	25.65	Pass
		ANT2	6.753			
		ANT3	8.001			
		ANT4	7.121			
	5785	ANT1	7.162	13.22	25.65	Pass
		ANT2	6.049			
		ANT3	7.026			
		ANT4	8.274			
	5825	ANT1	7.614	14.44	25.65	Pass
		ANT2	7.844			
		ANT3	9.007			
		ANT4	9.011			
802.11ac(VH20)	5745	ANT1	5.034	12.18	25.65	Pass
		ANT2	5.821			
		ANT3	7.145			
		ANT4	6.372			
	5785	ANT1	5.02	11.31	25.65	Pass
		ANT2	-2.477			
		ANT3	7.055			
		ANT4	6.737			
	5825	ANT1	8.192	13.70	25.65	Pass
		ANT2	7.381			
		ANT3	7.582			
		ANT4	7.525			
802.11ac(VH40)	5755	ANT1	3.689	10.08	25.65	Pass
		ANT2	3.943			
		ANT3	4.418			
		ANT4	4.143			
	5795	ANT1	3.412	10.04	25.65	Pass
		ANT2	4.386			
		ANT3	4.015			
		ANT4	4.206			
802.11n(VH20)	5745	ANT1	5.553	12.45	25.65	Pass
		ANT2	6.095			
		ANT3	7.018			
		ANT4	6.879			
	5785	ANT1	6.591	12.62	25.65	Pass
		ANT2	6.086			
		ANT3	7.011			
		ANT4	6.647			
	5825	ANT1	6.963	13.50	25.65	Pass
		ANT2	7.492			
		ANT3	7.608			
		ANT4	7.804			
802.11n(VH40)	5755	ANT1	3.247	10.31	25.65	Pass
		ANT2	4.397			
		ANT3	4.96			
		ANT4	4.385			
	5795	ANT1	3.444	10.22	25.65	Pass
		ANT2	3.93			
		ANT3	5.194			
		ANT4	4.028			
802.11ac(VH80)	5775	ANT1	2.581	9.16	25.65	Pass
		ANT2	2.785			
		ANT3	3.699			
		ANT4	3.41			

ANT 1

5745-5825MHz

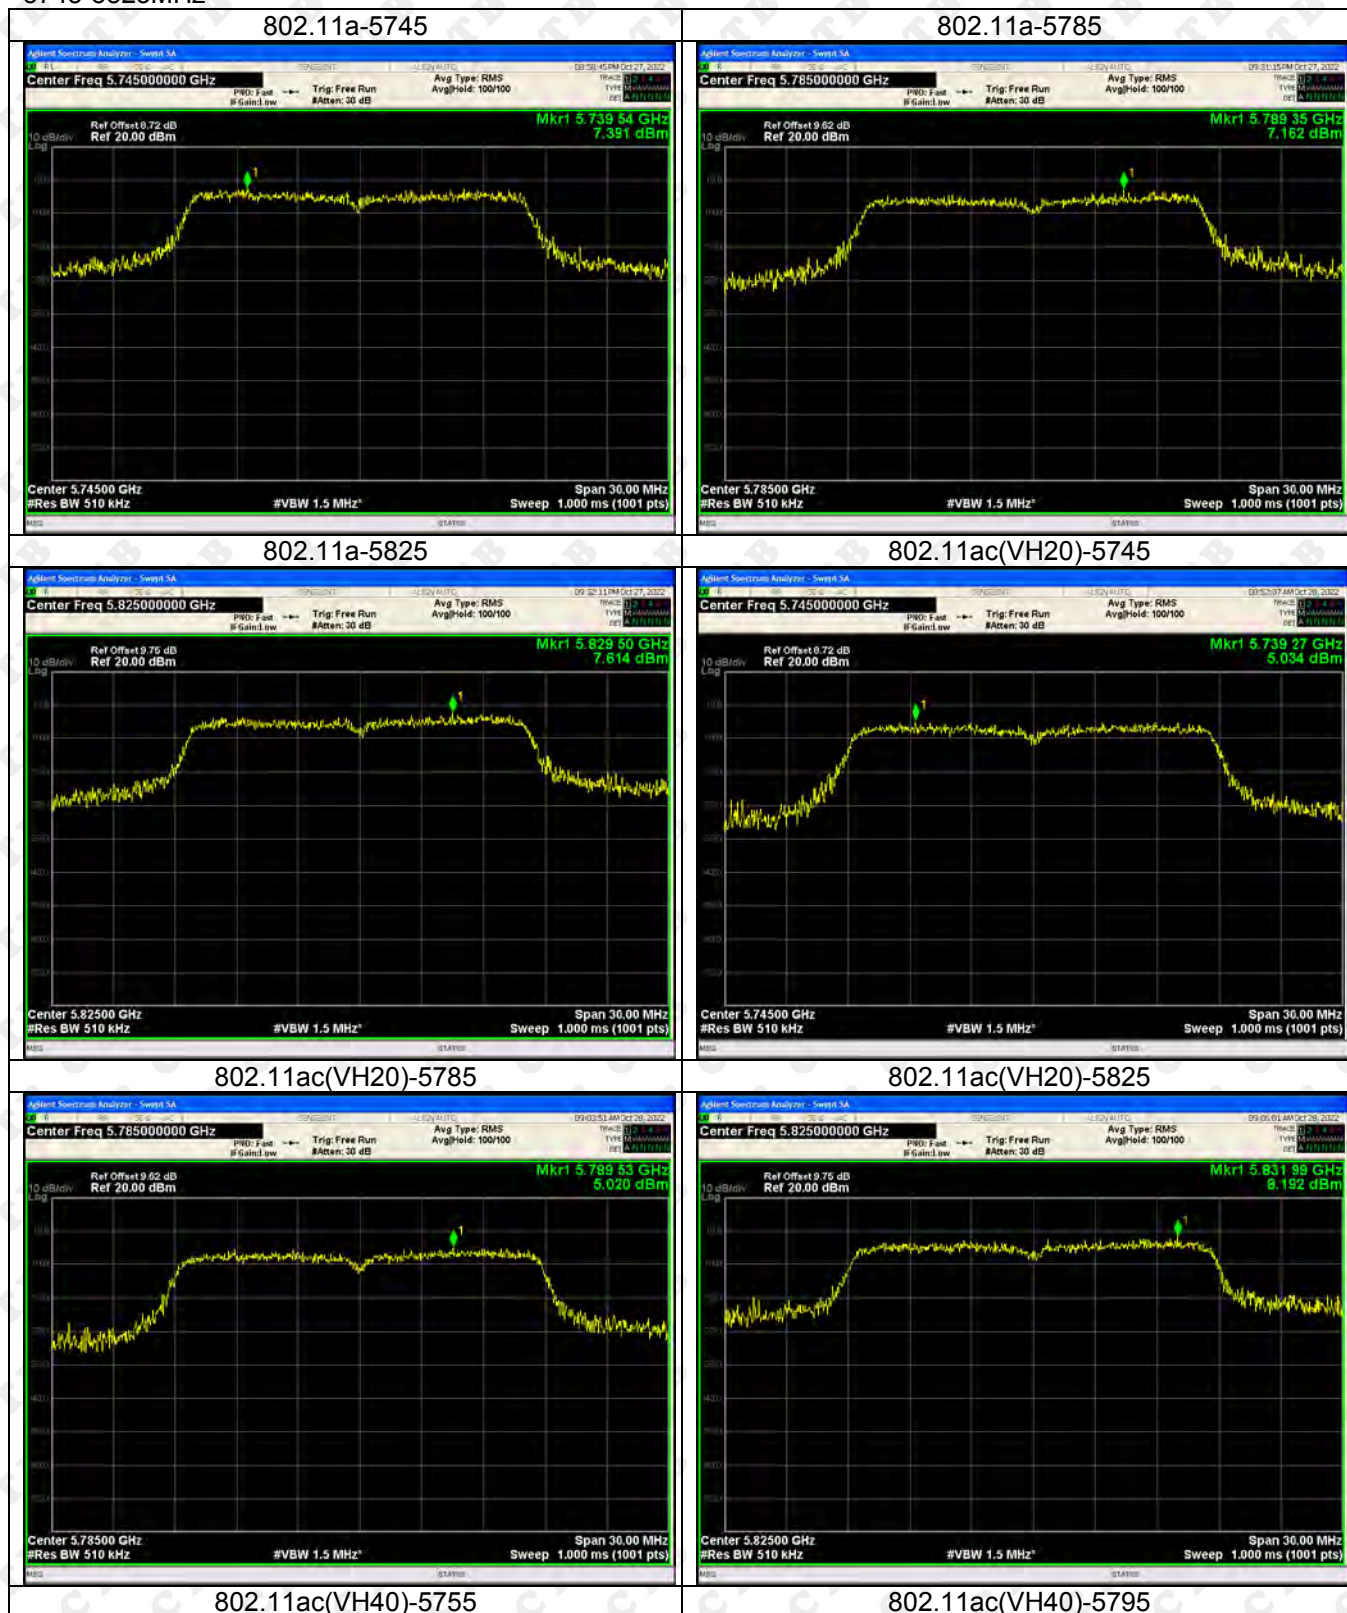

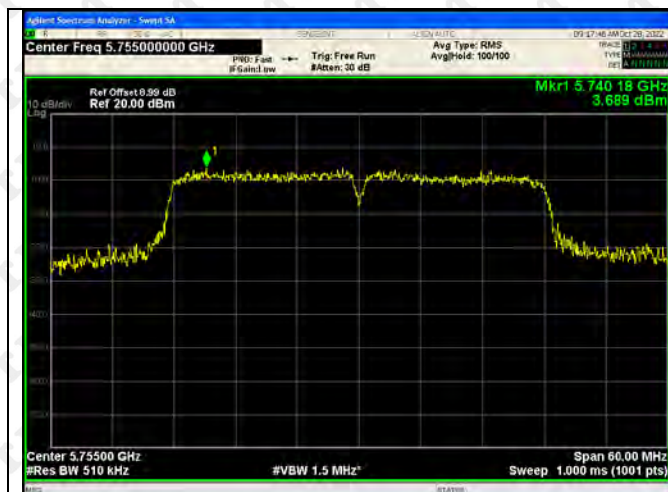

802.11n(HT20)-5745



802.11n(HT20)-5785



802.11n(HT20)-5825




802.11n(HT40)-5755



802.11n(HT40)-5795




802.11ac(HT80)-5775

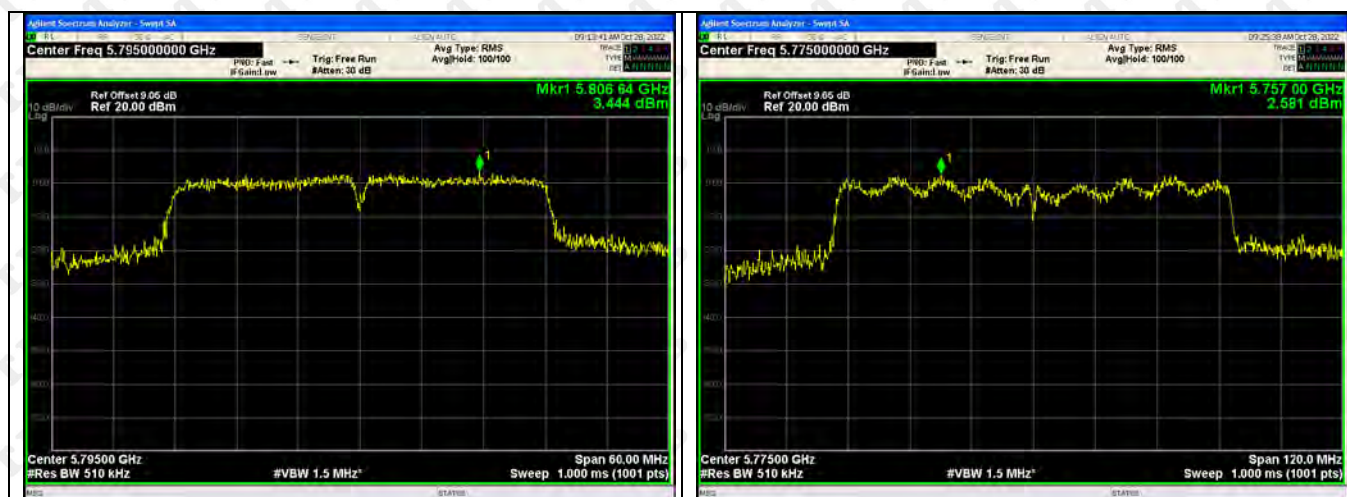

ANT 2

5745-5825MHz

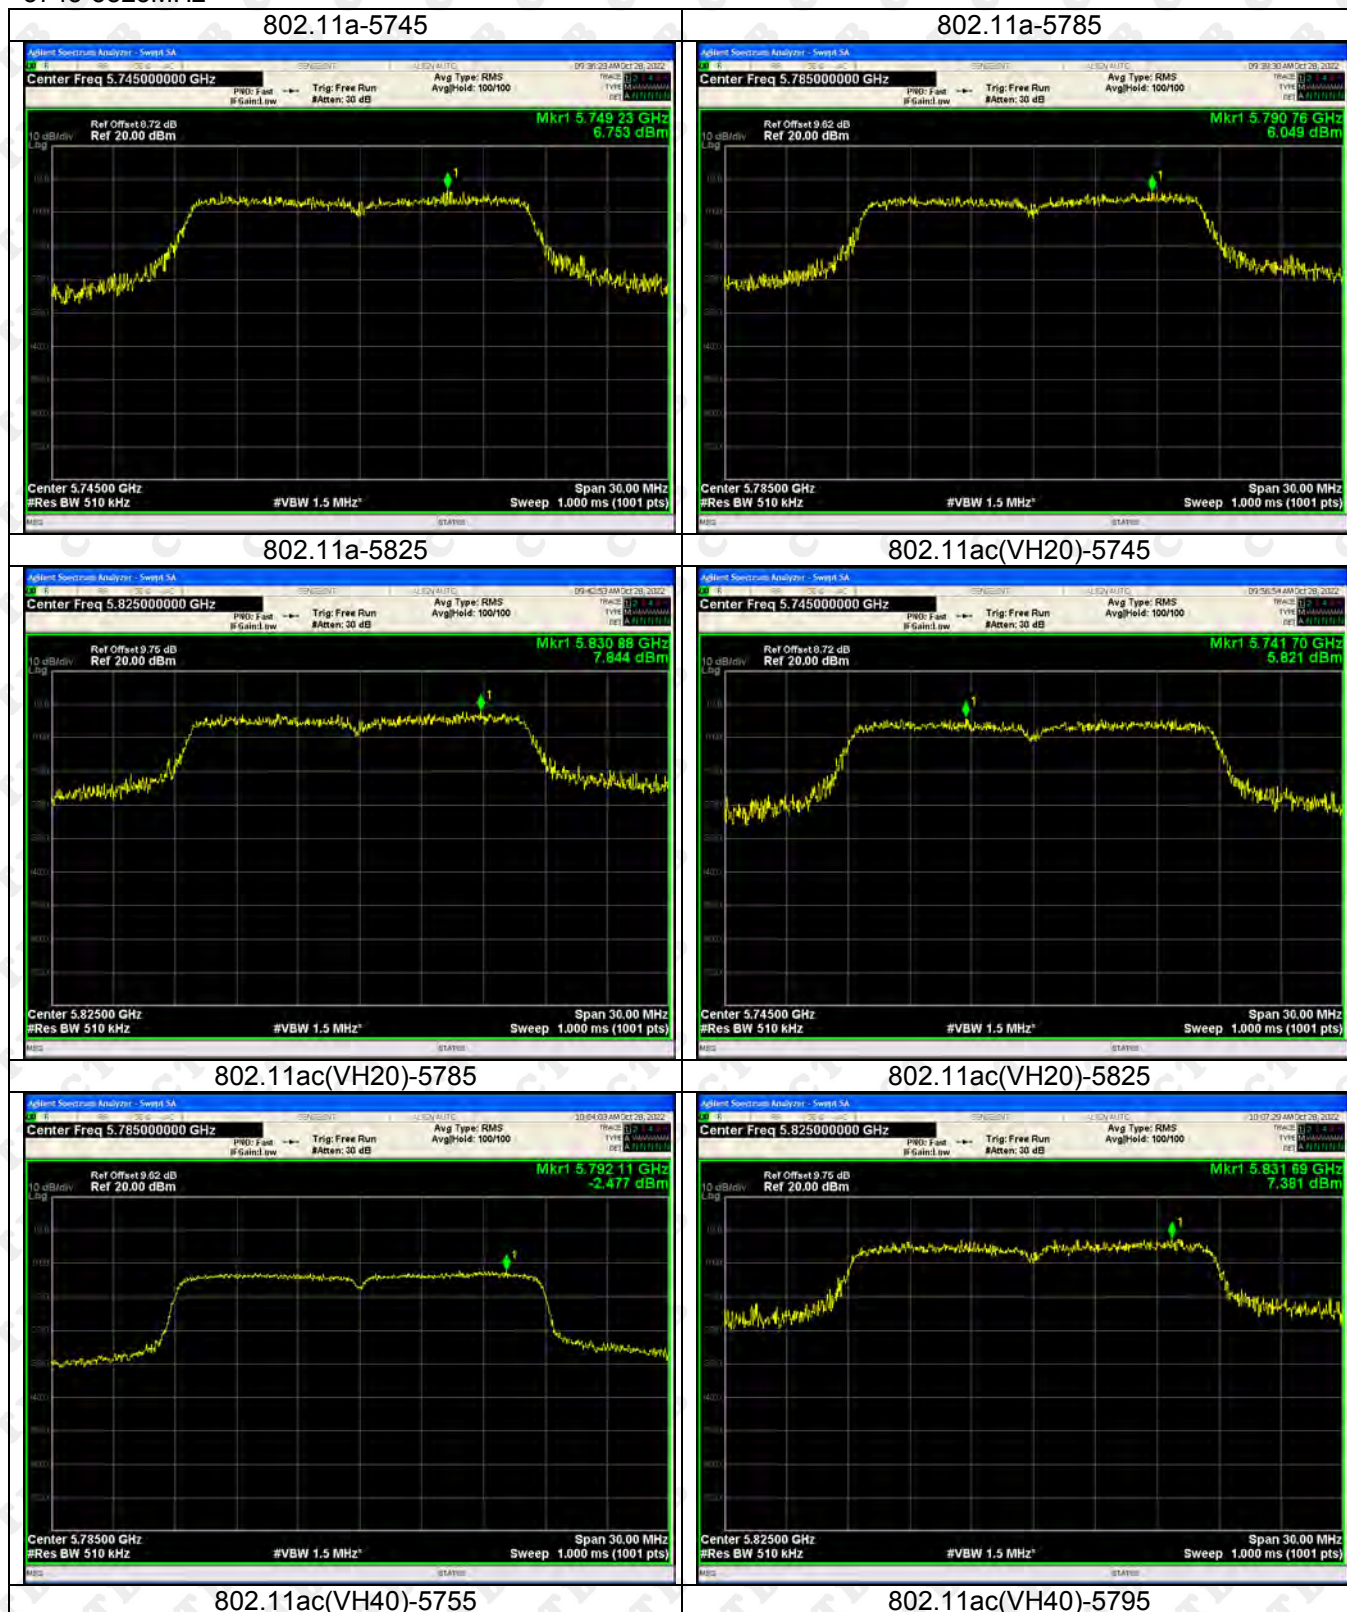



802.11n(HT20)-5745



802.11n(HT20)-5785



802.11n(HT20)-5825



802.11n(HT40)-5755



802.11n(HT40)-5795




802.11ac(HT80)-5775



ANT 3

5745-5825MHz

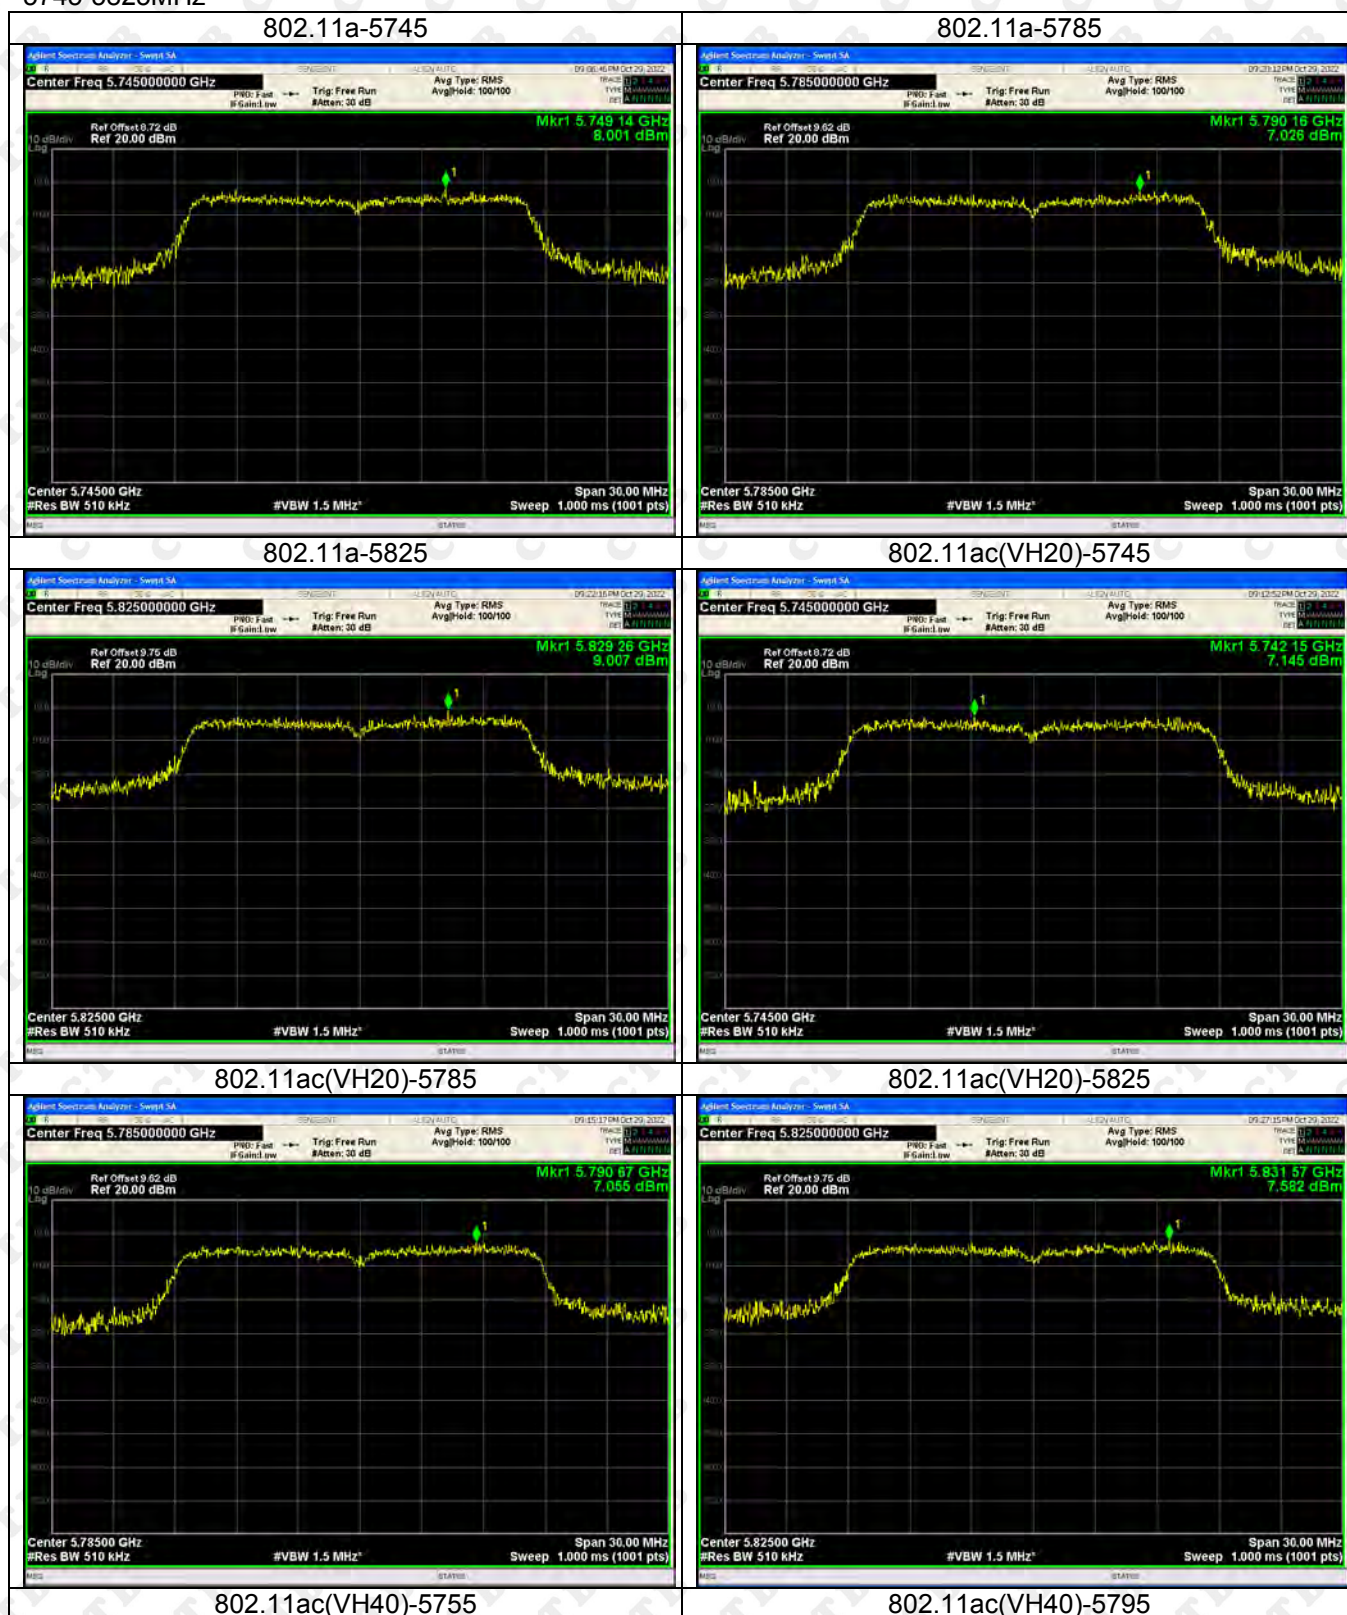



802.11n(HT20)-5745



802.11n(HT20)-5785



802.11n(HT20)-5825




802.11n(HT40)-5755



802.11n(HT40)-5795




802.11ac(HT80)-5775

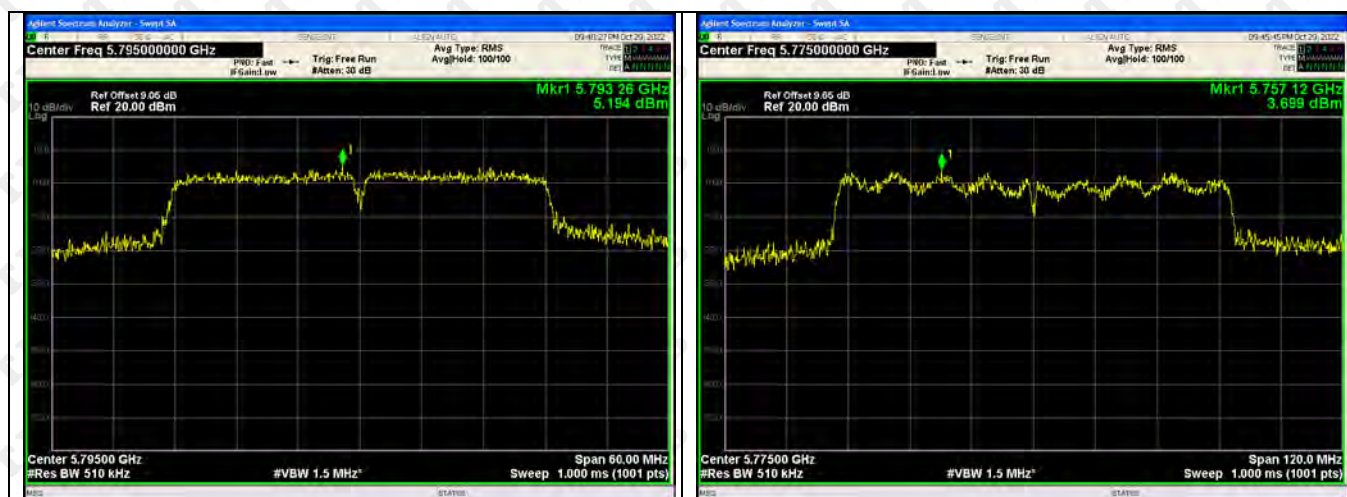

ANT 4

5745-5825MHz

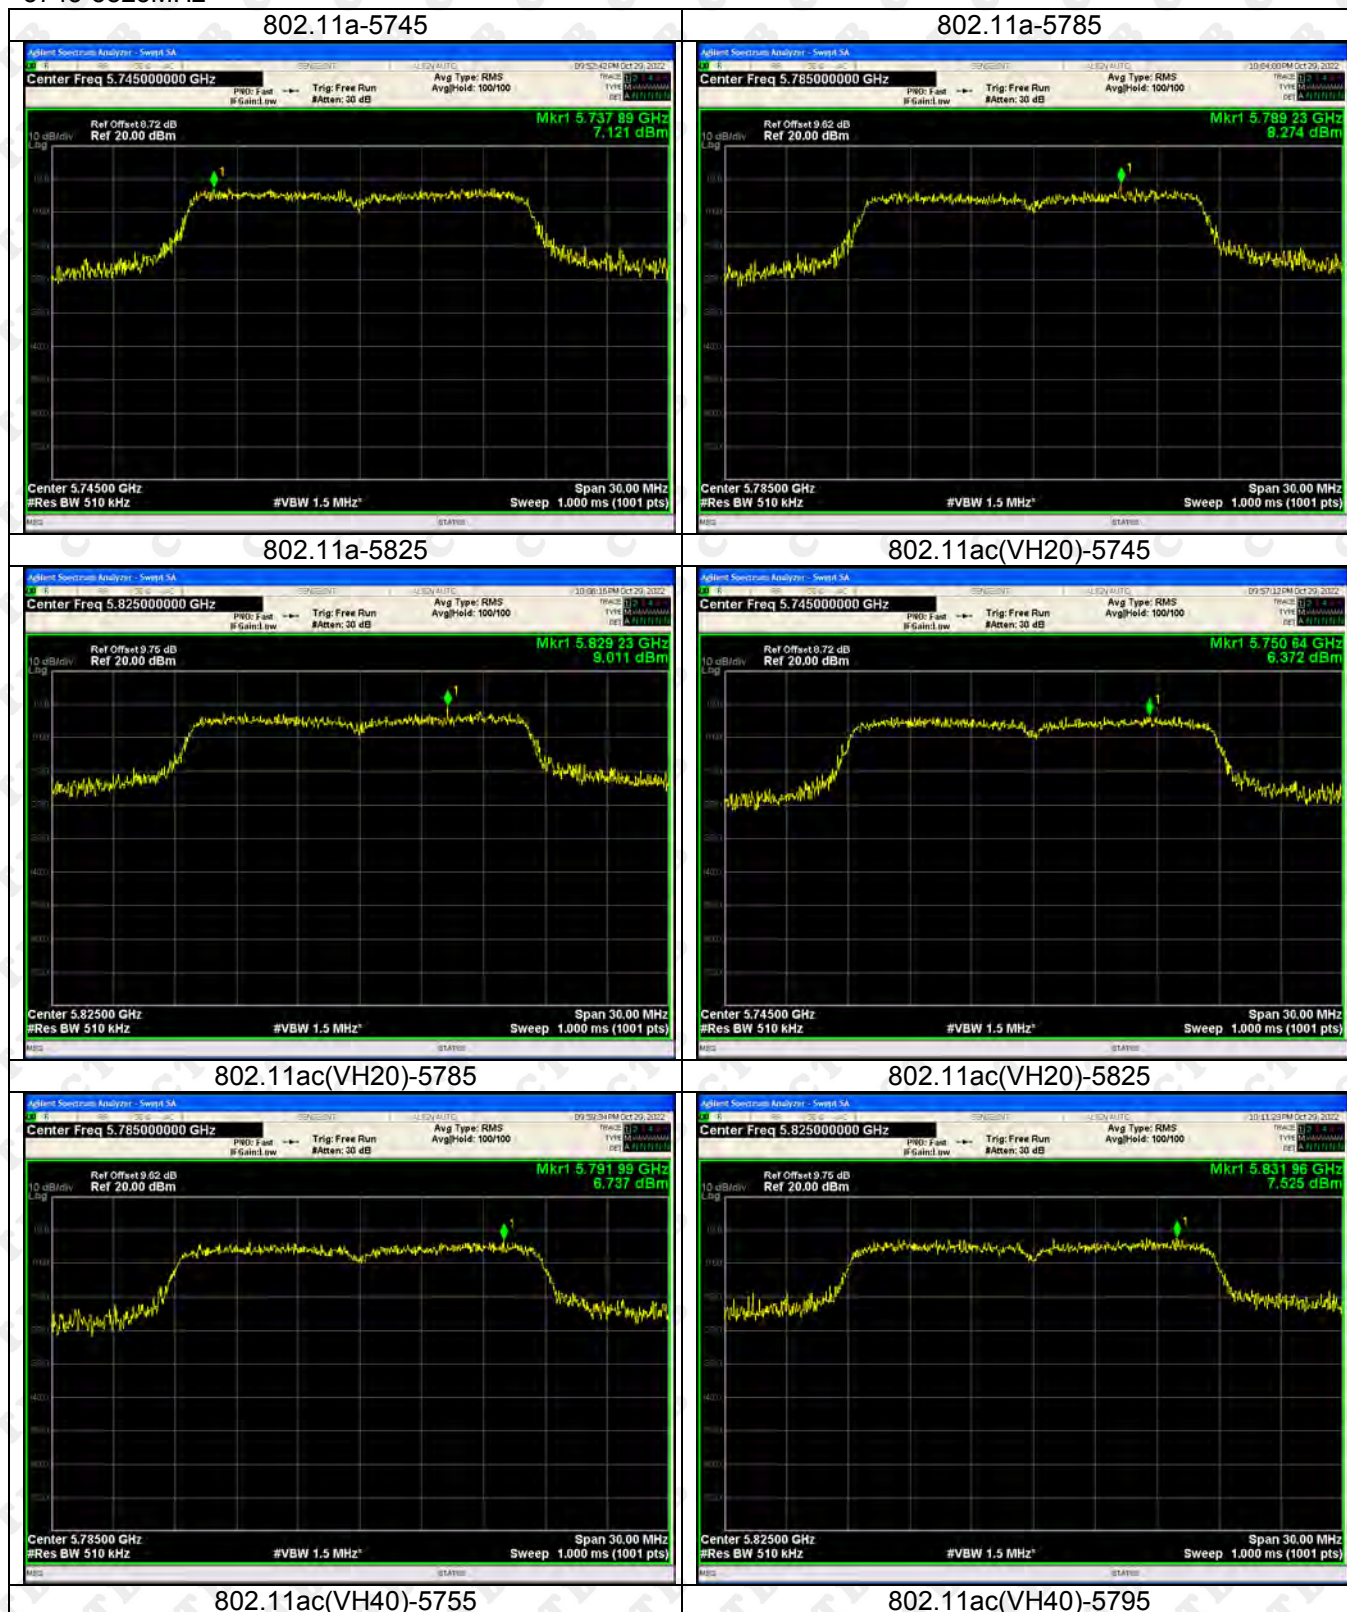



802.11n(HT20)-5745



802.11n(HT20)-5785



802.11n(HT20)-5825



802.11n(HT40)-5755



802.11n(HT40)-5795




802.11ac(HT80)-5775



12. FREQUENCY STABILITY

12.1 Block Diagram Of Test Setup

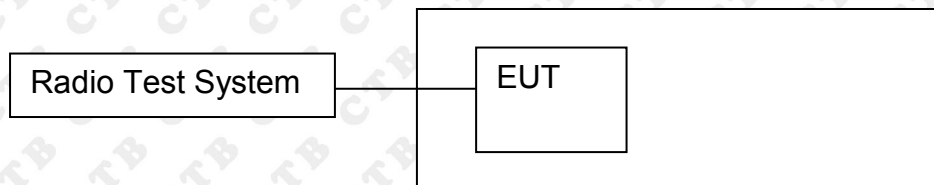

12.2 Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

12.3 Test procedure

1. The EUT was placed inside temperature chamber and powered and powered by nominal DC voltage.
2. Set EUT as normal operation.
3. Turn the EUT on and couple its output to spectrum.
4. Turn the EUT off and set the chamber to the highest temperature specified.
5. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT and measure the operating frequency.
6. Repeat step with the temperature chamber set to the lowest temperature.

12.4 Test Result

ANT1:

TX Frequency (5725-5850MHz)

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	#####	5745.0424	5745	0.0424	7.3803
		V max (V)	#####	5745.0445	5745	0.0445	7.7459
		V min (V)	#####	5745.0432	5745	0.0432	7.5196
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5745.0457	5745	0.0457	7.9547
		T (°C)	-10	5745.0403	5745	0.0403	7.0148
		T (°C)	0	5745.0424	5745	0.0424	7.3803
		T (°C)	10	5745.0478	5745	0.0478	8.3203
		T (°C)	20	5745.0483	5745	0.0483	8.4073
		T (°C)	30	5745.0420	5745	0.0420	7.3107
		T (°C)	40	5745.0415	5745	0.0415	7.2237
		T (°C)	50	5745.0496	5745	0.0496	8.6336
		T (°C)	60	5745.0409	5745	0.0409	7.1192
		T (°C)	70	5745.0498	5745	0.0498	8.6684
Limits				±20ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	12.00	5785.0458	5785	0.0458	7.9170
		V max (V)	#####	5785.0425	5785	0.0425	7.3466
		V min (V)	#####	5785.0484	5785	0.0484	8.3665
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5785.0488	5785	0.0488	8.4356
		T (°C)	-10	5785.0445	5785	0.0445	7.6923
		T (°C)	0	5785.0476	5785	0.0476	8.2282
		T (°C)	10	5785.0439	5785	0.0439	7.5886
		T (°C)	20	5785.0442	5785	0.0442	7.6404
		T (°C)	30	5785.0425	5785	0.0425	7.3466
		T (°C)	40	5785.0445	5785	0.0445	7.6923
		T (°C)	50	5785.0423	5785	0.0423	7.3120
		T (°C)	60	5785.0426	5785	0.0426	7.3639
		T (°C)	70	5785.0485	5785	0.0485	8.3838
Limits				±20ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	#####	5825.0433	5825	0.0433	7.4335
		V max (V)	#####	5825.0415	5825	0.0415	7.1245
		V min (V)	#####	5825.0437	5825	0.0437	7.5021
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5825.0439	5825	0.0439	7.5365
		T (°C)	-10	5825.0434	5825	0.0434	7.4506
		T (°C)	0	5825.0455	5825	0.0455	7.8112
		T (°C)	10	5825.0484	5825	0.0484	8.3090
		T (°C)	20	5825.0484	5825	0.0484	8.3090
		T (°C)	30	5825.0419	5825	0.0419	7.1931
		T (°C)	40	5825.0454	5825	0.0454	7.7940
		T (°C)	50	5825.0486	5825	0.0486	8.3433
		T (°C)	60	5825.0445	5825	0.0445	7.6395
		T (°C)	70	5825.0403	5825	0.0403	6.9185
Limits				±20ppm			
Result				Complies			

ANT2:

TX Frequency (5725-5850MHz)

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	#####	5745.0424	5745	0.0424	7.3803
		V max (V)	#####	5745.0445	5745	0.0445	7.7459
		V min (V)	#####	5745.0432	5745	0.0432	7.5196
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5745.0457	5745	0.0457	7.9547
		T (°C)	-10	5745.0403	5745	0.0403	7.0148
		T (°C)	0	5745.0424	5745	0.0424	7.3803
		T (°C)	10	5745.0478	5745	0.0478	8.3203
		T (°C)	20	5745.0483	5745	0.0483	8.4073
		T (°C)	30	5745.0420	5745	0.0420	7.3107
		T (°C)	40	5745.0415	5745	0.0415	7.2237
		T (°C)	50	5745.0496	5745	0.0496	8.6336
		T (°C)	60	5745.0409	5745	0.0409	7.1192
		T (°C)	70	5745.0498	5745	0.0498	8.6684
Limits				±20ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	12.00	5785.0458	5785	0.0458	7.9170
		V max (V)	#####	5785.0425	5785	0.0425	7.3466
		V min (V)	#####	5785.0484	5785	0.0484	8.3665
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5785.0488	5785	0.0488	8.4356
		T (°C)	-10	5785.0445	5785	0.0445	7.6923
		T (°C)	0	5785.0476	5785	0.0476	8.2282
		T (°C)	10	5785.0439	5785	0.0439	7.5886
		T (°C)	20	5785.0442	5785	0.0442	7.6404
		T (°C)	30	5785.0425	5785	0.0425	7.3466
		T (°C)	40	5785.0445	5785	0.0445	7.6923
		T (°C)	50	5785.0423	5785	0.0423	7.3120
		T (°C)	60	5785.0426	5785	0.0426	7.3639
		T (°C)	70	5785.0485	5785	0.0485	8.3838
Limits				±20ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	#####	5825.0433	5825	0.0433	7.4335
		V max (V)	#####	5825.0415	5825	0.0415	7.1245
		V min (V)	#####	5825.0437	5825	0.0437	7.5021
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5825.0439	5825	0.0439	7.5365
		T (°C)	-10	5825.0434	5825	0.0434	7.4506
		T (°C)	0	5825.0455	5825	0.0455	7.8112
		T (°C)	10	5825.0484	5825	0.0484	8.3090
		T (°C)	20	5825.0484	5825	0.0484	8.3090
		T (°C)	30	5825.0419	5825	0.0419	7.1931
		T (°C)	40	5825.0454	5825	0.0454	7.7940
		T (°C)	50	5825.0486	5825	0.0486	8.3433
		T (°C)	60	5825.0445	5825	0.0445	7.6395
		T (°C)	70	5825.0403	5825	0.0403	6.9185
Limits				±20ppm			
Result				Complies			

ANT3:

TX Frequency (5725-5850MHz)

Voltage vs. Frequency Stability

Page 16: Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	#####	5745.0424	5745	0.0424	7.3803
		V max (V)	#####	5745.0445	5745	0.0445	7.7459
		V min (V)	#####	5745.0432	5745	0.0432	7.5196
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5745.0457	5745	0.0457	7.9547
		T (°C)	-10	5745.0403	5745	0.0403	7.0148
		T (°C)	0	5745.0424	5745	0.0424	7.3803
		T (°C)	10	5745.0478	5745	0.0478	8.3203
		T (°C)	20	5745.0483	5745	0.0483	8.4073
		T (°C)	30	5745.0420	5745	0.0420	7.3107
		T (°C)	40	5745.0415	5745	0.0415	7.2237
		T (°C)	50	5745.0496	5745	0.0496	8.6336
		T (°C)	60	5745.0409	5745	0.0409	7.1192
		T (°C)	70	5745.0498	5745	0.0498	8.6684
Limits				±20ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	12.00	5785.0458	5785	0.0458	7.9170
		V max (V)	#####	5785.0425	5785	0.0425	7.3466
		V min (V)	#####	5785.0484	5785	0.0484	8.3665
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5785.0488	5785	0.0488	8.4356
		T (°C)	-10	5785.0445	5785	0.0445	7.6923
		T (°C)	0	5785.0476	5785	0.0476	8.2282
		T (°C)	10	5785.0439	5785	0.0439	7.5886
		T (°C)	20	5785.0442	5785	0.0442	7.6404
		T (°C)	30	5785.0425	5785	0.0425	7.3466
		T (°C)	40	5785.0445	5785	0.0445	7.6923
		T (°C)	50	5785.0423	5785	0.0423	7.3120
		T (°C)	60	5785.0426	5785	0.0426	7.3639
		T (°C)	70	5785.0485	5785	0.0485	8.3838
Limits				±20ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	#####	5825.0433	5825	0.0433	7.4335
		V max (V)	#####	5825.0415	5825	0.0415	7.1245
		V min (V)	#####	5825.0437	5825	0.0437	7.5021
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5825.0439	5825	0.0439	7.5365
		T (°C)	-10	5825.0434	5825	0.0434	7.4506
		T (°C)	0	5825.0455	5825	0.0455	7.8112
		T (°C)	10	5825.0484	5825	0.0484	8.3090
		T (°C)	20	5825.0484	5825	0.0484	8.3090
		T (°C)	30	5825.0419	5825	0.0419	7.1931
		T (°C)	40	5825.0454	5825	0.0454	7.7940
		T (°C)	50	5825.0486	5825	0.0486	8.3433
		T (°C)	60	5825.0445	5825	0.0445	7.6395
		T (°C)	70	5825.0403	5825	0.0403	6.9185
Limits				±20ppm			
Result				Complies			

ANT4:

TX Frequency (5725-5850MHz)

Voltage vs. Frequency Stability

Page 16: Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	#####	5745.0424	5745	0.0424	7.3803
		V max (V)	#####	5745.0445	5745	0.0445	7.7459
		V min (V)	#####	5745.0432	5745	0.0432	7.5196
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5745.0457	5745	0.0457	7.9547
		T (°C)	-10	5745.0403	5745	0.0403	7.0148
		T (°C)	0	5745.0424	5745	0.0424	7.3803
		T (°C)	10	5745.0478	5745	0.0478	8.3203
		T (°C)	20	5745.0483	5745	0.0483	8.4073
		T (°C)	30	5745.0420	5745	0.0420	7.3107
		T (°C)	40	5745.0415	5745	0.0415	7.2237
		T (°C)	50	5745.0496	5745	0.0496	8.6336
		T (°C)	60	5745.0409	5745	0.0409	7.1192
		T (°C)	70	5745.0498	5745	0.0498	8.6684
Limits				±20ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	12.00	5785.0458	5785	0.0458	7.9170
		V max (V)	#####	5785.0425	5785	0.0425	7.3466
		V min (V)	#####	5785.0484	5785	0.0484	8.3665
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5785.0488	5785	0.0488	8.4356
		T (°C)	-10	5785.0445	5785	0.0445	7.6923
		T (°C)	0	5785.0476	5785	0.0476	8.2282
		T (°C)	10	5785.0439	5785	0.0439	7.5886
		T (°C)	20	5785.0442	5785	0.0442	7.6404
		T (°C)	30	5785.0425	5785	0.0425	7.3466
		T (°C)	40	5785.0445	5785	0.0445	7.6923
		T (°C)	50	5785.0423	5785	0.0423	7.3120
		T (°C)	60	5785.0426	5785	0.0426	7.3639
		T (°C)	70	5785.0485	5785	0.0485	8.3838
Limits				±20ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	#####	5825.0433	5825	0.0433	7.4335
		V max (V)	#####	5825.0415	5825	0.0415	7.1245
		V min (V)	#####	5825.0437	5825	0.0437	7.5021
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5825.0439	5825	0.0439	7.5365
		T (°C)	-10	5825.0434	5825	0.0434	7.4506
		T (°C)	0	5825.0455	5825	0.0455	7.8112
		T (°C)	10	5825.0484	5825	0.0484	8.3090
		T (°C)	20	5825.0484	5825	0.0484	8.3090
		T (°C)	30	5825.0419	5825	0.0419	7.1931
		T (°C)	40	5825.0454	5825	0.0454	7.7940
		T (°C)	50	5825.0486	5825	0.0486	8.3433
		T (°C)	60	5825.0445	5825	0.0445	7.6395
		T (°C)	70	5825.0403	5825	0.0403	6.9185
Limits				±20ppm			
Result				Complies			

13. OPERATION IN THE ABSENCE OF INFORMATION TO THE TRANSMIT

13.1 Requirement

15.407(c) requirement:

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signal ling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

13.2 Test Results

Operation in the absence of information to the transmit:

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ASK message transmitting from remote device and verify whether it shall resend or discontinue transmission. (manufacturer declare)

14. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:


The antenna is External antenna and no consideration of replacement. The best case gain of the antenna is ANT1:4.33dBi, ANT2:4.33dBi, ANT3:4.33dBi, ANT4:4.33dBi.

15. EUT PHOTOGRAPHS**EUT Photo 1****EUT Photo 2**


16. EUT TEST SETUP PHOTOGRAPHS

Spurious emissions

Below 1GHz

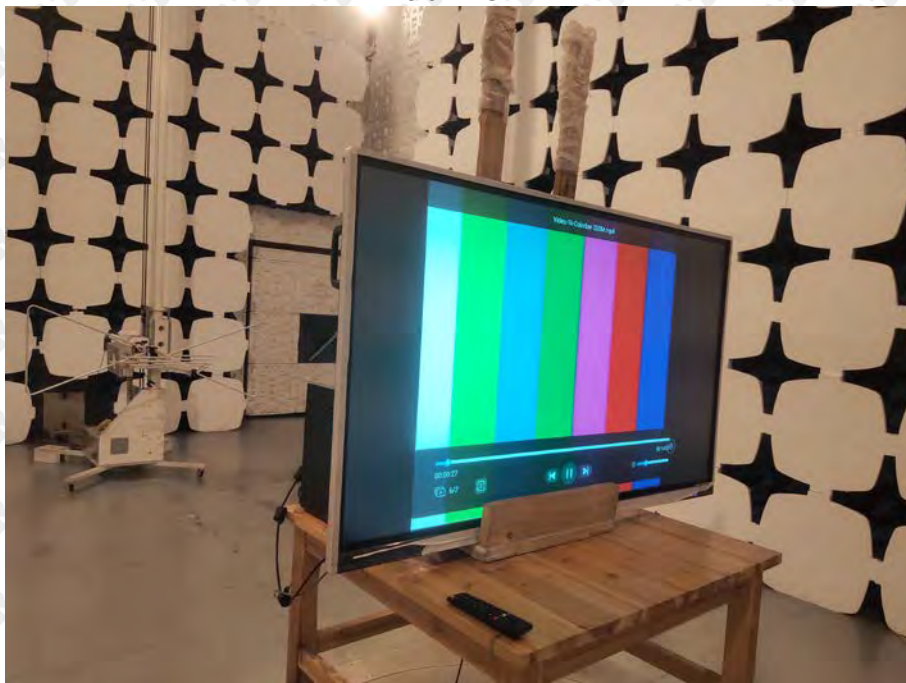

Above 1GHz

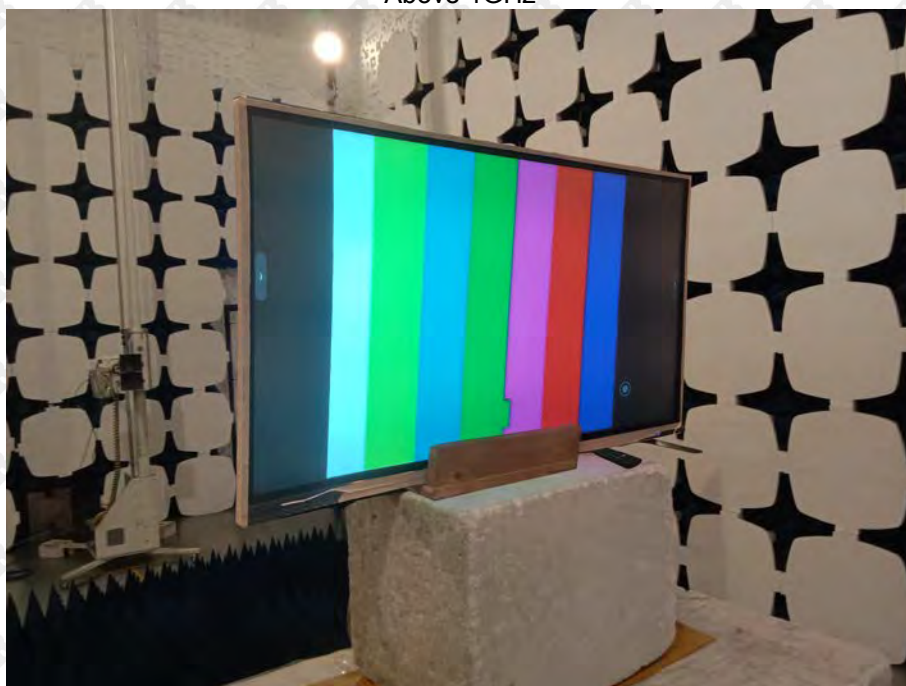

Conducted Emission



***** END OF REPORT *****