

ACA-5036-A2-CC-S Specification

1. APPLICATION:

WLAN, 802.11b/g, Bluetooth, etc...

2. Explanation of part number :

$\frac{AC}{(1)} \quad \frac{A}{(2)} - \frac{5036}{(3)} - \frac{A2}{(4)} - \frac{CC}{(5)} - \frac{S}{(6)} \quad \bar{(7)}$

- (1) Product Type : Chip Antenna
- (2) Center Frequency/Band Code : A--2.45GHz group
- (3) Size Code: 5.0mm(Length) x 3.6mm(Width)
- (4) Design Revision Code: Rev.2
- (5) CC= Coupling Ceramics Type
- (6) Special Code: S=RoHS Compliant
- (7) Suffix For Special Requirements

3. Electrical Specification :


ITEM		SPECIFICATION
Frequency Band		2.40GHz~2.50GHz
VSWR		Less than 2.5
Polarization		Linear
*Peak Gain	Layout A	3 dBi Typ.
	Layout B	2.1 dBi Typ.
*Peak Efficiency	Layout A	80% Typ.
	Layout B	74% Typ
Impedance		50Ω Typ.

* Test condition: Test board size 80*40 mm

Matching circuit: Pi matching circuit will be required

4. Physical Dimension : (Unit:mm)

TOP view



Bottom view



Chip Antenna	L	W	A	B	L1	W1	H
ACA5036	5.2±0.3	3.7±0.3	0.45±0.25	0.45±0.25	1.1±0.20	0.55±0.20	0.70±0.15

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=±

X.X=±

X.XX=

ANGLES=±

HOLEDIA=±



INPAQ TECHNOLOGY CO., LTD.

SCALE : -----

UNIT : mm

DRAWN BY : 黃琬珮

CHECKED BY : 楊奇峰

DESIGNED BY : 謝立庭

APPROVED BY : 蔡岳霖

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION



TITLE : ACA-5036-A2-CC-S Specification

DOCUMENT NO.

ENS000023010


SPEC REV.
A0

5. Recommend PCB Layout : (Unit:mm)

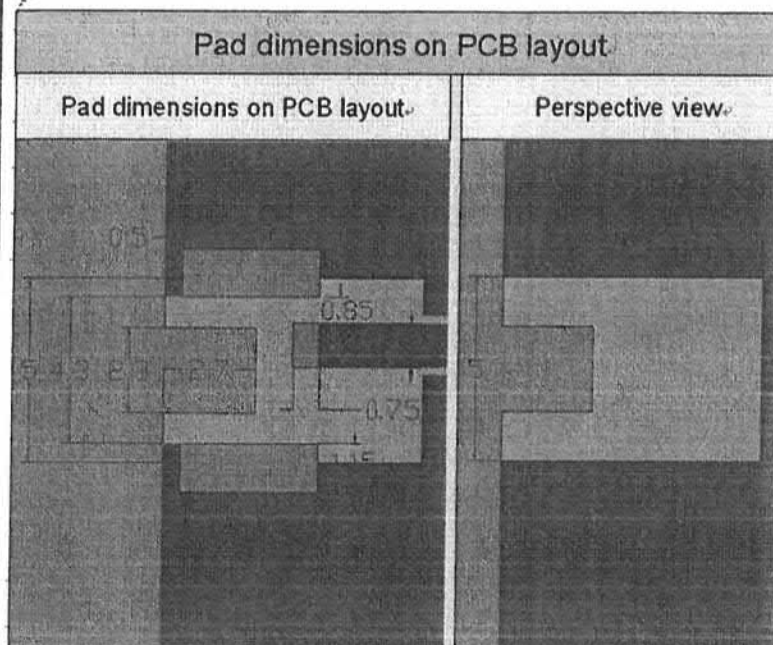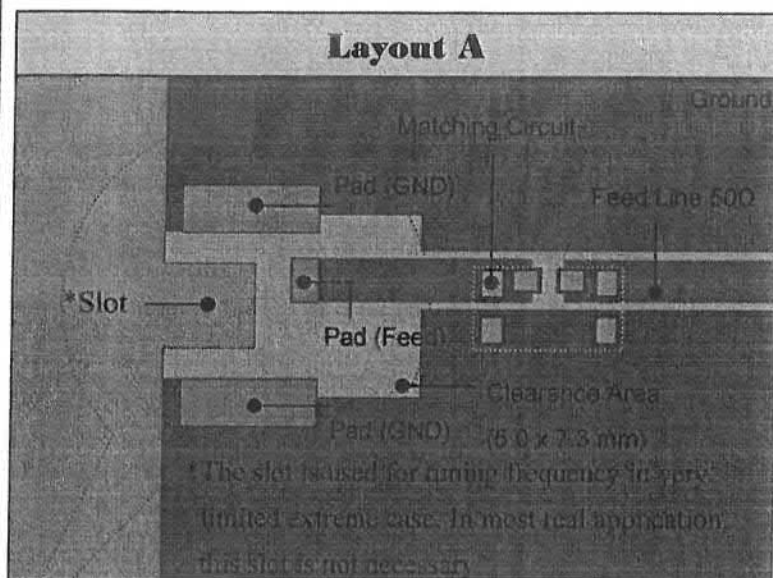

PCB pad dimensions

Terminal name	Terminal Dimensions
Pad (Feed)	1.2 X 0.75
Pad (GND)	3.8 X 1.15
Pad (GND)	3.8 X 1.15

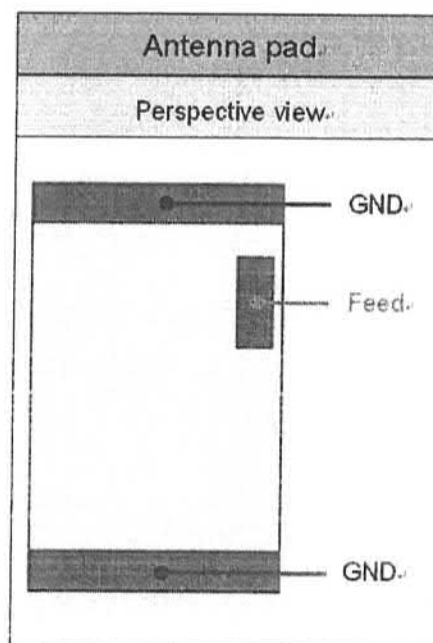

Antenna pad dimensions

Terminal name	Terminal Dimensions
Feed	1.1 X 0.55
GND	3.7 X 0.45
GND	3.7 X 0.45

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=±
 ANGLES=± HOLEDIA=±

SCALE : ----- UNIT : mm

DRAWN BY : 黃琬珮 CHECKED BY : 楊奇峰

DESIGNED BY : 謝立庭 APPROVED BY : 蔡岳霖

TITLE : ACA-5036-A2-CC-S Specification





INPAQ TECHNOLOGY CO., LTD.

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT
NO.


ENS000023010

SPEC REV.
A0

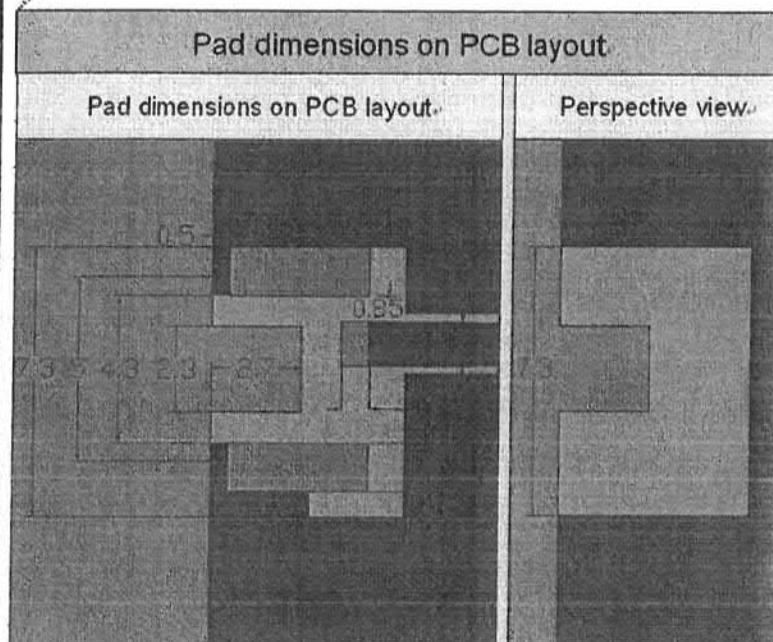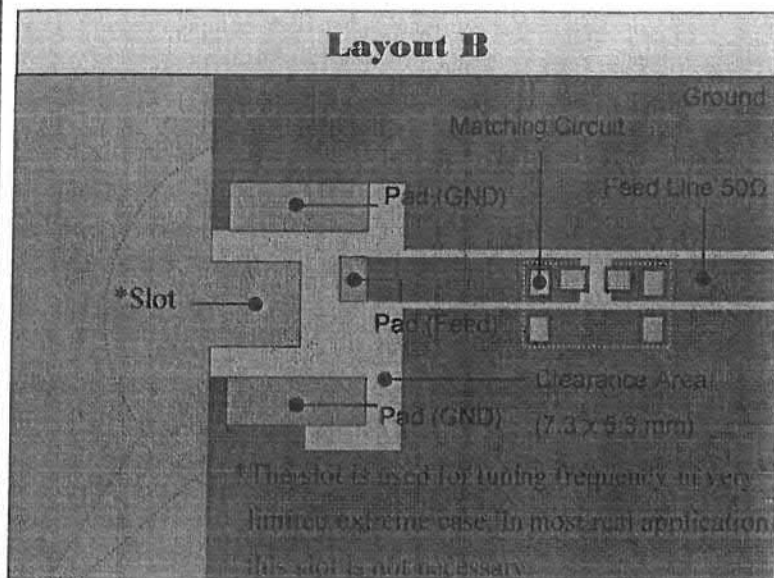

PCB pad dimensions

Terminal name	Terminal Dimensions
Pad (Feed)	1.2 X 0.75
Pad (GND)	3.8 X 1.15
Pad (GND)	3.8 X 1.15

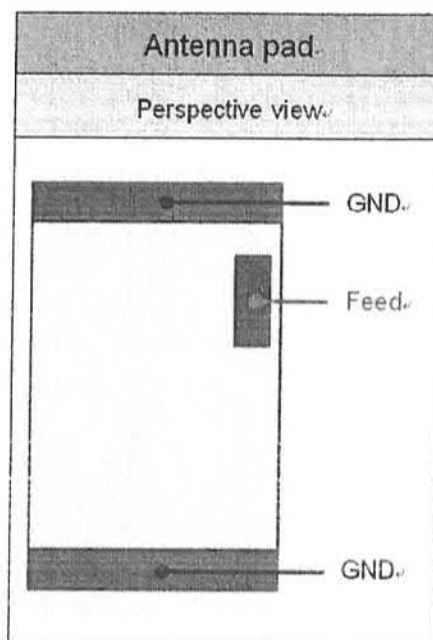

Antenna pad dimensions

Terminal name	Terminal Dimensions
Feed	1.1 X 0.55
GND	3.7 X 0.45
GND	3.7 X 0.45

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=±
 ANGLES=± HOLEDIA=±

SCALE : ----- UNIT : mm

DRAWN BY : 黃琬珮 CHECKED BY : 楊奇峰

DESIGNED BY : 謝立庭 APPROVED BY : 蔡岳霖

TITLE : ACA-5036-A2-CC-S Specification





INPAQ TECHNOLOGY CO., LTD.

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT NO.

ENS000023010

SPEC REV.
A0

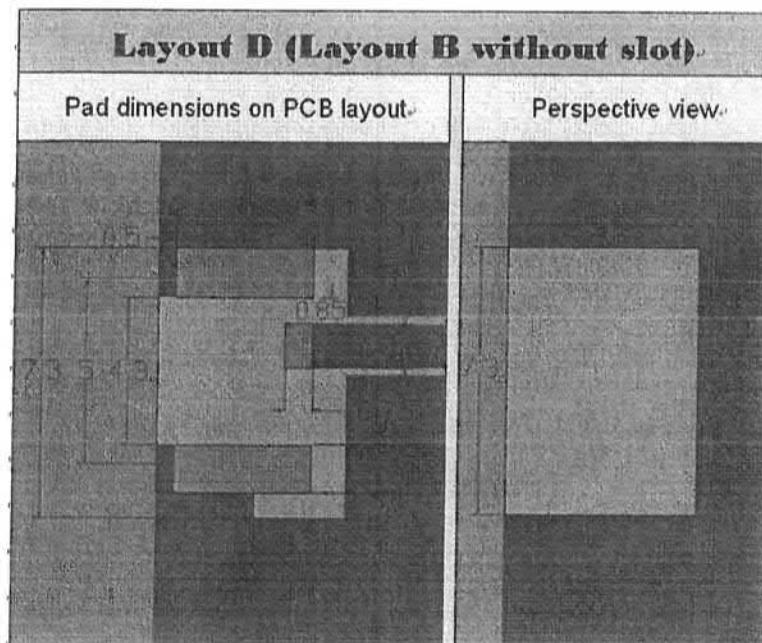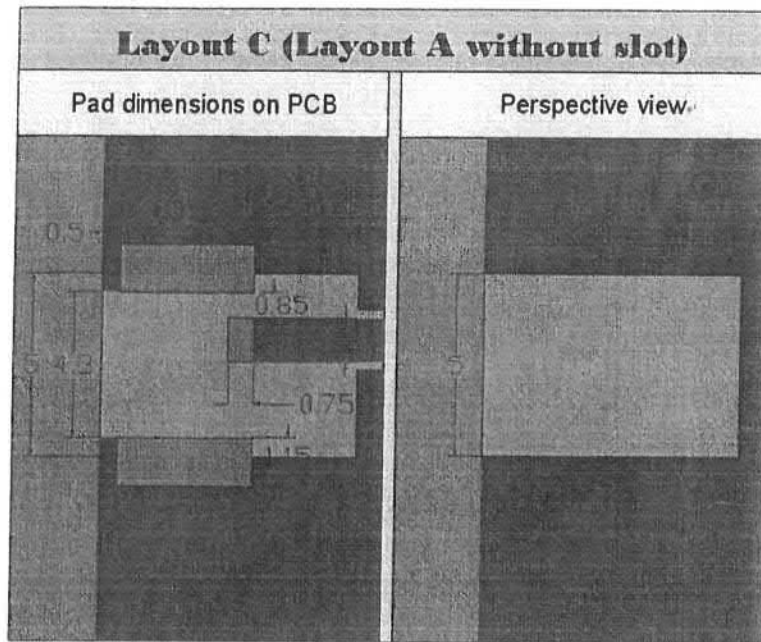

UNLESS OTHER SPECIFIED TOLERANCES ON :

$X = \pm$ $X.X = \pm$ $X.XX =$
 ANGLES = $\pm$ HOLEDIA = $\pm$

SCALE : ----- UNIT : mm

DRAWN BY : 黃琬珮 CHECKED BY : 楊奇峰

DESIGNED BY : 謝立庭 APPROVED BY : 蔡岳霖

TITLE : ACA-5036-A2-CC-S Specification



INPAQ TECHNOLOGY CO., LTD.

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


DOCUMENT
NO.

ENS000023010

SPEC REV.
A0


6. Electrical Characteristics :

Layout A : VSWR

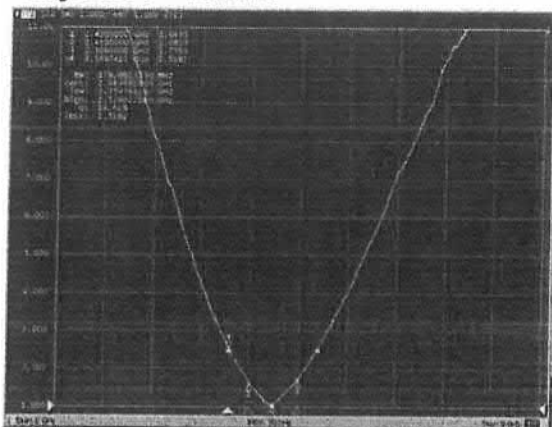

Mark	Frequency	VSWR
1	2400 MHz	1.65
2	2450 MHz	1.08
3	2500 MHz	1.73



Layout B : VSWR

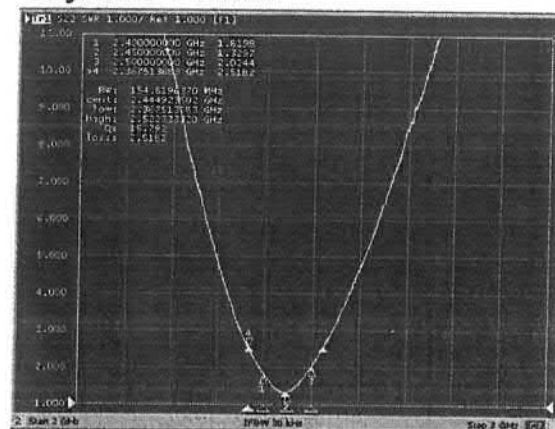

Mark	Frequency	VSWR
1	2400 MHz	1.82
2	2450 MHz	1.33
3	2500 MHz	2.02

Radiation Pattern


The Gain pattern is measured in INPAQ's FAR-field chamber. DUT is placed on the table of rotator, a standard horn antenna and Vector Network Analyzer is used to collect data.

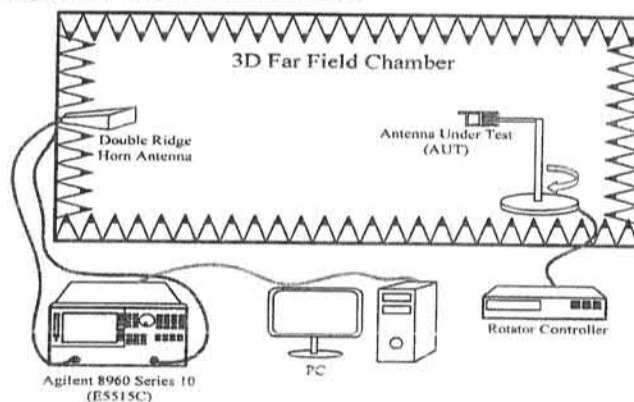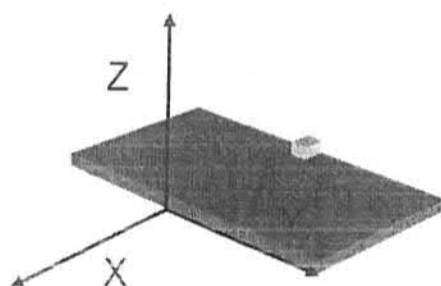


3D Chamber Definition

© 3D Gain Pattern (2450 MHz)

Layout A :

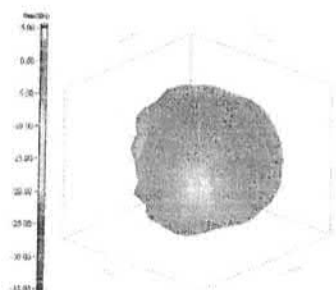

Layout B :

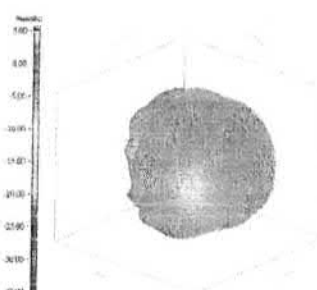

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=±
 ANGLES=± HOLEDIA=±

SCALE : ----- UNIT : mm

DRAWN BY : 黃婉珮 CHECKED BY : 楊奇峰

DESIGNED BY : 謝立庭 APPROVED BY : 蔡岳霖

TITLE : ACA-5036-A2-CC-S Specification



INPAQ TECHNOLOGY CO., LTD.

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


DOCUMENT
NO.

ENS000023010


SPEC REV.
A0

© 2D Gain Pattern (2450 MHz)


X-Y Plane

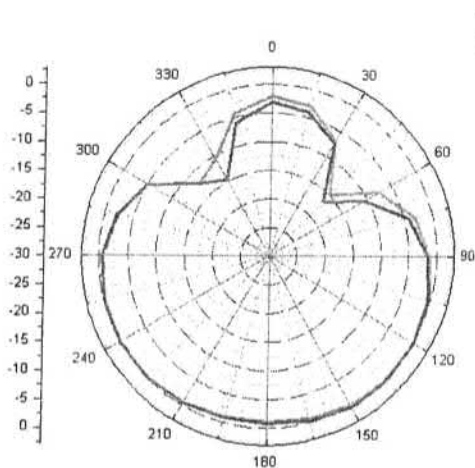

X-Z Plane

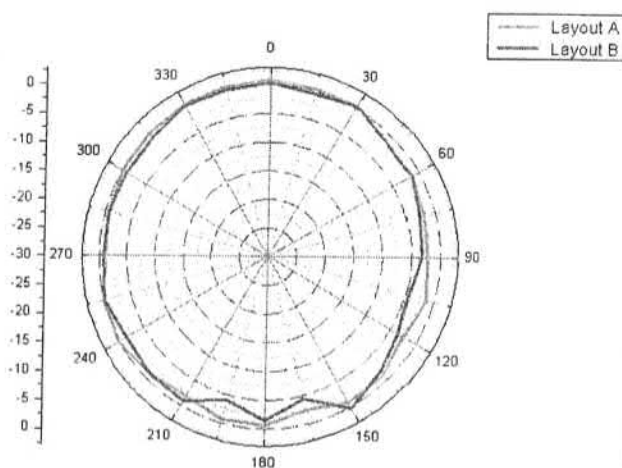

Y-Z Plane

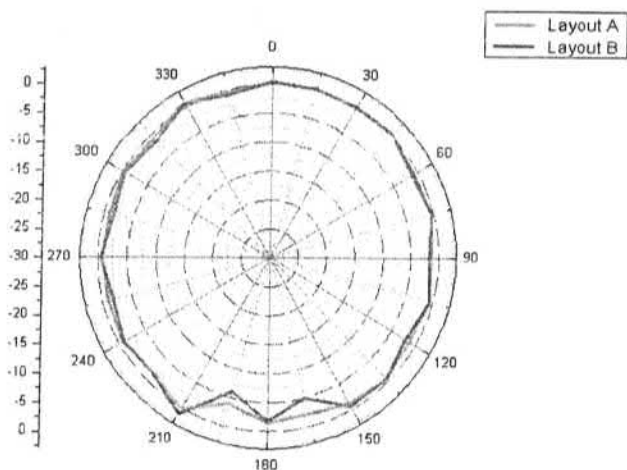

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=

ANGLES=± HOLEDIA=±

SCALE : -----

UNIT : mm

DRAWN BY : 黃婉珮

CHECKED BY : 楊奇峰

DESIGNED BY : 謝立庭

APPROVED BY : 蔡岳霖

TITLE : ACA-5036-A2-CC-S Specification

DOCUMENT
NO.

ENS000023010

SPEC REV.
A0




INPAQ TECHNOLOGY CO., LTD.


THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

7. Taping Package and Label Marking: (unit: mm)

- (1) Quantity/Reel: 2000pcs/Reel
- (2) Carrier tape dimensions

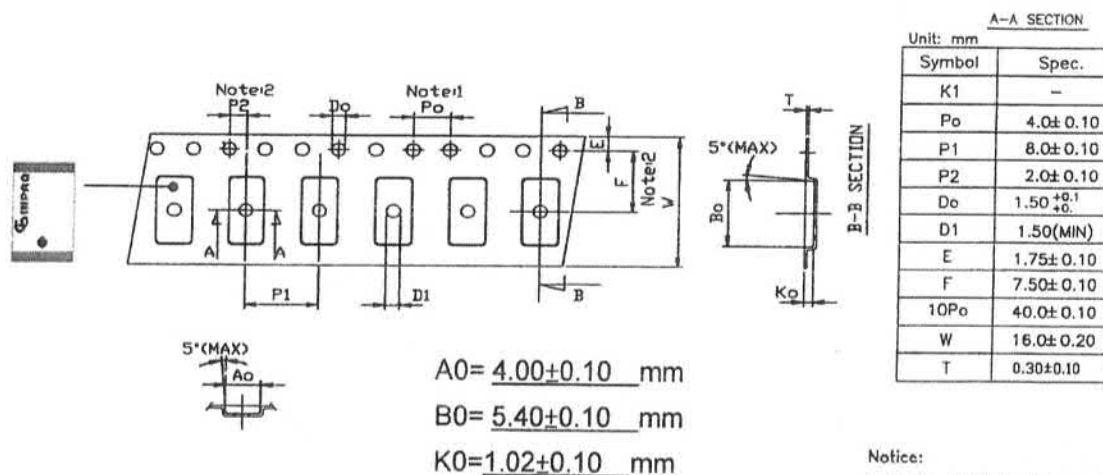

(3) Taping reel dimensions

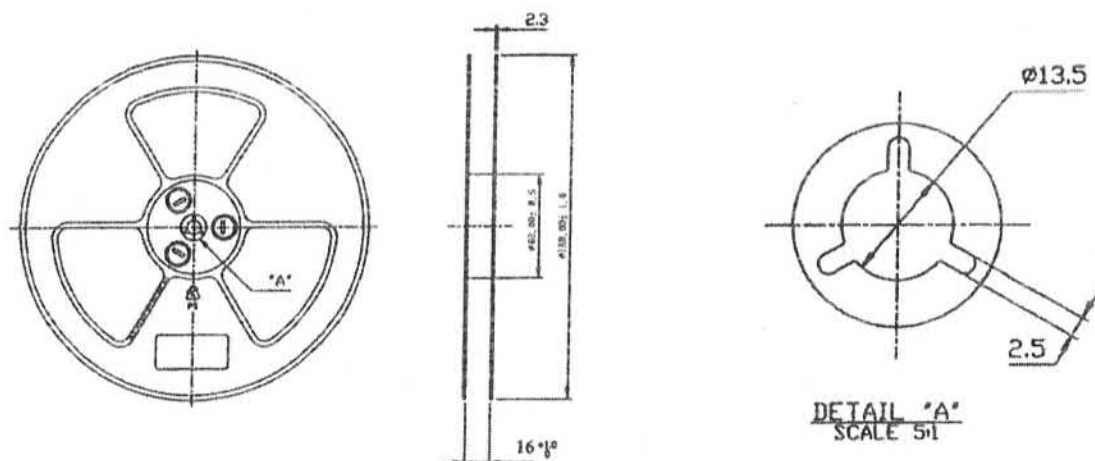

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=

ANGLES=± HOLEDIA=±

SCALE : ---- UNIT : mm

DRAWN BY : 黃琬珊 CHECKED BY : 楊奇峰

DESIGNED BY : 謝立庭 APPROVED BY : 蔡岳霖

TITLE : ACA-5036-A2-CC-S Specification



INPAQ TECHNOLOGY CO., LTD.

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT NO.

ENS000023010

SPEC REV.

A0

8. Environmental Characteristics

(1) Reliability Test

Item	Condition	Specification
Thermal shock	1. 30±3 minutes at -40°C±5°C, 2. Convert to +105°C (5 minutes) 3. 30±3 minutes at +105°C±5°C, 4. Convert to -40°C (5 minutes) 5. Total 100 continuous cycles	No apparent damage Fulfill the electrical spec. after test.
Humidity resistance	1. Humidity: 85% R.H. 2. Temperature: 85±5°C 3. Time: 1000 hours.	No apparent damage Fulfill the electrical spec. after test.
High temperature resistance	1. Temperature: 150°C±5°C 2. Time: 1000 hours.	No apparent damage Fulfill the electrical spec. after test.
Low temperature resistance	1. Temperature: -40°C±5°C 2. Time: 1000 hours.	No apparent damage Fulfill the electrical spec. after test.
Soldering heat resistance	1. Solder bath temperature : 260±5°C 2. Bathing time: 10±1 seconds	No apparent damage
Solderability	The dipped surface of the terminal shall be at least 95% covered with solder after dipped in solder bath of 245±5°C for 3±1 seconds.	No apparent damage

(2) Storage condition

(a) At warehouse:

The temperature should be within 0 ~ 30°C and humidity should be less than 60% RH.

The product should be used within 1 year from the time of delivery.

(b) On board:


The temperature should be within -40~85°C and humidity should be less than 85% RH.

(3) Operating temperature range

Operating temperature range : -40°C to +105°C.

UNLESS OTHER SPECIFIED TOLERANCES ON : X=± X.X=± X.XX=			INPAQ TECHNOLOGY CO., LTD.
ANGLES=± HOLEDIA=±			
SCALE : ----	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY : 黃婉珮	CHECKED BY : 楊奇峰		
DESIGNED BY : 謝立庭	APPROVED BY : 蔡岳霖		
TITLE : ACA-5036-A2-CC-S Specification		DOCUMENT NO.	ENS000023010
			SPEC REV. A0

9. Recommended reflow soldering

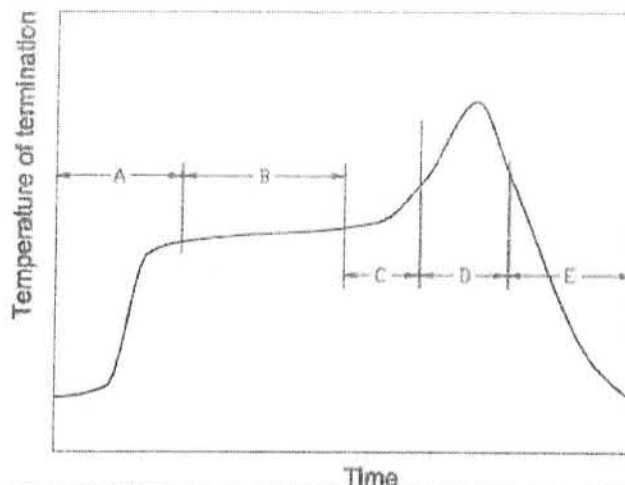

Time			
A	1 st rising temperature	The normal to Preheating temperature	30s to 60s
B	Preheating	140°C to 160°C	60s to 120s
C	2 nd rising temperature	Preheating to 200°C	20s to 40s
D	Main heating	if 220°C	50s~60s
		if 230°C	40s~50s
		if 240°C	30s~40s
		if 250°C	20s~40s
		if 260°C	20s~40s
E	Regular cooling	200°C to 100°C	1°C/s ~ 4°C/s

*reference: J-STD-020C

(1) Soldering gun procedure

Note the follows, in case of using solder gun for replacement.

- (a) The tip temperature must be less than 350°C for the period within 3 seconds by using soldering gun under 30 W.
- (b) The soldering gun tip shall not touch this product directly.

(2) Soldering volume

Note that excess of soldering volume will easily get crack the body of this product.

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=

ANGLES=± HOLEDIA=±

SCALE : ----

UNIT : mm

DRAWN BY : 黃琬珮

CHECKED BY : 楊奇峰

DESIGNED BY : 謝立庭

APPROVED BY : 蔡岳霖

TITLE : ACA-5036-A2-CC-S Specification



INPAQ TECHNOLOGY CO., LTD
No. 11, Keyi Street, Gongyi Li 11,
Zhunan Town, Miaoli County 350402

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT
NO.

ENS000023010

SPEC REV.
A0



环境管理物质不使用证明书 (ONLINE系统)

编号: GP-ANN-02 版本: V1.5

供应商标代码 (Supplier Code): P0017H
供应商标名称 (Supplier Name): 香港信邦电子有限公司
供应商标地址 (Supplier Add): ROAD KOWLOON HONGKONG

1. 签署人保证已经获得公司充分授权, 并保证本表格的内容及所附的环境测试报告完全准确/真实。The below undersigned person declares that he/she is duly authorized by their organization to sign on its behalf and that the contents of this sheet and corresponding test reports are completely true and accurate.
2. 如本公司物料或产品之制造地点、制造工艺、原材料和组成成分发生变更时将立即通知GCEC并提交不使用证明书。测试报告及其MSDS。在得到GCEC认可前不得实施变更。Supplier shall not be allowed to carry out any changes without of GCEC write, and inform GCEC immediately if any changes in manufacturing locations, Processes, raw materials or component composition. Supplier shall not be allowed to carry out any changes without of GCEC write.

负责人 (Responsible Person)
负责人所属部门 (Responsible Person Department)
职务 (Job Title)
邮箱地址 (E-mail)
声明日期 Date of Declaration

公司印章 Company Seal

职务(Job Title)		邮箱地址(E-mail)		声明日期 Date of Declaration	