

TEST REPORT

Part 15 Subpart E 15.407

Equipment under test NUGU candle SE

Model name NU110

FCC ID 2A9KPNU110SE

Applicant LISMA CO., LTD.

Manufacturer DongGuan Hajen Electro-mechanics Co., Ltd.

Date of test(s) 2022.12.01 ~ 2023.01.03

Date of issue 2023.01.12

Issued to

LISMA CO., LTD.

358, Samil-daero, Jung-gu, Seoul,

Republic of Korea

Tel: +82-10-3107-0083 / Fax: +82-0508-918-3183

Issued by

KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si,

Gyeonggi-do, 14057, Korea

473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, Korea

Tel: +82-31-425-6200 / Fax: +82-31-424-0450

Test and report completed by :	Report approval by :
	
Gu-Bong, Kang Test engineer	Yeong-Jun Cho Technical manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-RF-23T0015
Page (2) of (135)

Revision history

Revision	Date of issue	Test report No.	Description
-	2023.01.12	KES-RF-23T0015	Initial

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-RF-23T0015
Page (3) of (135)

TABLE OF CONTENTS

1.	General information	4
1.1.	EUT description	5
1.2.	Test configuration.....	6
1.3.	Information about derivative model	6
1.4.	Accessory information.....	6
1.5.	Sample calculation	6
1.6.	Measurement Uncertainty	6
1.7.	Frequency/channel operations	7
2.	Summary of tests	9
3.	Test results.....	10
3.1.	26 dB bandwidth & 99% Occupied Bandwidth	10
3.2.	6 dB bandwidth	26
3.3.	Maximum conducted output power	31
3.4.	Power spectral density	36
3.5.	Frequency Stability.....	47
3.6.	Radiated restricted band and emissions	52
3.7.	AC conducted emissions	131
3.8.	Antenna Requirement.....	133
Appendix A.	Measurement equipment	134
Appendix B.	Test setup photos	135

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-RF-23T0015
Page (4) of (135)

1. General information

Applicant: LISMA CO., LTD.
Applicant address: 358, Samil-daero, Jung-gu, Seoul, Republic of Korea
Test site: KES Co., Ltd.
Test site address: ☐ 3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si,
Gyeonggi-do, 14057, Korea
☒ 473-21, Gayeo-ro, Yeoju-si, Gyeonggi-do, Korea
Test Facility FCC Accreditation Designation No.: KR0100, Registration No.: 444148
FCC rule part(s): 15.407
FCC ID: 2A9KPNU110SE
Test device serial No.: ☒ Production ☐ Pre-production ☐ Engineering

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

1.1. EUT description

Equipment under test	NUGU candle SE
Frequency range	2 402 MHz ~ 2 480 MHz (BDR / EDR) 2 402 MHz ~ 2 480 MHz (LE 1 Mbps) 2 412 MHz ~ 2 462 MHz (802.11b/g/n_HT20) 2 422 MHz ~ 2 452 MHz (802.11n_HT40) UNII-1 5 180 MHz ~ 5 240 MHz (802.11a/n_HT20) 5 190 MHz ~ 5 230 MHz (802.11n_HT40) UNII-2A 5 260 MHz ~ 5 320 MHz (802.11a/n_HT20) 5 270 MHz ~ 5 310 MHz (802.11n_HT40) UNII-2C 5 500 MHz ~ 5 720 MHz (802.11a/n_HT20) 5 510 MHz ~ 5 710 MHz (802.11n_HT40) UNII-3 5 745 MHz ~ 5 825 MHz (802.11a/n_HT20) 5 755 MHz ~ 5 795 MHz (802.11n_HT40)
Model	NU110
Modulation technique	GFSK, $\pi/4$ DQPSK, 8DPSK, DSSS, OFDM
Number of channels	2 402 MHz ~ 2 480 MHz (BDR / EDR) : 79 ch 2 402 MHz ~ 2 480 MHz (LE 1 Mbps) : 40 ch 2 412 MHz ~ 2 462 MHz (802.11b/g/n_HT20) : 11 ch 2 422 MHz ~ 2 452 MHz (802.11n_HT40) : 7 ch UNII-1 5 180 MHz ~ 5 240 MHz (802.11a/n_HT20) : 4 ch 5 190 MHz ~ 5 230 MHz (802.11n_HT40) : 2 ch UNII-2A 5 260 MHz ~ 5 320 MHz (802.11a/n_HT20) : 4 ch 5 270 MHz ~ 5 310 MHz (802.11n_HT40) : 2 ch UNII-2C 5 500 MHz ~ 5 720 MHz (802.11a/n_HT20) : 12 ch 5 510 MHz ~ 5 710 MHz (802.11n_HT40) : 6 ch UNII-3 5 745 MHz ~ 5 825 MHz (802.11a/n_HT20) : 5 ch 5 755 MHz ~ 5 795 MHz (802.11n_HT40) : 2 ch
Antenna specification	BDR/EDR : Chip Antenna // Peak gain: 3.0 dBi LE 1 Mbps : Chip Antenna // Peak gain: 3.0 dBi WLAN 2.4 GHz : Chip Antenna // Peak gain: 3.0 dBi WLAN 5 GHz : Chip Antenna // Peak gain: 3.3 dBi
Power source	AC 120 V (AC/DC adapter output 15 V)
H/W version	V0.2
S/W version	130020312

1.2. Test configuration

The **LISMA CO., LTD. // NUGU candle SE // NU110 // FCC ID: 2A9KPNU110SE** was tested according to the specification of EUT, the EUT must comply with following standards and KDB documents.

FCC Part 15.407
KDB 789033 D02 v02r01
ANSI C63.10-2013

1.3. Information about derivative model

N/A

1.4. Accessory information

Equipment	Manufacturer	Model	Serial No.	Power source
AC/DC adapter	Dongguan RuiHeng Electronic Technology Co.,LTD	RH-150200US	221010000111	AC 120 V input, DC 15 V, 2.0 A output

1.5. Sample calculation

Where relevant, the following sample calculation is provided
For all conducted test items :

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 1.83 + 10 = 11.83 \text{ (dB)}\end{aligned}$$

For Radiation test :

Field strength level (dB μ V/m) = Measured level (dB μ V) + Antenna factor (dB) + Cable loss (dB) – Amplifier gain (dB)

1.6. Measurement Uncertainty

Test Item		Uncertainty
Uncertainty for Conduction emission test		2.38 dB (SHIELD ROOM #6)
Uncertainty for Radiation emission test (include Fundamental emission)	Below 1GHz	4.50 dB (SAC #6)
	Above 1GHz	4.90 dB (SAC #5)
Note. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.		

1.7. Frequency/channel operations

Ch.	Frequency (MHz)	Rate(Mbps)
00	2 402	BDR 1 Mbps, EDR 2 Mbps, EDR 3 Mbps
.	.	.
40	2 442	BDR 1 Mbps, EDR 2 Mbps, EDR 3 Mbps
.	.	.
78	2 480	BDR 1 Mbps, EDR 2 Mbps, EDR 3 Mbps

Ch.	Frequency (MHz)	Rate(Mbps)
00	2 402	LE 1 Mbps
.	.	.
20	2 442	LE 1 Mbps
.	.	.
39	2 480	LE 1 Mbps

Ch.	Frequency (MHz)	Rate(Mbps)
01	2 412	802.11b/g/n_HT20
.	.	.
06	2 437	802.11b/g/n_HT20
.	.	.
11	2 462	802.11b/g/n_HT20

Ch.	Frequency (MHz)	Rate(Mbps)
03	2 422	802.11n_HT40
.	.	.
06	2 437	802.11n_HT40
.	.	.
09	2 452	802.11n_HT40

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-RF-23T0015

Page (8) of (135)

UNII-1

Ch.	Frequency (MHz)
36	5 180
44	5 220
48	5 240

UNII-2A

Ch.	Frequency (MHz)
52	5 260
56	5 280
64	5 320

UNII-2C

Ch.	Frequency (MHz)
100	5 500
120	5 600
144	5 720

UNII-3

Ch.	Frequency (MHz)
149	5 745
157	5 785
165	5 825

802.11a/n_HT20 mode**UNII-1**

Ch.	Frequency (MHz)
38	5 190
46	5 230

UNII-2A

Ch.	Frequency (MHz)
54	5 270
62	5 310

UNII-2C

Ch.	Frequency (MHz)
102	5 510
118	5 590
142	5 710

UNII-3

Ch.	Frequency (MHz)
151	5 755
159	5 795

802.11n_HT40 mode

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

2. Summary of tests

Section in FCC Part 15	Parameter	Test results
15.407(a)	26 dB bandwidth & 99 % bandwidth	Pass
15.407(a)	6 dB bandwidth	Pass
15.407(a)	Maximum conducted output power	Pass
15.407(a)	Power spectral density	Pass
15.407(g)	Frequency stability	Pass
15.205, 15.209, 15.407(b)	Radiated restricted band and emission	Pass
15.207(a)	AC power line conducted emissions	Pass
15.203	Antenna Requirement	Pass

Note.


- Except for the list below, all tests were conducted with default output power.

2.4 GHz WLAN		
Mode	Frequency (MHz)	Setting value
802.11n_HT40	2 422	10
	2 437	10
	2 452	10
UNII-1		
802.11n_HT40	5 190	10
UNII-2A		
802.11n_HT40	5 310	10
UNII-2C		
802.11a	5 700	10
802.11n_HT20	5 700	10
802.11n_HT40	5 510	10
	5 670	10

3. Test results

3.1. 26 dB bandwidth & 99% Occupied Bandwidth

Test setup



Test procedure

26 dB bandwidth

KDB 789033 D02 v02r01– Section C.1

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the VBW > RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

99 % bandwidth

KDB 789033 D02 v02r01– Section D

1. Set span = 1.5 times to 5.0 times the OBW.
2. Set RBW = 1% to 5% of the OBW
3. Set the VBW > 3 x RBW.
4. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak bandwidth function of the instrument (if available).
5. Use the 99% power bandwidth function of the instrument (if available).
6. If the instrument does not have a 99% power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

Limit

N/A

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-RF-23T0015

Page (11) of (135)

Test results

Band	Frequency(MHz)	Mode	26 dB bandwidth(MHz)	99 % bandwidth(MHz)
UNII-1	5 180	802.11 a	21.52	18.85
	5 220		21.60	19.02
	5 240		21.18	18.97
UNII-2A	5 260		21.84	19.12
	5 280		21.33	18.75
	5 320		21.54	18.83
UNII-2C	5 500		20.96	18.64
	5 600		21.14	18.62
	5 720		21.08	18.83
UNII-3	5 745		21.04	18.83
	5 785		21.27	18.72
	5 825		21.09	18.86
UNII-1	5 180	802.11 n_HT20	21.51	19.77
	5 220		21.47	19.95
	5 240		21.50	19.92
UNII-2A	5 260		21.63	19.77
	5 280		21.81	19.90
	5 320		21.22	19.77
UNII-2C	5 500		21.36	19.71
	5 600		20.73	19.59
	5 720		21.68	19.88
UNII-3	5 745		20.92	19.72
	5 785		21.41	19.84
	5 825		21.33	19.71
UNII-2C (Band-crossing channels)	5 720	802.11 a	16.22	N/A
	5 720	802.11 n_HT20	16.87	N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-RF-23T0015


Page (12) of (135)

Band	Frequency(MHz)	Mode	26 dB bandwidth(MHz)	99 % bandwidth(MHz)
UNII-1	5 190	802.11 n_HT40	46.37	41.04
	5 230		48.32	41.07
UNII-2A	5 270		43.87	39.93
	5 310		43.72	40.21
UNII-2C	5 510		44.75	40.06
	5 590		45.10	40.24
	5 710		46.88	40.13
UNII-3	5 755		43.40	40.13
	5 795		44.84	39.99
UNII-2C (Band-crossing channels)	5 710	802.11 n_HT40	37.66	N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

26 dB bandwidth

Mode : 802.11a

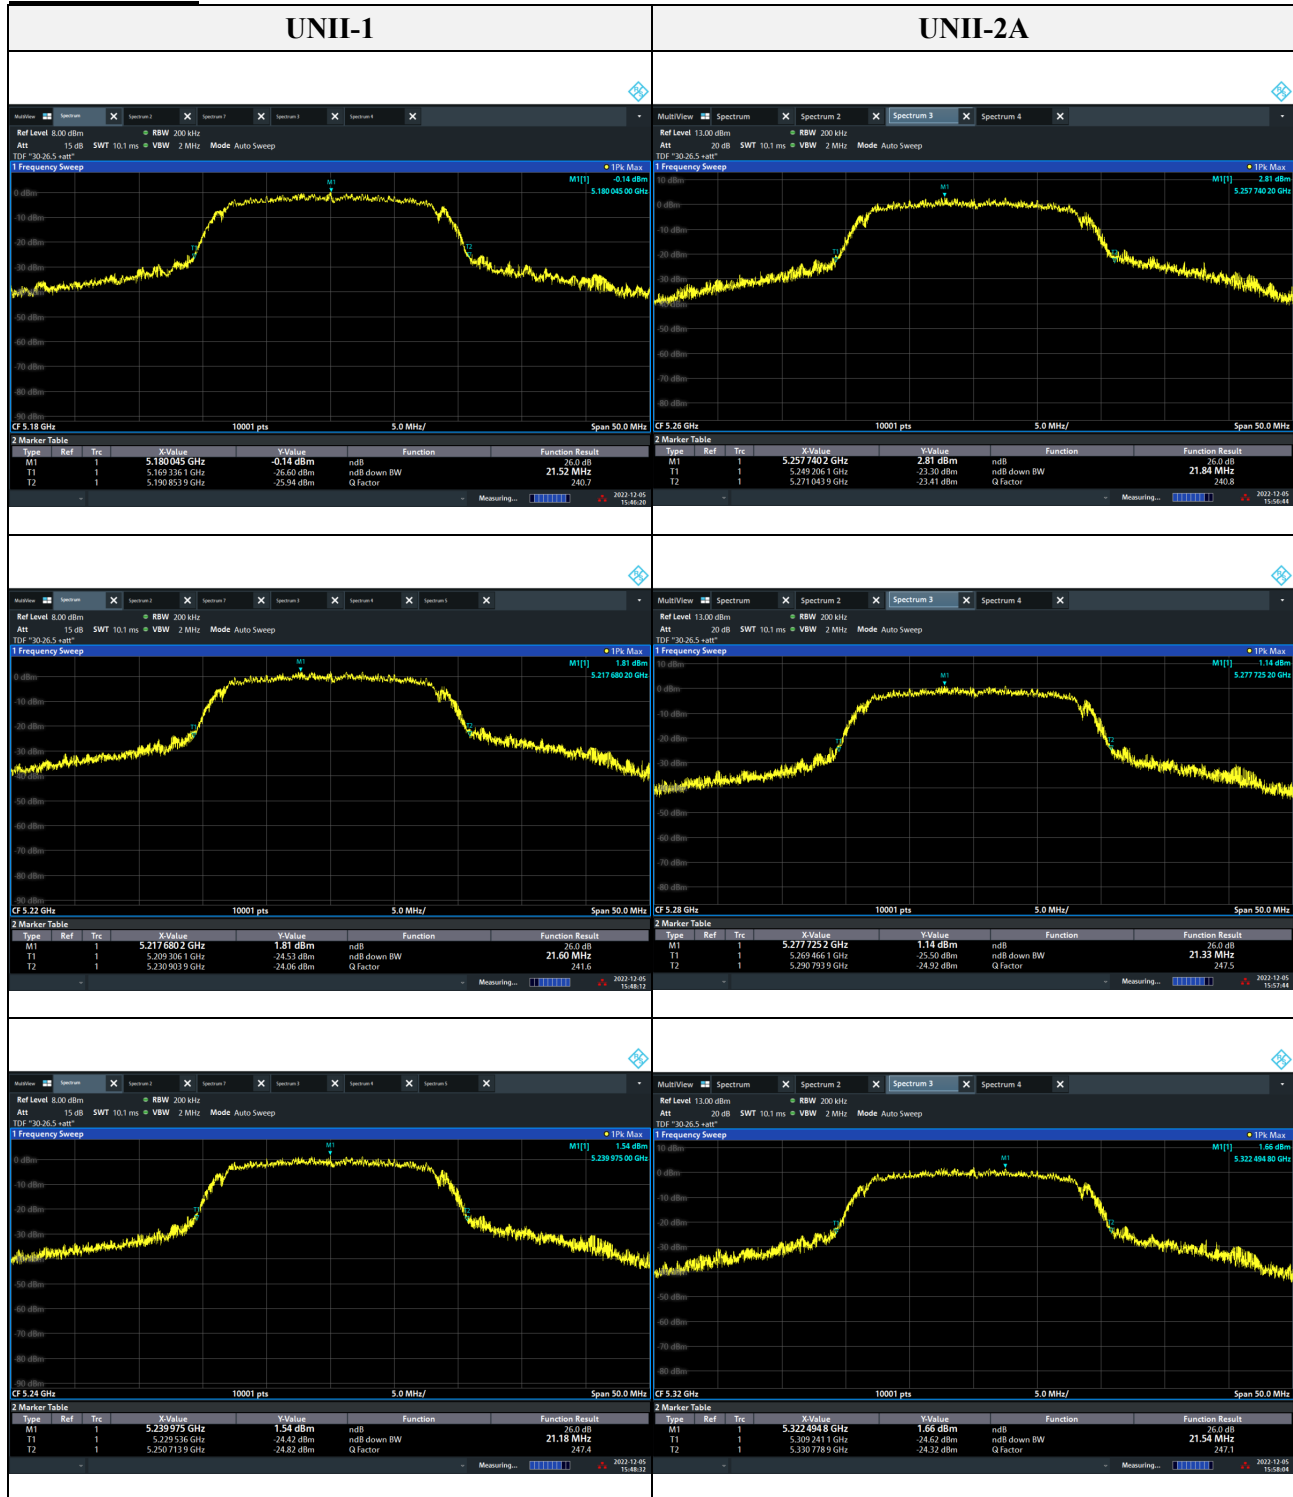

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-RF-23T0015

Page (14) of (135)

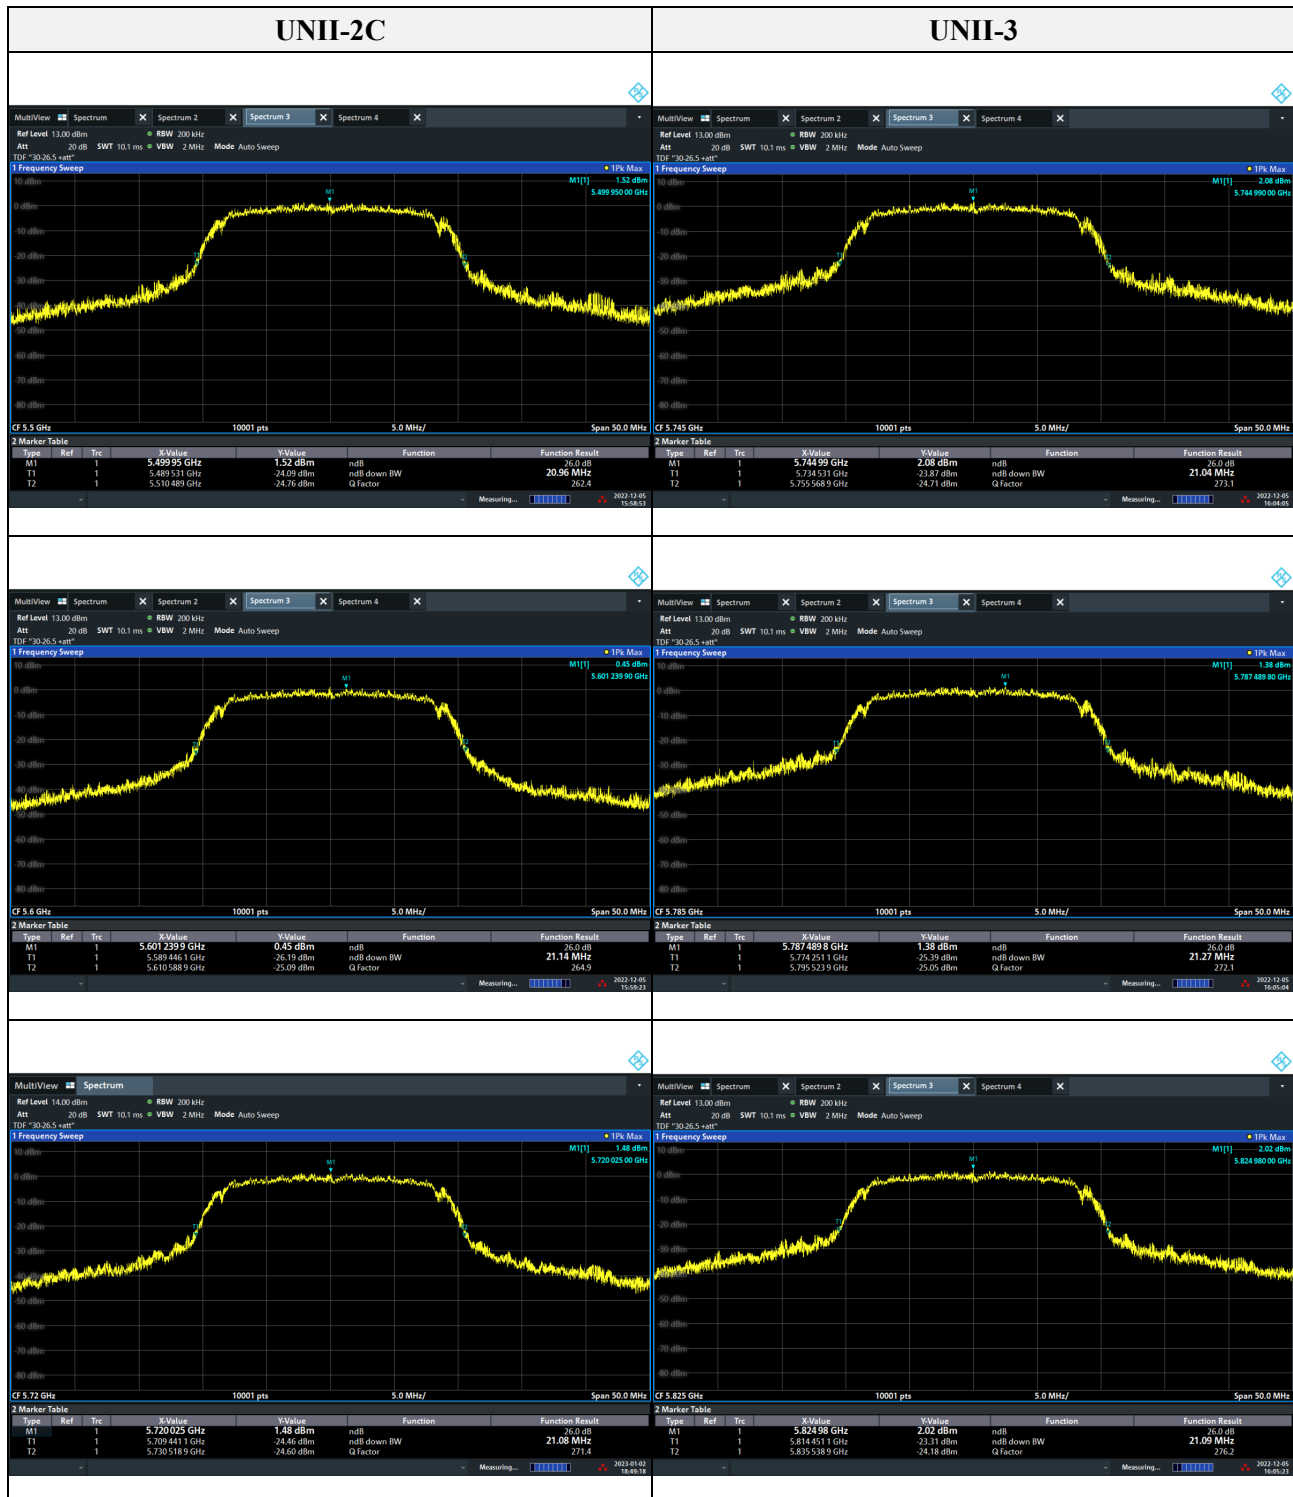

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-RF-23T0015

Page (15) of (135)

Mode : 802.11n HT20

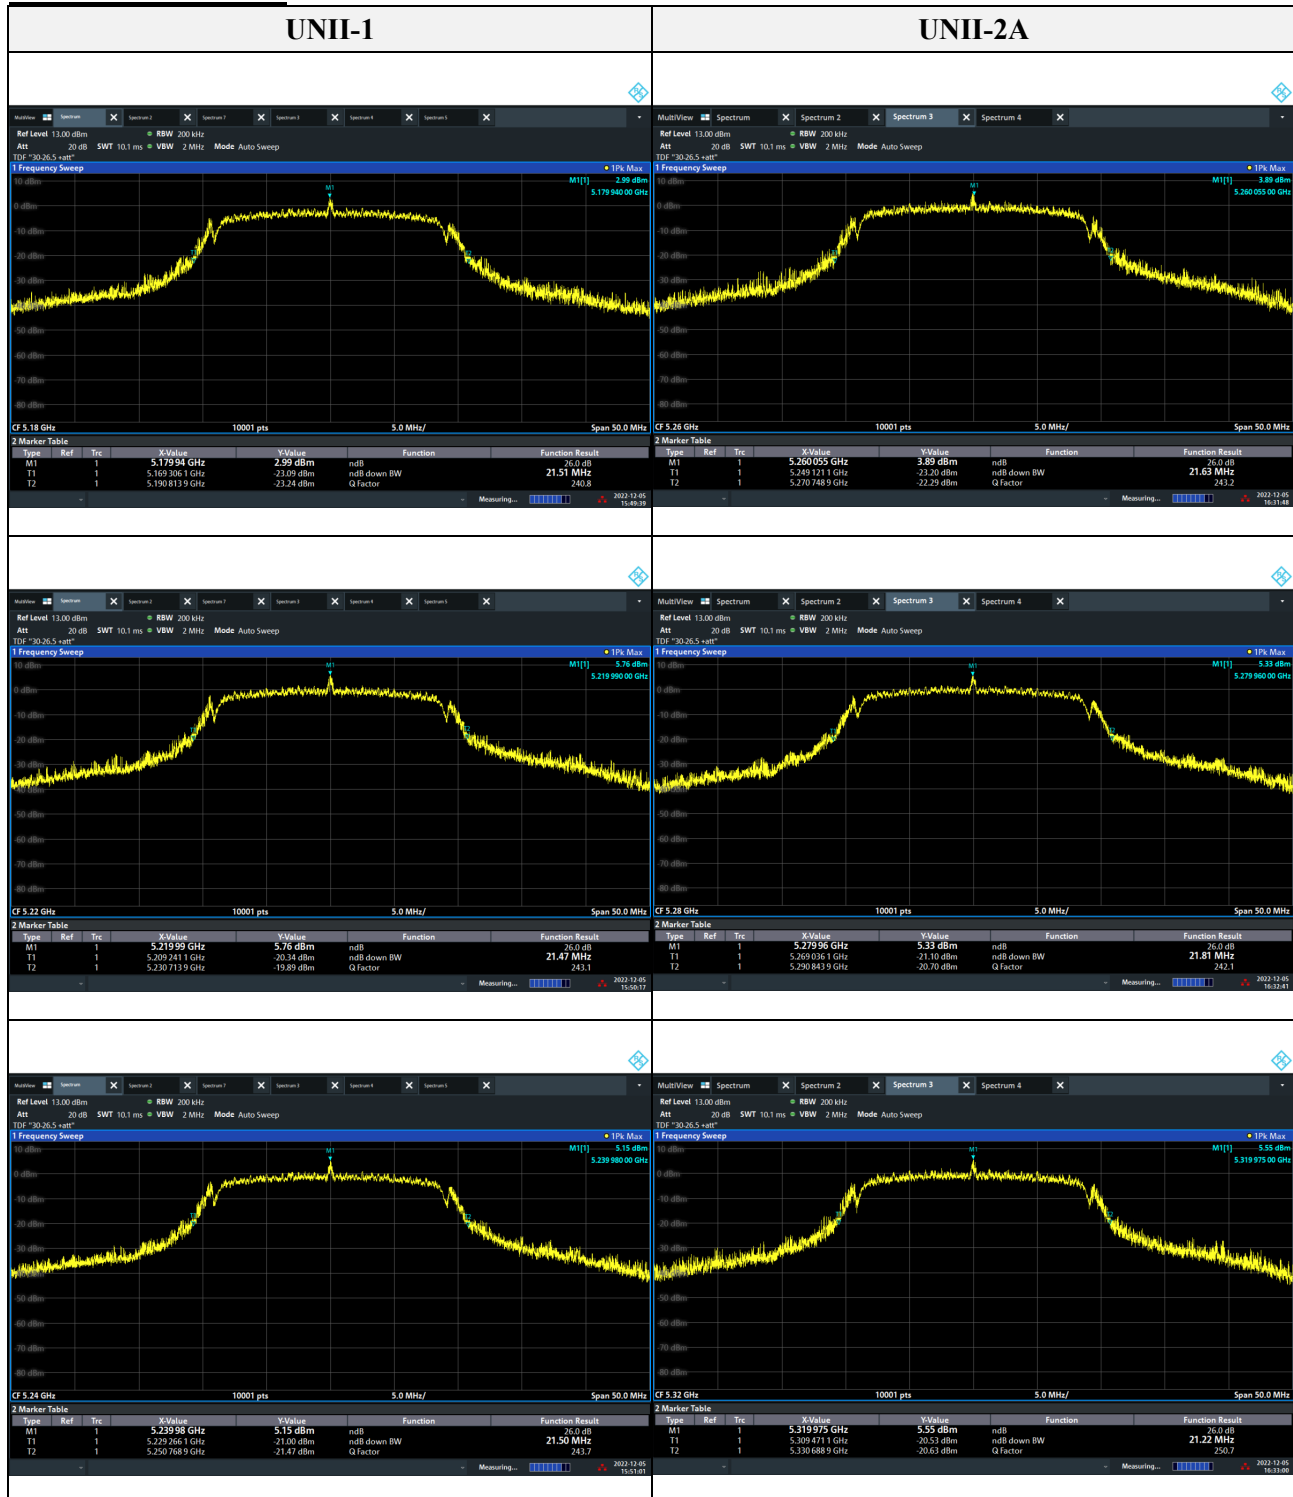

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

KES-QP16-F01(00-23-01-01)




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-RF-23T0015

Page (16) of (135)

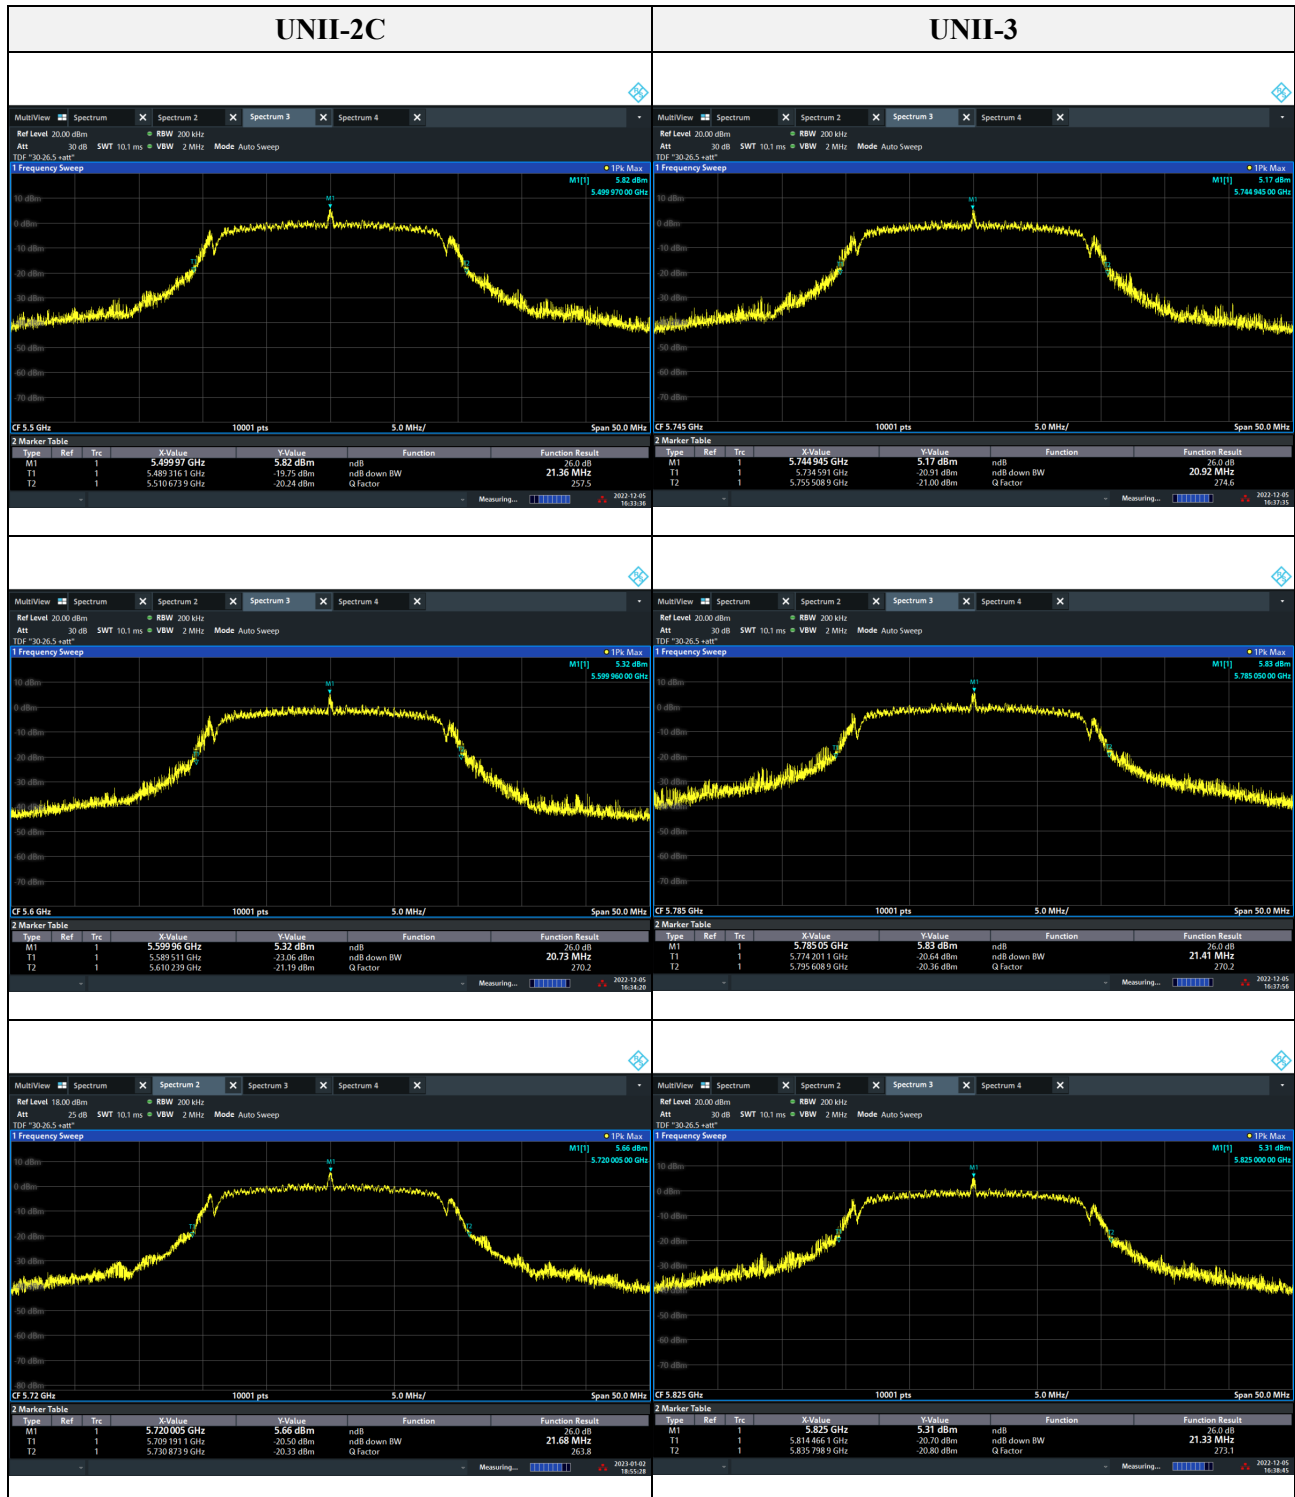

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-RF-23T0015

Page (17) of (135)

Mode : 802.11n HT40

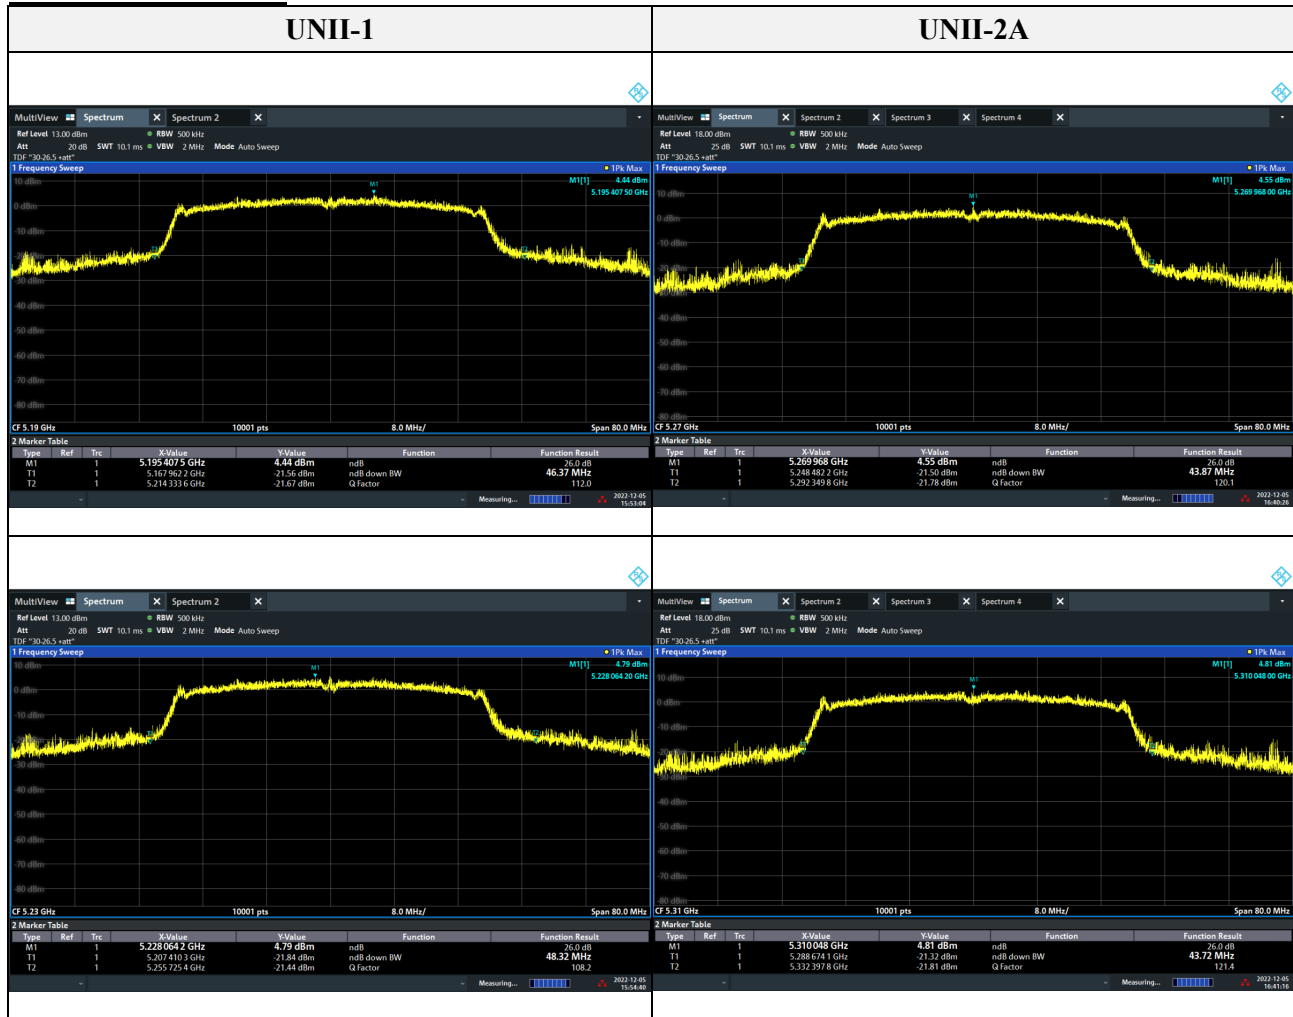

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr