



# FCC Test Report

## FCC ID : 2A9LU-A1000

Applicant: Guitar Center, Inc.

Address: 5795 Lindero Canyon Rd Westlake Village, California 91362 United States

Manufacturer: DONGGUAN LONGJOIN ELECTRONICS COMPANY LIMITED

Address: Longjoin Building, Gong Ye Da Dao, Shuilang Village, Dalingshan Town, Dongguan City, Guangdong Province, China.

EUT: 100 WATT STEREO ACOUSTIC INSTRUMENT AMP

Trade Mark: acoustic

Model Number: A1000

Date of Receipt: Nov. 20, 2022

Test Date: Nov. 21, 2022 - Dec. 13, 2022

Date of Report: Dec. 14, 2022

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone, Baolong Street, Longgang District, Shenzhen, Guangdong, China

Applicable Standards: FCC PART 15 C 15.247  
ANSI C63.10:2013

Test Result: Pass

Report Number: DL-20221206037E-2

Prepared (Test Engineer): Pxing Huang

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



*This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.*



| Table of Contents                                           | Page      |
|-------------------------------------------------------------|-----------|
| <b>1 . SUMMARY OF TEST RESULTS</b>                          | <b>4</b>  |
| 1.1 TEST FACILITY                                           | 5         |
| 1.2 MEASUREMENT UNCERTAINTY                                 | 5         |
| <b>2 . GENERAL INFORMATION</b>                              | <b>6</b>  |
| 2.1 GENERAL DESCRIPTION OF EUT                              | 6         |
| 2.2 DESCRIPTION OF TEST MODES                               | 7         |
| 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 8         |
| 2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)            | 8         |
| 2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING            | 8         |
| 2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS                      | 9         |
| <b>3 . EMC EMISSION TEST</b>                                | <b>10</b> |
| 3.1 CONDUCTED EMISSION MEASUREMENT                          | 10        |
| 3.1.1 POWER LINE CONDUCTED EMISSION LIMITS                  | 10        |
| 3.1.2 TEST PROCEDURE                                        | 10        |
| 3.1.3 DEVIATION FROM TEST STANDARD                          | 10        |
| 3.1.4 TEST SETUP                                            | 11        |
| 3.1.5 EUT OPERATING CONDITIONS                              | 11        |
| 3.1.6 TEST RESULTS                                          | 11        |
| 3.2 RADIATED EMISSION MEASUREMENT                           | 14        |
| 3.2.1 RADIATED EMISSION LIMITS                              | 14        |
| 3.2.2 TEST PROCEDURE                                        | 15        |
| 3.2.3 DEVIATION FROM TEST STANDARD                          | 15        |
| 3.2.4 TEST SETUP                                            | 15        |
| 3.2.5 EUT OPERATING CONDITIONS                              | 16        |
| 3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)                  | 17        |
| 3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)                   | 18        |
| 3.2.8 TEST RESULTS (1GHZ~25GHZ)                             | 20        |
| 3.3 RADIATED BAND EMISSION MEASUREMENT                      | 21        |
| 3.3.1 TEST REQUIREMENT:                                     | 21        |
| 3.3.2 TEST PROCEDURE                                        | 21        |
| 3.3.3 DEVIATION FROM TEST STANDARD                          | 21        |
| 3.3.4 TEST SETUP                                            | 22        |
| 3.3.5 EUT OPERATING CONDITIONS                              | 22        |
| <b>4.POWER SPECTRAL DENSITY TEST</b>                        | <b>24</b> |
| 4.1.1 APPLIED PROCEDURES / LIMIT                            | 24        |
| 4.1.2 TEST PROCEDURE                                        | 24        |
| 4.1.3DEVIATION FROM STANDARD                                | 24        |



| <b>Table of Contents</b>                            | <b>Page</b> |
|-----------------------------------------------------|-------------|
| 4.1.4 TEST SETUP                                    | 24          |
| 4.1.5 EUT OPERATION CONDITIONS                      | 24          |
| 4.1.6 TEST RESULTS                                  | 25          |
| <b>5. CHANNEL BANDWIDTH</b>                         | <b>27</b>   |
| 5.1.1 APPLIED PROCEDURES / LIMIT                    | 27          |
| 5.1.2 TEST PROCEDURE                                | 27          |
| 5.1.3 DEVIATION FROM STANDARD                       | 27          |
| 5.1.4 TEST SETUP                                    | 27          |
| 5.1.5 EUT OPERATION CONDITIONS                      | 27          |
| 5.1.6 TEST RESULTS                                  | 28          |
| <b>6. PEAK OUTPUT POWER TEST</b>                    | <b>30</b>   |
| 6.1.1 APPLIED PROCEDURES / LIMIT                    | 30          |
| 6.1.2 TEST PROCEDURE                                | 30          |
| 6.1.3 DEVIATION FROM STANDARD                       | 30          |
| 6.1.4 TEST SETUP                                    | 30          |
| 6.1.5 EUT OPERATION CONDITIONS                      | 30          |
| 6.1.6 TEST RESULTS                                  | 31          |
| <b>7. CONDUCTED BAND EDGE AND SPURIOUS EMISSION</b> | <b>33</b>   |
| 7.1.1 APPLICABLE STANDARD                           | 33          |
| 7.1.2 TEST PROCEDURE                                | 33          |
| 7.1.3 DEVIATION FROM STANDARD                       | 33          |
| 7.1.4 TEST SETUP                                    | 33          |
| 7.1.5 EUT OPERATION CONDITIONS                      | 33          |
| 7.1.6 TEST RESULTS                                  | 33          |
| <b>8. ANTENNA REQUIREMENT</b>                       | <b>40</b>   |
| 8.1 STANDARD REQUIREMENT                            | 40          |
| 8.2 EUT ANTENNA                                     | 40          |
| <b>9. TEST SETUP PHOTO</b>                          | <b>41</b>   |
| <b>10. EUT PHOTO</b>                                | <b>41</b>   |



## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

| FCC Part15 (15.247) , Subpart C |                                          |          |        |
|---------------------------------|------------------------------------------|----------|--------|
| Standard Section                | Test Item                                | Judgment | Remark |
| 15.207,                         | Conducted Emission                       | PASS     |        |
| 15.205/15.209,                  | Radiated Emission and Restricted Bands   | PASS     |        |
| 15.247(b)(3),                   | Conducted Peak Output Power              | PASS     |        |
| 15.247 (d),                     | Conducted Unwanted Emission and Bandedge | PASS     |        |
| 15.247(a)(2),                   | 6dB Bandwidth& 99% OCB                   | PASS     |        |
| 15.247 (e),                     | Power Spectral Density                   | PASS     |        |
| 15.203/15.247 (c),              | Antenna Requirement                      | PASS     |        |

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



### 1.1 TEST FACILITY

Shenzhen DL Testing Technology Co., Ltd.

Add. : 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone, Baolong Street, Longgang District, Shenzhen, Guangdong, China

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

ISED Registration number: 27485

IC Registered No.:CN0118

### 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95 %**.

| No. | Item                         | Uncertainty               |
|-----|------------------------------|---------------------------|
| 1   | Conducted Emission Test      | $\pm 2.56\text{dB}$       |
| 2   | RF power,conducted           | $\pm 0.42\text{dB}$       |
| 3   | Spurious emissions,conducted | $\pm 2.76\text{dB}$       |
| 4   | All emissions,radiated(<1G)  | $\pm 3.65\text{dB}$       |
| 5   | All emissions,radiated(>1G)  | $\pm 4.89\text{dB}$       |
| 6   | Temperature                  | $\pm 0.5^{\circ}\text{C}$ |
| 7   | Humidity                     | $\pm 2\%$                 |



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

|                        |                                         |
|------------------------|-----------------------------------------|
| Product Name:          | 100 WATT STEREO ACOUSTIC INSTRUMENT AMP |
| Test Model No.:        | A1000                                   |
| Sample ID:             | DL-20221206036E-1#                      |
| Serial No.:            | N/A                                     |
| Model Difference       | N/A                                     |
| Operation Frequency:   | 2402~2480MHz                            |
| Channel numbers:       | 40 Channels                             |
| Channel separation:    | 2M                                      |
| Modulation technology: | GFSK                                    |
| Antenna Type:          | FPCB antenna                            |
| Antenna gain:          | 4dBi                                    |
| Power supply:          | AC 110V~120V/60Hz, AC 220V~240V/50 Hz   |
| Power:                 | 150W                                    |

Note:

1.For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.The EUT's all information provided by client.

2.

| Channel List |                 |         |                 |         |                 |
|--------------|-----------------|---------|-----------------|---------|-----------------|
| Channel      | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 01           | 2402            | 11      | 2422            | 23      | 2444            |
| 02           | 2404            | 12      | 2424            | 24      | 2446            |
| ~            | ~               | ~       | ~               |         |                 |
| 9            | 2418            | 20      | 2440            | 39      | 2478            |
| 10           | 2420            | 21      | 2442            | 40      | 2480            |



## 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| Pretest Mode                      | Description |      |
|-----------------------------------|-------------|------|
| Mode 1                            | CH01        | GFSK |
| Mode 2                            | CH20        |      |
| Mode 3                            | CH40        |      |
| Mode 4                            | Link Mode   |      |
| For Conducted & Radiated Emission |             |      |
| Final Test Mode                   | Description |      |
| Mode 1                            | CH01        | GFSK |
| Mode 2                            | CH20        |      |
| Mode 3                            | CH40        |      |
| Mode 4                            | Link Mode   |      |


Note:

(1) The measurements are performed at the highest, middle, lowest available channels.




## 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test



Conducted Spurious Emission Test



## 2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment                               | Model/Type No. | Series No. | Note |
|------|-----------------------------------------|----------------|------------|------|
| E-1  | 100 WATT STEREO ACOUSTIC INSTRUMENT AMP | A1000          | N/A        | EUT  |
| AE   | Notebook                                | B40-80         | MP07F6JD   | AE   |

| Item | Shielded Type | Ferrite Core | Length | Note |
|------|---------------|--------------|--------|------|
|      |               |              |        |      |

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

## 2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the end product.

| Test software Version     | Test program: BT-Tool 1.1.2 |         |          |
|---------------------------|-----------------------------|---------|----------|
| Frequency                 | 2402 MHz                    | 2440MHz | 2480 MHz |
| Power Setting of Software | 7                           | 7       | 7        |



## 2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

### Radiation test, Band-edge test and bandwidth test equipment

| Item | Equipment                        | Manufacturer    | Type No.  | Serial No. | Last calibration | Calibrated until |
|------|----------------------------------|-----------------|-----------|------------|------------------|------------------|
| 1    | Spectrum Analyzer (9kHz-26.5GHz) | Agilent         | E4408B    | MY50140780 | Nov. 05, 2022    | Nov. 04, 2023    |
| 2    | Test Receiver (9kHz-7GHz)        | R&S             | ESRP7     | 101393     | Nov. 05, 2022    | Nov. 04, 2023    |
| 3    | Bilog Antenna (30MHz-1GHz)       | R&S             | VULB9162  | 00306      | Nov. 05, 2022    | Nov. 04, 2023    |
| 4    | Horn Antenna (1GHz-18GHz)        | Schwarzbeck     | BBHA9120D | 02139      | Nov. 05, 2022    | Nov. 04, 2023    |
| 5    | Horn Antenna (18GHz-40GHz)       | A.H. Systems    | SAS-574   | 588        | Nov. 05, 2022    | Nov. 04, 2023    |
| 6    | Amplifier (9KHz-6GHz)            | Schwarzbeck     | BBV9743B  | 00153      | Nov. 05, 2022    | Nov. 04, 2023    |
| 7    | Amplifier (1GHz-18GHz)           | EMEC            | EM01G8GA  | 00270      | Nov. 05, 2022    | Nov. 04, 2023    |
| 8    | Amplifier (18GHz-40GHz)          | Quanjuda        | DLE-161   | 97         | Nov. 05, 2022    | Nov. 04, 2023    |
| 9    | Loop Antenna (9KHz-30MHz)        | Schwarzbeck     | FMZB1519B | 00014      | Nov. 05, 2022    | Nov. 04, 2023    |
| 10   | RF cables1 (9kHz-1GHz)           | ChengYu         | 966       | 004        | Nov. 05, 2022    | Nov. 04, 2023    |
| 11   | RF cables2 (1GHz-40GHz)          | ChengYu         | 966       | 003        | Nov. 05, 2022    | Nov. 04, 2023    |
| 12   | Antenna connector                | Florida RF Labs | N/A       | RF 01#     | Nov. 05, 2022    | Nov. 04, 2023    |
| 13   | Power probe                      | KEYSIGHT        | U2021XA   | MY55210018 | Nov. 05, 2022    | Nov. 04, 2023    |
| 14   | Signal Analyzer 9kHz-26.5GHz     | Agilent         | N9020A    | MY55370280 | Nov. 05, 2022    | Nov. 04, 2023    |
| 15   | Test Receiver 20kHz-40GHz        | R&S             | ESU 40    | 100376     | Nov. 05, 2022    | Nov. 04, 2023    |
| 16   | D.C. Power Supply                | LongWei         | PS-305D   | 010964729  | Nov. 05, 2022    | Nov. 04, 2023    |

### Conduction Test equipment

| Item | Equipment         | Manufacturer | Type No. | Serial No. | Last calibration | Calibrated until |
|------|-------------------|--------------|----------|------------|------------------|------------------|
| 1    | 843 Shielded Room | ChengYu      | 843 Room | 843        | Sep. 20, 2022    | Sep. 19, 2025    |
| 2    | EMI Receiver      | R&S          | ESR      | 101421     | Nov. 05, 2022    | Nov. 04, 2023    |
| 3    | LISN              | R&S          | ENV216   | 102417     | Nov. 05, 2022    | Nov. 04, 2023    |
| 4    | 843 Cable 1#      | ChengYu      | CE Cable | 001        | Nov. 05, 2022    | Nov. 04, 2023    |

### Other

| Item | Name                         | Manufacturer | Model   | Software version |
|------|------------------------------|--------------|---------|------------------|
| 1    | EMC Conduction Test System   | FALA         | EZ_EMCC | EMC-CON 3A1.1    |
| 2    | EMC radiation test system    | FALA         | EZ_EMCC | FA-03A2          |
| 3    | RF test system               | MAIWEI       | MTS8310 | 2.0.0.0          |
| 4    | RF communication test system | MAIWEI       | MTS8200 | 2.0.0.0          |



### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

| FREQUENCY (MHz) | Limit (dBuV) |           | Standard |
|-----------------|--------------|-----------|----------|
|                 | Quasi-peak   | Average   |          |
| 0.15 -0.5       | 66 - 56 *    | 56 - 46 * | FCC      |
| 0.50 -5.0       | 56.00        | 46.00     | FCC      |
| 5.0 -30.0       | 60.00        | 50.00     | FCC      |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

| Receiver Parameters | Setting  |
|---------------------|----------|
| Attenuation         | 10 dB    |
| Start Frequency     | 0.15 MHz |
| Stop Frequency      | 30 MHz   |
| IF Bandwidth        | 9 kHz    |


##### 3.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

##### 3.1.3 DEVIATION FROM TEST STANDARD

No deviation

### 3.1.4 TEST SETUP

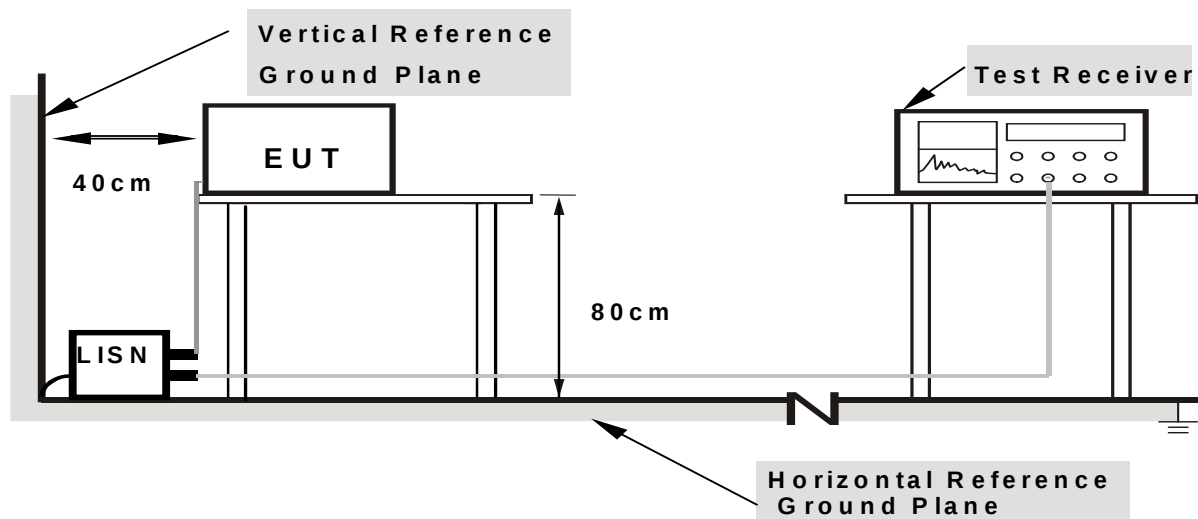

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

### 3.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

### 3.1.6 TEST RESULTS

We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.



|                |              |                    |        |
|----------------|--------------|--------------------|--------|
| Temperature:   | 25 °C        | Relative Humidity: | 54%    |
| Pressure:      | 1010hPa      | Phase :            | L      |
| Test Voltage : | AC 120V/60Hz | Test Mode:         | Mode 4 |

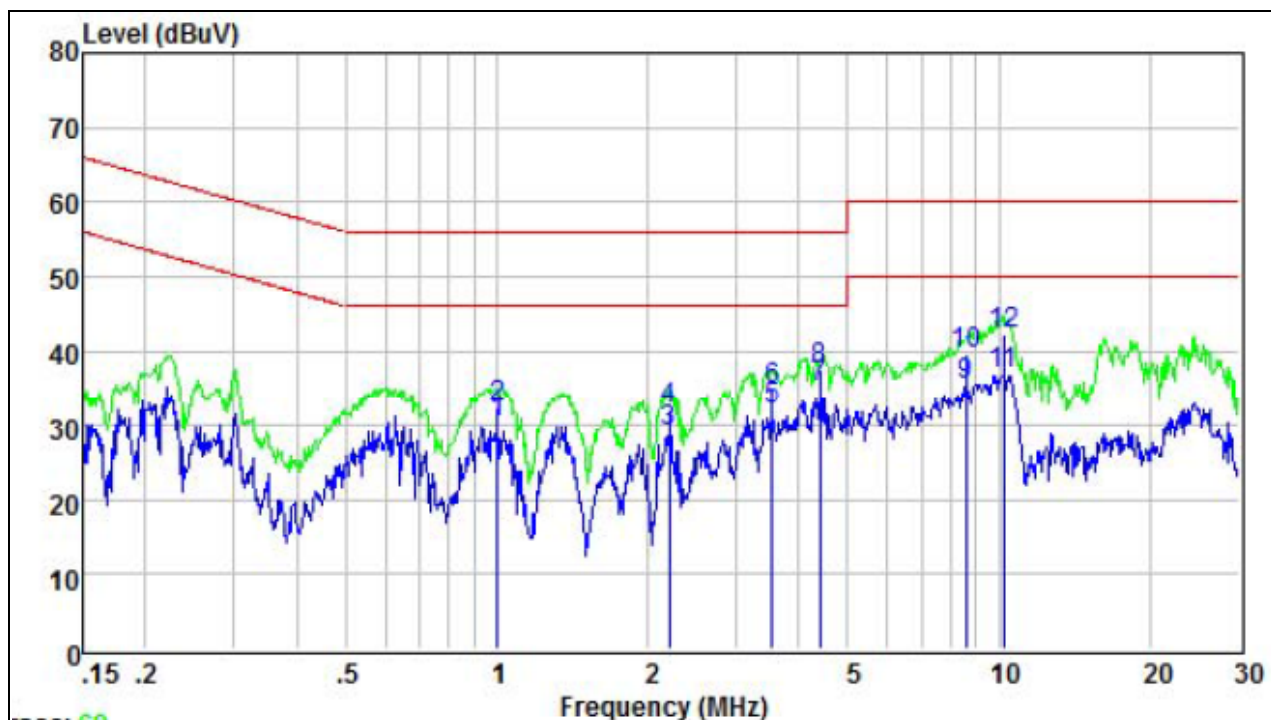

Page: 60


Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

|      | Read  | LISN   | Cable |       | Limit | Over   |         |  |
|------|-------|--------|-------|-------|-------|--------|---------|--|
| Freq | Level | Factor | Loss  | Level | Line  | Limit  | Remark  |  |
| MHz  | dBuV  | dB     | dB    | dBuV  | dBuV  | dB     |         |  |
| 1    | 20.34 | 9.87   | 0.06  | 30.27 | 46.00 | -15.73 | Average |  |
| 2    | 22.59 | 9.87   | 0.06  | 32.52 | 56.00 | -23.48 | QP      |  |
| 3    | 19.11 | 9.87   | 0.06  | 29.04 | 46.00 | -16.96 | Average |  |
| 4    | 22.11 | 9.87   | 0.06  | 32.04 | 56.00 | -23.96 | QP      |  |
| 5    | 22.06 | 9.90   | 0.06  | 32.02 | 46.00 | -13.98 | Average |  |
| 6    | 24.93 | 9.90   | 0.06  | 34.89 | 56.00 | -21.11 | QP      |  |
| 7    | 24.96 | 9.93   | 0.06  | 34.95 | 46.00 | -11.05 | Average |  |
| 8    | 27.46 | 9.93   | 0.06  | 37.45 | 56.00 | -18.55 | QP      |  |
| 9    | 25.13 | 10.06  | 0.09  | 35.28 | 50.00 | -14.72 | Average |  |
| 10   | 29.54 | 10.06  | 0.09  | 39.69 | 60.00 | -20.31 | QP      |  |
| 11   | 26.73 | 10.10  | 0.10  | 36.93 | 50.00 | -13.07 | Average |  |
| 12   | 31.95 | 10.10  | 0.10  | 42.15 | 60.00 | -17.85 | QP      |  |



|                |              |                    |        |
|----------------|--------------|--------------------|--------|
| Temperature:   | 25 °C        | Relative Humidity: | 54%    |
| Pressure:      | 1010hPa      | Phase :            | N      |
| Test Voltage : | AC 120V/60Hz | Test Mode:         | Mode 4 |

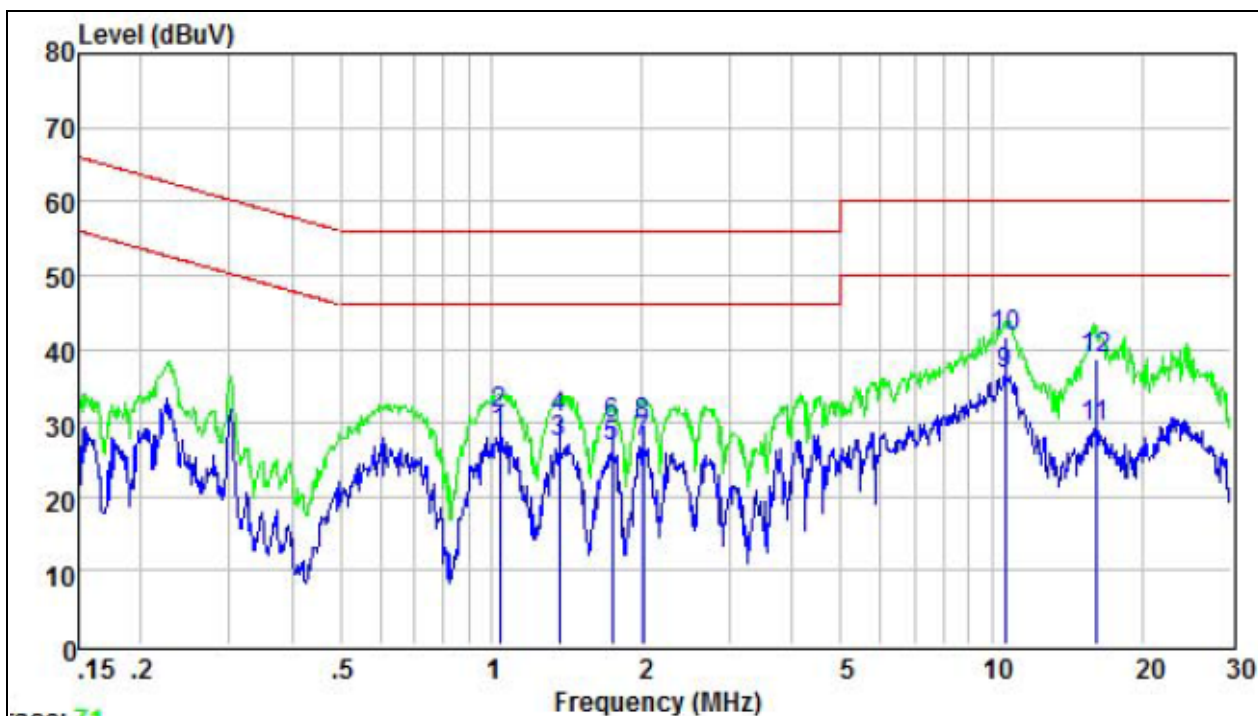

Page: 71

Remark:

Margin = Limit – Level, Correct Factor = Cable loss + LISN insertion loss, Level= Reading + Correct factor

|    | Freq  | Read Level | LISN Factor | Cable Loss | Level | Limit Line | Over Limit | Remark  |
|----|-------|------------|-------------|------------|-------|------------|------------|---------|
|    | MHz   | dBuV       | dB          | dB         | dBuV  | dBuV       | dB         |         |
| 1  | 1.04  | 18.61      | 9.74        | 0.06       | 28.41 | 46.00      | -17.59     | Average |
| 2  | 1.04  | 21.45      | 9.74        | 0.06       | 31.25 | 56.00      | -24.75     | QP      |
| 3  | 1.37  | 17.44      | 9.75        | 0.06       | 27.25 | 46.00      | -18.75     | Average |
| 4  | 1.37  | 20.71      | 9.75        | 0.06       | 30.52 | 56.00      | -25.48     | QP      |
| 5  | 1.74  | 16.80      | 9.79        | 0.06       | 26.65 | 46.00      | -19.35     | Average |
| 6  | 1.74  | 19.81      | 9.79        | 0.06       | 29.66 | 56.00      | -26.34     | QP      |
| 7  | 2.01  | 17.51      | 9.82        | 0.06       | 27.39 | 46.00      | -18.61     | Average |
| 8  | 2.01  | 19.75      | 9.82        | 0.06       | 29.63 | 56.00      | -26.37     | QP      |
| 9  | 10.62 | 26.39      | 9.97        | 0.10       | 36.46 | 50.00      | -13.54     | Average |
| 10 | 10.62 | 31.58      | 9.97        | 0.10       | 41.65 | 60.00      | -18.35     | QP      |
| 11 | 16.14 | 19.33      | 10.03       | 0.10       | 29.46 | 50.00      | -20.54     | Average |
| 12 | 16.14 | 28.54      | 10.03       | 0.10       | 38.67 | 60.00      | -21.33     | QP      |

**3.2 RADIATED EMISSION MEASUREMENT****3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)**

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequency (MHz) | Field Strength (microvolt/meter) | Measurement Distance (meters) |
|-----------------|----------------------------------|-------------------------------|
| 0.009~0.490     | 2400/F(KHz)                      | 300                           |
| 0.490~1.705     | 24000/F(KHz)                     | 30                            |
| 1.705~30.0      | 30                               | 30                            |
| 30~88           | 100                              | 3                             |
| 88~216          | 150                              | 3                             |
| 216~230         | 180                              | 3                             |
| 230~960         | 200                              | 3                             |
| Above 960       | 500                              | 3                             |

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

| Fundamental Frequency | Field Strength of Fundamental (millivolts/meter) | Field Strength of Harmonics (microvolts/meter) |
|-----------------------|--------------------------------------------------|------------------------------------------------|
| 902 - 928 MHz         | 50                                               | 500                                            |
| 2400 - 2483.5 MHz     | 50                                               | 500                                            |
| 5725 - 5875 MHz       | 50                                               | 500                                            |
| 24.0 - 24.25 GHz      | 250                                              | 2500                                           |

**LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)**

| FREQUENCY (MHz) | Limit (dBuV/m) (at 3M) |         |
|-----------------|------------------------|---------|
|                 | PEAK                   | AVERAGE |
| Above 1000      | 74                     | 54      |

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Receiver setup:

| Frequency    | Detector   | RBW    | VBW    | Value      |
|--------------|------------|--------|--------|------------|
| 9KHz-150KHz  | Quasi-peak | 200Hz  | 600Hz  | Quasi-peak |
| 150KHz-30MHz | Quasi-peak | 9KHz   | 30KHz  | Quasi-peak |
| 30MHz-1GHz   | Quasi-peak | 100KHz | 300KHz | Quasi-peak |
| Above 1GHz   | Peak       | 1MHz   | 3MHz   | Peak       |
|              | Peak       | 1MHz   | 10Hz   | Average    |

### 3.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre( Above 18GHz the distance is 1 meter and table is 1.5 metre).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

### 3.2.3 DEVIATION FROM TEST STANDARD


No deviation

### 3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

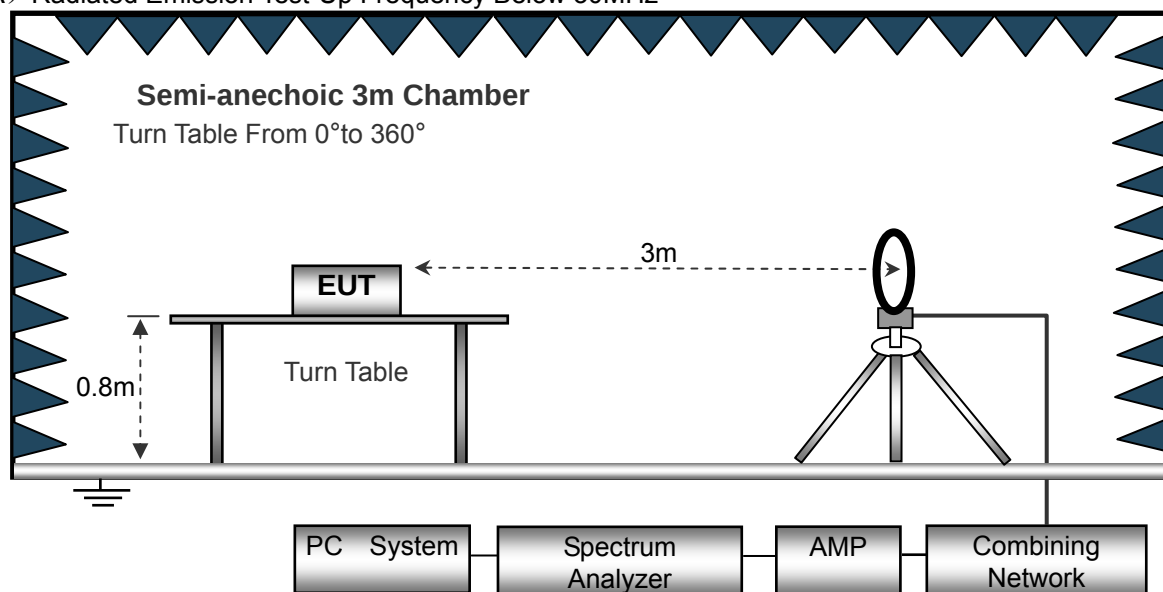

### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

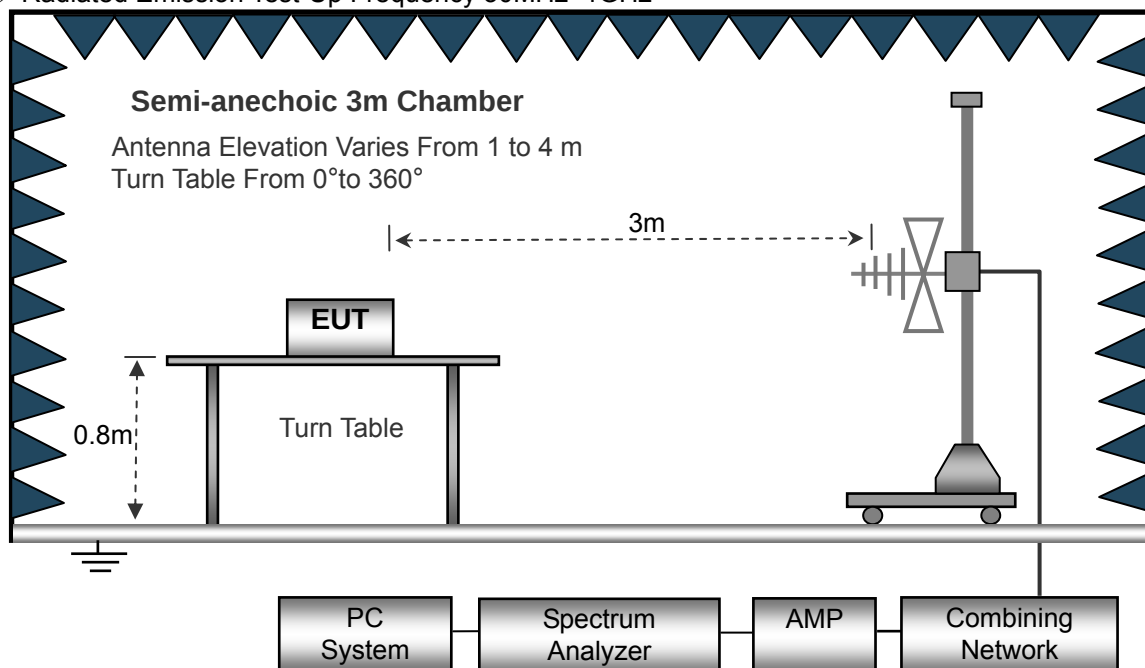

### (C) Radiated Emission Test-Up Frequency Above 1GHz

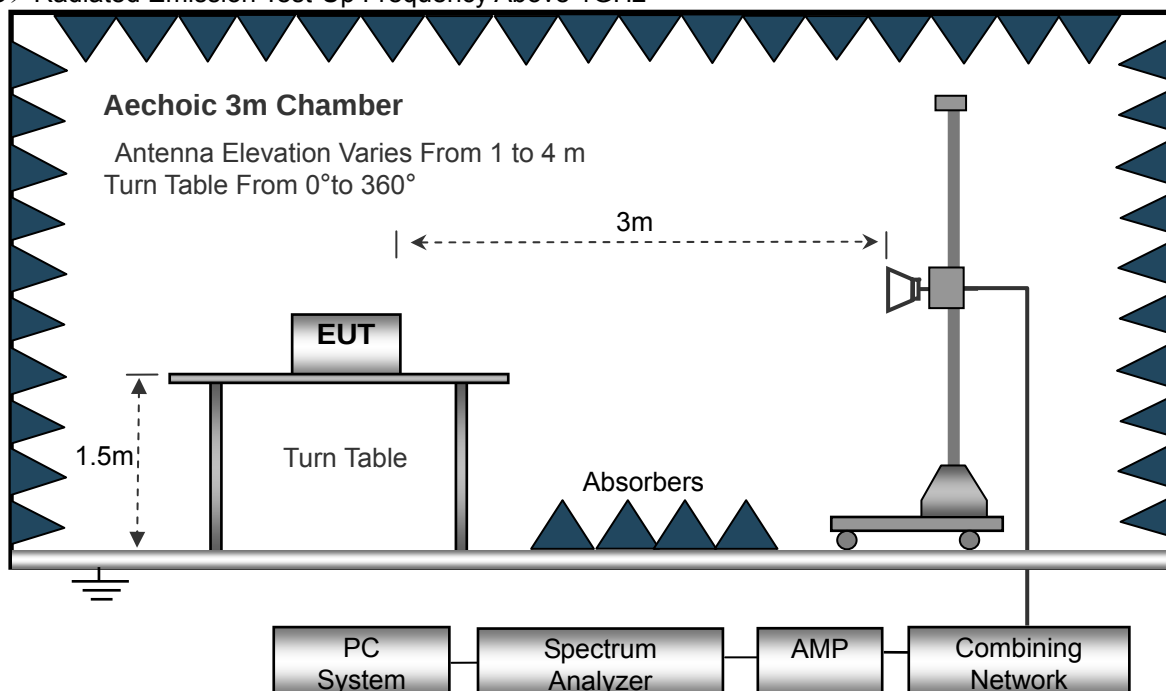

### 3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)**

|              |          |                    |              |
|--------------|----------|--------------------|--------------|
| Temperature: | 20℃      | Relative Humidity: | 48%          |
| Pressure:    | 1010 hPa | Test Voltage :     | AC 120V/60Hz |
| Test Mode :  | Mode 4   | Polarization :     | --           |

| Freq. | Reading  | Limit    | Margin | State |
|-------|----------|----------|--------|-------|
| (MHz) | (dBuV/m) | (dBuV/m) | (dB)   | P/F   |
| --    | --       | --       | --     | PASS  |
| --    | --       | --       | --     | PASS  |

**NOTE:**


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

**3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)**

|                |              |                    |            |
|----------------|--------------|--------------------|------------|
| Temperature:   | 26℃          | Relative Humidity: | 54%        |
| Pressure:      | 1010 hPa     | Polarization :     | Horizontal |
| Test Voltage : | AC 120V/60Hz |                    |            |
| Test Mode :    | Mode 4       |                    |            |

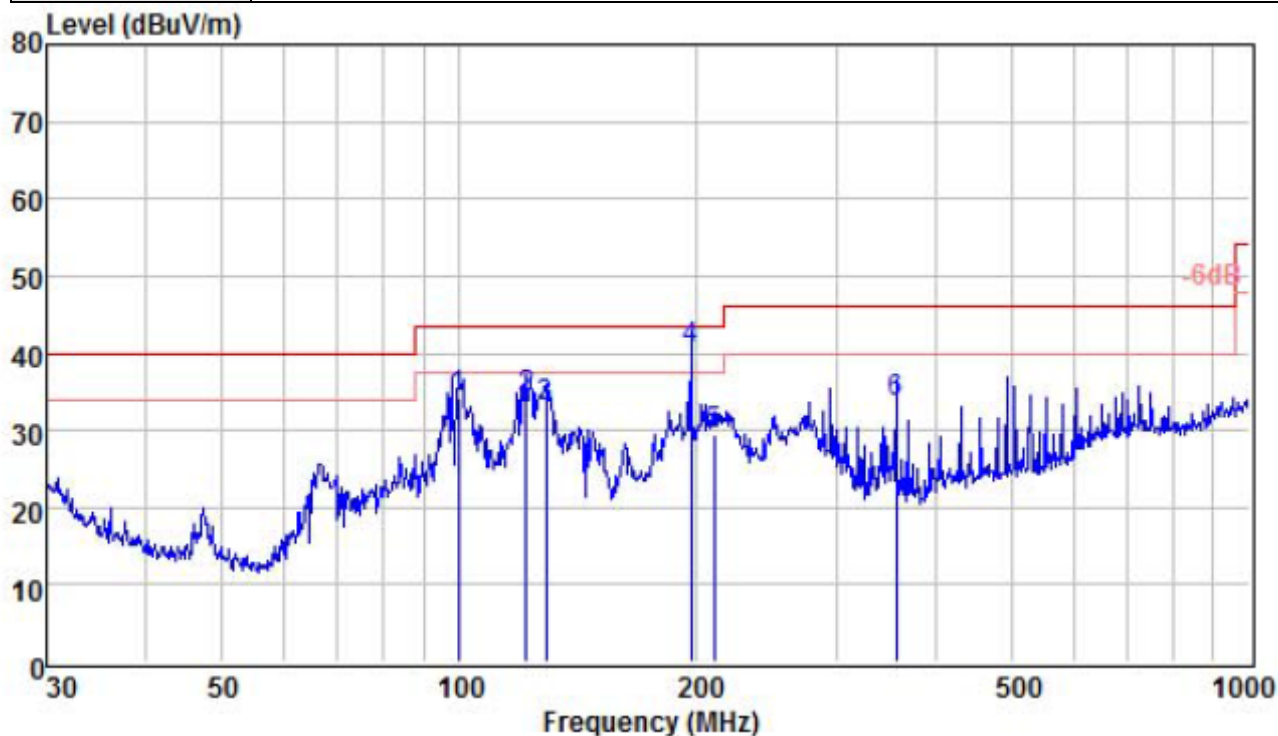

|     | Freq   | ReadAntenna | Cable  |      | Limit  | Over   |           |
|-----|--------|-------------|--------|------|--------|--------|-----------|
|     | MHz    | Level       | Factor | Loss | Level  | Line   | Limit     |
|     | MHz    | dBuV        | dB/m   | dB   | dBuV/m | dBuV/m | dB        |
| 1   | 99.53  | 23.88       | 9.60   | 0.76 | 34.24  | 43.50  | -9.26 QP  |
| 2   | 121.55 | 24.92       | 8.50   | 0.79 | 34.21  | 43.50  | -9.29 QP  |
| 3   | 128.56 | 23.98       | 8.30   | 0.80 | 33.08  | 43.50  | -10.42 QP |
| 4 ! | 196.51 | 28.51       | 11.00  | 0.87 | 40.38  | 43.50  | -3.12 QP  |
| 5   | 210.05 | 17.03       | 11.60  | 0.90 | 29.53  | 43.50  | -13.97 QP |
| 6   | 356.68 | 16.27       | 16.10  | 1.23 | 33.60  | 46.00  | -12.40 QP |


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;



|                |              |                    |          |
|----------------|--------------|--------------------|----------|
| Temperature:   | 26℃          | Relative Humidity: | 54%      |
| Pressure:      | 1010 hPa     | Polarization :     | Vertical |
| Test Voltage : | AC 120V/60Hz |                    |          |
| Test Mode :    | Mode 4       |                    |          |

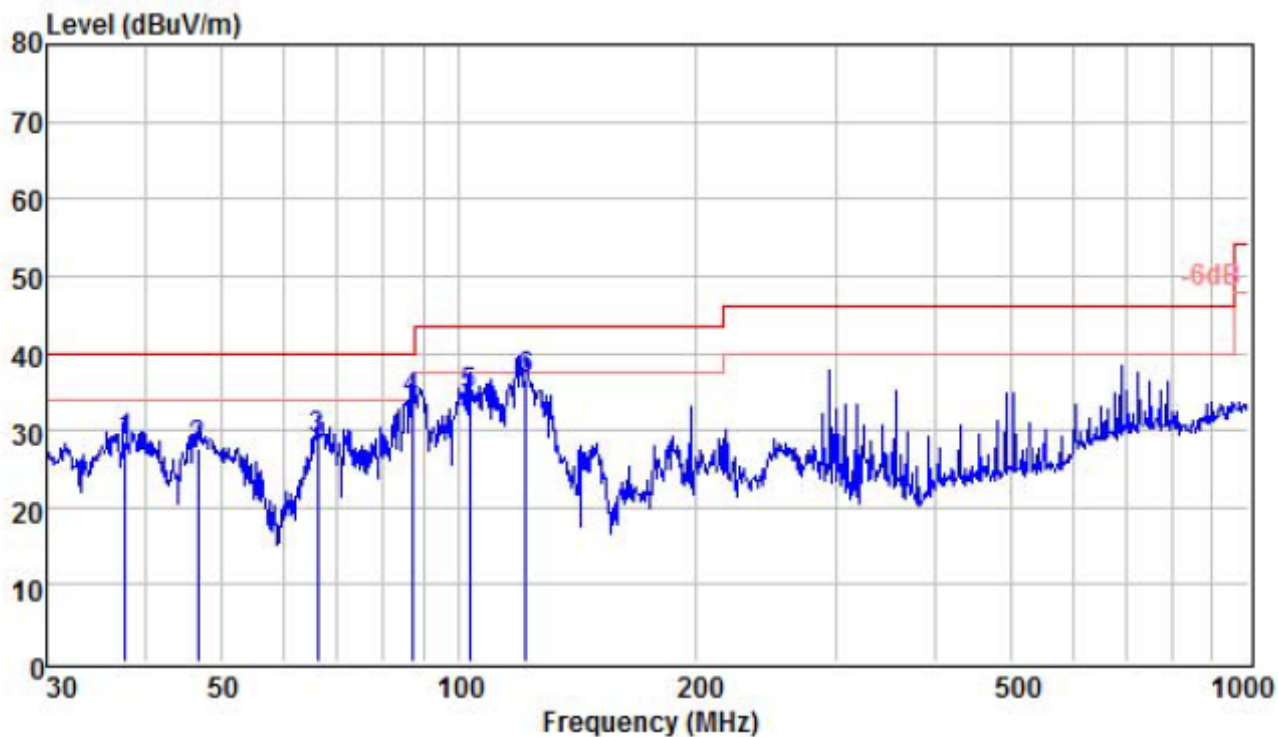

|     | Read   | Antenna | Cable  |      | Limit  | Over   |           |
|-----|--------|---------|--------|------|--------|--------|-----------|
|     | Freq   | Level   | Factor | Loss | Level  | Line   | Limit     |
|     | MHz    | dBuV    | dB/m   | dB   | dBuV/m | dBuV/m | dB        |
| 1   | 37.81  | 14.12   | 14.19  | 0.30 | 28.61  | 40.00  | -11.39 QP |
| 2   | 46.67  | 17.11   | 10.17  | 0.27 | 27.55  | 40.00  | -12.45 QP |
| 3   | 66.27  | 20.97   | 7.43   | 0.33 | 28.73  | 40.00  | -11.27 QP |
| 4 ! | 87.11  | 24.56   | 8.78   | 0.68 | 34.02  | 40.00  | -5.98 QP  |
| 5   | 103.08 | 24.29   | 9.51   | 0.76 | 34.56  | 43.50  | -8.94 QP  |
| 6   | 121.55 | 27.29   | 8.47   | 0.79 | 36.55  | 43.50  | -6.95 QP  |

Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;

**3.2.8 TEST RESULTS (1GHZ~25GHZ)**

GFSK

| Polar<br>(H/V)                                                                                                                                                                                                                                                                                                                                            | Frequency<br>(MHz) | Meter<br>Reading<br>(dBuV) | Pre-<br>amplifier<br>(dB) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB/m) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------------------------|---------------------------|-----------------------|-----------------------------|-------------------------------|--------------------|----------------|------------------|
| operation frequency:2402                                                                                                                                                                                                                                                                                                                                  |                    |                            |                           |                       |                             |                               |                    |                |                  |
| V                                                                                                                                                                                                                                                                                                                                                         | 4804.00            | 52.89                      | 30.55                     | 5.77                  | 24.66                       | 52.77                         | 74.00              | -21.23         | PK               |
| V                                                                                                                                                                                                                                                                                                                                                         | 4804.00            | 42.66                      | 30.55                     | 5.77                  | 24.66                       | 42.54                         | 54.00              | -11.46         | AV               |
| V                                                                                                                                                                                                                                                                                                                                                         | 7206.00            | 52.98                      | 30.33                     | 6.32                  | 24.55                       | 53.52                         | 74.00              | -20.48         | PK               |
| V                                                                                                                                                                                                                                                                                                                                                         | 7206.00            | 43.78                      | 30.33                     | 6.32                  | 24.55                       | 44.32                         | 54.00              | -9.68          | AV               |
| V                                                                                                                                                                                                                                                                                                                                                         | 12010.00           | 51.83                      | 30.85                     | 7.45                  | 24.69                       | 53.12                         | 74.00              | -20.88         | PK               |
| H                                                                                                                                                                                                                                                                                                                                                         | 4804.00            | 52.23                      | 30.55                     | 5.77                  | 24.66                       | 52.11                         | 74.00              | -21.89         | PK               |
| H                                                                                                                                                                                                                                                                                                                                                         | 4804.00            | 43.53                      | 30.55                     | 5.77                  | 24.66                       | 43.41                         | 54.00              | -10.59         | AV               |
| H                                                                                                                                                                                                                                                                                                                                                         | 7206.00            | 52.41                      | 30.33                     | 6.32                  | 24.55                       | 52.95                         | 74.00              | -21.05         | PK               |
| H                                                                                                                                                                                                                                                                                                                                                         | 7206.00            | 42.01                      | 30.33                     | 6.32                  | 24.55                       | 42.55                         | 54.00              | -11.45         | AV               |
| H                                                                                                                                                                                                                                                                                                                                                         | 12010.00           | 52.01                      | 30.85                     | 7.45                  | 24.69                       | 53.30                         | 74.00              | -20.70         | PK               |
| operation frequency:2440                                                                                                                                                                                                                                                                                                                                  |                    |                            |                           |                       |                             |                               |                    |                |                  |
| V                                                                                                                                                                                                                                                                                                                                                         | 4880.00            | 53.13                      | 30.55                     | 5.77                  | 24.66                       | 53.01                         | 74.00              | -20.99         | PK               |
| V                                                                                                                                                                                                                                                                                                                                                         | 4880.00            | 42.16                      | 30.55                     | 5.77                  | 24.66                       | 42.04                         | 54.00              | -11.96         | AV               |
| V                                                                                                                                                                                                                                                                                                                                                         | 7320.00            | 52.25                      | 30.33                     | 6.32                  | 24.55                       | 52.79                         | 74.00              | -21.21         | PK               |
| V                                                                                                                                                                                                                                                                                                                                                         | 7320.00            | 42.78                      | 30.33                     | 6.32                  | 24.55                       | 43.32                         | 54.00              | -10.68         | AV               |
| V                                                                                                                                                                                                                                                                                                                                                         | 12200.00           | 52.22                      | 30.85                     | 7.45                  | 24.69                       | 53.51                         | 74.00              | -20.49         | PK               |
| H                                                                                                                                                                                                                                                                                                                                                         | 4880.00            | 52.13                      | 30.55                     | 5.77                  | 24.66                       | 52.01                         | 74.00              | -21.99         | PK               |
| H                                                                                                                                                                                                                                                                                                                                                         | 4880.00            | 41.73                      | 30.55                     | 5.77                  | 24.66                       | 41.61                         | 54.00              | -12.39         | AV               |
| H                                                                                                                                                                                                                                                                                                                                                         | 7320.00            | 52.33                      | 30.33                     | 6.32                  | 24.55                       | 52.87                         | 74.00              | -21.13         | PK               |
| H                                                                                                                                                                                                                                                                                                                                                         | 7320.00            | 41.19                      | 30.33                     | 6.32                  | 24.55                       | 41.73                         | 54.00              | -12.27         | AV               |
| H                                                                                                                                                                                                                                                                                                                                                         | 12200.00           | 51.66                      | 30.85                     | 7.45                  | 24.69                       | 52.95                         | 74.00              | -21.05         | PK               |
| operation frequency:2480                                                                                                                                                                                                                                                                                                                                  |                    |                            |                           |                       |                             |                               |                    |                |                  |
| V                                                                                                                                                                                                                                                                                                                                                         | 4960.00            | 53.25                      | 30.55                     | 5.77                  | 24.66                       | 53.13                         | 74.00              | -20.87         | PK               |
| V                                                                                                                                                                                                                                                                                                                                                         | 4960.00            | 43.17                      | 30.55                     | 5.77                  | 24.66                       | 43.05                         | 54.00              | -10.95         | AV               |
| V                                                                                                                                                                                                                                                                                                                                                         | 7440.00            | 52.23                      | 30.33                     | 6.32                  | 24.55                       | 52.77                         | 74.00              | -21.23         | PK               |
| V                                                                                                                                                                                                                                                                                                                                                         | 7440.00            | 42.28                      | 30.33                     | 6.32                  | 24.55                       | 42.82                         | 54.00              | -11.18         | AV               |
| V                                                                                                                                                                                                                                                                                                                                                         | 12400.00           | 51.52                      | 30.85                     | 7.45                  | 24.69                       | 52.81                         | 74.00              | -21.19         | PK               |
| H                                                                                                                                                                                                                                                                                                                                                         | 4960.00            | 52.45                      | 30.55                     | 5.77                  | 24.66                       | 52.33                         | 74.00              | -21.67         | PK               |
| H                                                                                                                                                                                                                                                                                                                                                         | 4960.00            | 43.69                      | 30.55                     | 5.77                  | 24.66                       | 43.57                         | 54.00              | -10.43         | AV               |
| H                                                                                                                                                                                                                                                                                                                                                         | 7440.00            | 52.71                      | 30.33                     | 6.32                  | 24.55                       | 53.25                         | 74.00              | -20.75         | PK               |
| H                                                                                                                                                                                                                                                                                                                                                         | 7440.00            | 43.23                      | 30.33                     | 6.32                  | 24.55                       | 43.77                         | 54.00              | -10.23         | AV               |
| H                                                                                                                                                                                                                                                                                                                                                         | 12400.00           | 52.03                      | 30.85                     | 7.45                  | 24.69                       | 53.32                         | 74.00              | -20.68         | PK               |
| <b>Remark:</b><br>1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,<br>Margin= Emission Level - Limit<br>2. If peak below the average limit, the average emission was no test.<br>3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value<br>has no need to be reported. |                    |                            |                           |                       |                             |                               |                    |                |                  |



### 3.3 RADIATED BAND EMISSION MEASUREMENT

#### 3.3.1 TEST REQUIREMENT:

FCC Part15 C Section 15.209 and 15.205

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

| FREQUENCY (MHz) | Limit (dBuV/m) (at 3M) |         |
|-----------------|------------------------|---------|
|                 | PEAK                   | AVERAGE |
| Above 1000      | 74                     | 54      |

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

| Spectrum Parameter                    | Setting                                          |
|---------------------------------------|--------------------------------------------------|
| Attenuation                           | Auto                                             |
| Start Frequency                       | 2300MHz                                          |
| Stop Frequency                        | 2520                                             |
| RB / VB (emission in restricted band) | 1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average |

#### 3.3.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

#### 3.3.3 DEVIATION FROM TEST STANDARD

No deviation

### 3.3.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

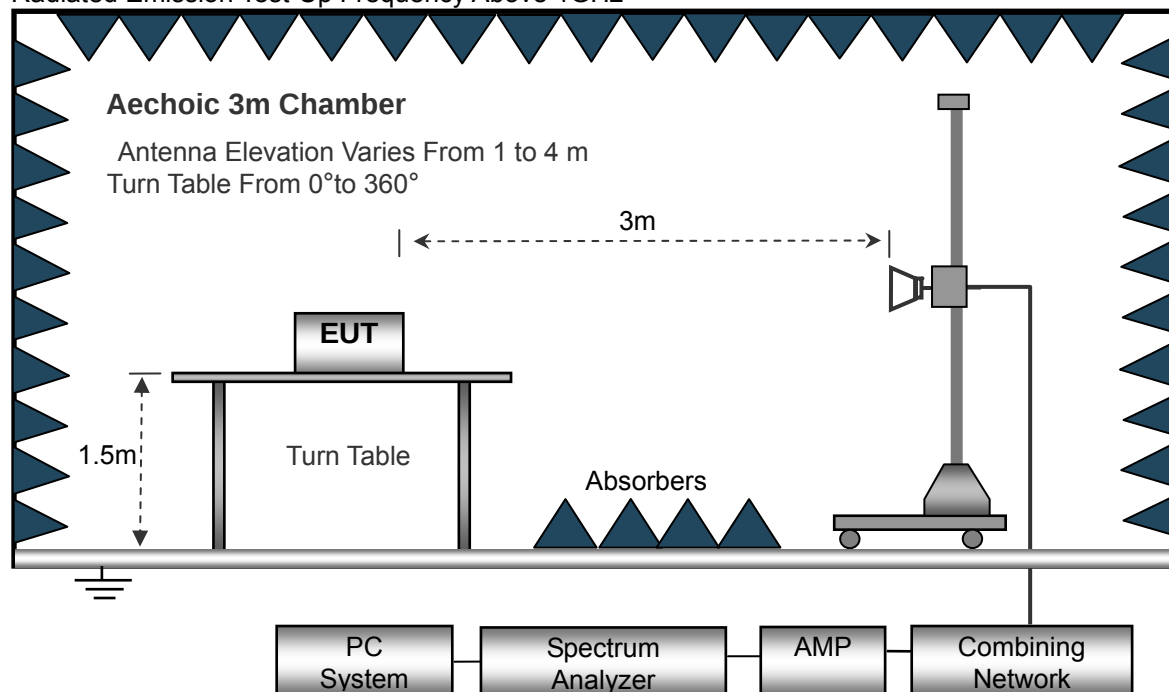

### 3.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



### 3.3.6 TEST RESULT

GFSK

| Polar<br>(H/V)           | Frequency<br>(MHz) | Meter<br>Reading<br>(dBuV) | Pre-<br>amplifier<br>(dB) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB/m) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Detector<br>Type |
|--------------------------|--------------------|----------------------------|---------------------------|-----------------------|-----------------------------|-------------------------------|--------------------|----------------|------------------|
| operation frequency:2402 |                    |                            |                           |                       |                             |                               |                    |                |                  |
| V                        | 2390.00            | 57.33                      | 30.22                     | 4.85                  | 23.98                       | 55.94                         | 74.00              | -18.06         | PK               |
| V                        | 2390.00            | 49.11                      | 30.22                     | 4.85                  | 23.98                       | 47.72                         | 54.00              | -6.28          | AV               |
| V                        | 2400.00            | 59.25                      | 30.22                     | 4.85                  | 23.98                       | 57.86                         | 74.00              | -16.14         | PK               |
| V                        | 2400.00            | 50.06                      | 30.22                     | 4.85                  | 23.98                       | 48.67                         | 54.00              | -5.33          | AV               |
| H                        | 2390.00            | 60.72                      | 30.22                     | 4.85                  | 23.98                       | 59.33                         | 74.00              | -14.67         | PK               |
| H                        | 2390.00            | 49.63                      | 30.22                     | 4.85                  | 23.98                       | 48.24                         | 54.00              | -5.76          | AV               |
| H                        | 2400.00            | 60.26                      | 30.22                     | 4.85                  | 23.98                       | 58.87                         | 74.00              | -15.13         | PK               |
| H                        | 2400.00            | 49.23                      | 30.22                     | 4.85                  | 23.98                       | 47.84                         | 54.00              | -6.16          | AV               |

| Polar<br>(H/V)           | Frequency<br>(MHz) | Meter<br>Reading<br>(dBuV) | Pre-<br>amplifier<br>(dB) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB/m) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Detector<br>Type |
|--------------------------|--------------------|----------------------------|---------------------------|-----------------------|-----------------------------|-------------------------------|--------------------|----------------|------------------|
| operation frequency:2480 |                    |                            |                           |                       |                             |                               |                    |                |                  |
| V                        | 2483.50            | 58.22                      | 30.22                     | 4.85                  | 23.98                       | 56.83                         | 74.00              | -17.17         | PK               |
| V                        | 2483.50            | 49.15                      | 30.22                     | 4.85                  | 23.98                       | 47.76                         | 54.00              | -6.24          | AV               |
| V                        | 2500.00            | 60.35                      | 30.22                     | 4.85                  | 23.98                       | 58.96                         | 74.00              | -15.04         | PK               |
| V                        | 2500.00            | 50.22                      | 30.22                     | 4.85                  | 23.98                       | 48.83                         | 54.00              | -5.17          | AV               |
| H                        | 2483.50            | 61.57                      | 30.22                     | 4.85                  | 23.98                       | 60.18                         | 74.00              | -13.82         | PK               |
| H                        | 2483.50            | 50.53                      | 30.22                     | 4.85                  | 23.98                       | 49.14                         | 54.00              | -4.86          | AV               |
| H                        | 2500.00            | 61.05                      | 30.22                     | 4.85                  | 23.98                       | 59.66                         | 74.00              | -14.34         | PK               |
| H                        | 2500.00            | 50.13                      | 30.22                     | 4.85                  | 23.98                       | 48.74                         | 54.00              | -5.26          | AV               |

**Remark:**

1. Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



#### 4. POWER SPECTRAL DENSITY TEST

|                   |                                          |
|-------------------|------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (e)          |
| Test Method:      | KDB558074 D0115.247 Meas Guidance v05r02 |

##### 4.1.1 APPLIED PROCEDURES / LIMIT

| FCC Part15 (15.247) , Subpart C |                        |           |                       |        |
|---------------------------------|------------------------|-----------|-----------------------|--------|
| Section                         | Test Item              | Limit     | Frequency Range (MHz) | Result |
| 15.247 (e)                      | Power Spectral Density | 8dBm/3kHz | 2400-2483.5           | PASS   |

##### 4.1.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to:  $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

##### 4.1.3 DEVIATION FROM STANDARD

No deviation.

##### 4.1.4 TEST SETUP



##### 4.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.



#### 4.1.6 TEST RESULTS

|               |      |                     |              |
|---------------|------|---------------------|--------------|
| Temperature : | 26°C | Relative Humidity : | 54%          |
| Test Mode :   | GFSK | Test Voltage :      | AC 120V/60Hz |

| Frequency | Power Spectral Density(dBm) | Limit (dBm) | Result |
|-----------|-----------------------------|-------------|--------|
| 2402 MHz  | -19.135                     | 8           | PASS   |
| 2440 MHz  | -17.787                     | 8           | PASS   |
| 2480 MHz  | -14.040                     | 8           | PASS   |

CH01






## CH20



## CH40

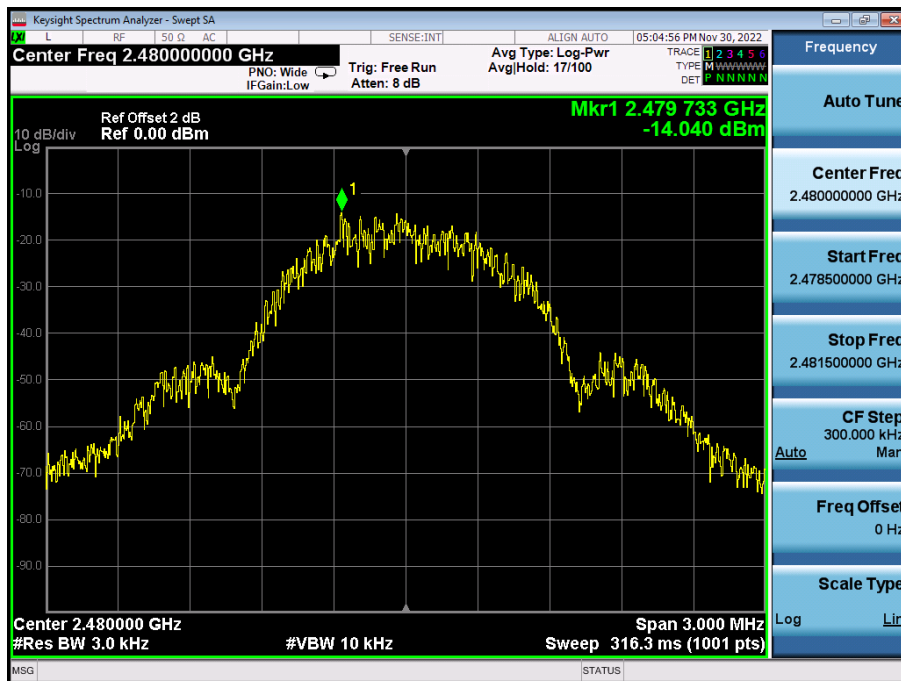



## 5. CHANNEL BANDWIDTH

|                   |                                          |
|-------------------|------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247(a)(2)        |
| Test Method:      | KDB558074 D0115.247 Meas Guidance v05r02 |

### 5.1.1 APPLIED PROCEDURES / LIMIT

| FCC Part15 (15.247) , Subpart C |           |                                         |                       |        |
|---------------------------------|-----------|-----------------------------------------|-----------------------|--------|
| Section                         | Test Item | Limit                                   | Frequency Range (MHz) | Result |
| 15.247(a)(2)                    | Bandwidth | $\geq 500\text{KHz}$<br>(6dB bandwidth) | 2400-2483.5           | PASS   |


### 5.1.2 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 5.1.3 DEVIATION FROM STANDARD

No deviation.

### 5.1.4 TEST SETUP

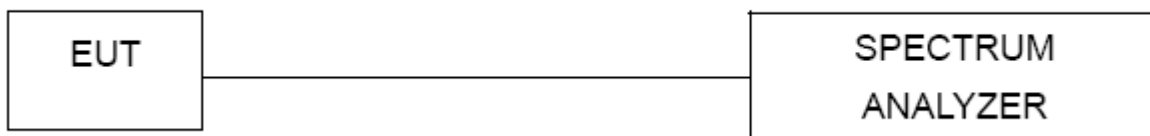

### 5.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.




### 5.1.6 TEST RESULTS

|               |      |                     |              |
|---------------|------|---------------------|--------------|
| Temperature : | 26°C | Relative Humidity : | 54%          |
| Test Mode :   | GFSK | Test Voltage :      | AC 120V/60Hz |

| Test channel | 6dB Bandwidth (MHz) | 99% Occupied bandwidth(MHz) | Limit(KHz) | Result |
|--------------|---------------------|-----------------------------|------------|--------|
| Lowest       | 0.7239              | 1.0465                      | >500       | Pass   |
| Middle       | 0.7269              | 1.0507                      |            |        |
| Highest      | 0.7346              | 1.0499                      |            |        |

CH01

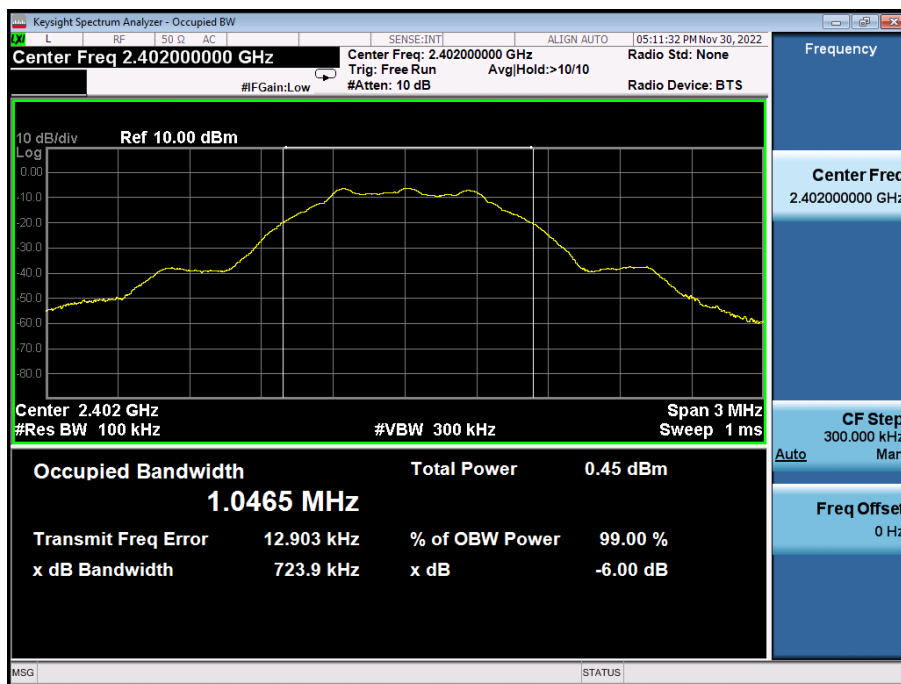



## CH20



## CH40



**6. PEAK OUTPUT POWER TEST**

|                   |                                          |
|-------------------|------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247(b)(3)        |
| Test Method:      | KDB558074 D0115.247 Meas Guidance v05r02 |

**6.1.1 APPLIED PROCEDURES / LIMIT**


| FCC Part15 (15.247) , Subpart C |                   |                 |                       |        |
|---------------------------------|-------------------|-----------------|-----------------------|--------|
| Section                         | Test Item         | Limit           | Frequency Range (MHz) | Result |
| 15.247(b)(3)                    | Peak Output Power | 1 watt or 30dBm | 2400-2483.5           | PASS   |

**6.1.2 TEST PROCEDURE**

- a. The EUT was directly connected to the SPECTRUM ANALYZER

**6.1.3 DEVIATION FROM STANDARD**

No deviation.

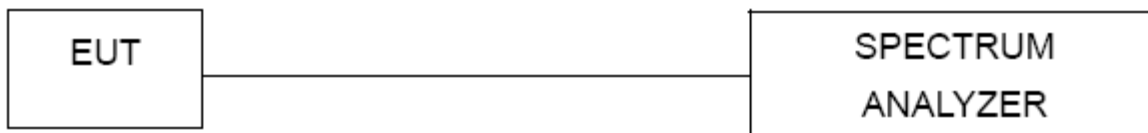**6.1.4 TEST SETUP****6.1.5 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



### 6.1.6 TEST RESULTS

|               |      |                     |              |
|---------------|------|---------------------|--------------|
| Temperature : | 26℃  | Relative Humidity : | 54%          |
| Test Mode :   | GFSK | Test Voltage :      | AC 120V/60Hz |


| Test channel | Peak Output Power (dBm) | Limit(dBm) | Result |
|--------------|-------------------------|------------|--------|
| Lowest       | -4.275                  | 30.00      | Pass   |
| Middle       | -2.920                  |            |        |
| Highest      | 0.730                   |            |        |

CH01






## CH20

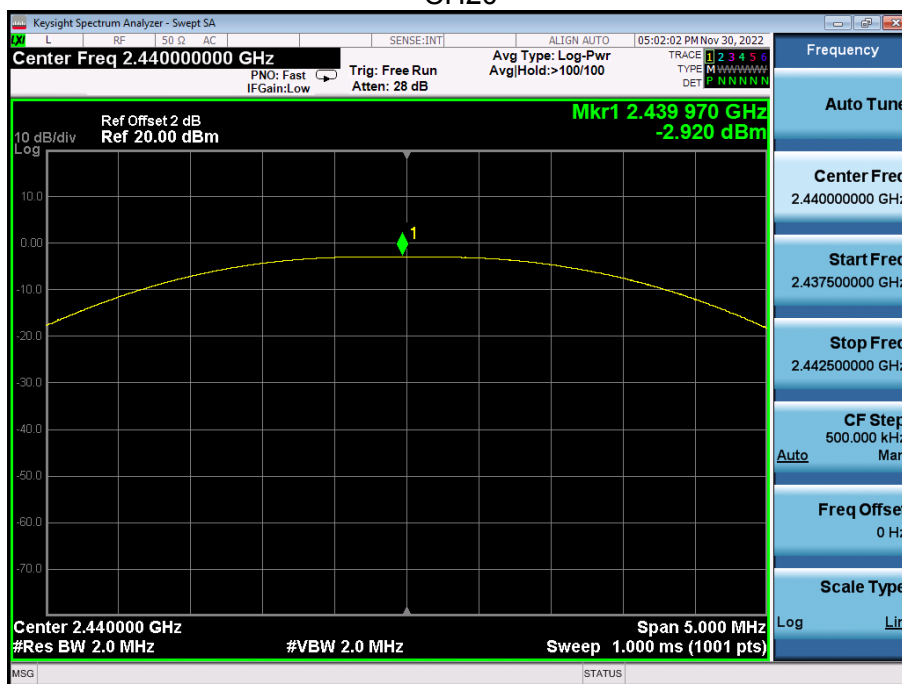

## CH40

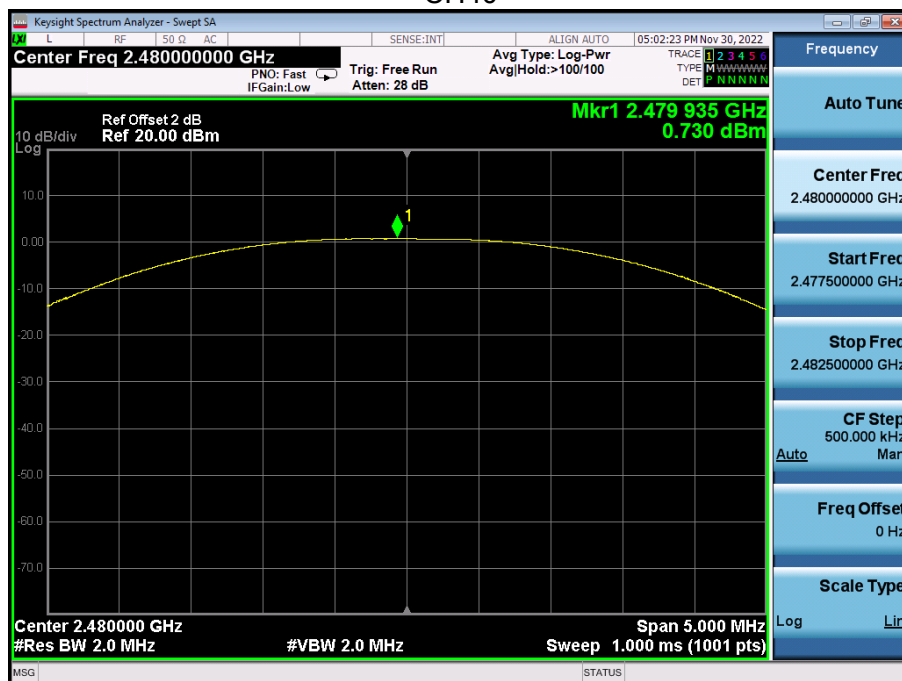



## 7. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

|                   |                                          |
|-------------------|------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (d)          |
| Test Method:      | KDB558074 D0115.247 Meas Guidance v05r02 |

### 7.1.1 APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 7.1.2 TEST PROCEDURE


Using the following spectrum analyzer setting:

- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.

### 7.1.3 DEVIATION FROM STANDARD

No deviation.

### 7.1.4 TEST SETUP

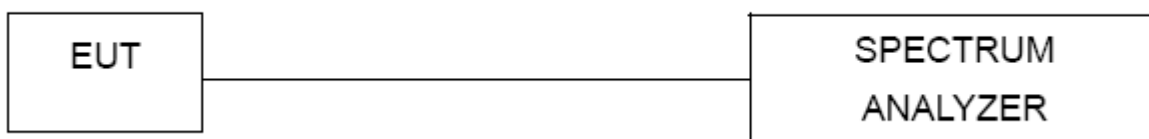

### 7.1.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

### 7.1.6 TEST RESULTS


| Frequency Band | Delta Peak to band emission(dBc) | > Limit (dBc) | Result |
|----------------|----------------------------------|---------------|--------|
| Left-band      | 53.506                           | 20            | Pass   |
| Right-band     | 58.300                           | 20            | Pass   |



## GFSK: Band Edge, Left Side

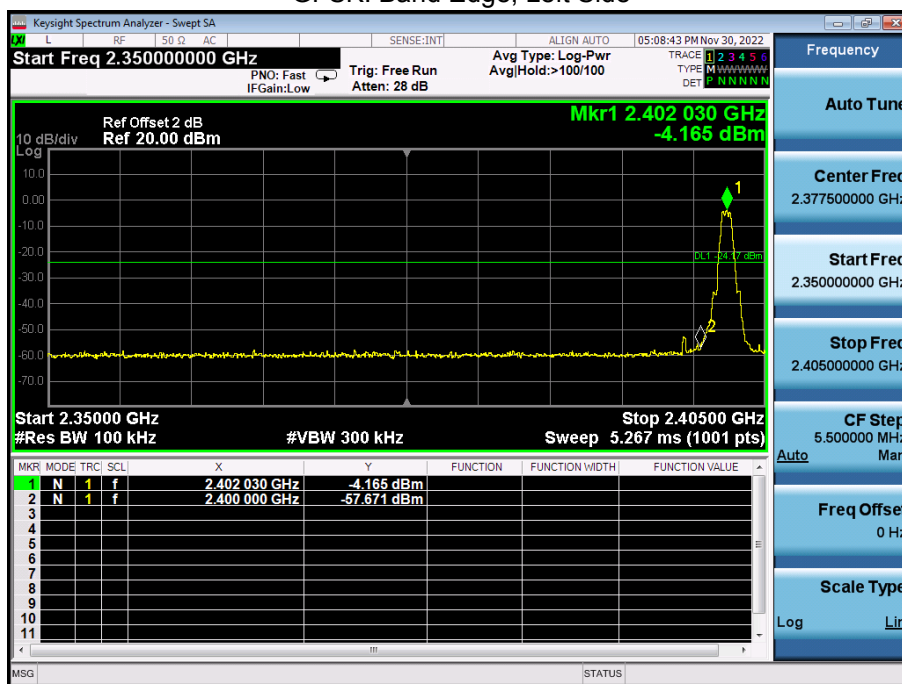


## GFSK: Band Edge, Right Side

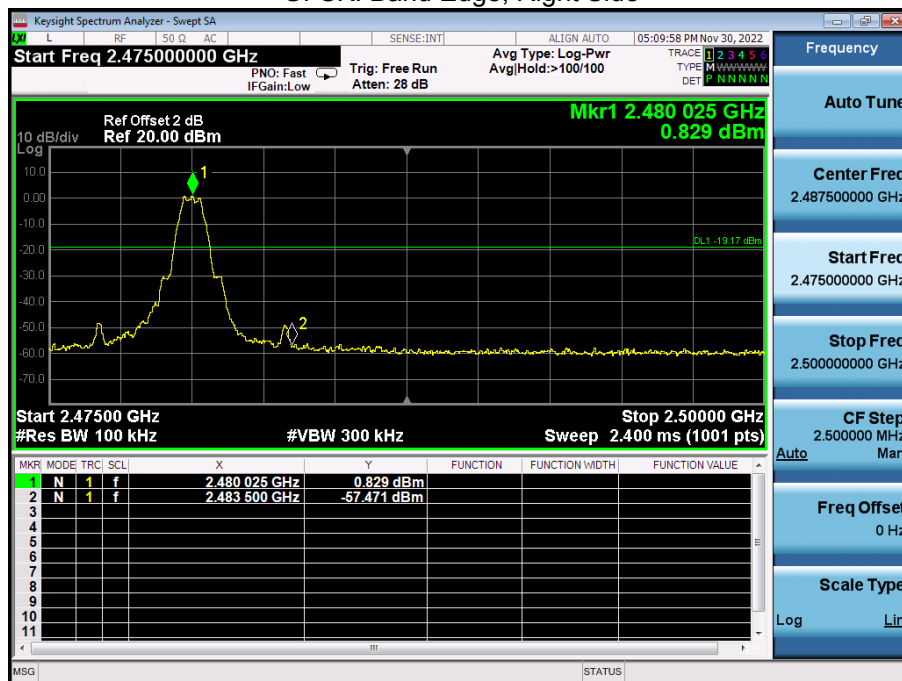



## SPURIOUS RF CONDUCTED EMISSION TEST RESULT

CH: 2402MHz

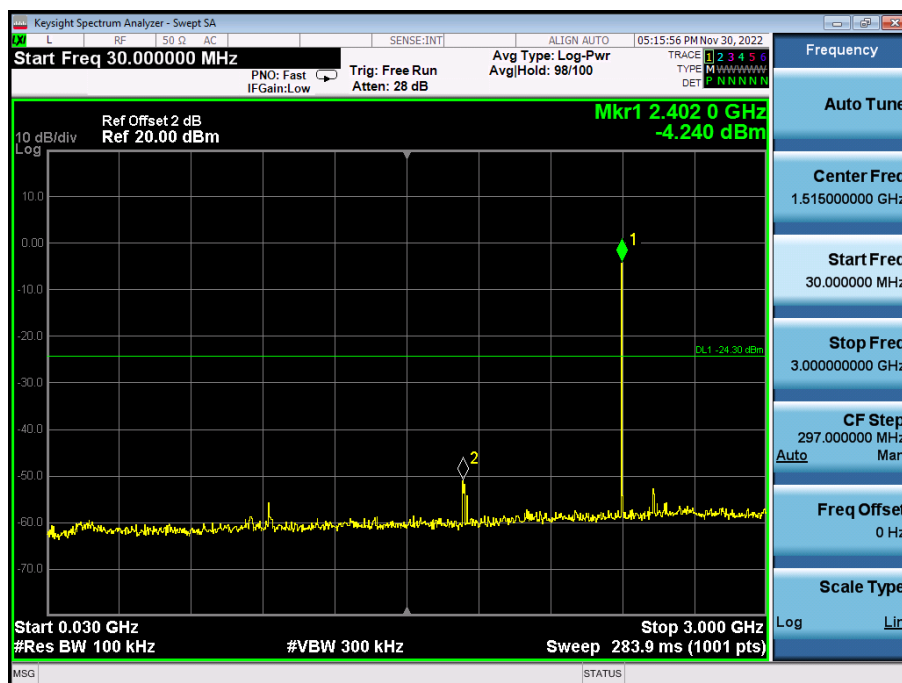


30MHz~3GHz



3GHz~25GHz

CH: 2440MHz



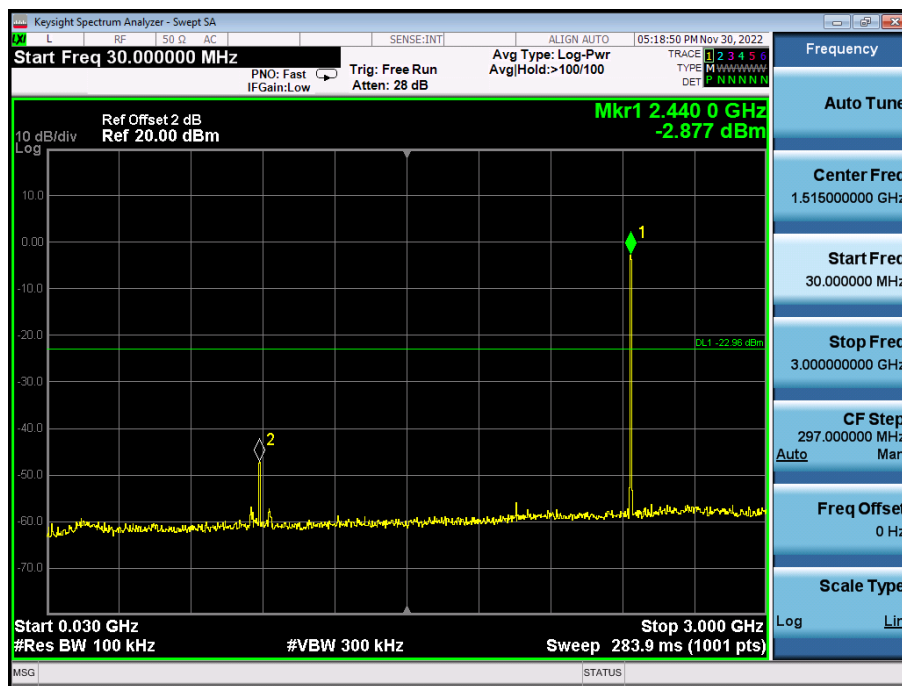



30MHz~3GHz



3GHz~25GHz



CH: 2480MHz

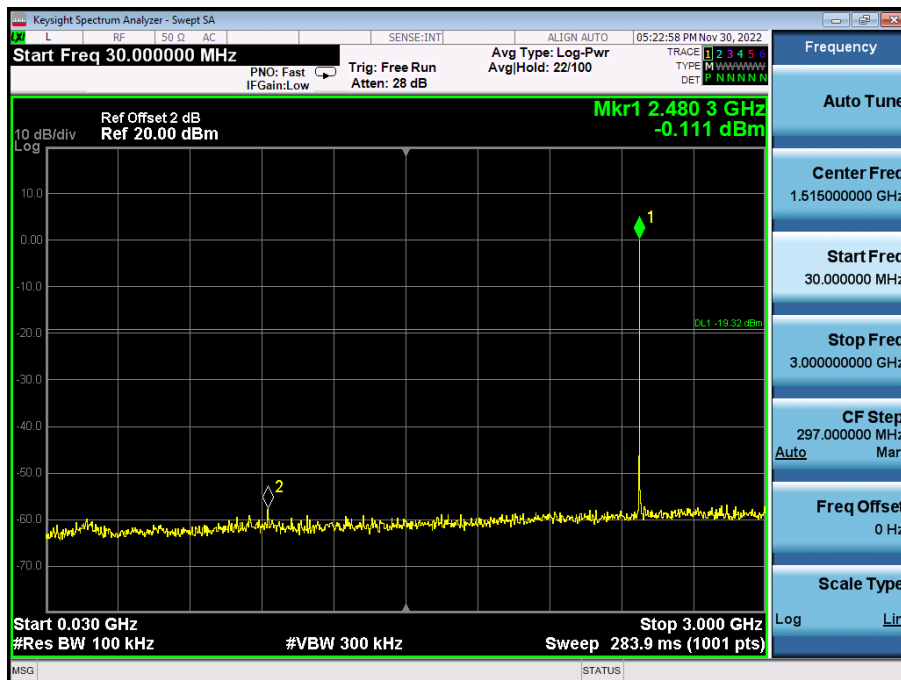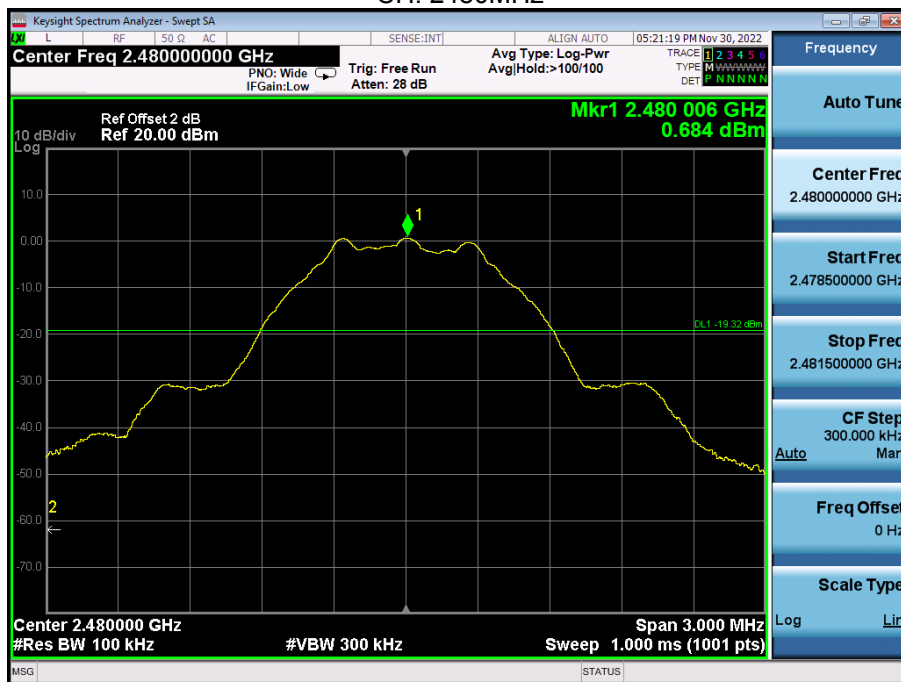

30MHz~3GHz




## 8. ANTENNA REQUIREMENT

### 8.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 8.2 EUT ANTENNA

The EUT antenna is FPCB antenna, It comply with the standard requirement.

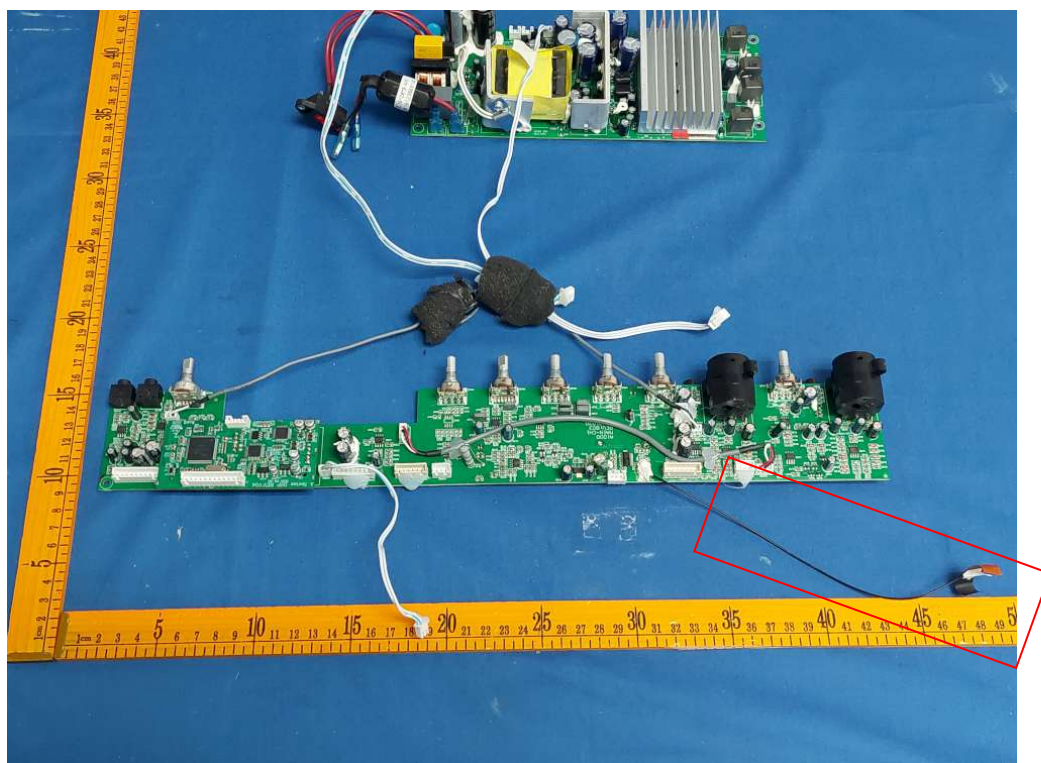



#### 9. TEST SEUUP PHOTO

Reference to the appendix I for details.

#### 10. EUT PHOTO

Reference to the appendix II for details.

※※※※※ END OF REPORT ※※※※※