

# PRIMST (CHUZHOU) INNOVATION CO.LTD

## MPE ASSESSMENT REPORT

**Report Type:**  
FCC MPE assessment report

**Model:**  
CT51-FRIDGE, TB-135, TB-135EYD, SCT-135EYD, HMCRCT135

**REPORT NUMBER:**  
220602246SHA-004

**ISSUE DATE:**  
March 6, 2023

**DOCUMENT CONTROL NUMBER:**  
TTRFFCCMPE-02\_V1 © 2018 Intertek



**Applicant** : PRIMST (CHUZHOU) INNOVATION CO.LTD  
NO. 588, NORTH SHANGHAI ROAD, CHUZHOU CITY, ANHUI, CHINA

**Manufacturer** : PRIMST (CHUZHOU) INNOVATION CO.LTD  
NO. 588, NORTH SHANGHAI ROAD, CHUZHOU CITY, ANHUI, CHINA

**Manufacturer Site** : PRIMST (CHUZHOU) INNOVATION CO.LTD  
NO. 588, NORTH SHANGHAI ROAD, CHUZHOU CITY, ANHUI, CHINA


**Type/Model:** : CT51-FRIDGE, TB-135, TB-135EYD, SCT-135EYD, HMCRCT135

**FCC ID** : 2A9LV-CT51FRIDGE

**SUMMARY:**

The equipment complies with the requirements according to the following standard(s) or Specification:

**FCC PART 1 SECTION 1.1310**  
**KDB447498 D01 General RF Exposure Guidance v06**  
**KDB 680106 D01 RF Exposure Wireless Charging App v03**

**PREPARED BY:**  
Project Engineer  
Dylan Tang**REVIEWED BY:**  
Reviewer  
Wakeyou Wang

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

**TEST REPORT****Revision History**

Report No.	Version	Description	Issued Date
220602246SHA-004	Rev. 01	Initial issue of report	March 6, 2023

**TEST REPORT****Measurement result summary**

TEST ITEM	FCC REFERENCE	TEST RESULT	NOTE
RF Exposure	1.1310	Pass	-

Notes: 1: NA =Not Applicable

2: Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.

3: Additions, Deviations and Exclusions from Standards: None.

**TEST REPORT****1 GENERAL INFORMATION****1.1 Description of Equipment Under Test (EUT)**

Product name:	SMART COFFEE TABLE(REFRIGERATOR)
Type/Model:	CT51-FRIDGE, TB-135, TB-135EYD, SCT-135EYD, HMCRCT135
Description of EUT:	The EUT is a SMART COFFEE TABLE which supports Wireless Charger and Bluetooth function, there are some series model and they are same except the appearance color. so choose CT51-FRIDGE to test as representative.
Rating:	110-120V ~ 60Hz
Category of EUT:	Class B
EUT type:	<input checked="" type="checkbox"/> Table top <input type="checkbox"/> Floor standing
Software Version:	0x0073
Hardware Version:	YZ-TB-CONTROL
Sample received date:	July 26, 2022
Date of test:	July 26, 2022 ~ February 28, 2023
Note: 3m AC cable with one core.	

**1.2 Technical Specification**

Frequency Range:	111kHz – 205kHz
Modulation:	FSK
Antenna:	Coil antenna

**TEST REPORT****1.3 Description of Test Facility**

Name:	Intertek Testing Services Shanghai
Address:	Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L0139
	FCC Accredited Lab Designation Number: CN0175
	IC Registration Lab CAB identifier.: CN0014
	VCCI Registration Lab Registration No.: R-14243, G-10845, C-14723, T-12252
	A2LA Accreditation Lab Certificate Number: 3309.02

**TEST REPORT****2 TEST SPECIFICATIONS****2.1 Standards or specification**

FCC PART 1 SECTION 1.1310  
KDB 680106 D01 RF Exposure Wireless Charging App v03  
KDB447498 D01 General RF Exposure Guidance v06

**2.2 Mode of operation during the test**

Within this test report, EUT was tested under all modes and tested under its rating voltage and frequency. Other voltage and frequency are specified if used. The worst data was listed in the report.

**2.3 Test peripherals list**

Item No.	Name	Band and Model	Description
1	Wireless load	iphone x	100% power level
2	Wireless load	iphone x	50% power level
3	Wireless load	iphone x	0% power level

**2.4 Record of climatic conditions**

Test Item	Temperature (°C)	Relative Humidity (%)	Pressure (kPa)
RF Exposure	24	53	101

**TEST REPORT****2.5 Instrument list**

Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Exposure Level Tester	Narda	NBM-550	EC 6113	2023-03-01
<input checked="" type="checkbox"/>	E-Field sensor(100kHz-3GHz)	Narda	EF 0391	EC 6113	2023-03-01
<input checked="" type="checkbox"/>	H-Field sensor(300kHz-30MHz)	Narda	HF 3061	EC 6113	2023-03-01
<input checked="" type="checkbox"/>	Exposure Level Tester(1Hz-400kHz)	Narda	ELT-400	EC 2928	2023-06-15

**2.6 Measurement uncertainty**

Test Items	Expanded Uncertainty (k=2)
H-field	0.9 dB
E-field	1.1 dB

**TEST REPORT**

### 3 RF Exposure Assessment

Test result: Pass

#### 3.1 Assessment Limit

Reference: 47 CFR §1.1310, KDB 680106


Limits for General Population/Uncontrolled Exposure

Frequency range [MHz]	Electric field strength [V/m]	Magnetic field strength [A/m]	Power density [mW/cm <sup>2</sup> ]	Averaging time [minutes]
0.1 – 0.3	614	1.63	*100	30
0.3 – 1.34	614	1.63	*100	30
1.34 – 30	824/f	2.19/f	*180/f <sup>2</sup>	30
30 – 300	27.5	0.073	0.2	30
300 – 1 500	-	-	f/1500	30
1 500 – 100 000	-	-	1.0	30

Limits for Occupational/Controlled Exposure

Frequency range [MHz]	Electric field strength [V/m]	Magnetic field strength [A/m]	Power density [mW/cm <sup>2</sup> ]	Averaging time [minutes]
0.1 – 0.3	614	1.63	*100	6
0.3 – 3.0	614	1.63	*100	6
3.0 – 30	1842/f	4.89/f	*900/f <sup>2</sup>	6
30 – 300	61.4	0.163	1.0	6
300 – 1 500	-	-	f/300	6
1 500 – 100 000	-	-	5	6

#### 3.2 Assessment Configuration

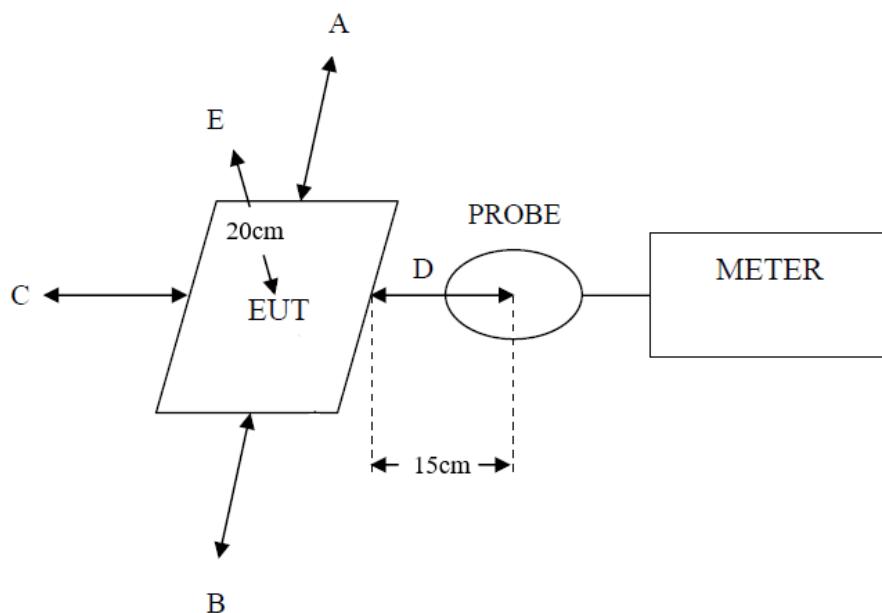

**TEST REPORT****3.3 Assessment Results**

Test result of Magnetic Field Strength:

Test Position	Test distance (cm)	Test result (A/m)	Limit (A/m)	Result (Pass/Fail)
A: Right	15	0.089	1.63 *0.5	Pass
B: Left	15	0.083	1.63 *0.5	Pass
C: Front	15	0.086	1.63 *0.5	Pass
D: Back	15	0.082	1.63 *0.5	Pass
E: Top	20	0.064	1.63 *0.5	Pass

Test result of Electric Field Strength:

Test Position	Test distance (cm)	Test result (V/m)	Limit (V/m)	Result (Pass/Fail)
A: Right	15	0.98	614 *0.5	Pass
B: Left	15	0.85	614 *0.5	Pass
C: Front	15	0.90	614 *0.5	Pass
D: Back	15	0.86	614 *0.5	Pass
E: Top	20	0.99	614 *0.5	Pass

\*\*\*\*\* END \*\*\*\*\*